



OPERATION AND SERVICE MANUAL

MODEL 1010D

DIGITAL OHMMETER


SERIAL NUMBER 117

**ASSOCIATED RESEARCH, INC.
905 CARRIAGE PARK AVENUE
LAKE BLUFF, IL 60044 U.S.A.
PHONE 1 (708) 295-3312
FAX: 1 (708) 295-9165**

**FOR TECHNICAL ASSISTANCE
PHONE: 1 (800) 858-TEST**

OPERATORS MANUAL

DIGITAL
OHMMETER

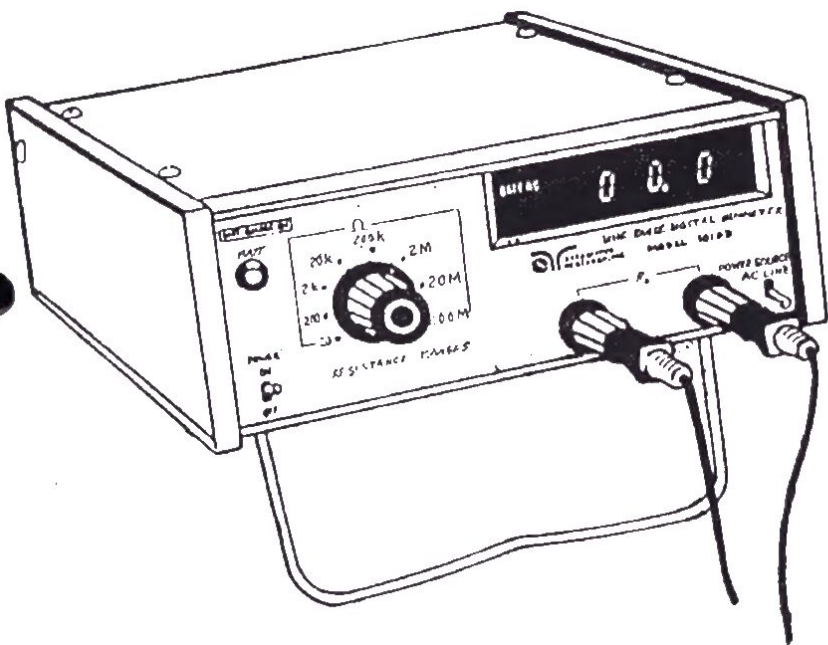

MODEL 1010D

 ASSOCIATED
RESEARCH, INC.

TABLE OF CONTENTS

Introduction	1
Safety	2
Preparation for test	3
Dual Power Supply	3
Operating Instructions	4
Specifications	5
Warranty	REAR COVER

INTRODUCTION

The Model 1010D ohmmeter is designed to measure a wide range of resistance values. On the lowest range, the resolution is 0.01 ohm. On the highest range, the maximum reading is 199.9 megohms.

The meter can be operated either from the AC line or rechargeable batteries, and is suitable for field, bench, and laboratory use.

SAFETY

Before preparing for a test and before operating the equipment, observe all safety rules. Be sure all safety gear is available and in good condition. When switches or breakers are opened for a test, be sure they are locked out and guards and safety signs are posted. Always test a disconnected circuit or apparatus for presence of voltage. Always apply a ground to a disconnected circuit before a test to prevent static charges.

PREPARATION FOR TEST

Take equipment or circuits out of service. Use a voltmeter to check between terminals and then apply a ground to be sure no voltage is present.

The equipment to be tested must be completely disconnected from the power source for safety and to prevent damage to the test equipment. In the case of rotating machinery, transformers, switches, etc., disconnect all leads. Inspect the wiring to determine exactly what will be included in the test. If switches or fuses are left in a circuit tested, they too will be tested and influence readings.

DUAL POWER SUPPLY

The Model 1010D can be operated from one of two sources:

BATTERY OPERATION

Four 1.2 Volt Nickel-Cadmium batteries are built in. When fully charged, they can provide up to 90 minutes of operation on the 20 ohm range (more on the other ranges). To operate from the batteries, set the Power Source switch to DC. The BATT light will flash, indicating that the ohmmeter is receiving its power from the batteries. When the BATT NG light indicates that the batteries need to be recharged, the line cord must be plugged in and the Power Source switch set to the AC position to charge the batteries. A full charge takes 15 hours, but the batteries will not be overcharged if left on charge for longer than 15 hours.

AC LINE OPERATION


To operate from the AC line, set the Power Source switch to AC and plug in the line cord. Operation in this mode will also charge the batteries whether the ohmmeter is being used or not. The AC LINE light indicates that the unit is being powered from the line.

OPERATING INSTRUCTIONS

CAUTION: BE CERTAIN THAT THE EQUIPMENT TO BE TESTED IS DE-ENERGIZED BEFORE ATTEMPTING TO MAKE ANY MEASUREMENTS.

To measure resistance:

1. Check for voltage to make sure the equipment to be tested is de-energized and apply a ground to be sure no static charge is present.
2. Select the desired power source, AC or DC.
3. Set the range selector switch to the desired range.
4. Connect the test leads to the measuring terminals.
5. Turn the power switch on. The display should show the overrange condition with the first "1" lit and all other digits blanked.
6. Connect the test leads to the item being tested. The resistance value will be indicated on the LED display.

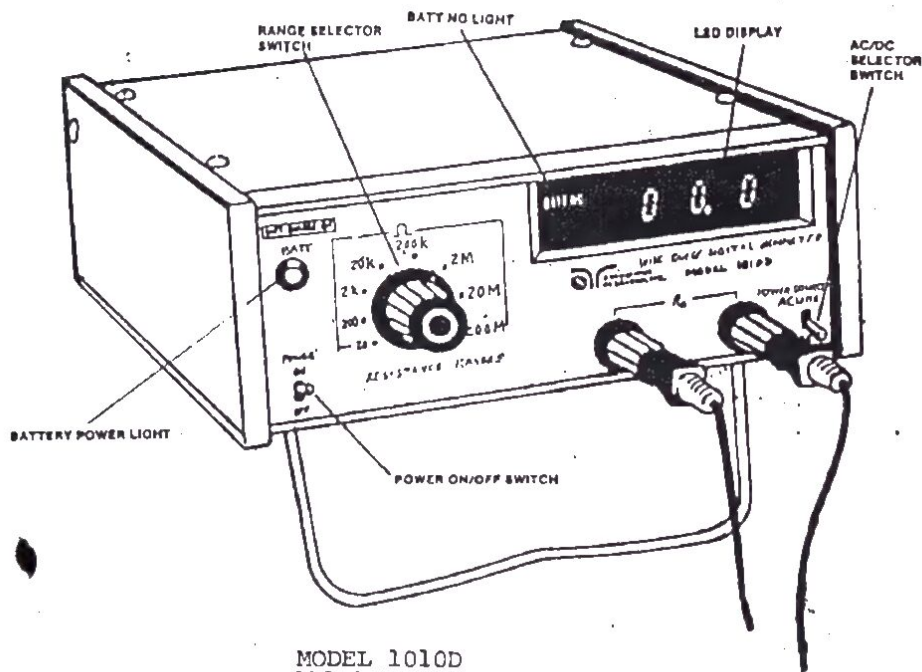

MODEL 1010D
SPECIFICATIONS

RANGE	DISPLAY	RESOLUTION	CURRENT	ACCURACY
20 Ohms	0-19.99 Ohms	.01 Ohms	10 mA	+0.3%RDG+0.2% FS
200 Ohms	0-199.9 Ohms	.1 Ohms	1 mA	" "
2 k	0-1.999 kOhm	1 Ohm	100 uA	" "
20 k	0-19.99 kOhm	10 Ohms	10 uA	" "
200 k	0-199.9 kOhm	100 Ohms	1 uA	" "
2 M	0-1.999 MOhm	1 kOhm	0.1 uA	" "
20 M	0-19.99 MOhm	10 kOhm	0.01 uA	+0.5%RDG+0.2% FS
200 M	0-199.9 MOhm	100 kOhm	0.001 uA	+ 10% FS

Operating Temp. Range:
5C - 35C

Guaranteed Accuracy:
If calibrated every 180 days and operated from the AC line between 15C and 30C.

Power Source:
AC main 120V AC or rechargeable nicad system

Size: 7"x3-1/8"x9-3/8"
(175 x 80 x 235 mm)
Weight: 5 lbs (2.3 kg.)

Model 1010DA 230V AC or rechargeable nicad system

DIGITAL OHMMETER LIMITED WARRANTY

This new Digital Ohmmeter is warranted to be free from defects in workmanship and material for one year from the date of shipment, provided there is no evidence of modifications, tampering or physical damage. Bypassing any safety systems will void this warranty.

THIS WARRANTY DOES NOT COVER TUBES, BATTERIES OR ACCESSORIES NOT OF ASSOCIATED RESEARCH MANUFACTURE.

Any unit found defective under this warranty will be repaired free of charge if returned to the factory prepaid and insured.


EXCEPT AS PROVIDED HEREIN, ASSOCIATED RESEARCH MAKES NO WARRANTIES TO THE PURCHASER OF THIS UNIT AND ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, (INCLUDING, WITHOUT LIMITATION, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE) ARE HEREBY EXCLUDED, DISCLAIMED AND WAIVED.

To avoid delay, before returning the instrument for repair, you must first contact Associated Research for authorization and shipping instructions.




SCHEMATIC

REVISIONS					REV STATUS
SYM	DESCRIPTION	ECO #	DATE	APP'D	CHK'D

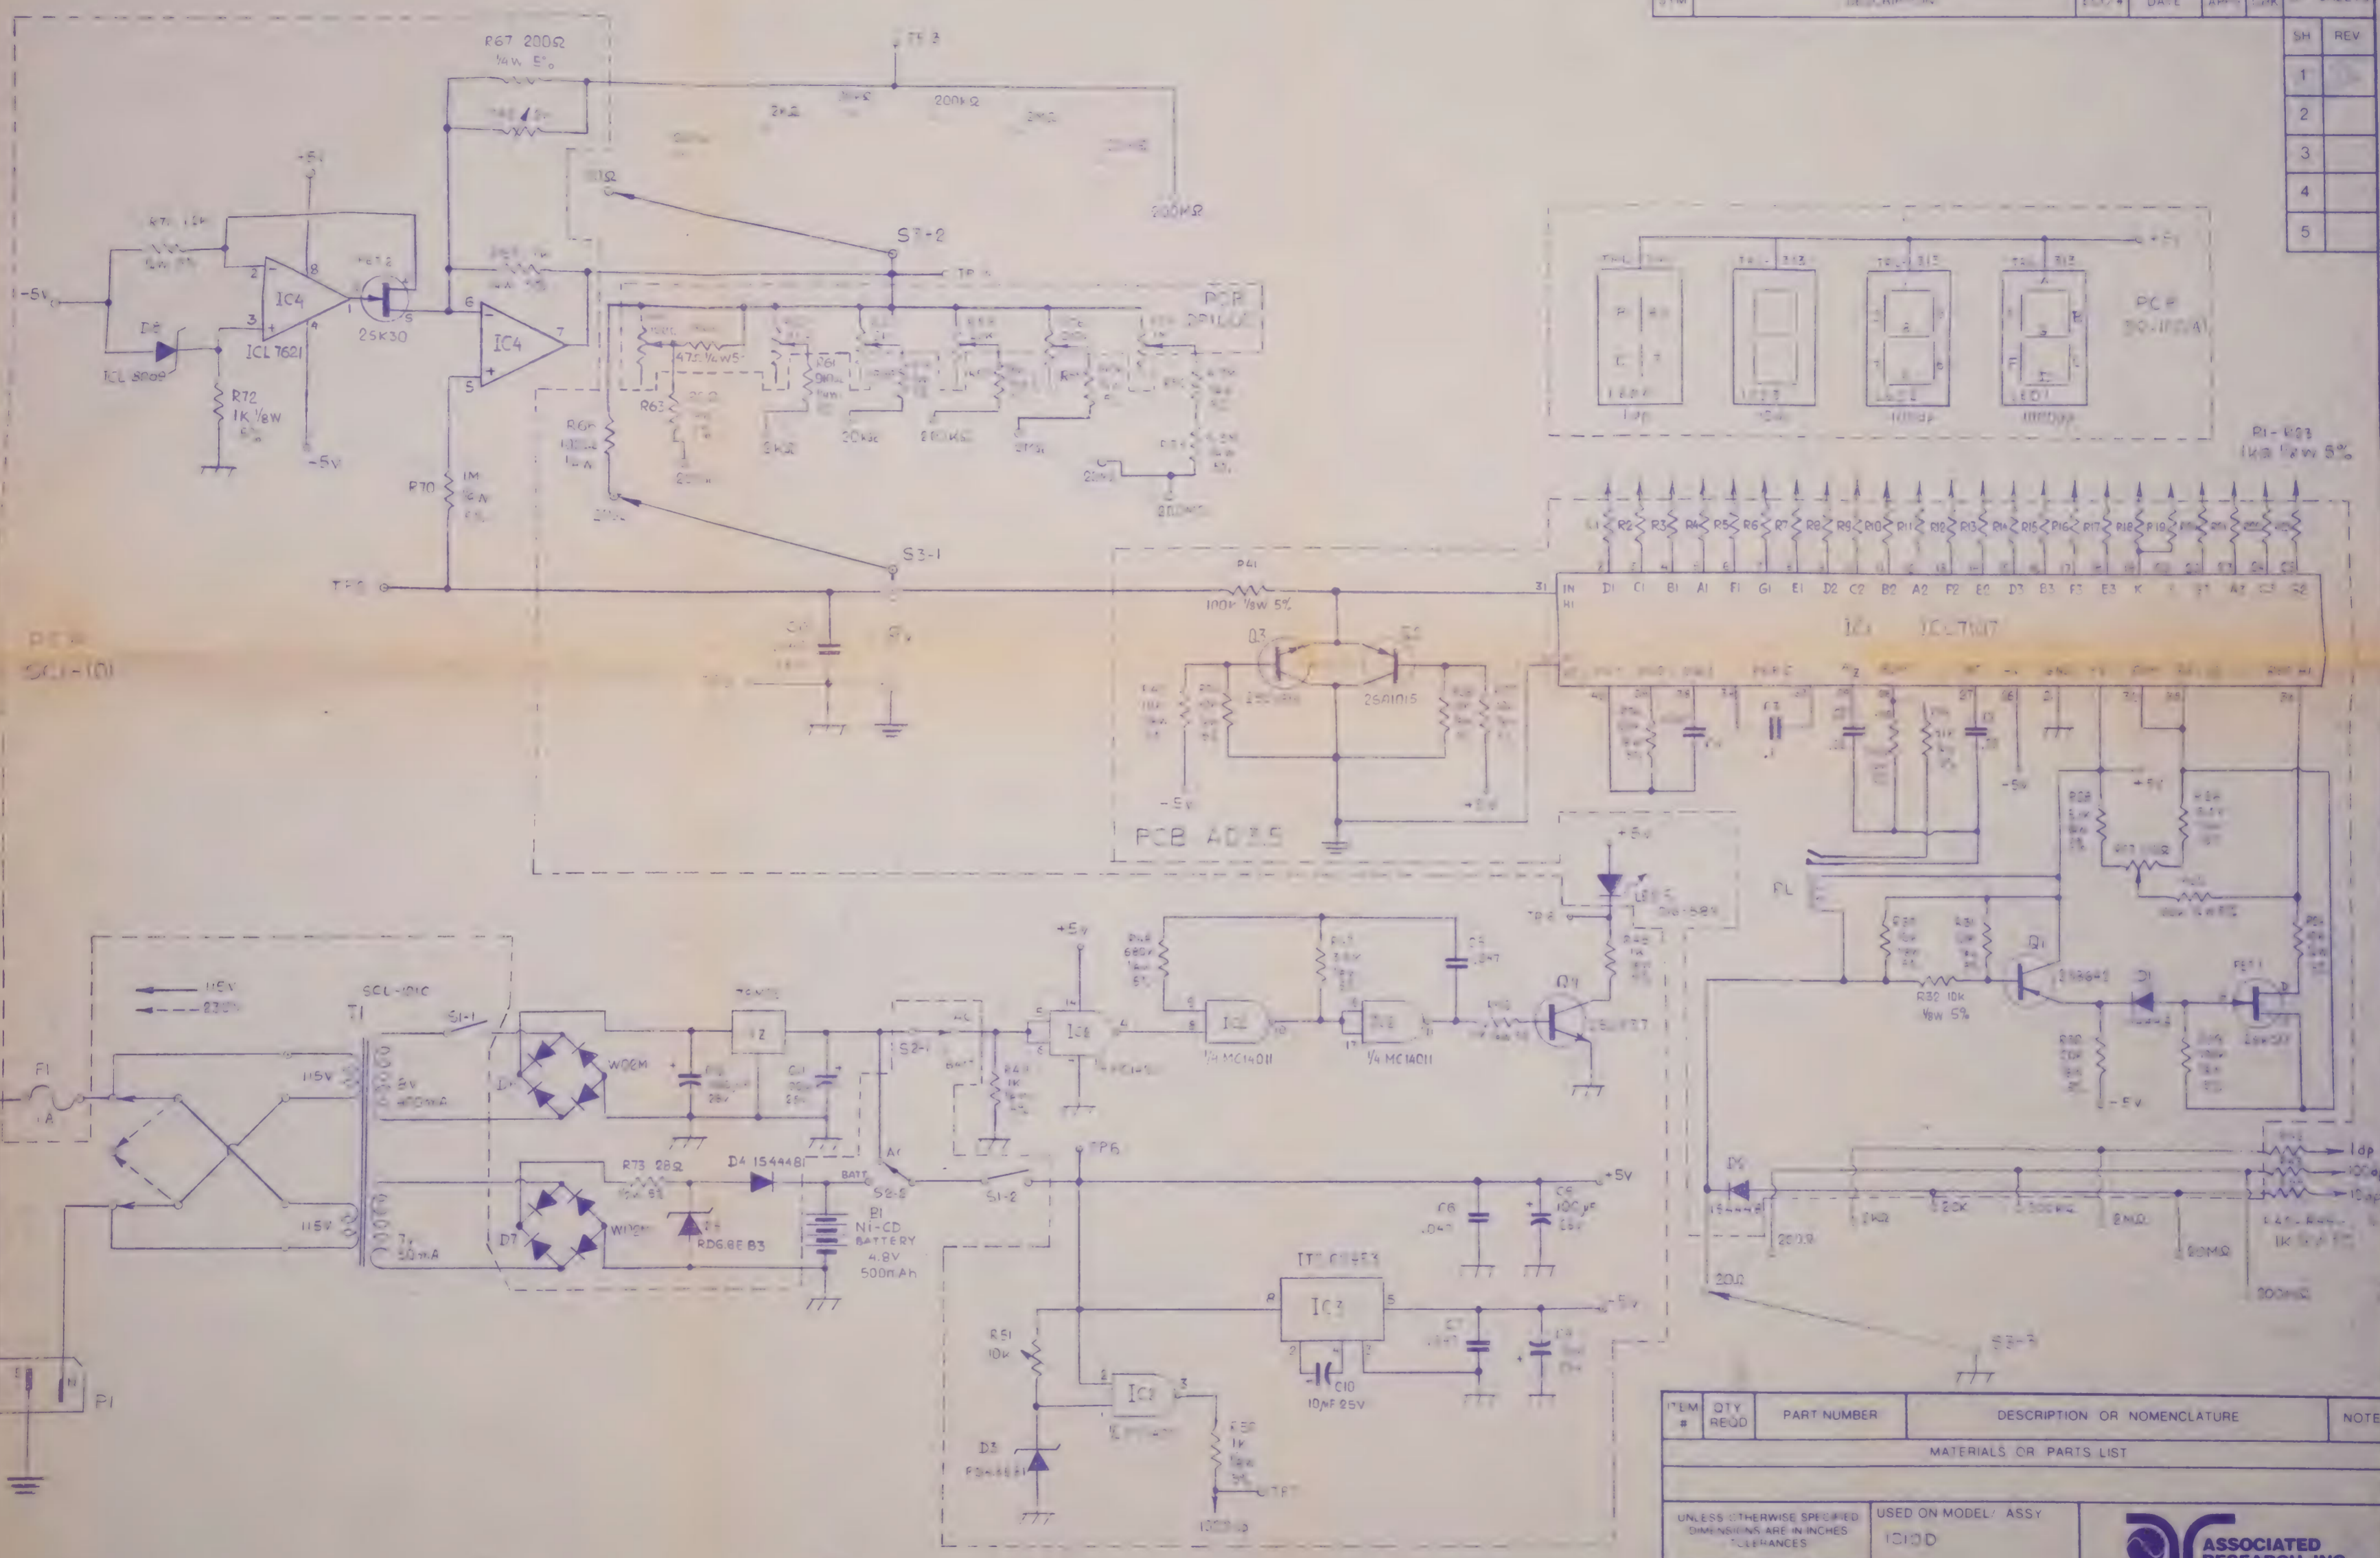

PCP
SCL-101

PCB AD35

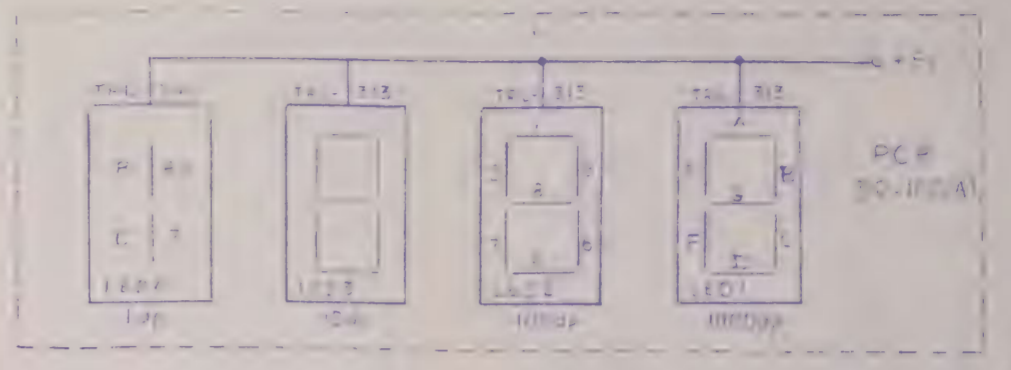


PCP-803
1K 1/2W 5%

NOTES SPECIFIC
1. REMOVE ALL BURRS AND SHARP EDGES, NICKS, AND SCRATCHES
NOTES GENERAL UNLESS OTHERWISE SPECIFIED AND AS APPLICABLE


ITEM #	QTY REQD	PART NUMBER	DESCRIPTION OR NOMENCLATURE	NOTE
MATERIALS OR PARTS LIST				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES		USED ON MODEL/ ASSY 1010D		
		NEXT ASSY NUMBER		
HEAT TREAT		FINISH		DRAWN: S1, S1-PA CHECKED: DAD, S1-PA APPROVED: A, S1-PA
SYMBOLS		ITEM NUMBER		
DRAWN: S1, S1-PA CHECKED: DAD, S1-PA APPROVED: A, S1-PA		SIZE: C SCALE: 1 WT:		SHEET 1 OF 1

ASSOCIATED RESEARCH, INC.
WIDE RANGE DIGITAL OHMMETER
SCHEMATIC WIRING DIAGRAM

REVISIONS					REV. STATUS OF SHEETS	
DESCRIPTION	ECO #	DATE	APPR	CHK	SH.	REV.
					1	
					2	
					3	
					4	
					5	

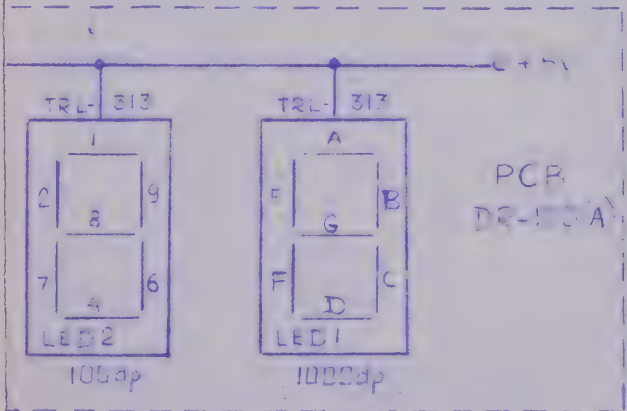

R1-R23
 1kΩ 1/8W 5%

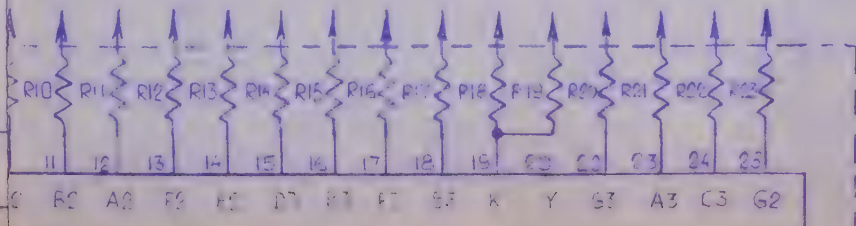

ICL7107

REPLACEMENT PARTS LIST

REVISIONS						REV. STATUS OF SHEETS
SYM	DESCRIPTION	ECO #	DATE	APPR	CHK	
						SH. REV.
						1
						2
						3
						4
						5


SYMBOL	F/N	DESCRIPTION	QTY
B1	77014	BATTERY NI-CD 4.8V 500mAh	1
C1, C2		CAPACITOR, MYLAR .22μF	2
C3		CAPACITOR, MYLAR .1μF	1
C4		CAPACITOR, CERAMIC DISC, 100pF	1
C5, C6, C7		CAPACITOR, CERAMIC DISC, .047μF	3
C8		CAPACITOR, ELECTROLYTIC, 100μF, 25V	1
C9, C10		CAPACITOR, ELECTROLYTIC, 10μF, 25V	2
C11		CAPACITOR, ELECTROLYTIC, 100μF, 25V	1
C12		CAPACITOR, ELECTROLYTIC, 1000μF, 25V	1
C13		CAPACITOR, POLYESTER FILM, .047μF, 630V	1
D1, D2		DIODE, SILICON, 1S4448	2
D3		DIODE, ZENER, RD 4.3E B1	1
D4		DIODE, SILICON, 1S4448	1
D5		DIODE, ZENER, RD 6.8E B3	1
D6, D7		DIODE BRIDGE TYPE, WD2M	2
D8		VOLTAGE REFERENCE, ICL 8069	1
F1		FUSE, 1A 250V 5X20mm	1
FET1, FET2		TRANSISTOR, 2SK30	2
IC1		IC, ICL 7107	1
IC2		IC, MC14011 OR MSM4011	1
IC3		IC, ITS 60953 OR ICL 7660	1
IC4		IC, ICL 7621	1
LED1-3	77101	TRL-313	3
LED4	77102	TRL-314	1
LED5	77103	D16-58R	1
P1		RECEPTACLE, 250VAC 6A MALE	1
Q1		TRANSISTOR, 2SB 642	1
Q2		TRANSISTOR, 2SA 1015	1
Q3		TRANSISTOR, 2SC 1815	1
Q4		TRANSISTOR, 2SD 637	1
R1-R23		RESISTOR, FXD, 1KΩ, 1/8W, 5%	23
R24		RESISTOR, FXD, 10KΩ, 1/4W, 5%	1
R25		RESISTOR, FXD, 100KΩ, 1/4W, 5%	1
R26		RESISTOR, FXD, 3.3KΩ, 1/4W, 5%	1
R27		RESISTOR, VARIABLE, 100Ω	1
R28		RESISTOR, FXD, 5.1KΩ, 1/4W, 5%	1
R29		RESISTOR, FXD, 100KΩ, 1/8W, 5%	1
R30		RESISTOR, FXD, 20KΩ, 1/8W, 5%	1
R31, R32, R33		RESISTOR, FXD, 10KΩ, 1/8W, 5%	3
R34		RESISTOR, FXD, 51KΩ, 1/4W, 5%	1
R35		RESISTOR, FXD, 390KΩ, 1/4W, 5%	1

SYMBOL	P/N	DESCRIPTION	QTY
R36		RESISTOR, FXD, 100KΩ, 1/8W, 5%	1
R37-R40		RESISTOR, FXD, 10KΩ, 1/8W, 5%	4
R41		RESISTOR, FXD, 100KΩ, 1/8W, 5%	1
R42-R45		RESISTOR, FXD, 1KΩ, 1/8W, 5%	4
R46		RESISTOR, FXD, 10KΩ, 1/8W, 5%	1
R47		RESISTOR, FXD, 3.9MΩ, 1/8W, 5%	1
R48		RESISTOR, FXD, 680KΩ, 1/8W, 5%	1
R49-R50		RESISTOR, FXD, 1KΩ, 1/8W, 5%	1
R51		RESISTOR, VARIABLE, 10KΩ	1
R52		RESISTOR, FXD, 4.7MΩ, 1/4W, 5%	1
R53		RESISTOR, FXD, 4.3MΩ, 1/4W, 5%	1
R54		RESISTOR, VARIABLE, 1MΩ	1
R55		RESISTOR, FXD, 910KΩ, 1/4W, 5%	1
R56		RESISTOR, VARIABLE, 200KΩ	1
R57		RESISTOR, FXD, 91KΩ, 1/4W, 5%	1
R58		RESISTOR, VARIABLE, 20KΩ	1
R59		RESISTOR, FXD, 9.1KΩ, 1/4W, 5%	1
R60		RESISTOR, VARIABLE, 2K	1
R61		RESISTOR, FXD, 910Ω, 1/4W, 5%	1
R62		RESISTOR, VARIABLE, 200Ω	1
R63		RESISTOR, FXD, 82Ω, 1/4W, 5%	1
R64		RESISTOR, FXD, 47Ω, 1/4W, 5%	1
R65		RESISTOR, VARIABLE, 100Ω	1
R66		RESISTOR, FXD, 100Ω, 1/4W, 5%	1
R67		RESISTOR, FXD, 200Ω, 1/4W, 5%	1
R68		RESISTOR, VARIABLE, 2KΩ	1
R69		RESISTOR, FXD, 1KΩ, 1/4W, 5%	1
R70		RESISTOR, FXD, 1MΩ, 1/8W, 5%	1
R71		RESISTOR, FXD, 1.2KΩ, 1/4W, 5%	1
R72		RESISTOR, FXD, 1KΩ, 1/8W, 5%	1
R73		RESISTOR, FXD, 28Ω, 1/2W, 5%	1
RL	77407	RELAY, REED DG1A05	1
S1, S2	77023	SNAP SWITCH, MS-245	2
S3	77021	ROTARY SWITCH 3-3-12	1
T1	77016	TRANSFORMER, SCL-10IC	1
VZ		VOLTAGE REGULATOR, 78M05	1
	77037	TEST LEADS (PAIR)	1

NOTES, SPECIFIC:

1. REMOVE ALL BURRS AND SHARP EDGES, NICKS, AND SCRATCHES.
 NOTES, GENERAL, UNLESS OTHERWISE SPECIFIED AND AS APPLICABLE:

ITEM #	QTY REQD	PART NUMBER	DESCRIPTION OR NOMENCLATURE	NOTE
MATERIALS OR PARTS LIST				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES		USED ON MODEL/ ASSY: 1010D		
FRACTIONAL ± .004	ANGLES ± 1/2°	SURF FINISH ✓	NEXT ASSY NUMBER:	
HEAT TREAT		FINISH		
SYMBOLS: ☐ NOTES ☐ PARTS LIST		DRAWN G.L. 6-21-84		
ITEM NUMBER		CHECKED DMD 6-21-84		
		APPROVED R 6-18-84		
		SIZE C		
		SCALE / WT		
		SHEET OF		



ASSOCIATED RESEARCH, INC.

WIDE RANGE DIGITAL OHMMETER

SYMBOL IDENTIFICATION

1010D

SIZE C

To order replacement parts, refer to the Replacement Parts List on the following pages. If you need assistance, call our Technical Support Hotline 1-800-858-TEST.

MP MASTER



MA30068