


ILLUSTRATION BOOKLET
















Part of 595-2279-01

PARTS PICTORIAL



John Ewing
10909 Ewing
888 8567

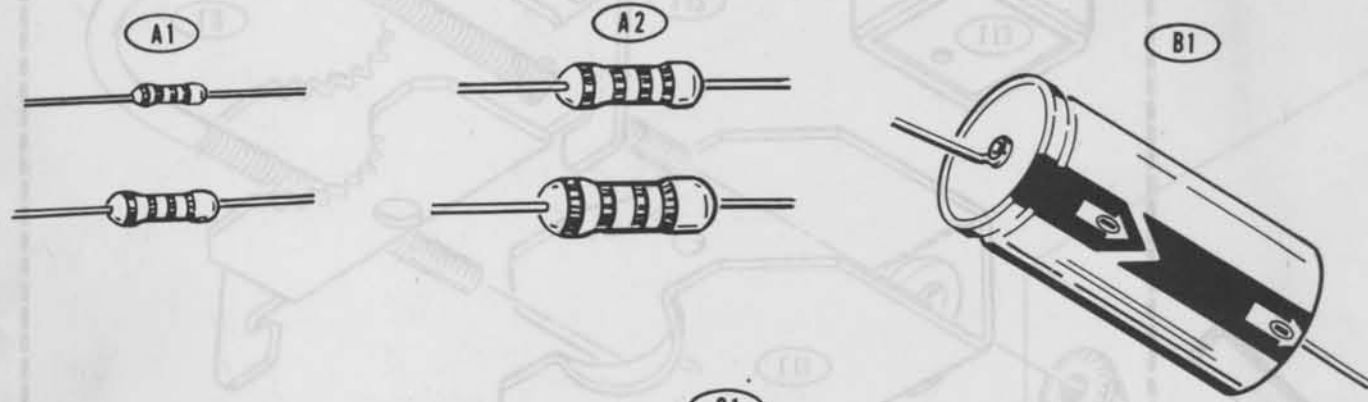



NOTE: HEATH PART NUMBERS ARE STAMPED ON MOST DIODES.

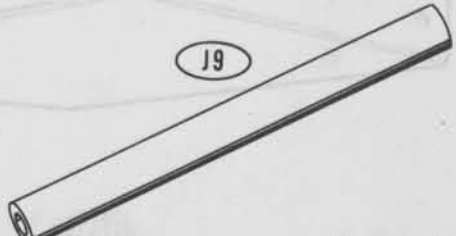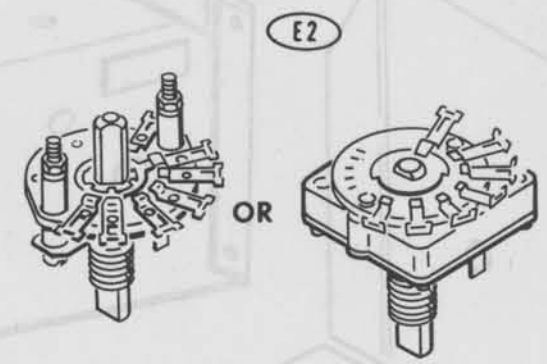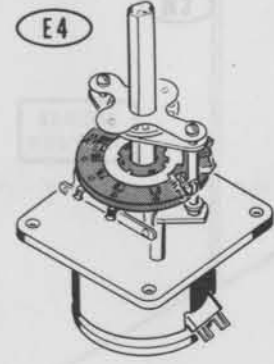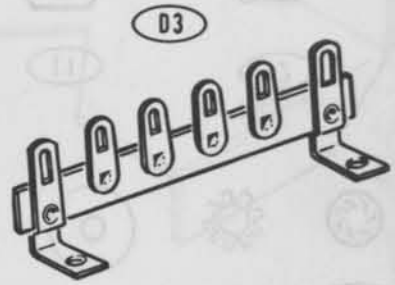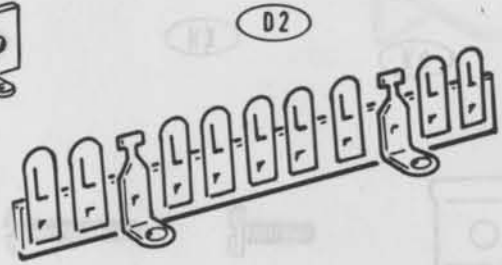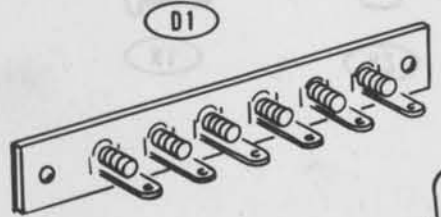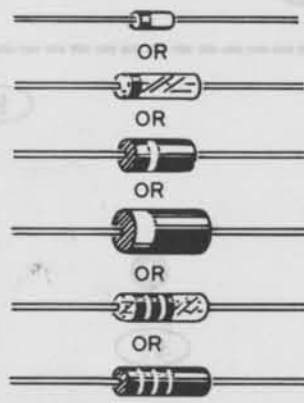


Parts Pictorial (Cont'd.)

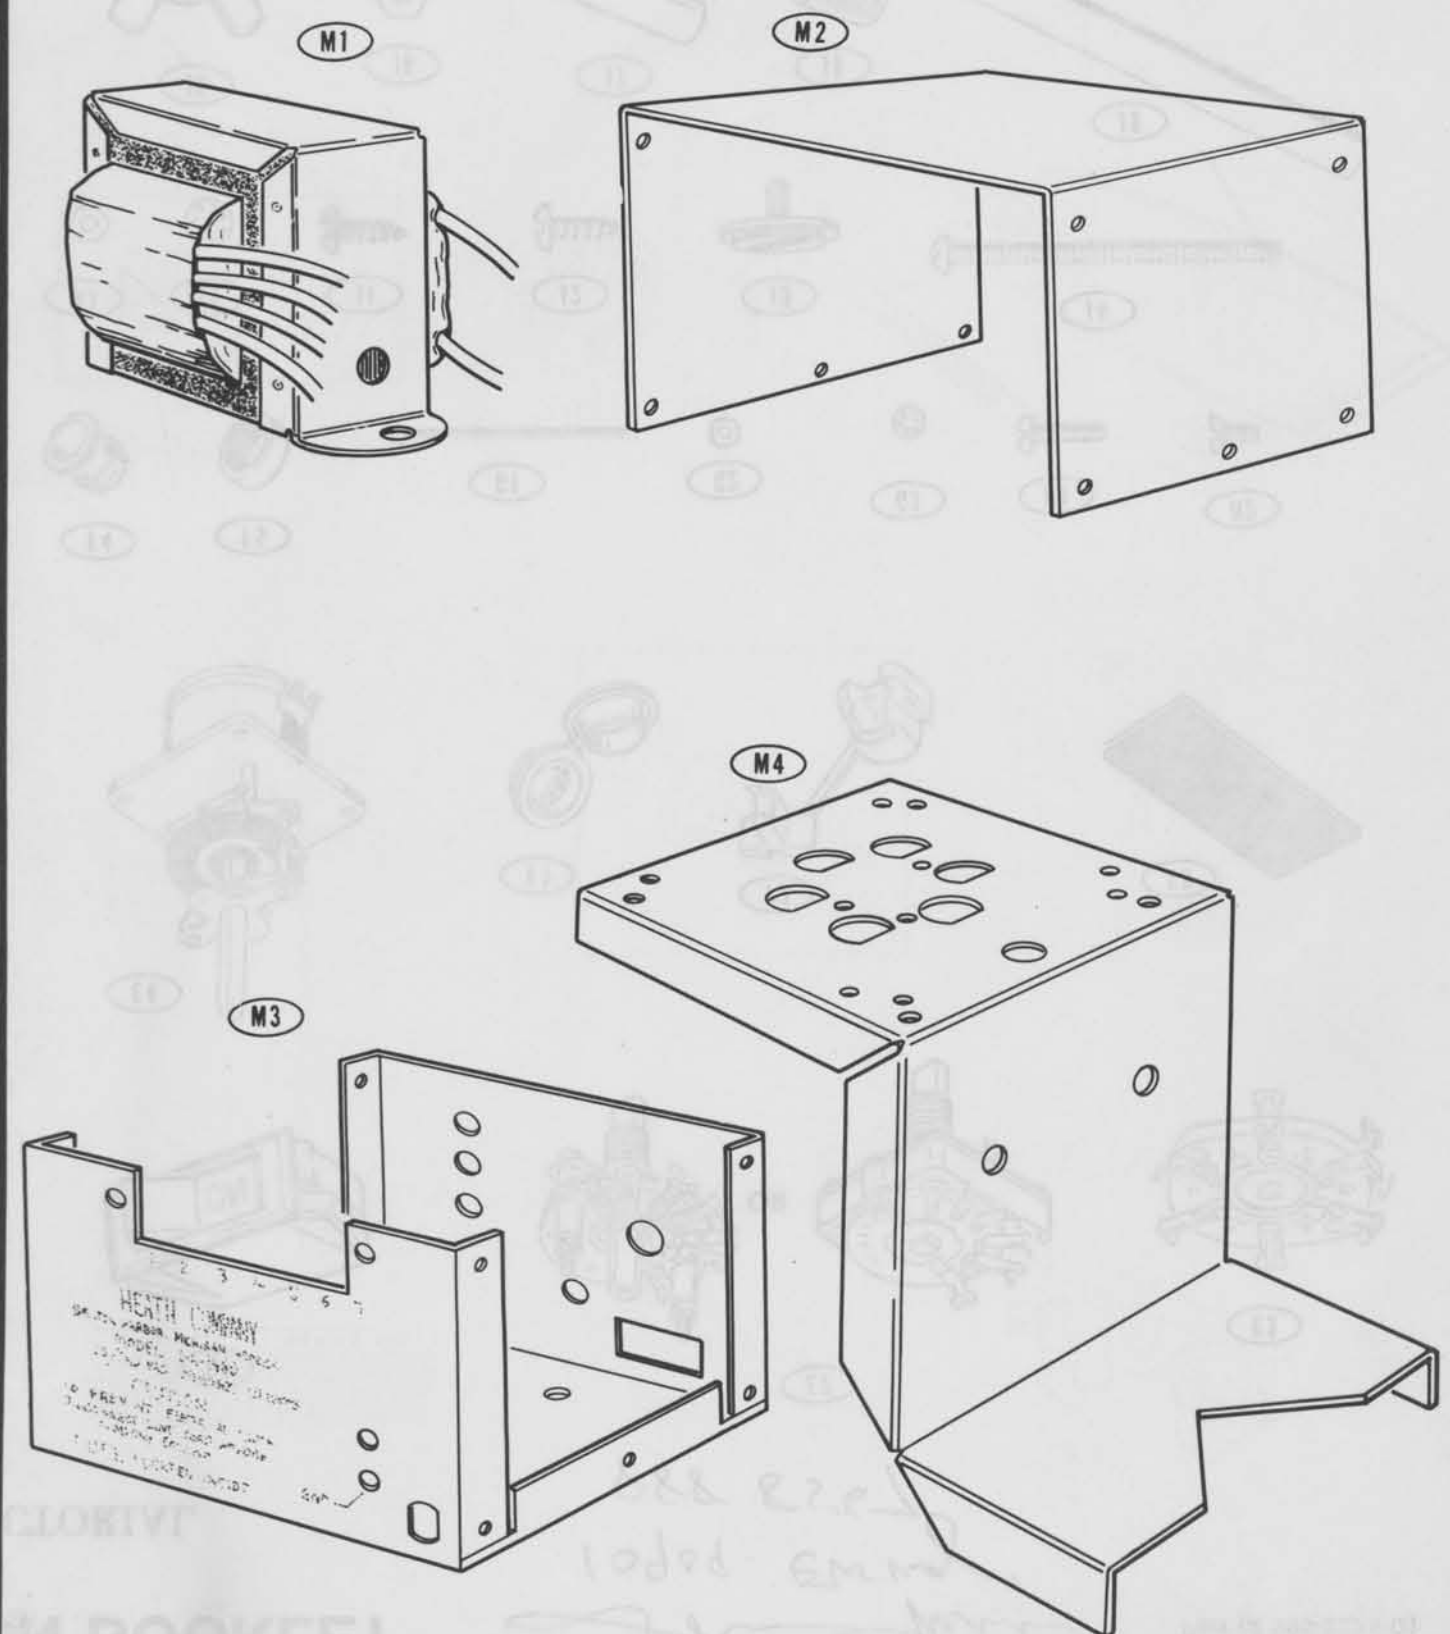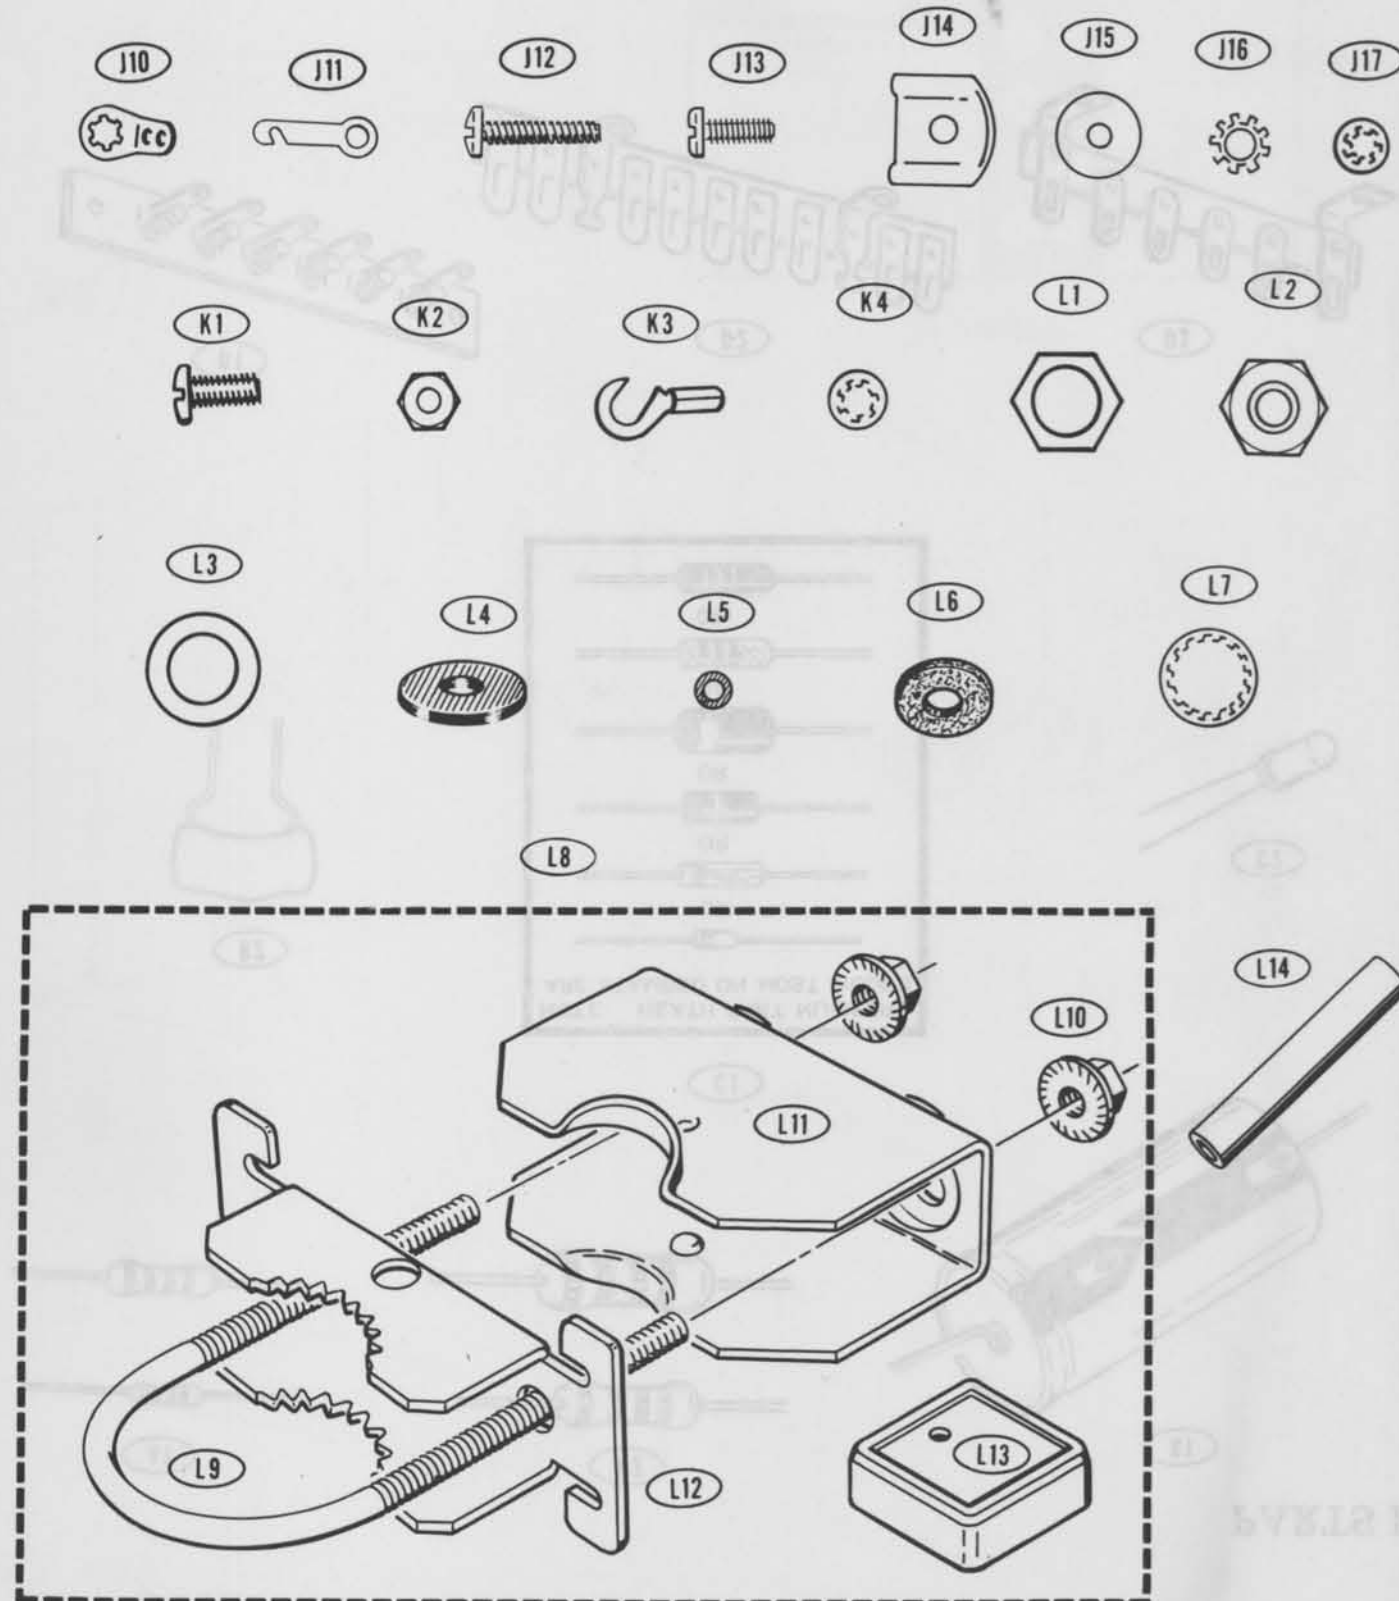


Parts Pictorial (Cont'd.)

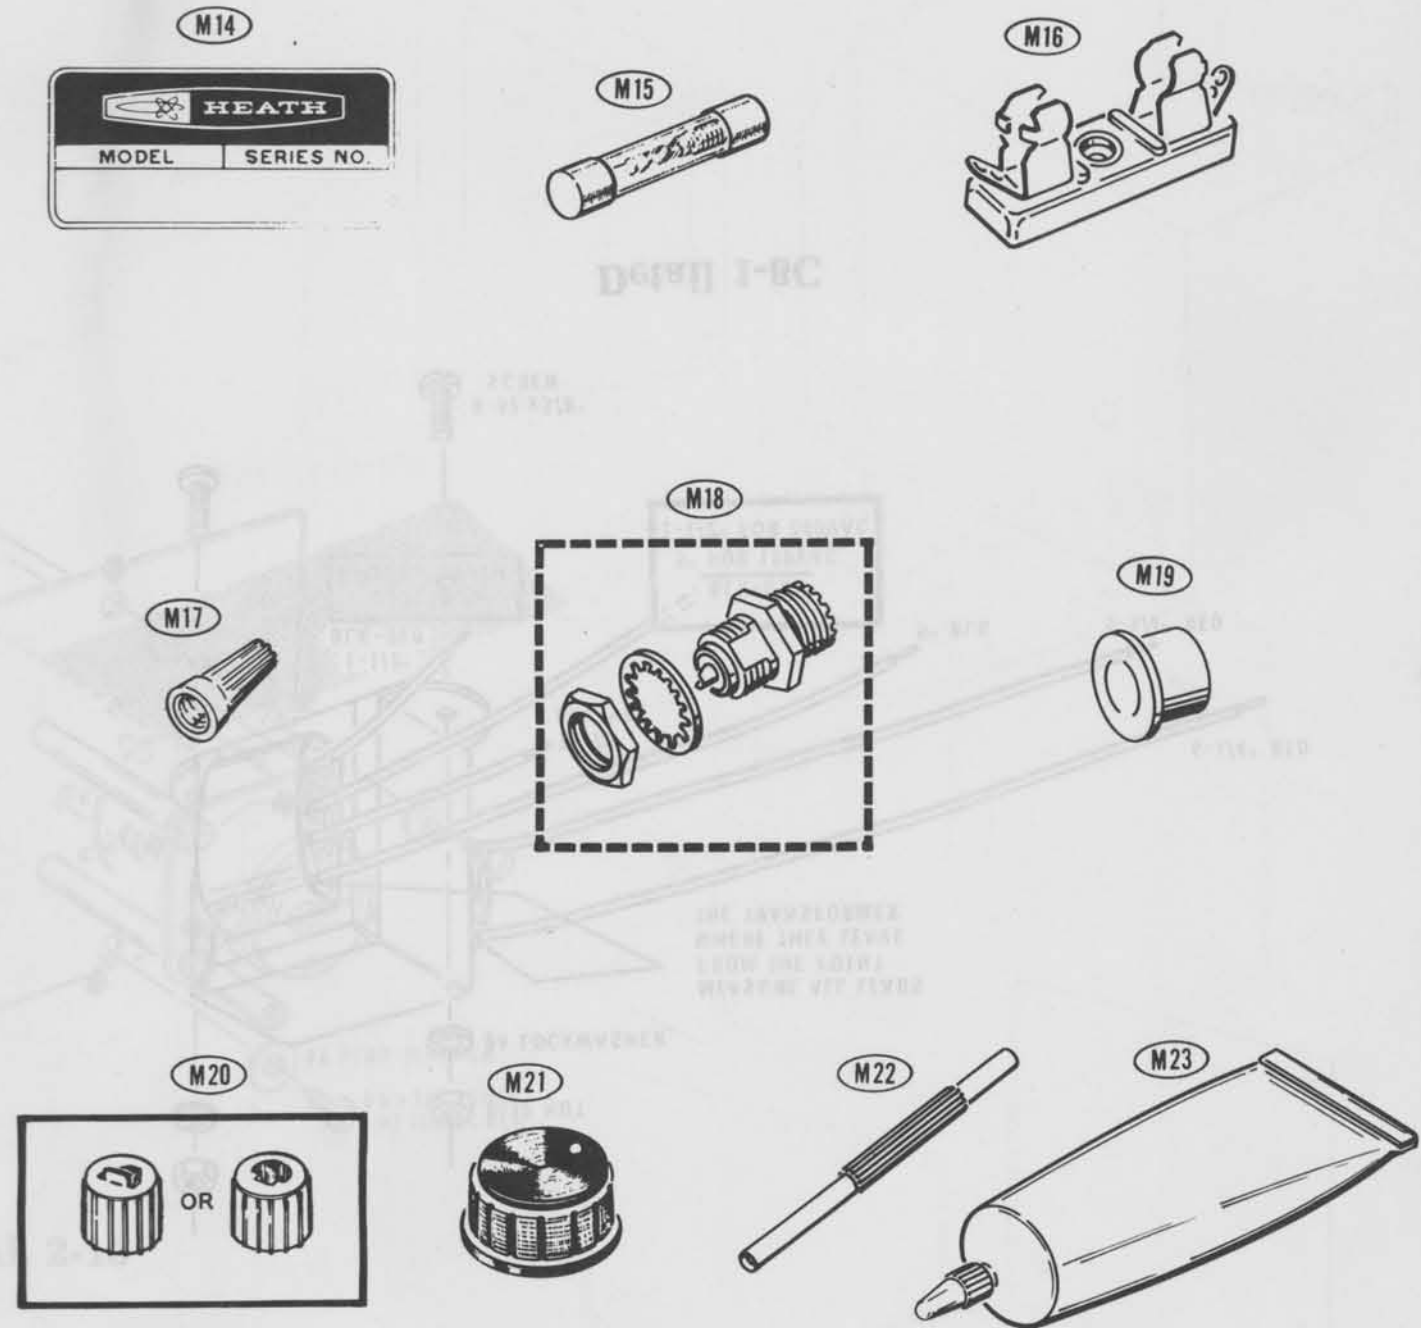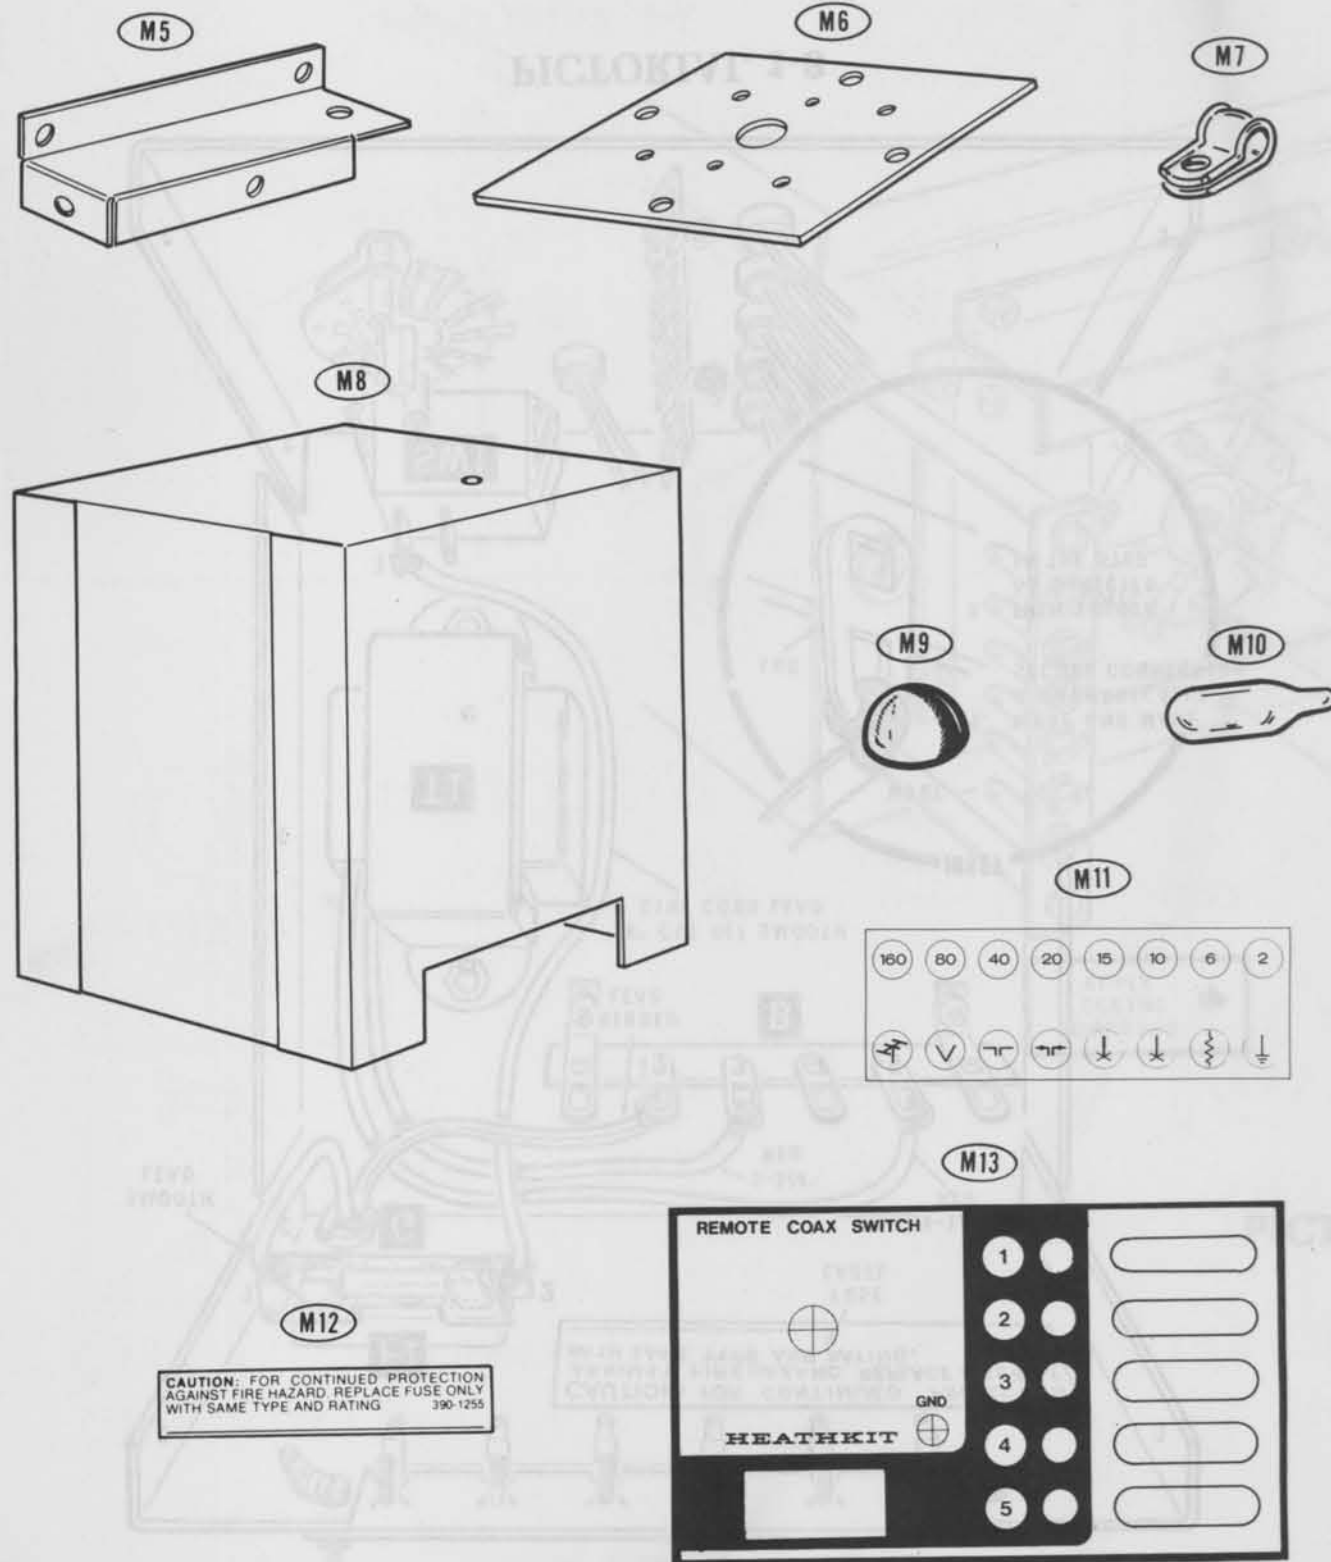


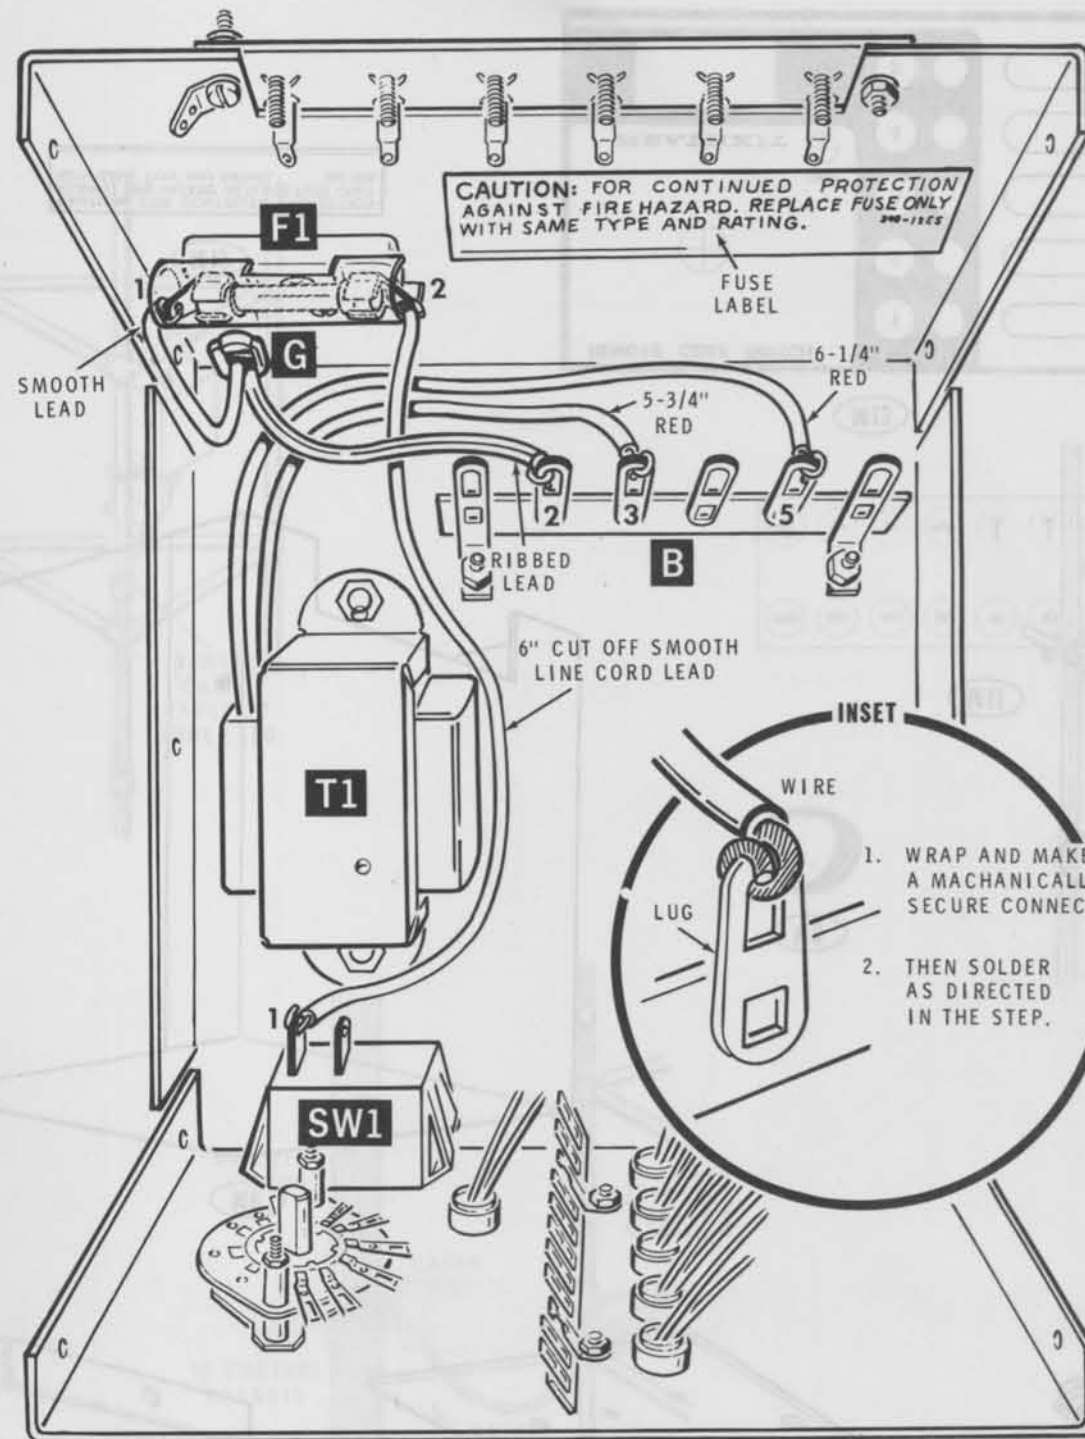


PICTORIAL 1-8

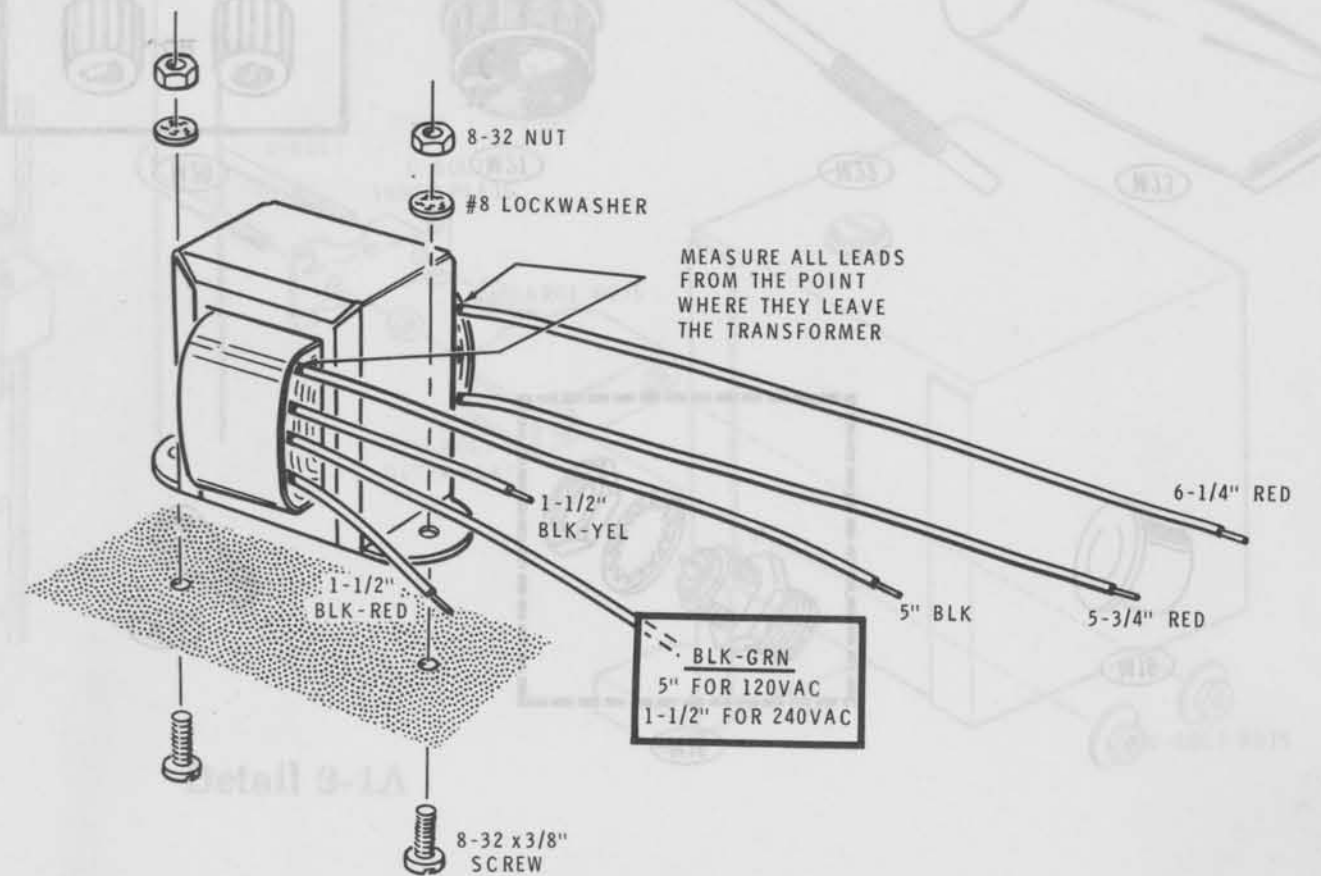


Detail 1-8C


NOTE: THE KNOB INSERT MAY LOOK LIKE EITHER A OR B BELOW IT MUST GO ON THE SHAFT AS SHOWN.

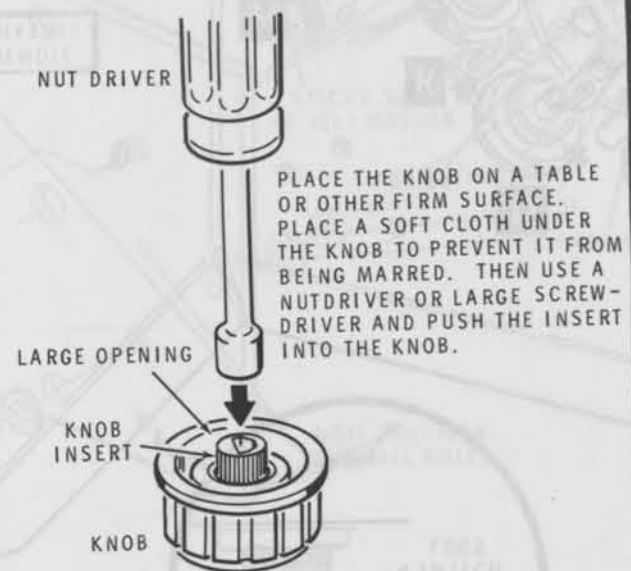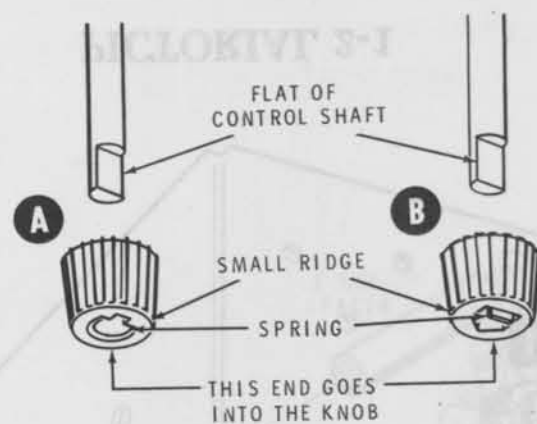


PICTORIAL 1-10

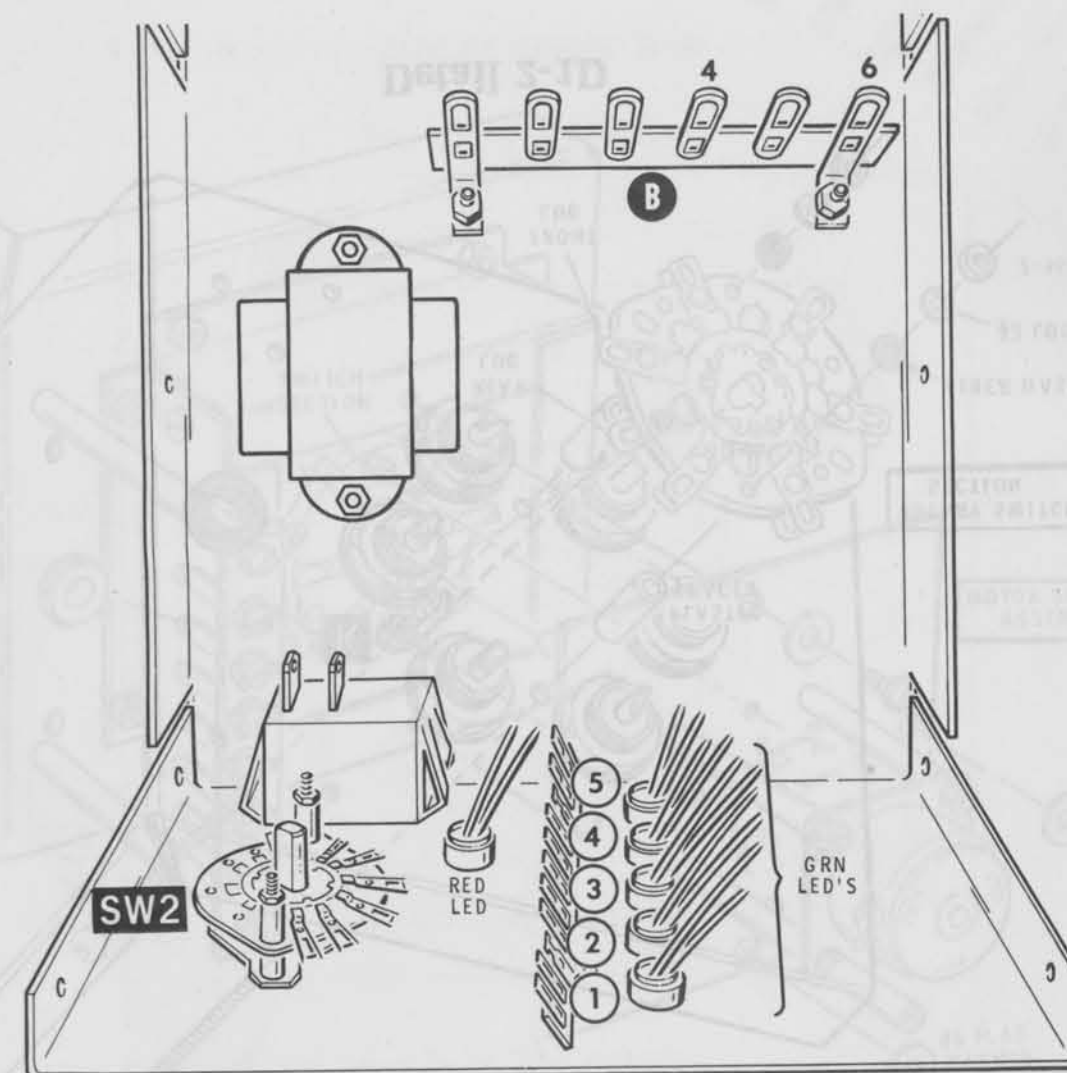


PICTORIAL 1-11

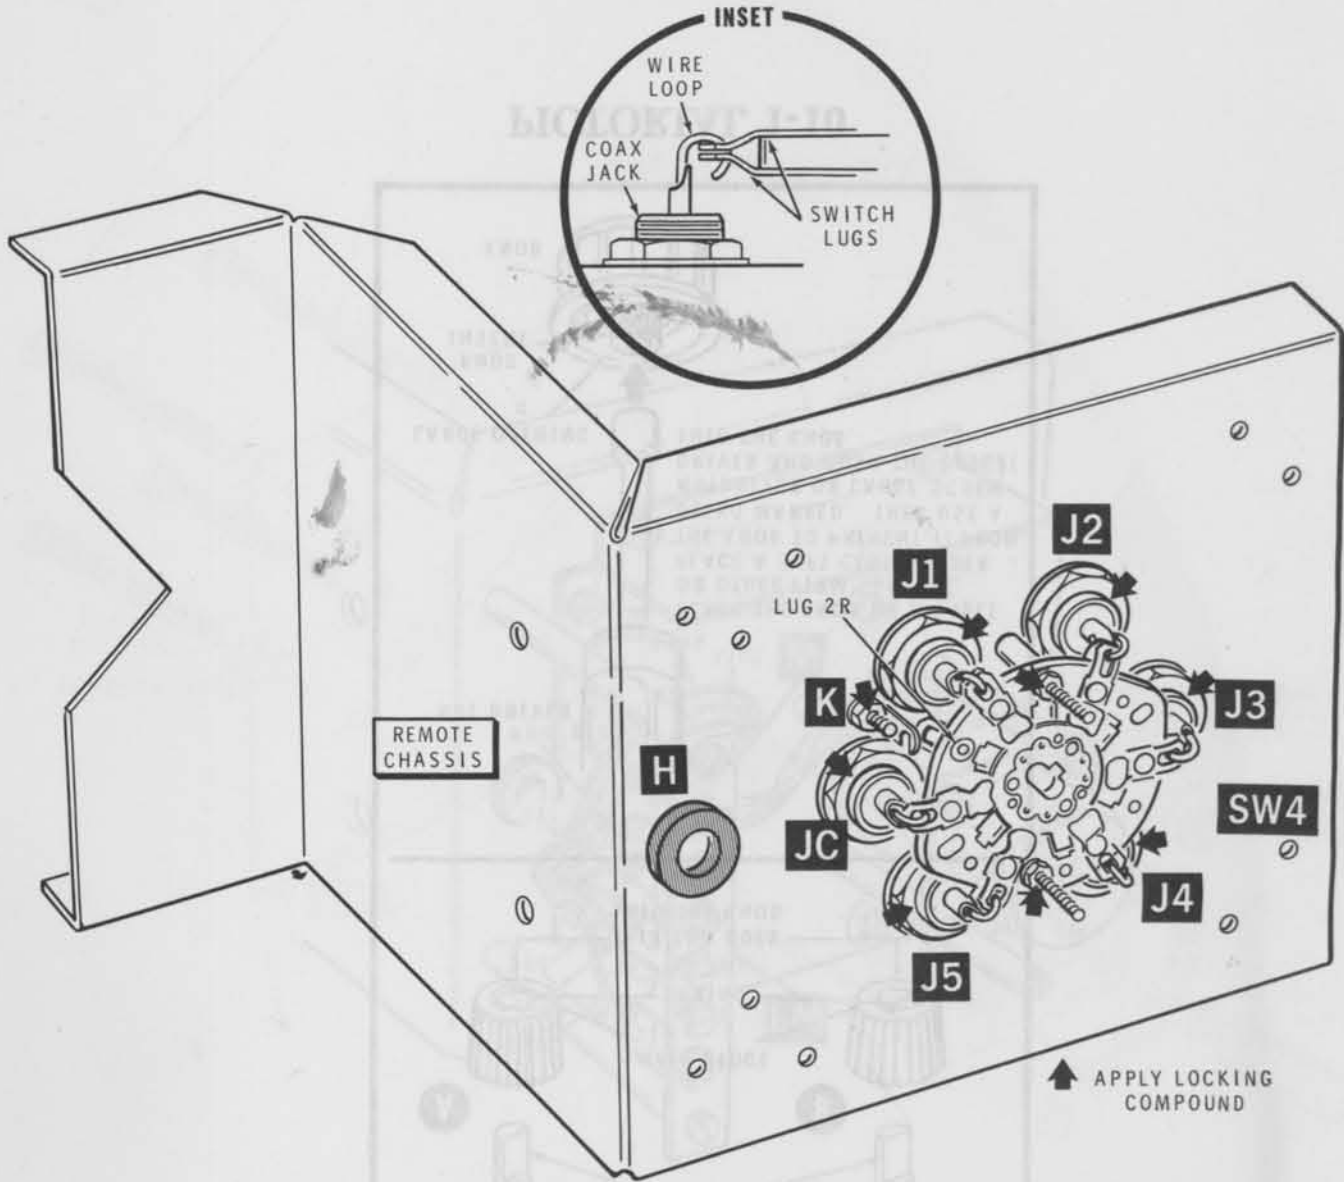


PICTORIAL 2-1

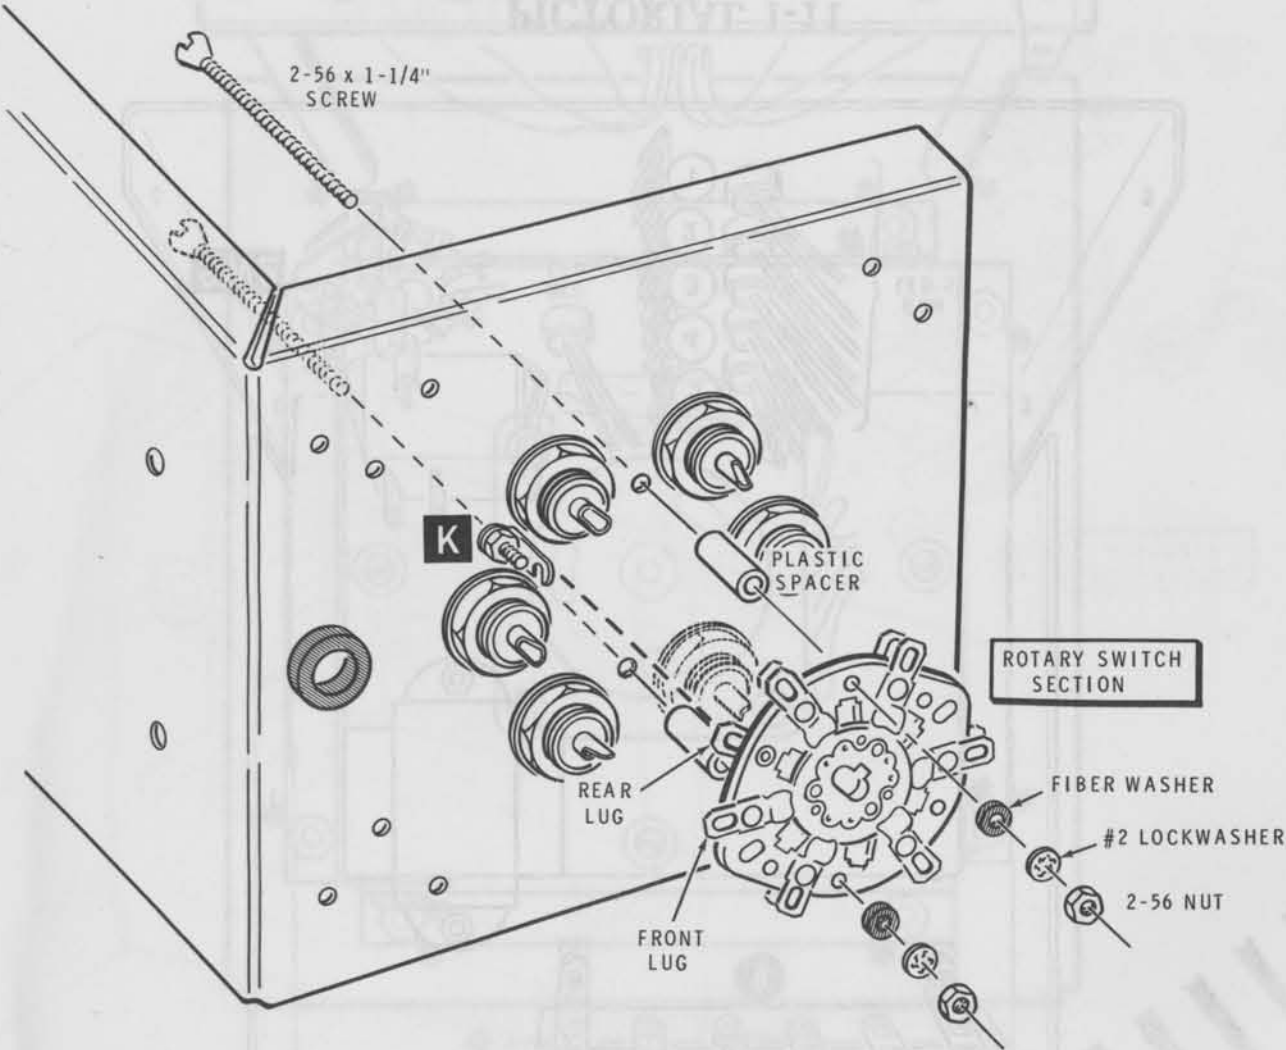


Detail 2-1D

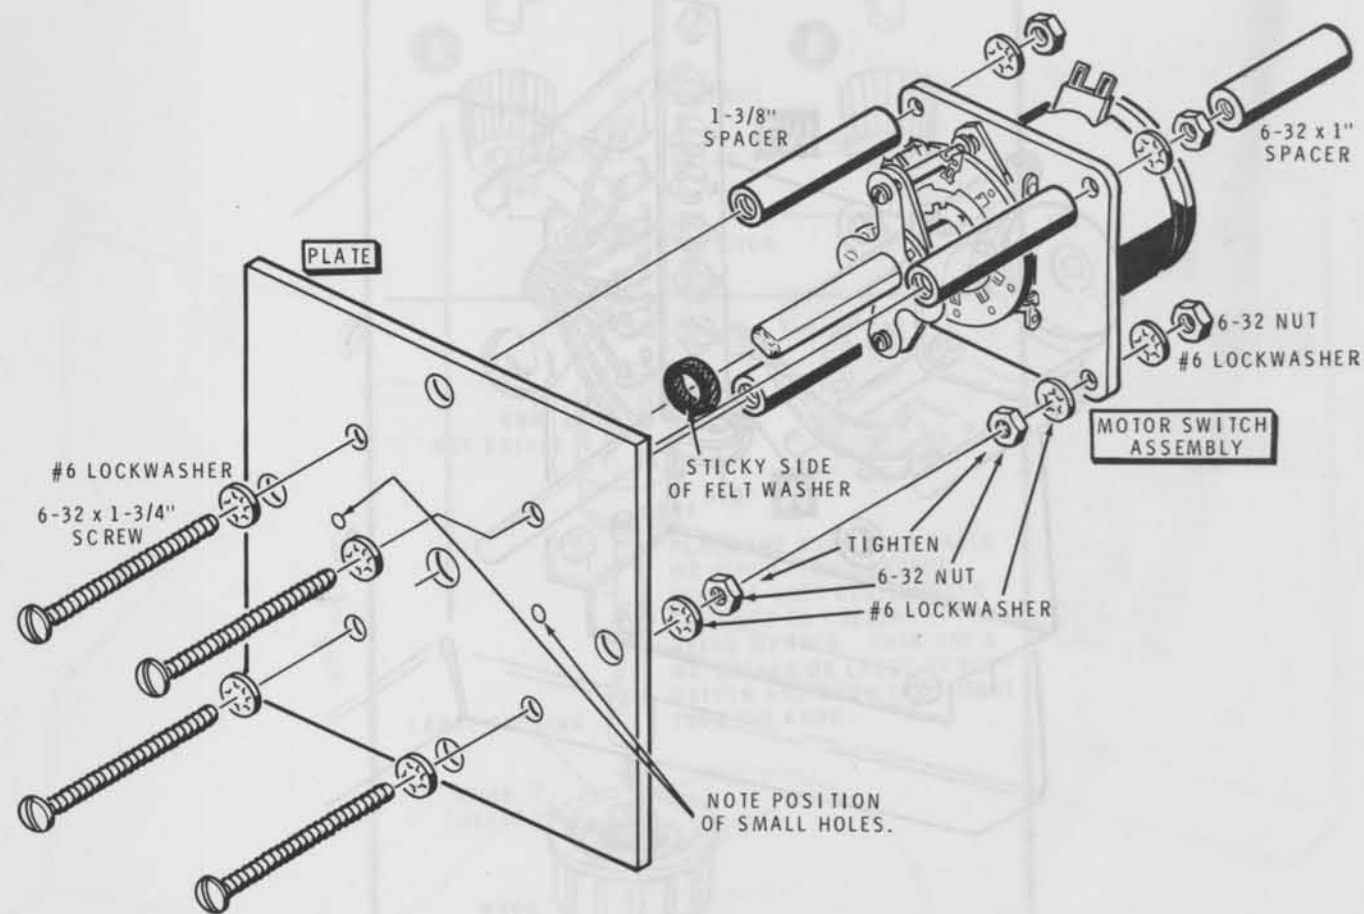


PICTORIAL 2-4

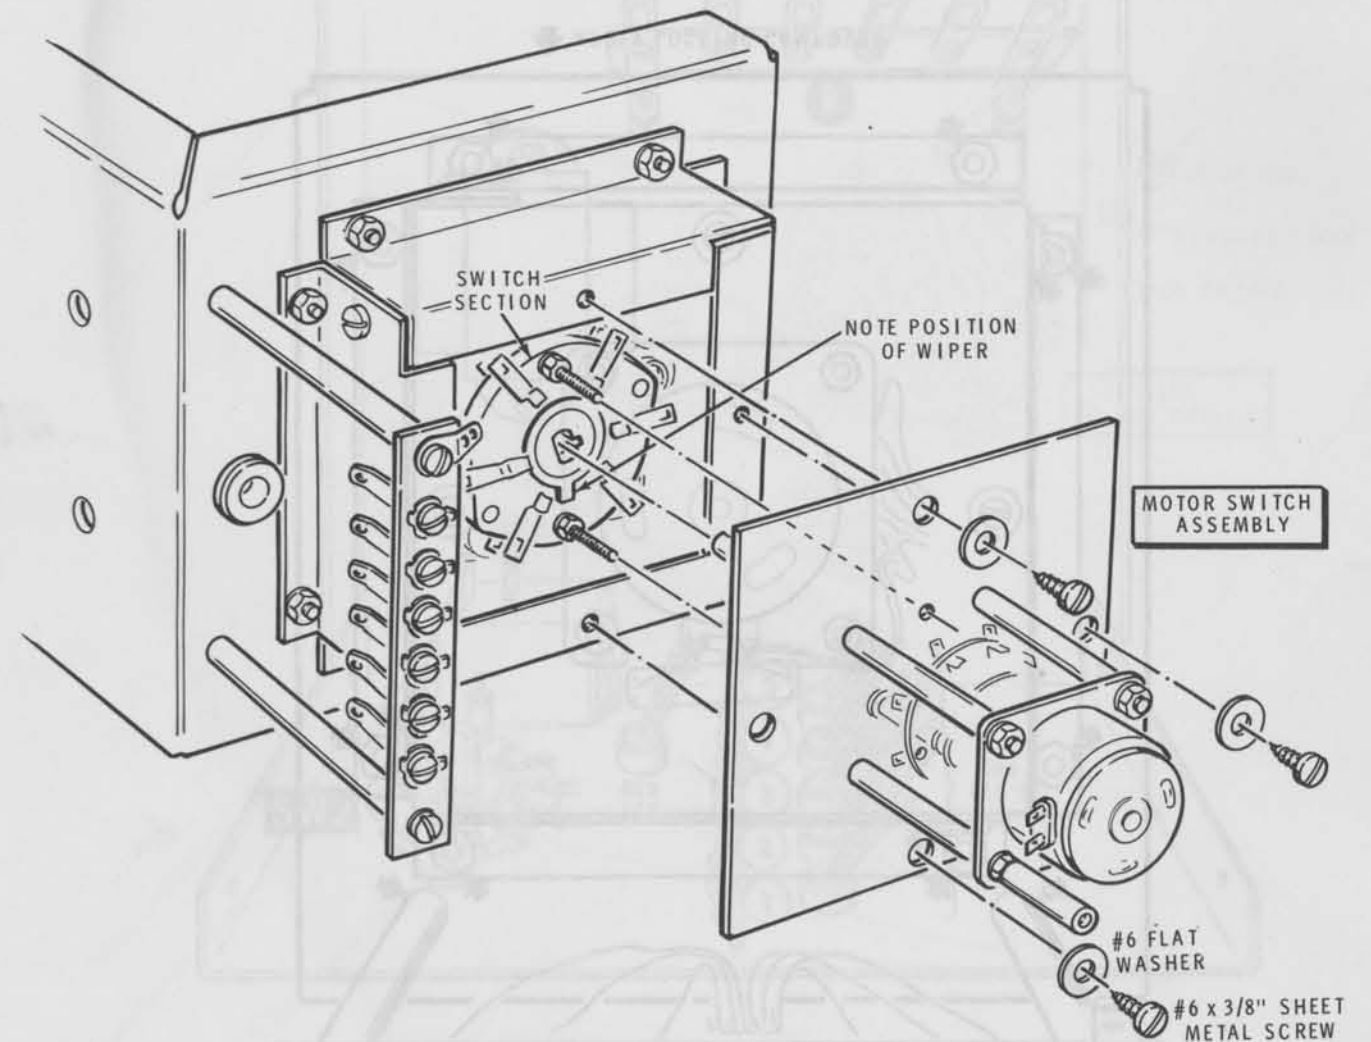

PICTORIAL 2-5

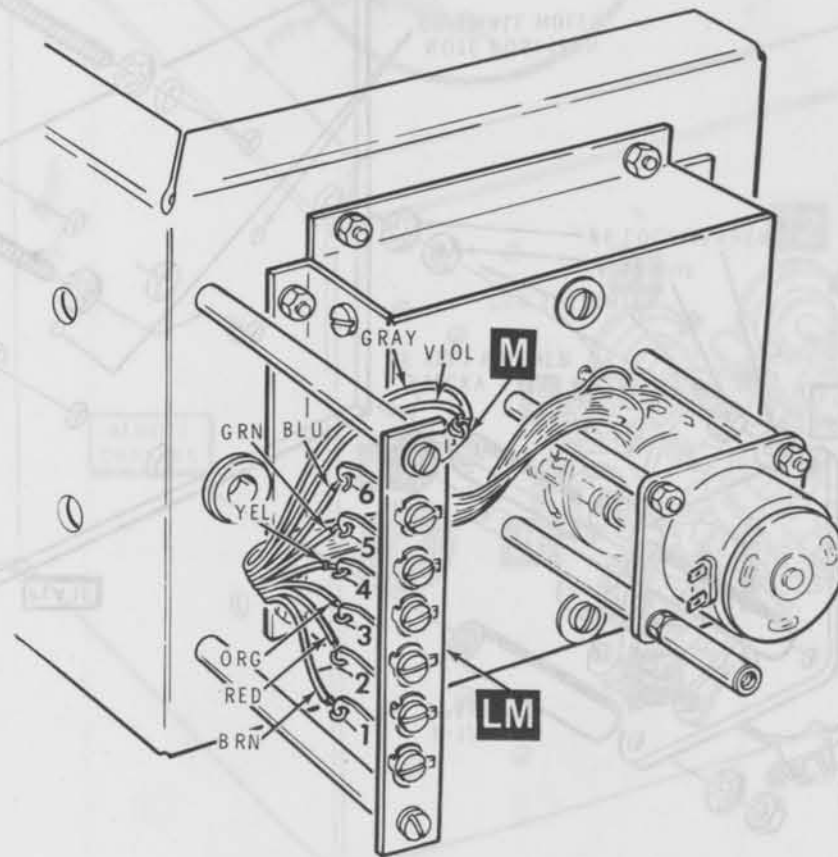




PICTORIAL 2-6

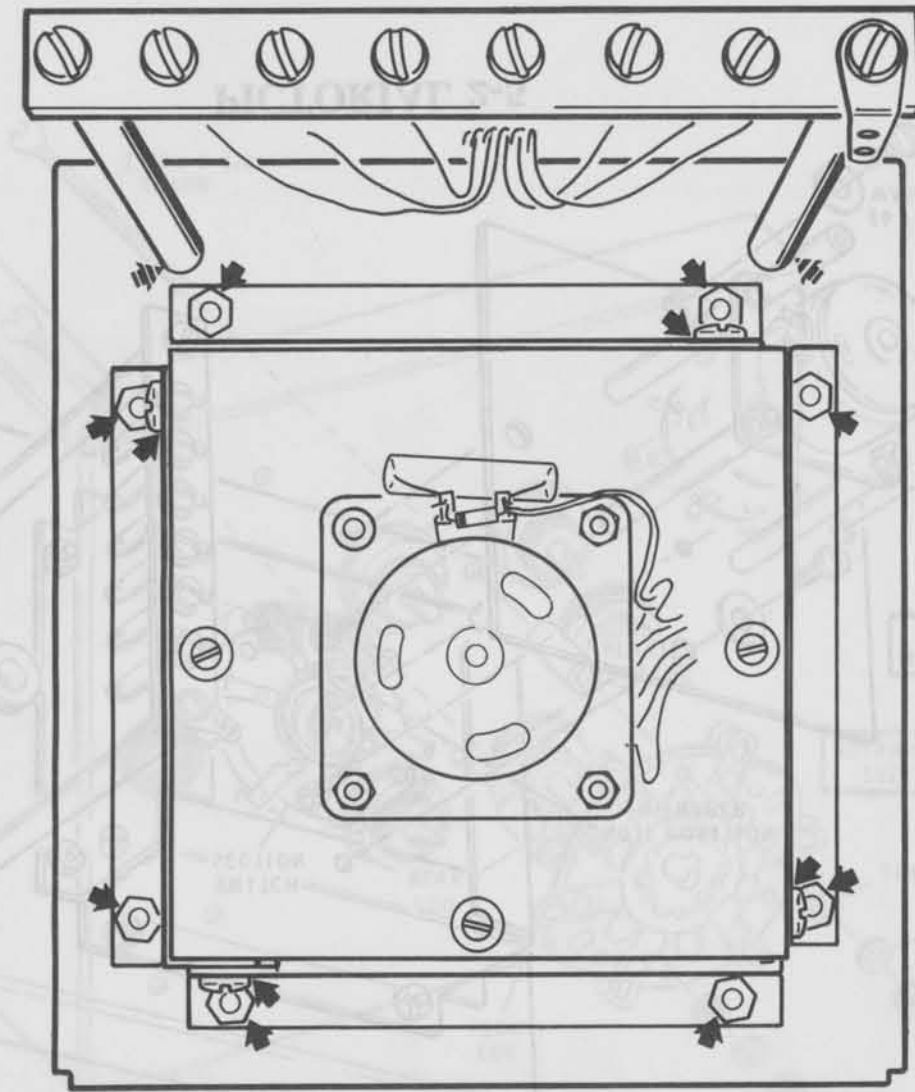



▲ APPLY LOCKING COMPOUND

PICTORIAL 2-9

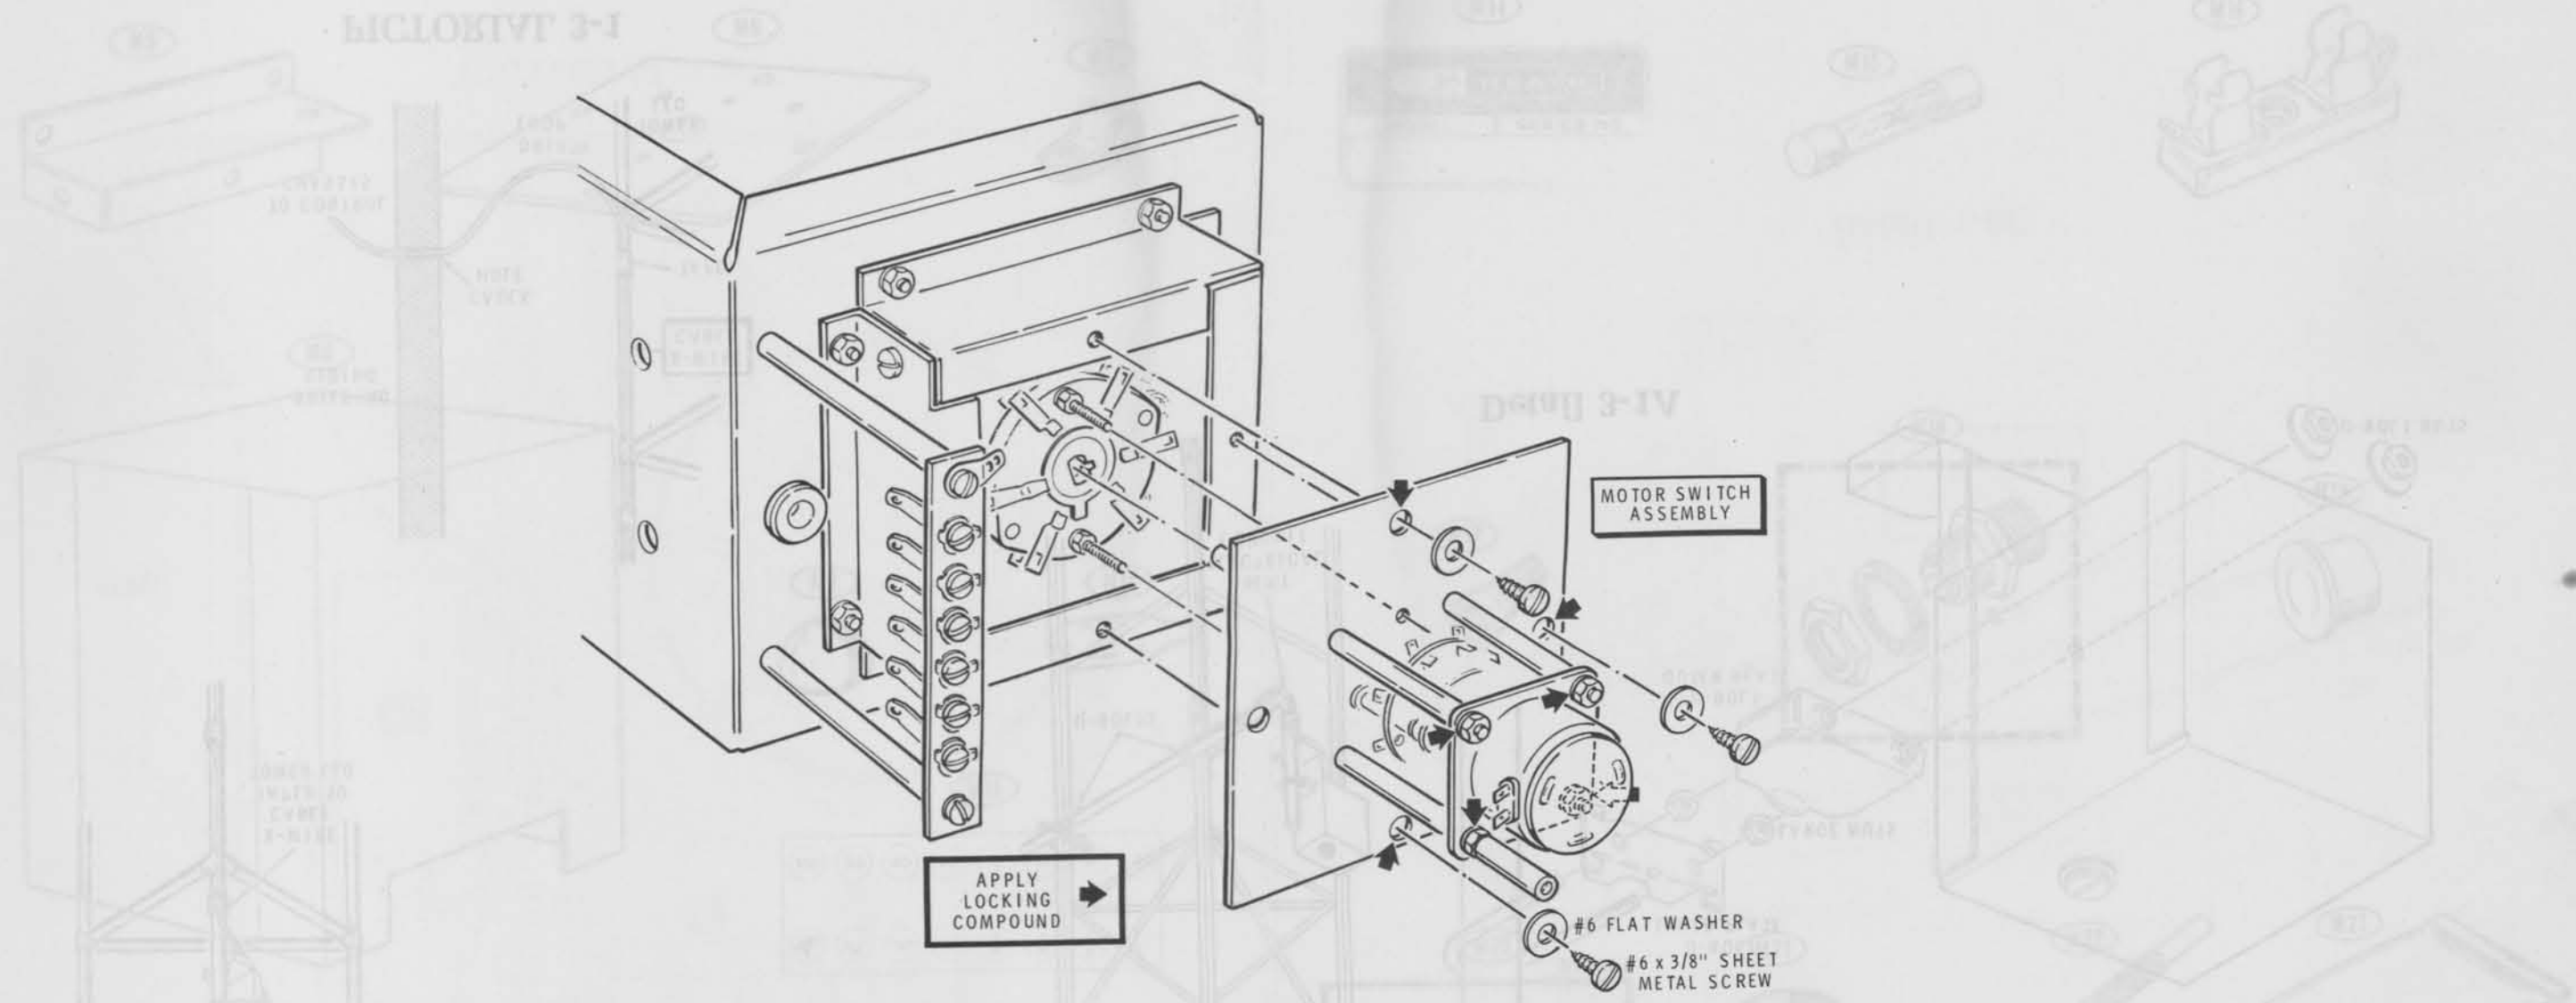

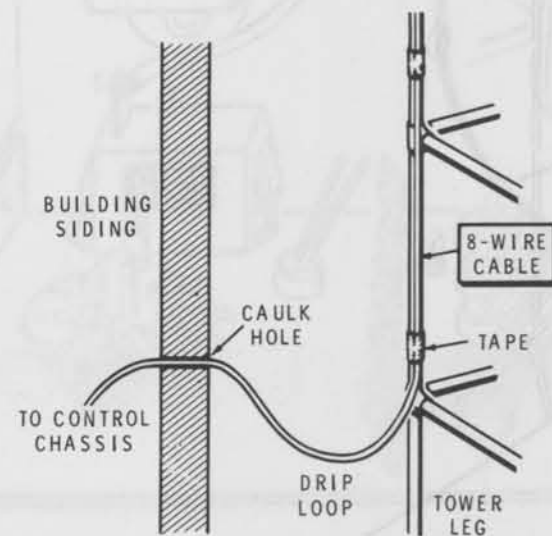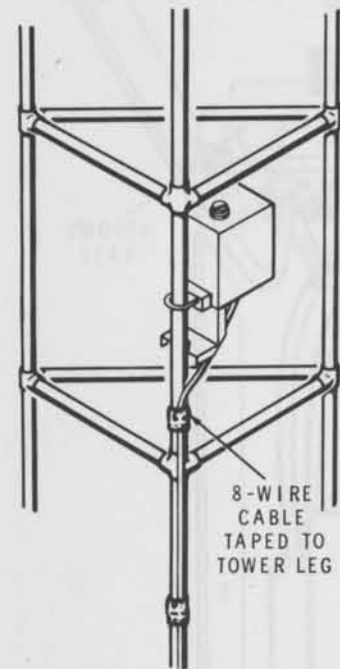


PICTORIAL 3-1

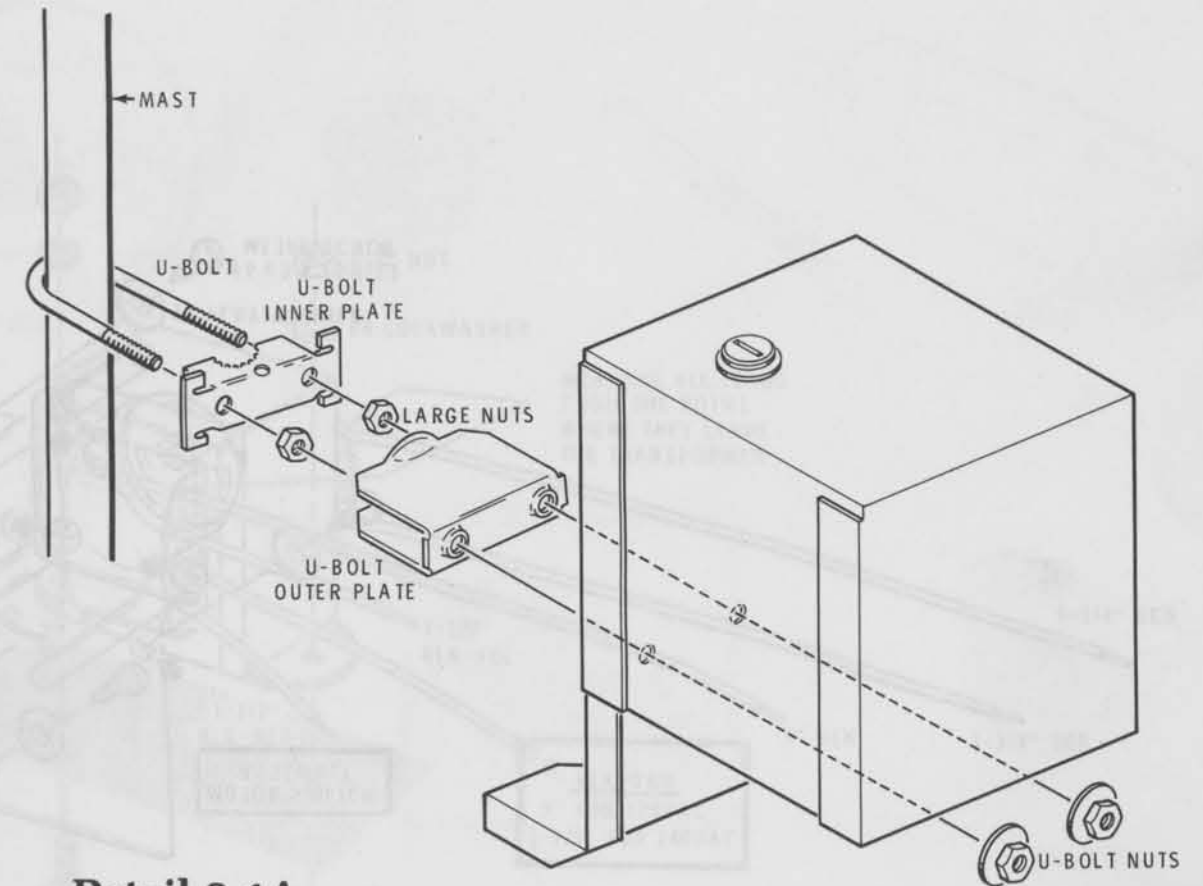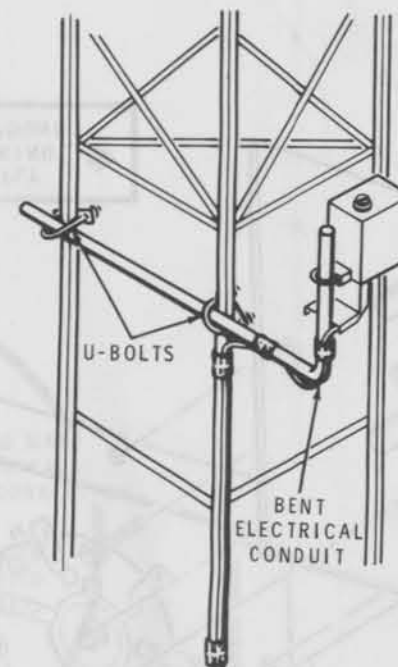

Detail 3-1A

Detail 1-8C

109091-01
P88 65-70

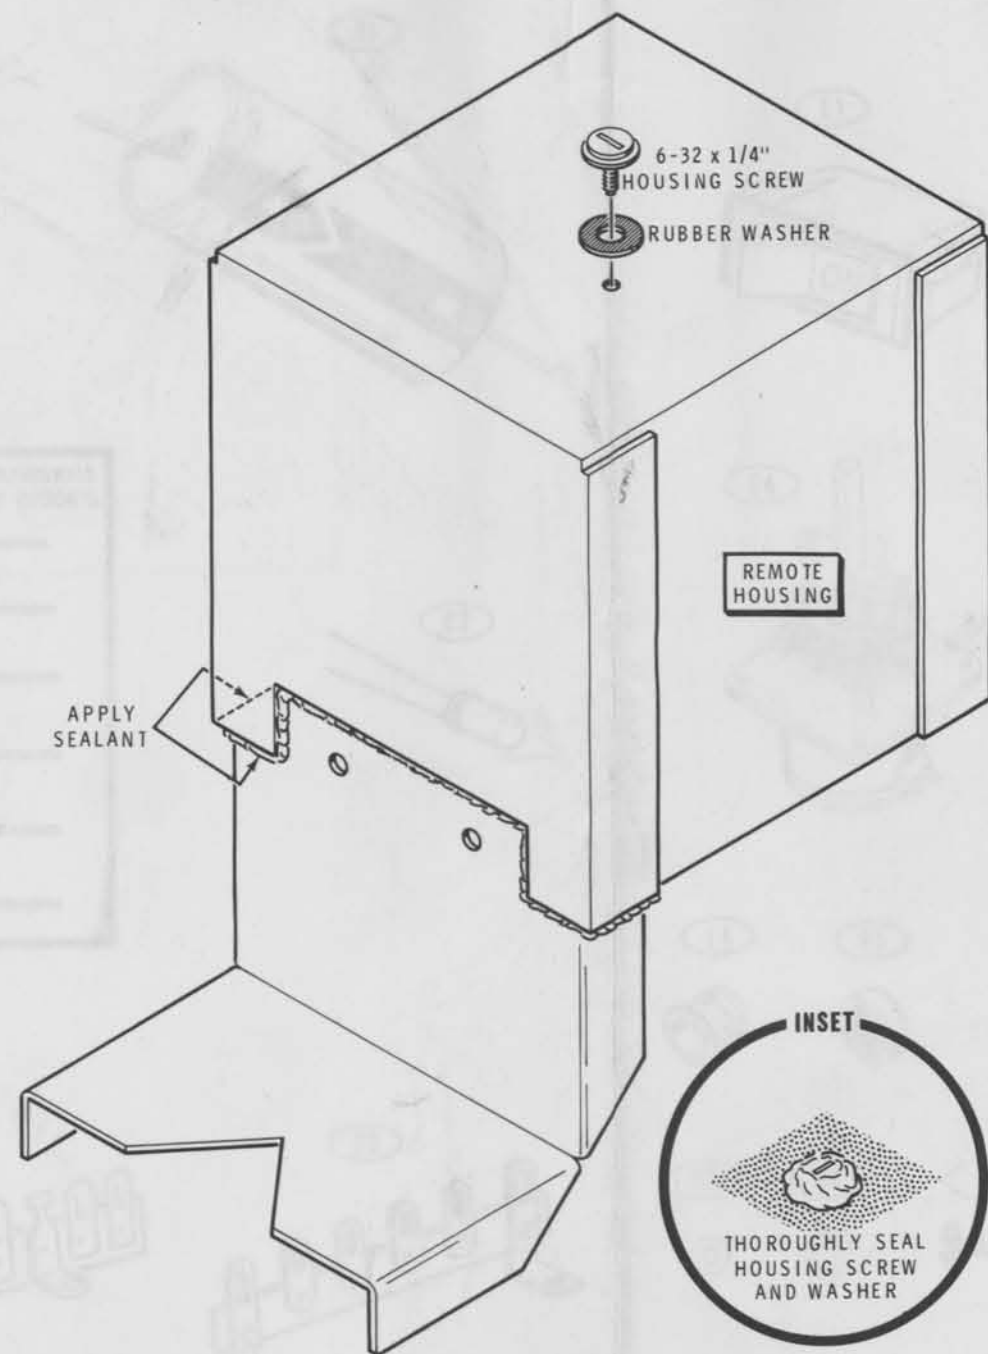

PICTORIAL 3-4