



Power Supply PS-1330, PS-1330M

SPECIFICATION

Model	PS-1330	PS-1330M
Input voltage	230VAC 50Hz	
Output voltage	13.8V fixed	DC5-15V adjustable
Output current	30A(max)	
Output voltage regulation	Less than 2%	
Ripple voltage	Less than 80mVp-p at rated load	
Protection	Short-circuit, Automatic current limiting over 30A, Over-temperature	
Fuse	5A/250V	
Dimensions	125(W)*60(H)*160(D)mm	
(Projections not included)	4.921(W)*2.362(H)*6.299(D)inches	
Weight	Approx. 1.6kg/ 3.35lb with AC cord	


MAIN FEATURE

- Ultra-compact & lightweight
- Voltage adjustable from 5 to 15V (PS-1330M) or fixed at 13.8V (PS-1330)
- Analog Volt/ Amp meter (PS-1330M only)
- Rear panel binding posts output terminals (30A max)
- Precision output voltage regulation of less than 2%
- Ripple less than 80mVp-p
- Protection for short-circuit, Over-temperature, current limiting
- Cooling fan


APPLICATION

- Most base and mobile radios
- Communications equipments like transceivers and receivers.
- Auto mobile sound systems
- Portable entertainment equipment and appliance
- Test equipment and appliances

PS-1330 Photo

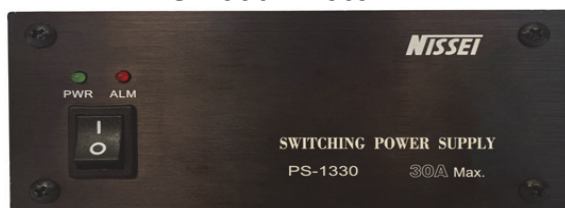

PS-1330M Photo

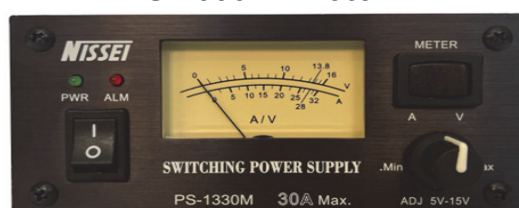

CE / LVD / RoHS