MAINTENANCE HANDBOOK

FOR

HF SSB LINEAR AMPLIFIER

TYPE 7010

CODAN PTY. LTD.
Graves Street,
NEWTON. S.A. 5074
Telephone (08) 337 7000
Telex : 82392
Telegrams : Techimport, Adelaide

CODAN PTY. LTD.
5 Bookham Street,
MORLEY W.A. 6062
Telephone (092) 76 3858
Telex : 92686
Telegrams : Radcomserv, Perth

CODAN PTY. LTD.
284 Victoria Avenue,
CHATSWOOD, N.S.W. 2067
Telephone : (02) 419 2397
Telex : 22631
Telegrams : Techimport, Sydney.

Order Code: 016 110

Handbook distribution is not recorded.

If you require this handbook to be kept up to date with amendments as they become available, either fill in the accompanying card and return, or notify us in writing stating EQUIPMENT TYPE NO. (including any suffixes), HANDBOOK CODE No. and HANDBOOK SERIAL No., also give FULL NAME or COMPANY NAME/DEPT and POSTAL ADDRESS, to which amendments are to be sent.

Always quote the handbook number in correspondence on technical matters concerning the maintenance of a unit.

On receipt of amendments, please insert them promptly.

Issue : 2, May 1975

AMENDMENT RECORD

Enter below the amendment title and date of entry, and the name of the person entering the amendment.

Amend No.	Amendment Title	Date Entered	By
1	300W PEP Version only	-	-
2	1KW PEP Pulse Transmitter Type 7010G only	-	-
3	Incorporated	Issue 2	
4	Incorporated	Issue 2	
5			
6			
7			
8			
9			
10			
11			
12			
13			
14			
15			
16			
17			
18			
19			
20			
21			
22			
23			
24			
25			
26			
27			
28			
29			
30			
31			

LINEAR AMPLIFIER INDEX

1. General

1.1 Introduction
1.2 CAUTION - Mode switch
1.3 Specifications

2. Not Used

3. Brief Description

3.1 General
3.2 Mechanical
3.3 Supplies
3.4 Signal Circuits

4. Brief Description - Servo System

4.1 Block diagram (Dwg D 03-00079)
4.2 Signal Conditions
4.3 Normal operations
4.4 Channel Change
4.5 Servo operation

4.5.1 Tune
4.5.2 Load

5. Technical Description

5.1 Power Supply

5.1.1 High Voltage Supply
5.1.2 Power Control Unit

5.2 Power Control Unit - Sequence

5.2.1 Starting sequence
5.2.2 Bias Fail
5.2.3 HT Overcurrent
5.2.4 High SWR
5.2.5 Airflow switch
5.2.6 Relay supply
5.2.7 AUX supply
5.2.8 Fils, bias & Minor HT
5.2.9 AC Mains supply
5.2.10 Remote indication

5.3 Amplifier Supplies

5.3.1 Fils, bias & Minor HT - primary
5.3.2 Filaments
5.3.3 Bias regulator
5.3.4 Major HT Monitor
5.3.5 Bias fail
5.3.6 Minor HT Regulator

5.4 Driver Stage

5.4.1 Valve conditions
5.4.2 Signal conditions
5.4.3 Phase comparator
5.4.4 Neutralising

5.5 PA Stage

5.5.1 Valve conditions
5.5.2 Signal conditions
5.5.3 Load comparator
5.5.4 Neutralising
5.5.5 Feedback

5.6 SWR Detector

5.7 Diode Matrix

5.8 Load & ALC Detectors

5.8.1 Power supply
5.8.2 Load comparator
5.8.3 ALC
5.8.4 Tune ALC
5.8.5 SWR Bridge
5.8.6 SWR Trip

5.9 Control Logic

5.9.1 Command detector Amp
5.9.2 Tune command gate
5.9.3 Initiate channel change
5.9.4 Timer
5.9.5 Signal lamp
5.9.6 Completion of tune

5.10 Servo AMP (Tune)

5.10.1 Coarse AMP
5.10.2 Servo balance indicator
5.10.3 Fine AMP
5.10.4 Inhibit gate

5.11 Servo AMP (Load)

5.12 Gate Switch Facility

6. Set Up Procedure - Sub Assemblies

Factory use only

7. Test And Alignment

7.1 General
7.2 Visual Examination
7.3 Test Equipment
7.4 Channel Selection (MULTI)
7.5 Channel Selection (SINGLE)
7.6 Preliminary Adjustments
7.7 Tuning, Neutralising & Loading (MULTI)

7.7.1 General
7.7.2 Tuning & Preliminary loading
7.7.3 Neutralising
7.7.4 Loading

7.8 Tuning, Neutralising & Loading (SINGLE)

7.8.1 General
7.8.2 Tuning & preliminary loading
7.8.3 Neutralising
7.8.4 Loading

7.9 ALC Level Adjustment
7.10 SWR Bridge Balance
7.11 Notes on adjustment and operation

8. PARTS LIST

8.1 Linear Amplifier

8.1.1 Main Chassis
8.1.2 Load, ALC & SWR Amplifier PCB
8.1.3 Servo Preset PCB — Multi channel only
8.1.4 Servo Amplifier PCB — Multi channel only
8.1.5 Bias Regulator PCB
8.1.6 Minor HT Regulator PCB
8.1.7 SWR Bridge PCB
8.1.8 Diode Matrix PCB — Multi channel only

8.2 Power Supply

8.2.1 Power Control Unit Chassis
8.2.2 Relay Interlock PCB
8.2.3 Start Relay PCB
8.2.4 Power Supply Chassis

9. LIST OF DRAWINGS

Block Diagram	D03-00079
Circuit Diagram	B04-00102 (1KW)
Circuit Diagram	B04-00313 (500W)
Power Supply CCT	C04-00103 (1KW)
Power Supply CCT	C04-00549 (500W)

Assembly Drawings

SWR Bridge	E08-00145
Diode Matrix	D08-00146
Load, ALC & DET	D08-00147 - 00750) Serial No's
Servo AMP	D08-00148 - 00751) 44 onwards
Bias Regulator	D08-00149
Minor HT Regualtor	D08-00150
Relay Interlock	D08-00151
Driver Stage	D08-00161
Transmitter Cabinet Loom	D08-00577
Tuning Chart (Grid)	10-00027 (1KW)
Tuning Chart (PA)	10-00028 (1KW)
Tuning Chart (Grid)	10-00030 (500W)
Tuning Chart (PA)	10-00031 (500W)

1. GENERAL INFORMATION

1.1 Introduction

The type 7010 LINEAR AMPLIFIER is intended for use as a base HF SSB/AM transmitter, driven by a type 7021 HF SSB/AM EXCITER, housed in the same cabinet. Output powers of 1 KW PEP or 500W PEP versions are available (others to special order). The transmitters are either single channel or multi-channel (up to six), the single channel being manually tuned. The multi-channel transmitters are automatically servo-tuned on channel change. Both version are pre-wired for remote control.

When placed into service the run-up procedure is fully automatic eliminating operator errors in sequencing. The transmitter is completely protected against any antenna condition ranging from absolute short circuit to completely open circuit and attempted operation of the transmitter under such conditions cannot cause damage. In addition to full metering of essential parameters at the front panel,a continous SWR indication is provided.

The cabinet rear door contains an air filter to ensure a dust free flow to the PA valve cooling system. The system is protected against air flow failure.

The linear amplifier is mounted on slides and may be extended from the cabinet for servicing. It is still operational in this position. Gate safety switching has been eliminated by careful construction. Adequate warning labels are affixed to panels under which lethal voltages are accessable.

The type 7010 may carry "CODAN" or "EILCO" brand names. It is type approved by the APO.

1.2 CAUTION - MODE Switch

The mode transmitted (A3H or A3J) is selected by a switch at the rear of the Exciter.

This switch must be returned to the correct position after tests or measurements have been performed.

1.3 Specification

The specification figures are for a 7010 Linear Amplifier driven by a 7021 Exciter. All figures refer to the 1KW version. Where 500W figures differ they are shown in brackets.

Frequency Range	2 - 12MHz (2 - 15MHz)
No. of Channels	6 maximum in multichannel version
Operating Modes	A3J normally upper sideband but lower sideband available A3H (compatable AM)
Frequency Stability	5 parts in 10^7 over the temperature range 0-60°C
Power Output	A3J 1000W PEP 2tone test (500W) A3H 250W nominal (125W)
RF output inpedance	50 ohms nominal. The transmitter can be loaded into any impedance producing a VSWR of less than 2:1
Harmonic Emissions	At least 45 dB below PEP
Spurious Emissions	Spurious Emissions (not harmonics) separated from the carrier by more than 20 kHz : 50 dB below PEP
Carrier Suppression	At least 50 dB below PEP
Unwanted Sideband	At least 43 dB below PEP
Intermodulation Products	At least 40 dB below PEP
Hum and noise	At least 50 dB below PEP
Audio input level	The onset of compression may be adjusted for input signals between -20 dBm and +10 dBm into 600 ohms.
Audio input impedance	10 k ohm balanced.
ALC Range	An increase of 30 dB in input level above the compression level will produce less than 1dB increase in power output.
AF frequency response	$\pm$ 3dB 300 - 2800 Hz.

1.3 Cont'd

Controls

Power on/off
HT on/off
Function:- Normal/Off/Local/Tune
Local control:- Standby/Transmit
CHANNEL select
Mode A3H/A3J at rear.

Metering Separate meters for

a) Cathode Current (Switched each tube & total)
b) Tune (Switched PA grid & anode)
c) Load
d) Switched. Screen current (each tube)
Major HT. voltage
Minor HT. voltage
Grid Bias voltage
Load SWR
Servo balance.

Protection

Overload trips are provided for.

Low air pressure
Low grid bias
High plate current
High SWR

Power requirements

220-260 v 50 Hz single phase. Other voltages and frequencies to order.

Power consumption

2000 V A (1300VA) 2 tone test.
500 V A standby

Environmental

Ambient Temperature C	0 to 30	30 to 60
Relative humidity	95%	from 95% at 30°C to 50% at 60°C
Atmospheric Pressure	700 milibars (7500' or 2500 metres) above sea level	

Dimensions (cabinet)

20½"W x 23"D x 56"H
52cmW x 58.4cmD x 142.2cmH
(19" standard panels).

Weight

Finish Colours

Colours to BS381C:1964
Panels Sky No 210 in semigloss stoved enamel
Cabinet Mid bronze green No 223 in armorhide vinyl
Lettering Black.

3. BRIEF DESCRIPTION

3.1 General

The LINEAR AMPLIFIER TYPE 7010 is in three main sections :-

(a) AMPLIFIER (and integral power units). (para 5.3 to 5.9)

(b) HIGH VOLTAGE SUPPLY (paras 5.3 to 5.9)

(c) POWER CONTROL UNIT. (para 5.1.2 and 5.2)

The AMPLIFIER occupies the top section of the cabinet and the other two units the bottom section.

An HF SSB EXCITER Type 7021 housed directly under the AMPLIFIER is an essential part of the complete transmitter.

3.2 Mechanical

The AMPLIFIER and EXCITER can be extended out from the cabinet on extending runners for servicing and adjustments. No gate switches are provided as access to lethal voltages can only be obtained by removing sub-panels which are clearly labelled. Provision is made for the fitting of a gate switch if locally required (see para 5.12).

The HIGH VOLTAGE SUPPLY is firmly bolted to the cabinet floor and should not be removed with the AMPLIFIER in the extended position.

The POWER CONTROL UNIT can be removed from the cabinet independant of the High Voltage Supply.

A centrifugal type air blower is fitted to the rear of the AMPLIFIER which provides cooling for the PA Valves. A pressure operated AIR FLOW SWITCH is fitted and if the air flow fails or reduces for any reason the unit is disabled.

3.3 Supplies

The HIGH VOLTAGE SUPPLY is designed to provide approximately +1800V DC for the PA Valve anodes, provision is made for monitoring the voltage and current supplied by the unit.

The POWER CONTROL UNIT provides a + 24V DC supply for relay operation and by a series of interlocks ensures correct operation of all the AMPLIFIER supplies. The unit houses the main circuit breaker and all fuses, the indicator neons for each supply and fault indicator lamps.

The AMPLIFIER houses the remainder of the supplies, namely the MINOR HT SUPPLY (regulated +350V DC and +300V DC), BIAS (-50 to -100 VDC) and FILAMENTS (6.1 and 6.3V AC).

3.4 Signal circuits

The DRIVER STAGE is a single valve Class A amplifier driven by the 100mW RF output from the exciter unit. The output is developed across the combined driver anode/PA grid tuned circuit. On multi-channel amplifiers the inductance tap and tuning capacitor is pre-selected to suit the channel frequency by relays switched by the diode matrix which is controlled by the exciter. The stage is manually tuned, assisted by a phase comparator circuit and tune indicator meter.

The PA STAGE uses four air-cooled valves in parallel operated in Class AB1. The cathode and screen currents of each valve are separately monitored and each screen voltage can be adjusted to "balance" the four cathode currents.

The PA TANK circuit on single channel amplifiers is manually tuned and loaded. On multi-channel amplifiers the tank inductor tap and additional loading capacitors are pre-selected to suit the channel frequencies by relays switched by the diode matrix. The tuning and loading capacitors are motor driven, servo operated from signals derived from a tuning phase comparator and a load comparator. Coarse control of the servo amplifiers is from relay selected SERVO PRESET potentiometers to ensure that the phase comparator does not accidently tune to a harmonic of the channel frequency.

Feedback from the PA anode to DRIVER cathode maintains linearity and stability of the amplifier. A separate ALC voltage is fed back to the exciter unit to limit the PA dissipation during'TUNE'and controls the PEP of the amplifier during normal operation.

An SWR detector is connected between the PA tank circuit and the output Socket. Signals from this circuit are fed to an SWR bridge circuit (on the LOAD, ALC & DET PCB) which drives the SWR meter and operates a SWR TRIP circuit should the load cause a high SWR reading. The SWR TRIP circuit will shut down the transmitter in the event of a fault.

The SERVO-AMPLIFIER system is described separately in para 4.

4. BRIEF DESCRIPTION - SERVO AMP ASSY

4.1 Reference BLOCK DIAGRAM D03-00079

4.2 SIGNAL CONDITIONS

(1) MAJOR HT MONITOR is a +12V level, present only when the Major HT SUPPLY is on.

(2) INITIATE CHANNEL CHANGE, normally this input is at +12V but becomes GND for a short duration when a channel change is initiated.

(3) TUNE COMMAND SIGNAL, normally this output is +12V but becomes GND for the duration of the TUNING and LOADING process. (LP1 normally illuminated, goes out during tuning).

4.3 NORMAL OPERATION

MAJOR HT MONITOR (+12V) and INITIATE CHANNEL CHANGE (+12V), via OR GATE 1 will hold the DETECTOR AMP output at ground.

OR GATE 2, has no inputs (MOTION DETECTORS no output) thus the ENABLE GATE has no input and the following AND GATE has only one input (MAJOR HT MONITOR).

The TUNE COMMAND GATE therefore gives +12V output inhibiting the SERVOS via OR GATES 3 and 4 and associated INHIBIT GATES, which prevent operation of the FINE SIGNAL AMPS.

Should the MAJOR HT MONITOR cease (GND) the input is removed from the AND GATE preventing operation of the TUNE COMMAND GATE even if an INITIATE CHANNEL CHANGE pulse is received.

4.4 CHANNEL CHANGE

The INITIATE CHANNEL CHANGE pulse (GND) via OR GATE 1 will cause the DETECTOR AMP output to be +12V and via OR GATE 2 and ENABLE GATE will give the second input to the AND GATE which now enables the TUNE COMMAND GATE which gives the TUNE COMMAND SIGNAL (GND). (LP1 goes out).

The TUNE COMMAND SIGNAL is fed to the EXCITER which generates the 'TUNE' SIGNAL for the LINEAR AMPLIFIER input. It is also passed to OR GATES 3 and 4 and when the INITIATE CHANNEL CHANGE pulse ceases (the DETECTOR AMP output +12V is holding the INHIBIT GATES) the FINE SIGNAL AMPS can operate. The TIME DELAY will maintain the TUNE COMMAND SIGNAL until the MOTION DETECTORS provide an output, either one of which will continue to maintain the TUNE COMMAND SIGNAL (and reset the TIMER), via OR GATE 2.

4.5 SERVO OPERATION

4.5.1 TUNE

The SERVO PRESET and FOLLOW POT (on the TUNE MOTOR) are arranged to give an identical output when the LINEAR AMPLIFIER is correctly tuned.

When the channel change was initiated a different SERVO PRESET was relay selected to suit the channel frequency and the TUNE COARSE AMP will now receive a differential input. This will be amplified, limited by the LEVEL GATE and fed via the FINE SIGNAL AMP and SERVO AMP to drive the TUNE MOTOR (in the correct direction) to turn the TUNING CAPACITOR towards resonance. The FOLLOW POT is ganged to the TUNING CAPACITOR and the TUNE COARSE AMP differential input will reduce to zero as resonance is reached. This is indicated on the SERVO BALANCE meter, used for initially setting the SERVO PRESETS, and periodic checks. This circuit ensures that the PA TANK CIRCUIT is not accidently tuned to a harmonic of the channel frequency.

When resonance is almost reached the output from the TUNE PHASE COMPARATOR (see para 5.4.3) will take command of the FINE SIGNAL AMP to give more precise tuning signals to the SERVO AMP.

4.5.2 LOAD

A coarse amplifier is not required, loading is achieved in the same manner as above, signals from the LOAD COMPARATOR, servo controlling the loading capacitors.

The TUNING and LOADING process is interdependant but when the LINEAR AMP is correctly tuned and loaded to the new channel frequency , both MOTION DETECTORS will cease to give an output. OR GATE 2 now has no inputs and cannot operate the ENABLE GATE and one input from the AND GATE is removed. The TUNE COMMAND GATE will be held by the TIMER for a short period (1.5 secs) and then shut off the TUNE COMMAND SIGNAL (revert to +12V output), the EXCITER (& LIN AMP) will now revert to normal operation, LP1 will light.

5. TECHNICAL DESCRIPTION

5.1 POWER SUPPLY (Ref. DWG. C04-00103)

The supplies are divided into three main sections :-

(a) HIGH VOLTAGE SUPPLY which provides +1800V DC
(b) POWER CONTROL UNIT which provides +24V DC for relay operation in the AMPLIFIER and controls all the supplies.
(c) FILS, BIAS and MINOR HT supplies which are integral with the amplifier and described in para. 5.3.

5.1.1 HIGH VOLTAGE SUPPLY (Ref DWG C04-00103)

The AC supply for the high voltage transformer (T1) is fed via a 10A 250V circuit breaker (CB1), contact A1, contacts C1, C2 and C3 in parallel and SW1. When energised the MAJOR HT neon (LP1) connected across T1 primary will be illuminated. Voltage taps are provided on T1 primary and a tap selection table is provided on DWG C04-00103.

The secondary of T1 is bridge rectified by D1 to D24, a VDR (Voltage dependant resistor) R1 to R24 is placed across each diode to ensure equal voltage distribution and protect the diodes from transients. Filtering is effected by L1 and C3A to C7B (in series parallel). R25 to R29 across the capacitors ensure equal voltage distribution and C1 tunes L1 to the ripple frequency. R31 and R32 are the bleed and divider network, arranged to give approximately +12V at their junction and this is fed via TS1/K as the MAJOR HT MONITOR voltage. (This is used for metering and in the BIAS REGULATOR and SERVO AMPLIFIER circuits as a control). The negative return current through R30 produces a negative voltage (proportional to current) which is fed via TS1/J to the HT OVERCURRENT detector circuit.

5.1.2 POWER CONTROL UNIT

The operational sequence is described in para 5.2

(A) Relay Supply

The AC supply for the relay supply transformer T2 is fed via CB1 and F1 and when energised will illuminate the AUXILLARY neon LP2. The primary of T2 is voltage tapped and the taps are also arranged to provide a corrected voltage for the FAN active supply when operated at 40 Hz.

The secondary of T2 is fed via F2 to supply two rectifier systems:-

(i) 24V Supply

D1 to D4 form a bridge rectifier and produce the +24V smoothed relay supply. It is fed via SK1/8 to the AMPLIFIER and via the interlock link and SK1/2 to contact E1

5.1.2 (ii) Fault Indicator Supply

D2, D4, D5 and D6 form a bridge rectifier to provide an unsmoothed supply of approx 15V which is used to operate the fault indicator lamps and relays. The RELAY SUPPLY lamp LP5 is illuminated from this supply.

(B) TIMER CIRCUIT

With the E1 contact closed (normal) the +24V supply is extended to the TIMER and the B, C and D relays.

In the normal sequence of operations (see para 5.2) D10 will be grounded via SK1/10 and TR2 will be cut-off its base being grounded via R6. The anode of D9 will also be grounded via R3. Current through R5, Z1 Z2 and D10 will establish a zenered voltage (+13.3V) at the junction of R5 and Z1. C2 and C3 connected to this point can only charge via R4 (D9 held back biased) so initially the gate of TR1 is held positive. TR1 is a P-channel deplection type FET and therefore non-conducting. When C2 and C3 have charged sufficiently via R4 (approx 60 seconds) TR1 will conduct. TR1 current through R6 will cause TR2 to conduct and operate the D relay. D2 contact will now complete the path for the C relay to operate.

In effect this circuit delays the application of the MAJOR HT supply for 60 secs, and allows the PA valve cathodes time to reach operating temperature.

In the event of a BIAS failure :-

(a) The ground is removed from SK1/10, and
(b) E1 contact opens the +24V supply, (this shuts off the MAJOR HT supply).

C2 and C3 will discharge via D9 (now forward biased) and R2, thus ensuring a further 60 seconds delay when the BIAS is restored.

However R3 causes a short delay in discharging C2 and C3, and this permits a momentary break in the AC supply (such as when resetting other fault indicators) avoiding the 60 second delay.

(C) MISCELLANEOUS

The AC supply for the FILS BIAS and MINOR HT supplies in the AMPLIFIER is fed through this unit via CB1, A1, B2 and F2 to SK1/17 and when energised will illuminate neon LP4.

NB. The EXCITER is activated independantly and not controlled by this unit.

(D) START DELAY

The Major HT transformer is energised via a current limiting resistor for approximately 50 mSec before the full AC supply is applied, thus reducing current transients to a tolerable level, see para 5.2.1

5.2 POWER CONTROL UNIT - OPERATION SEQUENCE

With the AC supply connected to the cabinet the EXCITER may be operated independantly of the remainder of the equipment.

5.2.1 STARTING SEQUENCE

Circuit Breaker CB1 switched ON :-

(a) AC MAINS neon LP3 illuminated

(b) AUXILLARY neon LP2 illuminated, if F1 intact.

(c) RELAY SUPPLY lamp LP5 illuminated, if F3 intact.

(d) +24V relay supply available to the AMPLIFIER and the B, C and D relays via E1.

Further action can only take place if the EXCITER, AMPLIFIER and the loom are correctly installed.

(1) If the EXCITER function switch is at NORMAL, the operator at the remote position must now operate the POWER ON switch to provide an earth at SK1/5.

(2) If the EXCITER function switch is at LOCAL, the earth at SK1/5 is automatically provided.

SK1/5 now grounded :-

(a) Relay $\frac{A}{3}$ will operate.

(b) A2 contact provides latching of the $\frac{A}{3}$ relay via SK1/6 and the EXCITER function switch or remote POWER OFF switch.

(c) A3 contact completes the AC fan active circuit via SK1/16

(d) A1 contact prepares the FILS, BIAS & MINOR HT and MAJOR HT active lines.

The AIR FAN now operating will close the AIR FLOW switch and earth SK1/4.

SK1/4 now grounded :-

(a) Relay $\frac{B}{3}$ will operate

(b) B1 contact prepares the $\frac{C}{3}$ relay path as far as D2 contact

5.2.1 Cont.

(c) B3 contact prepares the E/2 relay path as far as D1 contact.

(d) B2 contact completes the FILS., BIAS & MINOR HT active line via F2, SK1/17 and illuminates LP4.

The AMPLIFIER is now powered except for MAJOR HT. The BIAS FAIL relay A/1 in that unit operates providing an earth at SK1/10 and removing the earth from SK1/11. SK1/10 grounded starts the TIMER for D/2 relay and SK1/11 opens the E/2 relay path (until BIAS FAIL occurs).

After 60 seconds delay the TIMER operates D/2 relay via TR2.

(a) D1 contact prepares the E/2 relay path, (which will now operate in the event of a BIAS FAIL grounding SK1/11).

(b) D2 contact completes the C/3 relay path and grounds SK1/3. This lights the TX AVAILABLE lamp at the remote console. (If applicable)

C/3 relay operates via the charging current of 3C1.

(a) Contacts C1 and C2 complete the AC supply to T1 via 3R4 and SW1. SW1 is normally closed, its use generally being limited to isolation of MAJOR HT during adjustments. 3R4 limits the high current transient which may cause CB1 to trip out as T1 core energises.

(b) Contact C2 permits 3C2 to charge via 3R3. After a delay of 50mS J/3 operates.

(c) Contacts J1 and J3 close and bypass 3R4. This allows full AC supply to T1, the current transient now being within acceptable limits.

(d) Contact J2 closes and bypasses 3C1, and also holds C/3 relay via 3R1.

The MAJOR HT is now available, the Major HT Indicator LP1 illuminated, and the AMPLIFIER fully powered. The MAJOR HT supply will be switched off when C/3 relay is released due to either POWER "OFF" being selected on any one of the fault relay contacts opening (B1,D2,G1 or F1). Contact C2 will cause 3C2 to discharge via 3R3 and release J/3 relay. Contact J2 prevents re-operation of C/3 relay without the start delay afforded by J/3. 3R1 will discharge 3C1 rapidly to permit a restart sequence.

Should the $\frac{J}{3}$ relay be inadvertantly be unplugged and a POWER "ON" start made, $\frac{C}{3}$ will operate but will abort within 2 seconds as 3C1 ceases charging. No further action is possible until $\frac{J}{3}$ is replaced.

5.2.2. BIAS FAIL

Should the BIAS supply fail the BIAS FAIL RELAY will release grounding SK1/11 and opening SK1/10. SK1/10 open will release the $\frac{D}{2}$ and $\frac{C}{3}$ relays SK1/11 grounded will operate $\frac{E}{2}$ relay and illuminate LP6.

(a) E1 contact will release the supply from the $\frac{B}{3}$ relay and also the $\frac{C}{3}$, $\frac{D}{2}$ relay and the TIMER. This removes all the supply to the AMPLIFIER except the FAN active.

(b) E2 contact provides self latching of the $\frac{E}{2}$ relay.

This circuit cannot be restored until the BIAS supply is restored to ground SK1/10.

5.2.3 HT OVERCURRENT

The MAJOR HT negative return via R30 developes a voltage proportional to the current and is arranged to operate the $\frac{H}{2}$ relay if excessive. R1a and R1b are provided to adjust the current sensitivity.

$\frac{H}{2}$ relay operates :-

(a) H1 contact will operate the $\frac{G}{2}$ relay and light LP7 indicating an HT OVERCURRENT.

$\frac{G}{2}$ relay operates :-

(a) G1 contact releases $\frac{C}{3}$ relay (MAJOR HT off).

(b) G2 contact provides self-latching of the $\frac{G}{2}$ relay.

$\frac{C}{3}$ relay released : opens the AC supply to T1 and the MAJOR HT is switched off, this releases the $\frac{H}{2}$ relay (no self latching) but $\frac{G}{2}$ remains operated(self-latching).

The circuit may be restored by momentarily breaking the MAIN AC supply (at CB1) which releases the $\frac{G}{2}$ relay.

5.2.4 HIGH SWR

The SWR measuring circuit will provide a ground at SK1/1 in the event of an aerial fault. This will operate the $\frac{F}{2}$ relay and illuminate LP8.

(a) F1 contact releases $\frac{C}{3}$ relay (MAJOR HT off).

(b) F2 contact provides self latching of $\frac{F}{2}$ relay.

When the aerial fault is rectified the $\frac{F}{2}$ relay may be released by momentarily breaking the AC supply at CB1.

5.2.5 AIR FLOW SWITCH

Failure or partial failure of the air supply will remove the ground from SK1/4 and release $\frac{B}{3}$ relay.

(a) B1 contact releases $\frac{C}{3}$ relay (MAJOR HT off)

(b) B2 contact open circuits the FILS, BIAS & MINOR HT supply.

(c) B3 contact open the $\frac{E}{2}$ relay path, preventing its operation as the BIAS supply fails which would give a false indication.

NB : No AIR FLOW FAIL lamp is provided, but this is self-evident.

5.2.6 RELAY SUPPLY

A short circuit or overload of the relay supply will blow the F2 fuse and extinguish the RELAY SUPPLY lamp LP5.

5.2.7 AUXILIARY SUPPLY

A short circuit or overload of the FAN Supply or T2, will blow the F1 fuse and extinguish LP2.

5.2.8 FILS BIAS & MINOR HT

A short circuit or overload of this circuit will blow the F3 fuse and extinguish LP4.

5.2.9 AC MAINS SUPPLY

An overload of the MAJOR HT supply or any other circuit protected by fuses will trip the circuit breaker CB1 and extinguish LP3.

5.2.10 REMOTE INDICATION

Release of the $\frac{C}{3}$ relay by any of the above eventualities will extinguish the TX AVAILABLE lamp on the operators console. Normal procedure would be for the operator to operate the POWER ON switch to reset the fault indicators and relays if the failure was temorary or intermittent. Repeated attempts to reset will not damage the equipment but if unsuccessful the POWER CONTROL PANEL should be consulted for indication of the fault and subsequent rectification

NB : The TX AVAILABLE lamp will not light for at least 60 seconds if the $\frac{D}{2}$ relay was released by a BIAS failure.

5.3 AMPLIFIER SUPPLIES Ref DWG B04-00102 (1 Kw) B 04-00313 (500 W)

5.3.1. FILS, BIAS and MINOR HT Primary Supply

The AC mains are connected to the appropriate voltage tap on the primary of T4, the active fed via PL1/23 and the neutral fed via PL1/24.

5.3.2 FILAMENTS

(A) The 6.3V secondary of T4 is connected only to V5 the DRIVER AMP valve filaments.

(B) The 6.1V secondary of T4 is connected to V1 to V4 the PA VALVES filaments.

5.3.3. BIAS REGULATOR

The 90V secondary of T4 is rectified by 5D1 to 5D4 and filtered by 5C1, the positive rail being grounded. The negative supply via 5R2 is zenered by 5Z1 to set the negative supply to 5TR1 and 5TR2 at -12V, from this rail 5R10, 5D6 and 5Z3 zener the base of 5TR2 at approx - 6.8V. When the PTT is operated an earth is applied to PL1/12. The path 5R1, 5Z2 is effectively open circuit because the voltage across 5R1 and 5Z2 is less than the conduction voltage of 5Z2.

The potential divider 5R7, RV6 (BIAS SET), 5R6 and 5R5 set the base of 5TR1 at a voltage dependant on the bias voltage. As the negative rail (BIAS) tends to go negative this will be reflected across 5R6 and 5R5 to reduce the conduction of 5TR1 and 5TR2 will conduct. The volt drop across 5R9 will turn on 5TR4. 5R16, 5R17 and 5R18 potential divider hold 5TR5 and 5TR6 in a conducting state, the current controlled by 5TR4. Conduction through this SHUNT circuit will reduce the bias voltage by increasing the volt drop across 5R3. The BIAS is set by RV6 to approx - 55V.

When the PTT is released (i.e. no ground on PL1/12) the positive voltage via 1R69 (from PL1/8), 5R1, 5Z2 and 5D5 will cause the ratio of the voltage divider chain feeding 5TR1 base to change, and allow the BIAS voltage to reach a higher value (approx - 70 V). This will reduce (but not cut off) the standing current in the PA valves.

5.3.4 MAJOR HT MONITOR

When PL1/21 is positive indicating that the MAJOR HT is available the base of 5TR3 is held at approx +0.6V via 5R11 and 5D7. 5TR3 is therefore cut-off having no effect on 5TR4.

If the MAJOR HT fails or is switched off, 5R12 and 5R11 potential divider will cause 5TR3 to conduct and ground the base of 5TR4 which will cut off. This open circuits the SHUNT chain and full BIAS (- 90 V) is available to cut off the PA Valves.

5.3.5 BIAS FAIL

Normally the BIAS is at -55V (or higher) and the bias voltage via 5R21 and 5Z4 will zener the emitter of 5TR7 at -6.8V. The potential divider 5R20, 5RV1 (SET TRIP), and 5R19 set the base of 5TR7 such that 5TR7 is conducting and relay $\frac{A}{T}$ is operated 5R4 and 5Z5 zener the collector of 5TR7 at -51V so that the voltage rating of 5TR7 is not exceeded.

If the BIAS falls below the safe level the voltage on the base of 5TR7 will rise, cut off 5TR7 and release the $\frac{A}{T}$ relay.

The A1 contact will remove the ground from PL1/19 (BIAS AVAILABLE) and ground PL1/20 (BIAS FAIL).

(This action operates the $\frac{E}{2}$ relay in the POWER CONTROL UNIT, closing down all supplies except the FAN active, see para 5.2.2).

5.3.6 MINOR HT REGULATOR

The 300V secondary of T4 is rectified by 6D1 to 6D4, filtered by 1C48; 1R70 is the capacitor bleed resistor.

The 12-0-12V secondary of T4 is rectified by 6D5 and 6D6 and filtered by 6C1. The negative rail of this supply is connected to the +350V rail.

6TR1 is an IC precision voltage regulator powered by the floating supply and produces a reference voltage (7.15V nominal between V ref and V-. 6R4 and 6R5 divide this reference voltage such that half is supplied to the INVERTING input (pin 4.) Vref is also connected to the potential divider 6R7, 6RV1, 6R1, 6R2 and 6R3 the latter grounded. The regulator controls the +350V rail so that the current flowing in the divider chain produces a voltage drop of half V ref between V ref and the slider of 6RV1 which is connected to the NON-INVERTING input (pin 5).

The output voltage at Vz (pin 9) is passed via 6R10 and 6R11 divider to the base of the external pass transistor 6TR3 and thus controls the conduction of 6TR3 (and 6TR2 in series). 6R14 and 6R15 divider controls the base of 6TR4 such that the Volt drops across 6TR3 and 6TR2 are equalised.

The voltage divider 6R9 and 6R8 will set the voltage at CL (pin 2) at approx. - 2.7V (w.r.t. Cs) and the internal current limiter is held off. 6R12 is effectively connected between C_L and C_S and when 6TR3 current through 6R12 reaches 130mA the volt drop across it will be approx 3.4V sufficient to overcome the - 2.7V delay and the 0.6V base drive required to operate the internal current limit transistor, which conducts. The output from Vz is thus reduced.

If the supply is short circuited, the output current is limited to 25 mA, since no voltage is developed across 6R9. This fold- back action action reduces the dissipation in 6TR2 and 6TR3 to a safe value under fault conditions. If under any fault condition (e.g. flashover of a PA valve) the screen voltage should rise above the unregulated screen supply voltage, 6D9 will conduct to provide a low impedance path to IC48. 6Z1 to 6Z4 are across the screen set potentiometers 1RV1 to 1RV4 maintaining a zenered 50V drop across them and supplying + 300V to the driver stage.

The current drawn from the +300V supply is greater than the maximum negative screen current of the PA Valves.

5.4 DRIVER STAGE Ref DWG B04-00102 (1 Kw) BO4-00313 (500W)

5.4.1 Valve Conditions

The DRIVER Valve V5 is a very high slope (45mA/V) pentode type E55L. In consequence to maintain a constant plate current a positive voltage is applied to the grid through divider R2, R3, and a suitable cathode resistor is used.

R10 and C1 form a filter for the driver stage from the +300V stabilised rail (Va = approx 210V).

R3 and R9 form a voltage divider for the screen supply and this is de-coupled to the cathode by C7, (Vg2 = approx 100V).

5.4.2 Signal conditions

The RF signal input from the EXCITER unit at approx. 100 mW (50 ohm) is applied via SK1 to the primary of T1 a wide-band RF transformer. The signal from the secondary of T1 feeds the floating input circuit, R4 is a parasitic stopper and R1 peaked by L1 set the input impedance to 50 ohms.

The amplified output is coupled via C10 to the PA grid tuned circuit L6 and C19 (for other channels the appropiate L6 tap and tuning capacitor are relay selected). C19B is selected in value such that C19A is at approx. mid-travel when the circuit is at resonance. R31 is a damping resistor across the tuned circuit and if required R23 to R28 may be added across C14A to C19A to suit channel requirements for additional damping.

The driver stage is tuned manually (pre-set) and indication of resonance is afforded by a phase comparator, which compares the phase of the grid to cathode input signal and the phase of the output signal. This is the most sensitive

means of tuning to resonance and the comparator gives a zero meter reading when the input and output are 180° out of phase.

5.4.3 PHASE COMPARATOR

A balanced push-pull voltage is obtained across R13, R14 in phase with the current through T2 primary. Since the current in the inductive branch of a parallel tuned circuit is 90° out of phase with the voltage across the tuned circuit the voltages across R13, R14 will be 90° out of phase with the anode voltage of V5. The grid to cathode voltage of V5 is added to the junction of R13, R14 and the vecter sum is rectified by D1, D2. When the anode circuit is correctly tuned the rectified output from D1 and D2 will be equal and M1 when switched to the GRID position will show zero. Detuning the grid circuit will cause unequal outputs from D1 and D2 and hence indicate on M1.

5.4.4 NEUTRALIZING

Because feedback from the PA anodes to the driver stage cathode is used a simple neutralizing circuit cannot be used.

A balanced bridge circuit is arranged such that C4 is used to neutralize the valve anode to grid capacity and C2 is used to neutralize the feed back circuit. The two capacitors are inter-dependant. The adjustment procedure is described in para 7.6.

5.5 PA STAGE

5.5.1 Valve Conditions

The PA valves V1 to V4 are ceramic based air cooled tetrodes type 4CX250B. They are operated in Class AB1, the most linear mode consistant with adequate efficiency, improved by feedback to the previous stage and ALC fed back to the EXCITER stages. Forced air cooling is provided as soon as the heater voltage is applied, an air fail circuit is fitted and the anode supply is inhibited until the cathodes reach operating temperature (60 secs delay).

The MAJOR HT (+1800V) is fed via L11 and L10 decoupled by C31 to the anodes in parallel. The screens are fed from the MINOR HT stabilised supply (+350V) via the individual screen set potentiometers VR1 to VR4.

The screen currents may be independantly monitored and each screen is independantly decoupled by C24 to C27. The signal grid BIAS is fed from the BIAS REGULATOR via R30 (decoupled by C22), R29, L9 and L6. Each grid has a parasitic stopper fitted. The PA valves have four cathode connections and a 10 ohm resistor is connected between each and ground. The effective 2.5 ohms at each cathode enables individual cathode currents to be monitored. The voltage developed when the PA is off resonance is also used to operate an ALC overide circuit, this is described in para. 5.8.4 (TUNE ALC).

5.5.2 Signal Conditions

The signal across the GRID tuned circuit (L6, C19) is amplified and fed via C28, C29 and C30 to the PA TANK circuit. A small voltage is fed via C32, C35 to the phase comparator circuit. (see para.5.4.3) The correct tap on L12 is relay selected and C36 and C37 are the TUNING capacitors. C38 and C39 are the LOADING capacitors and at lower frequencies C40 to C46 may be added by relay contacts M1 and N1 when the diode matrix is pre-conditioned. L13 is a protective inductor providing a short circuit to DC in the event of a failure of C28 to C30 dielectric (no effect on RF). The output signal is fed via the primary of 7T1 to the output socket SK2.

5.5.3 Load Comparator

Since the voltage gain of a circuit is dependant upon load resistance a comparator circuit can be used to determine when the stage is properly loaded. It is designed so that a pre-determined ratio between a negatively rectified grid voltage and a positively recified anode voltage produce zero error output when the stage is correctly loaded.

Grid voltage indication is derived from 2C1 and 2C2 capacitive divider rectified by 2D1, filtered by 2R1 and 2C4 producing a proportional negative voltage at 2VR1. Anode voltage indication is derived from IC33 and 2C7 capacitive divider coupled via 2C6, rectified by 2 D2, filtered by 2R3 and 2C5 producing a proportional positive voltage at 2 VR1. The slider of 2VR1 is set to give zero indication on the centre zero meter M2 (LOAD INDICATOR) when the stage is

correctly loaded.

The error voltage is also used on automatic transmitters to operate the SERVO LOADING SYSTEM.

The TUNE ALC circuit see (para 5.8.4) limits the PA cathode current to 400 mA when TUNING and LOADING.

5.5.4 NEUTRALIZING

Neutralizing is effected by C20 and C23. Adjustment of this circuit is described in paras. 7.7.3 for Multi-Channel, 7.8.3 for single channel, transmitters.

5.5.5 Feedback

Overall feedback from the PA anode to the driver stage cathode is via C11, C6 divider.

5.6 SWR DETECTOR. (Sub-Assembly) 08-00145

This circuit is used to generate two voltages proportional to the forward and reflected powers of the transmission line connected to the load (aerial). To achieve this 7T1 secondary load is divided into two equal parts 7R1 and 7R2, the centre of which is connected to the voltage sampling divider 7C1, 7C2, and 7C3. This will provide sum and difference voltages at the ends of the transformer secondary which are rectified by 7D1 and 7D2. 7D1 rectifies the FORWARD component and 7D2 rectifies the REFLECTED component (filtered by 7C4 and 7C5 respectively).

The use of a toroidal current transformer for 7T1 and a low value load resistor across the secondary renders the detector virtually independant of frequency.

7C2 is adjusted until the indicated SWR is minimum under matched conditions. Forward bias for the diodes 7D1 and 7D2 is provided from the SWR BRIDGE circuit via L1 (see para. 5.8.5)

5.7 DIODE MATRIX (Sub-Assembly) 08-00146

A ground appropriate to the channel selected will be extended from the EXCITER via PL1 pins 1 to 6. The appropriate diode cathode (D7 to D12) will be grounded and thus operate the channel select relays. Relays A,B,D,F,H and K select the appropriate tap on L6 (Grid) and tuning capacitor (C14 to C19). Relays C,E,G,J and L select the appropriate tap on L12. (PA TANK) the lowest channel

tap is pre-set. Relays M and N may be selected for pre-determined channels by the addition of diodes D13 to D24 which will add in the additional load capacitors C40 to C46. Diodes D1 to D6 are the catching diodes across the channel relays. This sub-assy also carries R1 a 330 ohm resistive load for the indicator lamp LP1.

5.8 LOAD, ALC and DETECTOR sub-assembly 08-00147

5.8.1 Power Supply

The 10V-0-10V secondary to T4 is applied to pins 18,31 and 20 respectively. This is bridge rectified by 2D5 to 2D8 and filtered by 2C14 and 2C15 to provide a +12.5V-0-12.5V supply.

5.8.2 Load Comparator

Part of this sub-assembly but has been described in para 5.5.3

5.8.3 ALC

Part of the PA TANK circuit voltage is tapped from 1C34 and 2C13 capacitive divider, rectified by 2D4 and filtered by 2C12 and fed via 2VR2 to PL1/17. This ALC voltage is fed back to the EXCITER stages. During normal operation 2D3 is back biased 2TR1 output being negative. (see next para).

5.8.4 TUNE ALC

During normal operation the EXCITER TUNE COMMAND is positive and applied to the INVERTING input of 2TR1 via 2R5 and 2R7 ensures the output of 2TR1 is negative to back-bias 2D3.

During TUNE the EXCITER TUNE COMMAND is ground holding the INVERTING input of 2TR1 at ground. The NON-INVERTING input is positive fed via 2R6 with a voltage dependant upon PA cathode current. The resultant output from 2TR1 is positive and proportional to PA cathode current is passed via 2D3 to the ALC line over-riding normal ALC voltages. The circuit is adjusted to limit the PA cathode current to 400 mA during TUNE.

5.8.5 SWR BRIDGE

The +12.5V aupply is dropped by 2R10 and zenered by 2Z1 to +6.2V. The -12.5V supply is dropped by 2R37 and zenered by 2Z2 to -6.2V. The voltage divider 2R14, 2D10 provides 0.6V forward bias for the SWR detector diodes 7D1, 7D2 and the logarithmic diodes 2D11, 2D12 (i.e. 0.3V per diode) which improves the low level efficiency of the rectifier diodes and provides a low standing current for the logarithmic diodes. The rectified output voltages from the forward and reflected power rectifiers are fed to the logarithmic diodes through series resistors so that the current in these diodes is proportional to the forward and reflected powers and hence the voltages appearing across the logarithmic diodes are proportional to the logarithm of the forward and reflected powers. (The voltage across a forward biased silicon diode is proportional to the logarithm of the current passing through it).

2TR4 to 2TR9 firm a high input impedance differential amplifier to indicate the difference between the voltages on 2D11, 2D12 on meter M4 which is calibrated directly in SWR. (It can be shown that SWR is directly related to the ratio of forward and reflected power i.e. the difference between the logarithms of the forward and reflected power). 2RV3 sets the balance of the amplifier with no power output from the transmitter and 2R22 is adjusted to give the correct amplifier gain. (It should be noted that 1:1 SWR gives 0 reflected power and hence theoretically infinite deflection of the meter so that the meter may read over full scale when the transmitter is loaded into a 50 ohm resistor).

5.8.6 SWR TRIP

The SWR TRIP is operated when the reflected power rises above that produced by full power into a load with a VSWR of greater than 2:1. Operation directly from the SWR indicator is not practicable as the circuit would trip on RF pick-up by the transmitter aerial from an adjacent transmitter when the transmitter was delivering no power to the aerial (PTT no speech A3J).

The output voltage from the reflected power rectifier is applied to the base of TR10, the emitter of which is biased to +3V by 2R31, 2R33. When the reflected power rises above the trip level TR10 will conduct 2TR11 will conduct and latch 2TR10 on via 2D9 and cause 2TR12 to conduct grounding PL1/14. This ground (SWR TRIP) is passed to the POWER CONTROL UNIT and will cause the power supply to be removed and the HIGH SWR fault indicator to light.

5.9 CONTROL LOGIC Part of Sub-assembly 08-00148 (SERVO AMP PCB)

Refer to the Section 4 BRIEF DESCRIPTION for the overall operation of the circuit before the technical description.

5.9.1 Command Detector Amplifier

Normal

The INITIATE CHANNEL CHANGE and MAJOR HT MONITOR inputs are normally both +12V and the OR gate diodes 4D9 and 4D10 are back-biased. 4TR24 base is held positive via 4R59 and thus conducting to bias off 4TR25 and hence 4TR26, providing no output from this stage.

Operate

Either input becomes ground and therefore the cathode of 4D9 or 4D10 will be grounded to cut off 4TR24 causing 4TR25 and 4TR26 to conduct and produce +12V output across 4R64.

If this was initiated by the MAJOR HT MONITOR failing the output via 4D11 and 4D12 is used to inhibit the SERVO AMPS but a TUNE COMMAND SIGNAL cannot be generated, due to the lack of supply voltage to 4TR31.

If the output was initiated by the INITIATE CHANNEL CHANGE signal (GND) the TUNE COMMAND SIGNAL will be generated and maintained by a TIMER until the INITIATE CHANNEL CHANGE pulse is removed and the output via 4D11 and 4D12 ceasing releases the INHIBIT GATES at the SERVO AMPS.

5.9.2 TUNE COMMAND GATE and associated ENABLE GATE

Normal

The +12V supplied by MAJOR HT MONITOR is grounded by 4TR31 whose base is held positive via 4R71 and 4D18. The base of 4TR29 is grounded cutting off 4TR29 and +12V is fed via 4R69 to the TUNE COMMAND rail.

This is fed direct to PL1/11 and the EXCITER to inhibit the TUNE signal and also to the TUNE ALC inhibit circuit. It is also fed via 4D13 and 4D14 the OR GATES inhibiting the SERVO AMPS.

MAJOR HT MON fails

The TUNE COMMAND signal remains positive there being no +12V via 4R73 to operate the base of 4TR29.

5.9.3 INITIATE CHANNEL CHANGE

The +12V output from the COMMAND DETECTOR amplifier is fed via 4D17 (OR GATE), 4R68 and 4Z3 to the base of 4TR30 (ENABLE GATE) 4TR30 will conduct and drop the anode of 4D18 to -12.5V rail and cut off 4TR31 (AND GATE). 4TR31 cut off permits +12V via 4R73 to the base of 4TR29 which will conduct and ground the TUNE COMMAND rail.

The TUNE COMMAND signal (Gnd) :-

(a) is passed via PL1/11 to the EXCITER which will now produce the TUNE signal to the AMPLIFIER input.

(b) removes the OR GATE inputs via 4D13 and 4D14.

(When the INITIATE CHANNEL CHANGE pulse ceases the OR GATES will have no inputs and the INHIBIT GATES no longer hold the SERVO AMPS which will start to tune the LINEAR AMPLIFIER). The MOTION DETECTORS now provide an input via 4D15 and 4D16 the OR GATE and thus maintain the TUNE COMMAND signal.

5.9.4 TIMER (TUNE COMMAND)

During the period between cessation of the INITIATE CHANNEL CHANGE pulse and an output being received from the MOTION DETECTORS the TUNE COMMAND GATE is held operating by 4C11 which is charging via 4R71 (approx $1\frac{1}{2}$ secs delay).

5.9.5 SIGNAL LAMP

Whenever the TUNE COMMAND SIGNAL is present only a TUNE input is available from the EXCITER.

When the TUNE COMMAND signal ceases the programme input is available from the EXCITER and this is indicated by LP1.

Normally 4TR28 is held conducting by the positive voltage via 4R69 and 4R67 and the resultant volt drop across 4R69 turns on 4TR27 illuminating LP1. During TUNE, 4TR28 is held off by the TUNE COMMAND signal (gnd) which cuts off 4TR27 extinguishing LP1. The supply for LP1 is extended via 2R1 from the +24V rail on the DIODE MATRIX sub-assembly.

5.9.6 COMPLETION OF TUNE

The TUNE and LOAD motors have tuned and loaded the LINEAR AMPLIFIER the MOTION DETECTORS will give no output and the OR GATE (D15-D17) will have no input. 4TR30 will cut off and the negative of 4C11 is now connected

via 4R71 to the +12.5 V rail (instead of -12.5V). The positive end of 4C11 is a 0v via 4TR27 and 4C11 discharges via 4R71 until the base of 4TR31 is sufficiently positive for 4TR31 to conduct ($1\frac{1}{2}$ secs delay). 4TR31 conducting grounds 4TR29 which will now cut off and the TUNE COMMAND rail reverts to +12V.

5.10 SERVO AMPLIFIER (TUNE)

5.10.1 Coarse Amplifier

When the LINEAR AMPLIFIER is correctly tuned the FOLLOW POT 1RV5 connected to the tuning capacitor shaft and the appropriate SERVO POT (3RV1 to 3RV6) both give the same output; and there is no voltage differential at the input to 4TR1. When a channel change occurs a different SERVO PRESET is brought into circuit by the channel select relays. There will then exist a voltage differential between the FOLLOW POT connected to the NON-INVERTING input and the selected SERVO POT connected to the INVERTING input of 4TR1. The difference will be amplified in 4TR1 to give an output (appropriate to the direction of motion required) via 4D1 and 4D3 if positive or via 4D2 and 4D4 if negative. This will be passed via 4R10, limited by 4D5 and 4D6, to the NON-INVERTING input of 4TR3. The amplified signal will over-ride any output from the TUNE phase comparator circuits being fed via 4R11.

When (as will be shown) the TUNE motor has driven the tuning capacitor to almost the correct position for resonance the FOLLOW POT and SERVO POT differential and hence the coarse AMP output will diminish below the output from the phase comparator.

The phase comparator output will now take control of the FINE amplifier (4TR3) for more precise tuning.

5.10.2 SERVO BALANCE INDICATOR.

The output of the COARSE AMP is fed via 4R8 to the multimeter circuit and enables initial setting up and subsequent checks to be made on the SERVO PRESET adjustment. The purpose of the SERVO-PRESETS and COARSE AMP is to ensure that the tuning capacitor is driven to the correct position to tune the frequency by the phase comparator as the latter can give an output at a harmonic frequency.

5.10.3 FINE AMPLIFIER

The signal (derived from COARSE AMP or phase comparator) is amplified by 4TR3 and fed via 4R16 to the SERVO AMPLIFIER. If the FINE AMP output is positive 4TR4 will conduct (vice versa, 4TR5) The resultant volt drop across 4R18 will cause 4TR8 to conduct sending a positive output to the TUNE MOTOR (M5). 4TR8 conducting causes 4TR6 to conduct turning 4TR8 full on ensuring a good start to M5 and full speed. (The motors are not proportionally controlled). When the tuning capacitor has correctly tuned the circuit to resonance, the phase comparator output will be zero and the SERVO system will stop.

The reverse direction is accomplished by 4TR5, 4TR9 and 4TR7 giving a negative output to M5.

5.10.4 FINE AMP INHIBIT GATE

4TR2 connected to the INVERTING input of 4TR3 is a P-channel depletion type FET. Normally the TUNE COMMAND rail at +12V holds 4TR2 cut off and full feedback from the SERVO AMP via 4R17 reduces the gain of 3TR3 to less than unity and its output is inhibited. During TUNE, the TUNE COMMAND signal grounds the gate of 4TR2 which conducts and 4R15 reduces the feed-back (via 4R17) allowing 4TR3 to amplify and operate the SERVO AMP.

5.11 SERVO AMPLIFIER (LOAD)

The LOAD SERVO system is a duplicate of the TUNE SERVO system, except that no COARSE AMP is fitted or required. The load comparator operates directly into the FINE AMPLIFIER (Comprises 4TR14 to 4TR23.)

5.12 GATE SWITCH FACILITY Ref DWG C04-00103

Reference to the drawing will show a link fitted between SK1/8 and SK1/2, this bridges the +24V supply to contact E1. This link may be removed and a GATE SWITCH (closed when safe) may be connected to bridge SK1/8 and SK1/2.

7.11 Notes on adjustment and operation

These notes should be read in conjunction with "Section 7 Test & Alignment" to provide a greater insight to the operation of the automatic tuning system.

1. Automatic Tuning

The automatic tuning and loading facility provides signals to drive two electric motors one driving the anode tank tuning capacitor, the other driving the loading capacitor (output capacitor of the pi-tank).

The signal for the control of the anode tuning is derived from a phase comparator which compares the phase of the RF voltage on the grid of the PA stage with the phase of the RF voltage in the anode circuit. Correct tuning is achieved when the load presented to the anode of the tubes is resistive, i.e. when the anode voltage is precisely 180° out of phase with the voltage on the grid. When this is true, the output voltage from the phase comparator is zero, the anode tuning meter reads zero and the motor driving the anode tuning capacitor ceases to rotate. Because the phase comparator output can be positive or negative, (depending on whether the phase of the voltage in the anode circuit lags or leads that of the grid circuit) the motor driving the anode tuning capacitor can be caused to rotate clockwise or anticlockwise as is required to drive the system to the null point.

The phase comparator will also provide an output if the anode tank is tuned to a harmonic of the operating frequency (if this should exist within the tuning range of the capacitor). To prevent the capture of this false tuning point an additional arrangement is provided. This consists of a mechanically driven potentiometer which provides a voltage related to the actual position of the tuning capacitor. Another potentiometer (SET COARSE SERVO) is set such that the voltage from its moving arm is the same as that from the potentiometer on the tuning capacitor when the correct point is reached. The output from each potentiometer is fed to the differential inputs of an integrated circuit amplifier arranged such that the output of the amplifier falls to zero when the correct tuning is achieved.

The signal from the phase comparator is mixed with the signal from the coarse position amplifier and fed to the main amplifier driving the servo motor. The signal from the coarse position control is fed via diodes, the forward voltage drop of which must be overcome before the voltage alters the voltage from the phase comparator. In this way, a "dead band" is established in which the setting of the coarse servo pot is unimportant and the capacitor positioning is arranged by the phase comparator alone. In order to ensure that the SET COARSE SERVO pot is correctly set, the output of the coarse amplifier can be read on the meter when the switch is in the SERVO BAL position.

CCT. REF.	DESCRIPTION				MANUFACTURER	NOTES
R30	1M	Ohm	5%	1/3W	Philips CR25	
R31	47K	Ohm	5%	1/3W	Philips CR25	
R32	1M	Ohm	5%	1/3W	Philips CR25	
R33	47K	Ohm	5%	1/3W	Philips CR25	
R34	100K	Ohm	5%	1/3W	Philips CR25	
R35	10K	Ohm	5%	1/3W	Philips CR25	
R36	220	Ohm	5%	1/3W	Philips CR25	
R37	560	Ohm	5%	1/3W	Philips CR25	
R38	1K8	Ohm	5%	1/3W	Philips CR25	
R39	1K8	Ohm	5%	1/3W	Philips CR25	
R40	470K	Ohm	5%	1/3W	Philips CR25	
R41	470K	Ohm	5%	1/3W	Philips CR25	
R42	3M3	Ohm	10%	1/3W	Philips CR25	
R43	3M3	Ohm	10%	1/3W	Philips CR25	
R44	Select on test		5%	1/3W	Philips CR25	
TR1	741C	Integrated Circuit			Fairchild	
TR4-TR10	BC148	NPN Silicon			Philips	
TR11	AY115	PNP Silicon			Fairchild	
TR12	OC946	NPN Silicon			Philips	
RV1 & RV3	10K Ohms 20% Lin. Type MP/PC Carbon Potentiometer				404/8/02857/028	
RV2	3K3 ohms 20% Lin Type MP/PC Carbon Potentiometer				Plessey 404/8/02857/028	

1. Cont.

NOTE : A setting of the SET COARSE SERVO pot must be found such that this meter reading is zero when the transmitter has self tuned for if this is not the case, the advantages of the automatic phase comparason is lost and in fact the anode circuit will be forced to tune at the wrong point.

The correct tuning requires only sufficient RF signal to operate it, and it is not unduly level sensitive. The presence of the feedback circuits etc, do not influence the operation since the sensing of phase is entirely within the feedback loop.

The correct setting for the load capacitor is established by recognising the correct ratio of grid swing to anode swing of the PA stage. A sample of the grid voltage is rectified and bucked by a voltage derived in a similar way from the anode circuit. When these two voltages are equal, the net output is zero and the correct loading point will be achieved. If the transmitter is under loaded the anode swing will be too high and the output of the bridge is positive and vice versa.

The correct transmitter loading is first established by disabling the ALC, ensuring that 1KW PEP can be achieved in the A3J mode without flat-topping in the anode circuit with the mains voltage input 5% low.

The transmitter is then switched to tune, and the preset LOAD ADJUSTMENT set such that when the transmitter is caused to auto-tune, the load capacitor dial takes up the same setting. The mains are then restored to normal voltage, the transmitter switched back to A3J and the two-tone audio input increased. The ALC adjustment is then made to give 1KW PEP output (640mA) when the audio signal is increased by 2dB, above that when the loading adjustment was made. The exciter should then be switched to A3H if that mode is to be used.

Once the correct adjustment of the load preset is established for the transmitter it should not need readjustment unless components in the loading bridge itself are changed. The load preset should not be adjusted on making tube changes.

The balance point of the loading bridge is level sensitive because of curvature in the input/output characteristic of the PA tubes. Because of this, the loading adjustment is only made in the TUNE mode, and the meter reading will not show balance when the transmitter is operating normally in other modes.

When the servo system is tuning, a special tune signal (limited to 1a = 400mA) is derived from the exciter. This tune signal continues until the voltage on both servo motors has fallen to zero whence the flip-flop toggles, the tune signal is switched off and the green lamp lights. At the same time, the FET switches in the servo motor amplifiers open and their gain is greatly reduced such that the motors will not run again until the TUNE mode is selected.

2. Sequence of Adjustments

If, for example, it is necessary to check and re-adjust the circuits in the transmitter, the following points should be bourne in mind.

2.1 The transmitter is designed for A3J operation (A3H mode is an additional facility) and hence all adjustments, current readings etc, are based on A3J mode using a 2-tone test signal as required.

2.2 Screen potentiometers are provided for the purpose of balancing the quiescent current of the four tubes. In order to set this current, the transmitter should be switched to TRANSMIT (A3J) without an audio input signal. Under these conditions the standing plate current should be about 60mA per tube (240mA total). All screen pots should be set at maximum and the tube with the lowest current noted. The SET BIAS control is adjusted to make the standing current of this (lowest) tube 60mA. The screen potentiometer of the remaining three tubes only are then adjusted to reduce their standing current to 60mA (see 7.6(v)).

2.3 Assuming the transmitter is correctly loaded, the ALC sets the maximum anode swing and hence the maximum anode current under signal drive conditions. Increase in audio drive does not cause an increase in RF output after the ALC threshold is reached. However this is independent of the loading in so far as the loading determines the plate swing and current required for a given power output. The correct adjustment of the loading is achieved when the transmitter delivers 1KW PEP A3J from a 2-tone test signal without significant flat-topping. The ALC is then set to see that increased audio drive does not cause the RF output to rise which would then take the operation into the region of increasing intermodulation distortion. In order to make the loading adjustment the mains supply is first reduced by 5% to ensure that (when operating normally) a drop in mains voltage is not accompanied by an increased distortion due to reduced anode HT voltage. Although a Variac auto-transformer, a CRO and a dummy load and watt meter are used in the factory for the loading set-up, a good approximation can be achieved in the field by operating the transmitter on 240 volt tap to give the effect of a 5% reduction in mains voltage. Also, instead of observing the flat-topping on a CRO, the screen current meter can be used as an indicator since there is a sudden rise in screen current when the maximum anode swing is reached.

2.4 In general, then, it is necessary to disable the ALC by advancing the SET ALC pot fully clockwise (as mentioned in 7.6(b) and reduce the loading by setting the LOAD ADJ pot fully anticlockwise as mentioned in 7.6 (c).

2.4 Cont.

When switched to TUNE, THE TRANSMITTER should tune and load, the adjustment of 7.7.2(d) and (e) should be made to see that the operation is in the dead-band of the coarse servo amplifier. Loading should now be attempted as in 7.7.4. The procedure in 7.7.4(d) may be used if desired and after Ia = 640mA is achieved, the ALC LEVEL ADJUSTMENT must be made according to 7.9. It should be recognised that alteration of the LOAD pot will not have any effect until TUNE is selected and the transmitter caused to auto-tune. The effect of the re-loading so caused is then observed by switching back to LOCAL with the standby switch in the TRANSMIT position. Further, there is an interdependence of load capacitor and anode tuning capacitor setting such that changes in loading will affect the position of the anode tuning. It is necessary therefore to keep checking (and readjusting as necessary) the position of the SET COARSE SERVO using the SERVO BALANCE position of the meter as an indicator whilst the loading procedure is carried out.

2.5 After the tuning and loading adjustments are complete A3H may be selected. The anode current reading will be about 680mA. This current is set by the characteristics of the ALC circuit and is related to the current for full PEP (640mA) set under A3J conditions. Transmitter adjustment, however, should not be attempted in the A3H mode.

3. Tube Changing

The effects of tube ageing are substantially reduced by the amount of negative feedback applied. In general, the effect of low tubes will be an increase in intermod distortion at full PEP (N.B. intermod distortion can only be measured with a 2-tone test signal in the A3J mode).

The setting of the ALC preset pot, and preset LOADING ADJ pot are controlled essentially by parameters established in the transmitter itself, and once set, should not require alteration unless component parts have been changed.

If new tubes are fitted it should only be necessary to set all screen pots to maximum, readjust the SET BIAS for 60mA for the lowest tube and adjust the screen pots for the others for 60mA also (TRANSMIT MODE A3J, no audio input). Further readjustment should not then be required.

If readjustment of the COARSE SERVO pots appear necessary accompanied with a change in dial reading of the Anode Tuning Capacitor and dial reading of the Loading control, this suggests the antenna impedance presented to the transmitter has changed from that existing when originally set-up. In general this will be accompanied by a change in SWR indicator reading and leads to an examination of the antenna system.

3. Cont.

Variation of dial readings of Tuning and/or Loading capacitors where the antenna circuits are known to be correct (or a change in previous readings established on a known dummy load) suggest a mal-function in the phase comparator or load comparator circuits.

The 4CX250B tubes used in this equipment operate at almost zero screen current. In some cases, depending upon the particular tube and working condition, the screen current may be negative.

4. Record this amendment on the AMENDMENT RECORD PAGE and insert this section in lieu of Section 6, (Factory use only).

7. TEST AND ALIGNMENT

This section is applicable to a complete equipment assembled into a cabinet. Figures in brackets refer to 500W LIN AMP.

7.1 General

(a) The HF SSB EXCITER Type 7021 must be an operational unit, fully set-up and tested.

(b) The POWER CONTROL UNIT must be a checked unit with time-delay and overcurrent trips etc functionable.

7.2 Visual Examination

(a) Remove covers from the DRIVER and PA compartments of the amplifier.

(b) Open the PA STAGE compartment, ensure valves and chimneys are are correctly fitted and anode leads are secure. The compartment should be clean.

(c) Inspect plugs and sockets and ensure they are correctly mated on the POWER CONTROL UNIT, EXCITER and AMPLIFIER with those on the cabinet harness. The RF cable from EXCITER to AMPLIFIER should be fitted.

(d) Check that FAN impeller turns freely. Check FAN connections, left to right should be BLACK, BLUE, BROWN, SLATE.

(c) Check the voltage taps selected on the :-

MAIN POWER TRANSFORMER T1 (Ref DWG C04-00103)

AUXILIARY TRANSFORMER T2 (Ref DWG C04-00103)

MINOR HT TRANSFORMER T4 (Ref DWG B04-00102)

If the equipment is to be used on other than 50 Hz supply, special components will be fitted :-

POWER SUPPLY (L1 and C1)
FAN Capacitor (C47)
and the AUXILIARY TRANSFORMER T2 will require a different tapping (Ref DWG C04-00103).

7.3 Test Equipment Required

(a) AUDIO OSCILLATOR (600 ohm output).
(b) C.R.O. with response to 10 MHz and low capacity probe.
(c) AVO Model 8 or similar 20K 10PV multimeter.
(d) RF Dummy Load 50 ohm, 500W.
(e) Peak-reading VTVM (300V AC Range)
(f) EILCO SSB DISTORTION METER Type 6918 or SPECTRUM ANALYSER

7.4 CHANNEL SELECTION (MULTI-CHANNEL TRANSMITTER)

(a) Use 10/0.010 wire of the appropriate colour for the channel number (e.g. Channel 1 - brown etc) and connect pin 10 of Relays A, B, D, F, H or K to the correct tap on the DRIVER Tank inductor L6 as shown on the TUNING CHART DWG. D10-00027 (30)
If the chart indicates turn 21 (counting down from coil top) no physical connection is made as the circuit is completed by the parasitic suppressor L7-R22.

(b) For frequencies below 8 MHz damping resistors (PHILIPS Type CR52) are fitted across capacitors C14A-C19A between the common bus line and the wire joining each capacitor to its selection relay. The value is shown on the TUNING CHART DWG. D10-00027 (30)

(c) For frequencies below 3.5 MHz additional tuning capacitors C14B-C19B are added in parallel with the appropriate variable capacitor. These are DUCON Styroseal 630V 5% the value as shown on the TUNING CHART DWG D10-00027 (30)

(d) Use 14 SWG (0.080") TCW and connect the PA TANK COIL (L12) tap to the appropriate channel relay C, E, G, J or L. Ensure that solder eyes are filled with solder and keep the tap wires as short and direct as possible bending to maintain adequate clearances.

Note that there is no relay allocated for the lowest frequency channel and the tank tap should be connected directly to the common relay contact bus bar. The taps are shown on the TUNING CHART DWG. D10-00028 (31)

(e) Refer to the TUNING CHART DWG D10-00028 (31) and add diodes (EM402) to the DIODE MATRIX PCB to select relays M and/or N to operate on lower frequency channels where required

The diodes (D13-D24) are connected between the channel select line (cathode) and the relay coils bus bars (anode).

7.5 CHANNEL SELECTION (SINGLE CHANNEL TRANSMITTER)

(a) Use 10/0.010" wire (BROWN) and connect the tuning capacitor C14A direct to the DRIVER tank inductor L6 as shown on the TUNING CHART DWG D10-00027 (30)

(b) For frequencies below 8 MHz a damping resistor (PHILIPS Type CR52) is fitted across C14A the value as shown on the TUNING CHART DWG D10-00027 (30)

(c) For frequencies below 3.5 MHz an additional tuning capacitor C14B is added in parallel with C14A. The value (DUCON Styroseal 630V 5%) as shown on the TUNING CHART DWG. D10-00027 (30)

(d) Select the appropriate PA TANK COIL (L12) inductance from the TUNING CHART DWG D10-00028(31) and connect the tap to the lowest point of the coil with 3 mm auto cable. Ensure that the solder eye is filled with solder and keep the tap wire as short and direct as possible.

(e) Refer to the TUNING CHART DWG D10-00028(31) and add additional loading capacitors as indicated. These are DUCON Type CTP CERAMIC CAPACITORS Style F N150 10% 330 pF and are wired directly between C38 and/or C39 and ground at C39.

7.6 Preliminary Adjustments

(a) Switch to OFF, SCREEN SUPPLY, SW1

(b) Set the following controls fully clockwise :-

SET-SCREEN VOLTS, RV1-RV4.
SET BIAS
ALC LEVEL, 2RV2

(c) Set the following controls fully ANTI-CLOCKWISE :
SERVO PRESETS, 3RV1-3RV6 (Multi-Tx only)
BIAS TRIP, SRV1
LOAD, 2RV1

(d) Remove SERVO AMPLIFIER PCB from underside of amplifier chassis (Multi-Tx only).

(e) Set NEUTRALISING CAPACITORS, C23 to minimum capacity and C20 to half-capacity.

(f) Set the EXCITER controls as follows :-

LOCAL MODE	(SW7)	to A3J (Amplifier rear)
OUTPUT	(SW4)	to AMPLIFIER.
LOCAL CONTROL	(SW5)	to STANDBY.
FUNCTION	(SW2)	to LOCAL CONTROL.
AUDIO INPUT	(SW1)	to 1.
CHANNEL	(SW3)	to highest frequency channel fitted,
	(Multi-Tx only).	
POWER	(SW6)	to ON.

(g) Remove the blank panel immediately above the POWER CONTROL PANEL and remove the MAIN POWER SUPPLY cover plate.

WARNING

THE HIGH VOLTAGES PRESENT ARE LETHAL.

Check that the DANGER - HIGH VOLTAGE label attached to cover is in good order and legible.

7.6 (h) Check that MAJOR HT switch is OFF, then switch ON the CIRCUIT BREAKER CB1. Observe that the AC MAINS, AUXILIARY, AND RELAY supply lamps light. The FAN should start and run up to speed and when the air pressure switch closes the FILS, BIAS & MINOR HT lamp should light.

(j) Check the Filament Voltages at transformer T1,

(i) PA Valves 6.1 Volts
(ii) DRIVER Valve 6.3 Volts

(k) Switch OFF CB1, remove the FILS, BIAS & MINOR HT fuse F3, switch ON CB1. Check that all Channel relays operate correctly.

(l) Connect AUDIO OSCILLATOR to the audio input jack of the EXCITER, set to 1 KHz, 0 dBm at 600 ohms.

(m) Connect CRO proble to RF INPUT SK1 on the amplifier

(n) Switch EXCITER LOCAL CONTROL switch to TRANSMIT

(o) Observe RF input signal at SK1 and adjust AUDIO OSCILLATOR output until CRO measures 3V peak.

(p) Use a low capacity probe, AC coupled and connect CRO to the hot-end of the DRIVER tank inductor (junction of L7-R22 and tuning capacitor or relay bus-bar.) Adjust appropriate tank tuning capacitor (highest channel fitted) for maximum deflection. Then NEUTRALISE driver stage by adjusting C4 (attached to V5 socket) for minimum deflection (less than 10 mV peak).

(q) Disconnect the wire to V5 cathode at capacitor C6 by unscrewing 2BA nut. Use a male BNC connector fitted with short leads and connect the EXCITER output cable inner to V5 cathode (pin 5) and ground the outer at the earthy end of R9.

(r) Adjust AUDIO OSCILLATOR output until RF signal is approximately 5V peak. Connect the CRO probe to SK1 and observe the RF waveform. The waveform will be unsymmetrical consisting of one positive peak and several negative peaks for each cycle.

Adjust C2 until all the negative peaks are in line, disregard the positive peaks. This neutralises the negative feedback bridge.

(s) Reduce AUDIO OSCILLATOR output to zero. Switch EXCITER LOCAL CONTROL switch to STANDBY. Re-connect EXCITER output cable to SK1, disconnect male BNC adaptor and reconnect cathode lead of V5 to C6.

(t) Switch OFF, CIRCUIT BREAKER CB1, replace fuse F3 and switch ON, CB1. Adjust 6RV1 (on MINOR HT REGULATOR PCB) to give a reading of 350V on the SWITCHED METER, and with an AVO check the +300V rail.

(u) Connect a DC Voltmeter (2500V Range) to the high voltage rail in the MAIN POWER SUPPLY. Switch ON the MAJOR HT (SW1) observe that

7.6 the MAJOR HT pilot lamp lights. Check the MAJOR HT Voltage on the SWITCHED METER and compare with the DC Voltmeter reading. Adjust SWITCHED METER sensitivity by adding a calibration resistor across R32 (this will be greater than 3K3 ohms).

Adjust SET BIAS (RV6) to Max (clockwise).

Switch OFF, MAJOR HT, remove DC Voltmeter, replace MAIN POWER SUPPLY cover, then switch ON, MAJOR HT.

(v) Switch EXCITER LOCAL CONTROL switch to TRANSMIT (no audio input to exciter), check cathode currents for V1, V2, V3 and V4 on the PA CATHODE CURRENT Meter.
Observe which valve passes the lowest cathode current and adjust SET BIAS until this valve current is 60 mA.
Switch the PA CATHODE CURRENT meter to each other valve in turn and adjust the corresponding SET SCREEN VOLTS (RV1-RV4) until all four cathode currents read 60 mA. (Do not adjust the SET SCREEN VOLTS potentiometer for the valve originally passing the lowest cathode current.

(w) Switch the PA CATHODE CURRENT meter to ALL and re-adjust the SET BIAS potentiometer for 440 mA (top scale). (220 mA for 500W)

Slowly turn the BIAS TRIP potentiometer 5RV1 clockwise until the BIAS TRIP operates. Ch eck that the BIAS FAIL fault indicator lamp lights, MAJOR HT lamp extinguishes and FILS, BIAS and MINOR HT fails as the B relay releases. Rotate SET BIAS anticlockwise approximately $\frac{1}{4}$ turn (90°)

Reset the FAULT INDICATOR by switching OFF CB1 for 2 to 5 seconds, switch ON again. When the time delay has expired and the MAJOR HT is restored, re-adjust the SET BIAS to give a PA CATHODE CURRENT of 240 mA (ALL - top scale), (approx -60V).
Switch EXCITER LOCAL CONTROL switch to STANDBY, observe that PA CATHODE CURRENT falls to 80 mA (top scale) or less. (40 mA for 500W)
Switch - OFF, MAJOR HT switch.

(x) Adjust SWR BALANCE potentiometer 2RV3 until SWR indicated on SWITCHED METER reads infinity (meter zero). This adjustment is temperature sensitive and should only be attempted after the equipment has been running at least ten minutes.

(y) Connect a jumper lead across the PA ANODE-TUNING capacitors C36 and C37 to ground. Switch ON, MAJOR HT. Switch EXCITER LOCAL CONTROL SWITCH to TRANSMIT. Check GRID tuning.
Observe PA CATHODE CURRENT meter (ALL) and increase AUDIO OSCILLATOR input to EXCITER until the HT OVERCURRENT TRIP operates. (Do NOT run amplifier under these conditions for longer than necessary to observe trip point). The trip should operate below 850 mA (425 mA for 500W)
Check that the HT OVERCURRENT fault indicator lamps lights and MAJOR HT lamp extinguishes. Reduce audio input to zero and reset the trip as in (w) above.

A calibrating resistor R2 (PHILIPS Type CR37) must be fitted in parallel with R1 (10 ohm) on the RELAY INTERLOCK PCB. Choose the highest standard value (E10 series) which allows the trip to operate at just over 850mA. (425mA for 500W)

(z) Switch EXCITER LOCAL CONTROL switch to STANDBY. Switch OFF, MAJOR HT. Switch OFF, CIRCUIT BREAKER CB1. Remove anode circuit jumper lead. Re-fit SERVO AMPLIFIER PCB.

7.7 TUNING, NEUTRALISING AND LOADING (MULTI-CHANNEL)

7.7.1 General

The procedure differs from single-channel transmitters inasmuch as the tuning and loading capacitors are adjusted through the SERVO AMPLIFIER. In addition the normal operation of the EXCITER is inhibited until tuning and loading has been satisfactorily completed.

7.7.2 Tuning and Preliminary Loading

(a) Connect the 50 ohm RF DUMMY LOAD and peak-reading VTVM to the output SKT2.

(b) Select the highest frequency channel on the EXCITER and place the FUNCTION switch to TUNE.

(c) Switch ON, CIRCUIT BREAKER CB1. Switch the TUNE meter to GRID and adjust the appropriate GRID TUNING capacitor until the TUNE meter balances. (Ensure the meter needle moves in the same direction as the GRID TUNING knob when adjusting)

(d) Switch TUNE METER to ANODE and SWITCHED METER to SERVO BALANCE. Switch ON, MAJOR HT. Adjust the appropriate SERVO PRESET potentiometer slowly clockwise, the servo-system will follow and attempt to tune the transmitter. Continue until the TUNE INDICATOR DIAL approximates the expected indication for the channel frequency (refer P.A. TUNING CHART, Dwg. 10-00028 if unknown), and the TUNE, LOAD and SERVO BALANCE meters all read zero. (Note, meter readings may not provide significant indications until resonance is approached).

(e) Switch EXCITER FUNCTION switch to LOCAL and the SYSTEM READY LAMP should light after a slight delay. Switch to another channel briefly then reselect channel under adjustment. The servo-system should re-tune the transmitter and when auto-tuning completed, again light the SYSTEM READY lamp. If hunting occurs proceed to para (f), adjust then repeat para (e). A PA CATHODE CURRENT of less than 400mA may be used if the system has any tendency to hunt. Log the level finally selected.

(f) Adjust the TUNE LEVEL potentiometer 1RV1 EXCITER (furthest from crystal filter of pair at LHS of PCB), to give a PA CATHODE CURRENT (ALL) of 400mA (max) (200mA for 500W) (300mA for 750W)

(g) Repeat (b), (c), (d) and (e) for each channel fitted. The amplifier is then tuned on all channels but the loading will be too light.

(h) Switch to the highest frequency channel fitted and allow the SERVO SYSTEM to re-tune and load.

(j) Switch EXCITER FUNCTION switch to LOCAL CONTROL Check that LOCAL CONTROL switch is at STANDBY.

7.7.3 Neutralising

This should be done on the highest frequency channel fitted, check that 7.7.2 (h) and (j) is completed before proceeding.

(a) Switch OFF at CB1 and remove the SERVO AMPLIFIER PCB.

This allows the EXCITER output level to be controlled by the external audio input level.

(b) Connect the CRO (low capacity probe, AC coupled) to the hot end of the DRIVER TANK inductor (junction of L7-R22 and relay bus).

Switch OFF, MAJOR HT
Switch OFF, SCREEN SUPPLY
Check EXCITER FUNCTION switch is at LOCAL CONTROL

(c) Switch ON, CIRCUIT BREAKER CB1.
Switch EXCITER LOCAL CONTROL switch to TRANSMIT. Increase AUDIO OSCILLATOR input to the EXCITER until the CRO indicates approximately 50V peak RF. (Trim GRID TUNING for maximum)

(d) Transfer CRO probe to the PA ANODE TUNING CAPACITOR C36-C37 and retrim the GRID TUNING capacitor (TUNE meter switched to GRID).

Adjust C23 by sliding the collar UP or DOWN until deflection on CRO is a minimum. (approx 150 mV).

CAUTION C23 is at approximately - 100 Volts with respect to ground and a short circuit during adjustment will cause the BIAS FAIL trip to operate.

An indication of the accuracy of adjustment can be obtained by adjusting C20. Approaching balance by increasing C20 indicates C23 collar is too high and vice versa.

(e) Switch EXCITER FUNCTION switch to STANDBY
Disconnect CRO
Switch OFF, CB1
Refit SERVO AMPLIFIER PCB
Switch ON, SCREEN SUPPLY
Switch ON, MAJOR HT
Switch ON, CB1.

7.7.4 Loading

For this adjustment it is necessary to drive the EXCITER with a two-tone audio source since full measurement of PEP is required. (SSB DISTORTION METER Type 6918 audio output).

7.7.4 (a) Connect a two-tone audio signal source to the EXCITER AUDIO INPUT SKT 1.
Connect CRO probe to sample the RF waveform. This may be done by inserting CRO probe into PA valve compartment, taking care that it does not come into contact with the connections the valve anodes.

Reduce mains input by 5%

(b) Switch EXCITER LOCAL CONTROL switch to TRANSMIT
Increase two-tone audio input level until peak flattening is noticable on the RF output waveform. The power output will be less than 1 KW PEP (224 volts ~~peak~~ RMS across 50 ohms). (316 V peak)
(500W PEP = 158 volts peak across 50 ohms)

(c) Rotate LOAD potentiometer 2RV1 slightly clockwise. Switch EXCITER FUNCTION switch to TUNE, allow servo system to tune and load, return switch to LOCAL CONTROL

Observe the new power output.

Repeat (c) until power output is 1 KW PEP. (500W).

Proceed to section 7.9 ALC LEVEL ADJUSTMENT.

(d) If a means of measuring power (RF Wattmeter or peak-reading VTVM) is unavailable :-

(i) instead of observing flat topping of RF waveform on the CRO, increase audio drive until screen current goes slightly positive e.g. $2\frac{1}{2}$ mA, (b).

(ii) load the PA until PA CATHODE CURRENT (ALL) rises to 640 mA, (c). (320 mA for 500W)

7.8 TUNING, NEUTRALISING AND LOADING (SINGLE CHANNEL)

7.8.1 General

The procedure for a single channel transmitter is relatively simple, as there is no SERVO AMPLIFIER and associated interlocks to inhibit the EXCITER operation.

7.8.2 Tuning and Preliminary Loading

(a) Connect the 50 ohm RF DUMMY LOAD and peak reading VTVM to the output SKT 2.

(b) Switch EXCITER FUNCTION switch to TUNE
Switch ON, CB1.
Switch TUNE meter to GRID, adjust GRID TUNING capacitor until meter balances.
Switch TUNE meter to ANODE

(c) Turn LOADING control to 0 (min. loading, max. capacity).
Turn TUNING control to 0 (min frequency)
Switch EXCITER FUNCTION switch to TUNE
Switch ON, MAJOR HT and adjust TUNING control until TUNE meter balances.

When the PA Anode circuit is detuned the PA CATHODE CURRENT will rise and under these conditions should be limited to 400 mA by adjusting TUNE LEVEL potentiometer 1RV1 in the EXCITER (furthest from crystal filter of pair at LHS of PCB). DO NOT operate the amplifier in a detuned state for longer than necessary to make the adjustment. (200 mA for 500W)

(d) Switch EXCITER FUNCTION switch to LOCAL CONTROL Switch OFF, MAJOR HT.

7.8.3 Neutralising

The transmitter will be tuned and lightly loaded when procedure 7.8.2 is completed.

(a) Connect the CRO (low capacity probe, AC coupled) to the hot end of the DRIVER TANK inductor (junction of L7-R22 and C14A).
Switch OFF, SCREEN SUPPLY
Switch EXCITER LOCAL CONTROL switch to TRANSMIT

(b) Connect AUDIO OSCILLATOR to EXCITER AUDIO INPUT and increase signal input until CRO indicates 50 Volts peak RF (trim GRID TUNING capacitor for maximum)

(c) Transfer CRO probe to PA ANODE TUNING CAPACITOR C36-C37 and retrim the GRID TUNING capacitor (TUNE meter switched to GRID).

Adjust C23 by sliding the collar UP or DOWN until deflection on CRO is a minimum.

CAUTION : C23 is at approximately - 100V with respect to ground and short circuit during adjustment will cause the BIAS FAIL trip to operate.

An indication of the accuracy of adjustment can be obtained by adjusting C20. Approaching balance by increasing C20 indicates C23 collar is too high and vice versa.

(d) Switch EXCITER FUNCTION switch to STANDBY. Disconnect CRO.

Switch ON, SCREEN SUPPLY.
Switch ON, MAJOR HT.

7.8.4 Loading. (Single channel)

For this adjustment it is necessary to drive the EXCITER with a two-tone audio source since the full measurement of PEP is required. (SSB DISTORTION METER Type 6918 audio output).

(a) Connect a two-tone audio signal source to the EXCITER AUDIO INPUT SKT 1
Connect CRO probe to sample the RF waveform. This may be done by inserting CRO probe into the PA valve compartment taking care that it does not come into contact with the connections to the valve anodes.

Reduce mains supply by 5%.

(b) Switch EXCITER LOCAL CONTROL switch to TRANSMIT. Increase two-tone audio input level until peak flattening is noticeable on the RF output waveform. The power output will be less than 1 KW PEP (224 volts peak across 50 ohms). (500W PEP = 158 volts peak across 50 ohms).

RMS at peak of envelope → RMS ← 316 V peak

(c) Turn LOADING control to increase loading and at the same time adjust the TUNING control to keep the TUNE meter (ANODE) centred. (The two controls are interdependant). Continue until required output 1 KW PEP is achieved. (500W)

Proceed to section 7.9 ALC LEVEL ADJUSTMENT.

(d) If a means of measuring power is unavailable (i.e. RF wattmeter or peak reading VTVM) refer to the notes in para 7.7.4 (d).

7.9 ALC LEVEL ADJUSTMENT.

(a) Raise the mains voltage again to the nominal value (refer 7.7.4 (a) and 7.8.4 (a)).

(b) Increase the two-tone audio signal to the EXCITER by approximately 2 dB (20%) to obtain a power output in excess of 1 KW PEP. (500W)

(c) Rotate the ALC LEVEL potentiometer 2RV2 anticlockwise until the output power reduces to 1KW PEP (or PA CATHODE CURRENT reads 640 mA if no wattmeter is available). (320 mA for 500W)

(d) On multi-channel transmitter switch to each channel in turn and check that power output is 1KW PEP $\pm \frac{1}{2}$ dB. (500W PEP $\pm \frac{1}{2}$ dB)

(e) Check the INTERMODULATION DISTORTION on all channels
The intermodulation products (D3 and D5+) must be less than -34dB with respect to either tone of the two tone test. (Eilco Type 6918 Distortion meter reading 34dB)

Proceed to section 7.10

7.10 SWR BRIDGE BALANCE

(a) Switch EXCITER LOCAL CONTROL switch to STANDBY.
Switch EXCITER FUNCTION switch to TUNE.

(b) Adjust IC2 (on SWR DETECTOR PCB) for maximum meter deflection on SWITCHED METER set to SWR (i.e. minimum SWR).

(c) Switch EXCITER FUNCTION Switch to LOCAL CONTROL so that meter returns to zero. If necessary trim SWR BALANCE potentiometer 2RV3 (para 7.6. (x)).

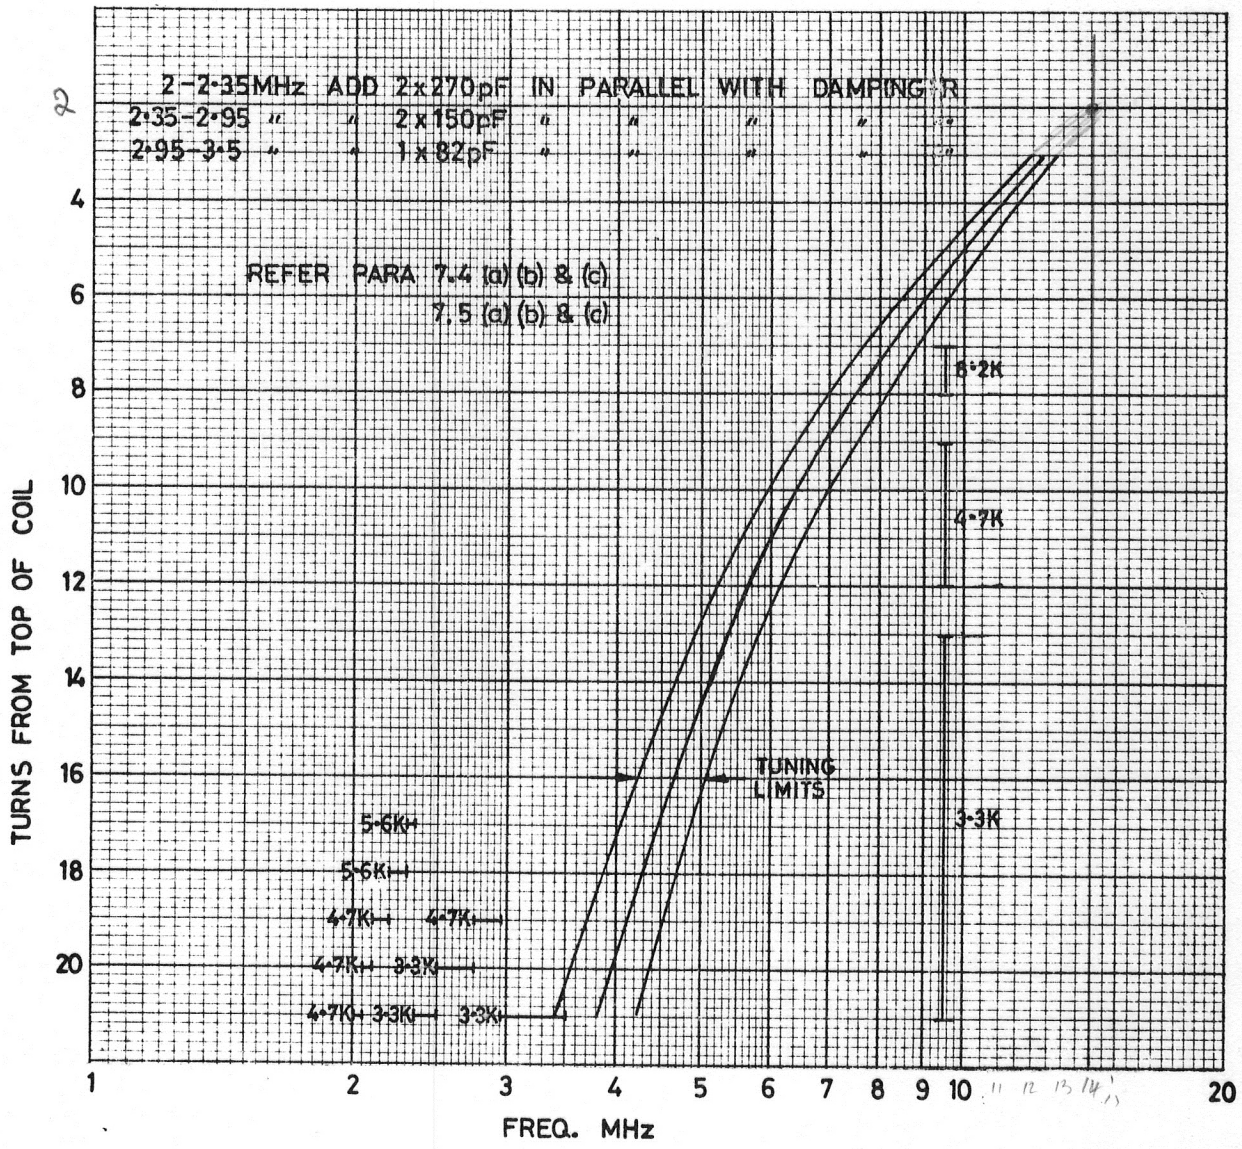

GRID TUNING CHART
10-00027
1KW

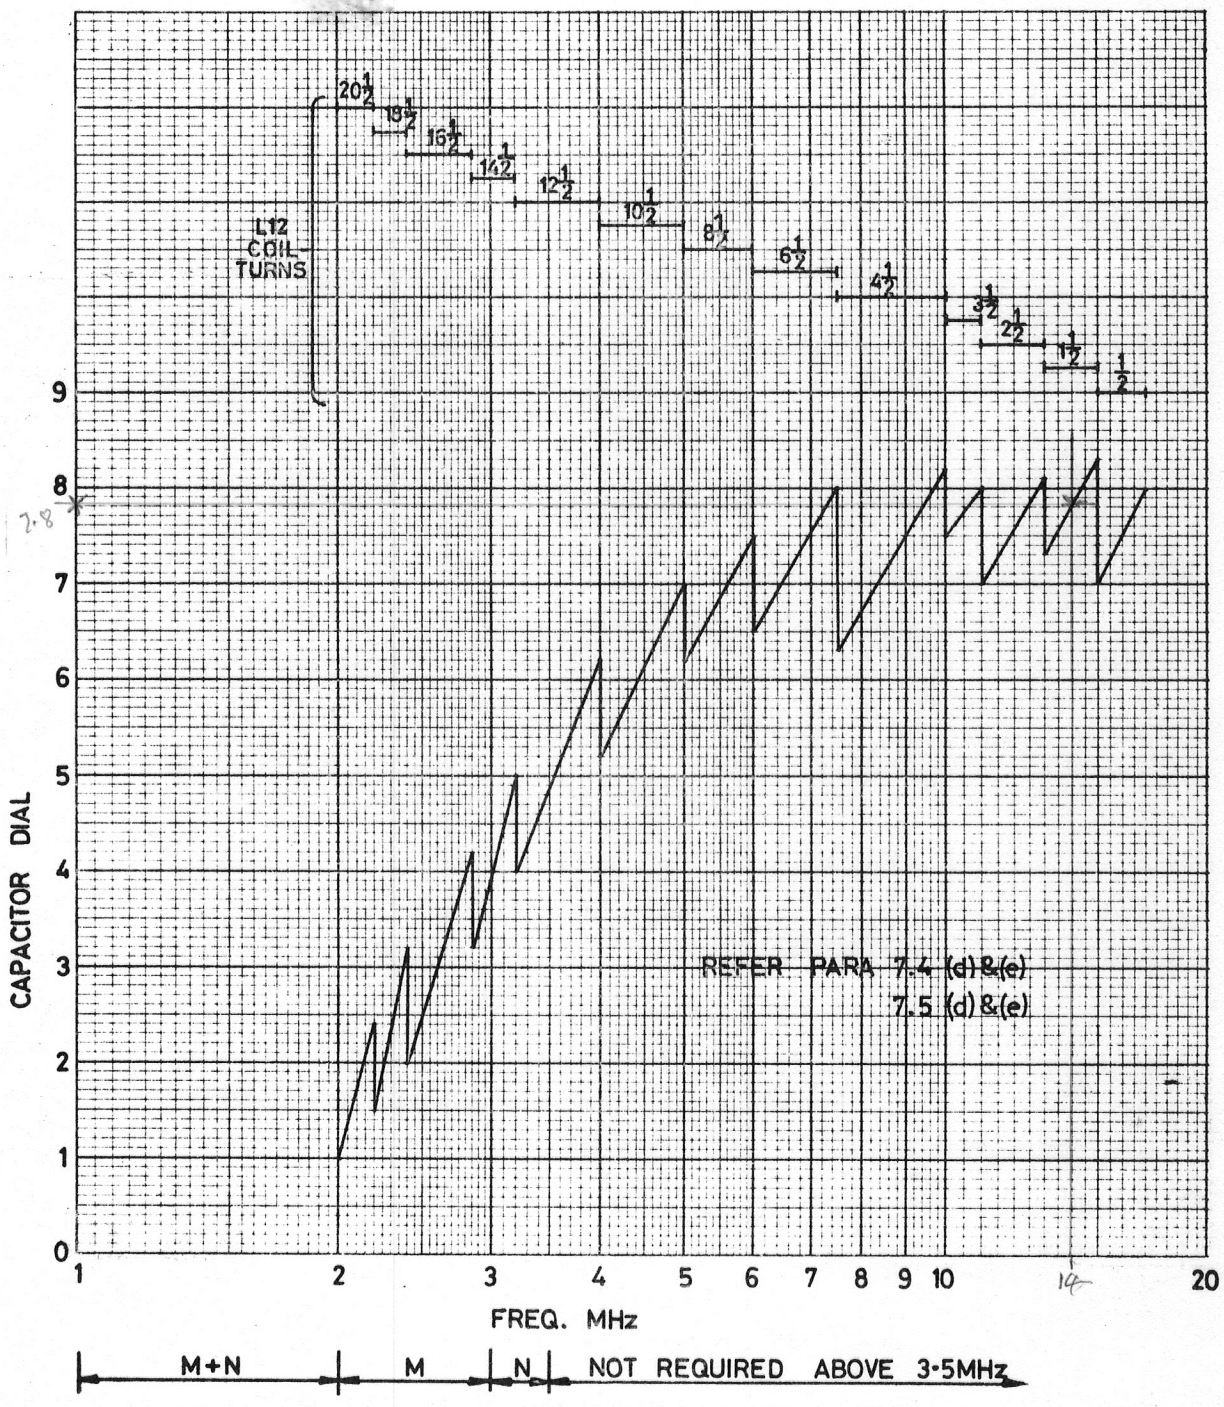

ADD DIODES TO DIODE MATRIX (D13–18) TO OPERATE RELAYS AS SHOWN WHEN CHANNEL FREQUENCY LIES WITHIN BANDS INDICATED

P.A. TUNING CHART
10-00028
1KW

8. PARTS LIST

The parts list contains the following information.

(a)	Circuit reference number	Each component is prefixed. This prefix must be stated when ordering the component. The prefix is given in the table below and at the beginning of each section of the parts list.
(b)	Description	Gives the value and type of component
(c)	Manufacturer	States the manufacturer and component series. Where no manufacturer is stated, the number given is a CODAN part number.

When ordering, it is necessary to quote all of this information for the particular component required to minimise the risk of obtaining the wrong part.

Note : 1. All resistor values are in Ohms
2. All resistors are carbon film unless otherwise stated.
3. All electrolytic capacitors are aluminium foil unless otherwise stated.

Parts lists are assembled in order of their prefix.

CCT REF.	DESCRIPTION			MANUFACTURER NOTES
8.1.1	MAIN CHASSIS			
	All components prefixed 1.			
C1	32uF +50%-10%	300V	Electrolytic	Ducon ET5B
C2a	18pF Trimmer	500V	Ceramic	Philips 802
C2b	22pF 5% NPO	500V	Ceramic	Philips 555
C3	330pF 5%	630V	Styroseal	Ducon DFB
C4	3pF Trimmer	500V	Ceramic	Philips 801
C5	220pF 5%	630V	Styroseal	Ducon DFB
C6	0.01uF 20% Y	2KV	Ceramic	Ducon CAD103
C7	1000pF +50%-20%	500V	Ceramic	Philips 563
C8	0.01uF +80%-20%	25V	Ceramic	Ducon CDR
C9	0.01uF +80%-20%	25V	Ceramic	Ducon CDR
C10	0.01uF +80%-20%	25V	Ceramic	Ducon CDR
C11	39pF 10% NPO	10KV	Ceramic	Ducon CAA33
C12	4700pF 10%	400V	Polyester	Philips 315
C13	0.01uF +80%-20%	25V	Ceramic	Ducon CDR
C14a C19a	6-150pF Trimmer		Air	Polar/Jackson C804
C14b C19b	Selected during set-up 5%	630V	Styroseal	Ducon DFB
C20	15-130pF compression trimmer		Mica	Arco 302
C21	1500pF 20% Y	2KV	Ceramic	Ducon CAD
C22	0.1uF 10%	400V	Polyester	Philips 315
C23	Neutralising capacitor			08-00413
C24-27	2700pF integral with valve socket			
C28	1000pF +50%-20%	20KV	Ceramic	Ducon CVH
C29	1000pF +50%-20%	20KV	Ceramic	Ducon CVH
C30	1000pF +50%-20%	20KV	Ceramic	Ducon CVH
C31	4700pF 20%	3KV	Ceramic	Ducon CTP
C32	2.2pF 5%	5KV	Ceramic	Ducon CDI
C33	2.2pF 5%	5KV	Ceramic	Ducon CDI
C34	2.2pF 5%	5KV	Ceramic	Ducon CDI

CCT REF.	DESCRIPTION		MANUFACTURER	NOTES
8.1.1	Cont.			
C35	3300pF 10% 400V	Polyester	Philips 315	
C36	23-347pF Variable	Air	E.F. Johnson 154-10 1KW only	
C37	23-347pF Variable	Air	E.F. Johnson 154-10 1KW only	
C38	23-1000pF Variable	Air	E.F. Johnson 154-0030-001	
C39	23-1000pF Variable	Air	E.F. Johnson 154-0030-001	
C40	330pF 10% N150 1KV	Ceramic	Ducon CTR-F	
C41	330pF 10% N150 1KV	Ceramic	Ducon CTR-F	
C42	330pF 10% N150 1KV	Ceramic	Ducon CTR-F	
C43	330pF 10% N150 1KV	Ceramic	Ducon CTR-F	
C44	330pF 10% N150 1KV	Ceramic	Ducon CTR-F	1KW only
C45	330pF 10% N150 1KV	Ceramic	Ducon CTR-F	1KW only
C46	330pF 10% N150 1KV	Ceramic	Ducon CTR-F	1KW only
C47	2uF 5% 440V AC	Paper	Ducon GPE420	50Hz
OR	3uF 5% 440V AC	Paper	Ducon GPE430	40Hz
C48	2x100uF +50%-10% 500V	Electrolytic	Ducon EMG1016S	
OR	200uF +50%-10% 500V	Electrolytic	Ducon EMG/F2050S	
D1	OA91 Germanium diode		Philips	
D2	OA91 Germanium diode		Philips	
D3	OA91 Germanium diode		Philips	
D4	OA91 Germanium diode		Philips	
D5	BY127/800 Silicon diode		Philips	
D6	EM402 Silicon diode		Philips	
L1	Peaking Inductor		44-80065	
L2	RF choke		44-80008	
L3	1mH RF choke		Philips 535	
L4	1mH RF choke		Philips 535	
L5	1mH RF choke		Philips 535	
L6	Driver tank inductor		44-70071	
L7	Parasitic suppressor		44-80006	
L8	1mH RF choke		Philips 535	

CCT REF	DESCRIPTION			MANUFACTURER NOTES
8.1.1	Cont.			
L9	1mH RF choke			Philips 535
L10	180uH RF choke			44-80054
L11	4uH RF choke			44-80026
L12	Anode tank inductor			44-80064
L13	180uH RF choke			44-80054
LP1	Indicator lamp green 5V 0.06A			Plessey BFK5
M1	50-0-50uA M/C Scale X693			Master S225
M2	50-0-50uA M/C Scale X693			Master S225
M3	0-1mA 100 ohm M/C Scale X692			Master S225
M4	0-1mA 100 ohm M C Scale X694			Master S225
M5	12V 23 rpm DC motor			Philips 9904-120-52607 Multi channel only
M6	12V 23 rpm DC motor			Philips 9904-120-52607 Multi channel only
M7	240V fan and motor (EBM120-2)			08-00194
PL1	24 way chassis mtg plug			Painton P24MFS
R1	220	5%	½W	Philips CR37
R2	470K	5%	½W	Philips CR37
R3	56K	5%	½W	Philips CR37
R4	10	5%	1/3W	Philips CR25
R5	330	5%	2/3W	Philips CR52
R6	10	5%	½W	Philips CR37
R7	470	5%	5W	IRC PW5
R8	15K	5%	2W	Philips CR93
R9	33K	5%	2W	Philips CR93
R10	1.5K	5%	7W	IRC PW7
R11	10K	5%	1/3W	Philips CR25
R12	10K	5%	1/3W	Philips CR25

CCT REF.	DESCRIPTION			MANUFACTURER NOTES
8.1.1	Cont.			
R13	10	5%	1/3W	Philips CR25
R14	10	5%	1/3W	Philips CR25
R15	4K7	5%	1/3W	Philips CR25
R16	10K	5%	1/3W	Philips CR25
R17	10K	5%	1/3W	Philips CR25
R18	10K	5%	1/3W	Philips CR25
R19	10	5%	1/3W	Philips CR25
R20	10	5%	1/3W	Philips CR25
R21	4K7	5%	1/3W	Philips CR25
R22	Part of L7			Philips CR52
R23	Selected during set-up			Philips CR52
R24				Philips CR52
R25				Philips CR52
R26				Philips CR52
R27				Philips CR52
R28				Philips CR52
R29	1K	5%	½W	Philips CR37
R30	1K	5%	½W	Philips CR37
R31	6.8K	5%	2/3W	Philips CR52
R32	10	5%	½W	Philips CR37
R33	10	1%	½W	Philips CR37
R34	10	1%	½W	Philips CR37
R35	10	1%	½W	Philips CR37
R36	10	1%	½W	Philips CR37
R37	6.8	5%	½W	Philips CR37
R38	6.8	5%	½W	Philips CR37
R39	100	5%	½W	Philips CR37
R40	10	5%	½W	Philips CR37
R41	10	1%	½W	Philips CR37
R42	10	1%	½W	Philips CR37
R43	10	1%	½W	Philips CR37

CCT REF	DESCRIPTION			MANUFACTURER	NOTES
8.1.1	Cont.				
R44	10	1%	½W	Philips CR37	
R45	6.8	5%	½W	Philips CR37	
R46	6.8	5%	½W	Philips CR37	
R47	100	5%	½W	Philips CR37	
R48	523	1%	½W	Philips MR30	
R49	10	5%	½W	Philips CR37	
R50	10	1%	½W	Philips CR37	
R51	10	1%	½W	Philips CR37	
R52	10	1%	½W	Philips CR37	
R53	10	1%	½W	Philips CR37	
R54	6.8	5%	½W	Philips CR37	
R55	6.8	5%	½W	Philips CR37	
R56	100	5%	½W	Philips CR37	
R57	10	5%	½W	Philips CR37	1KW only
R58	10	1%	½W	Philips CR37	
R59	10	1%	½W	Philips CR37	
R60	10	1%	½W	Philips CR37	
R61	10	1%	½W	Philips CR37	
R62	6.8	5%	½W	Philips CR37	
R63	6.8	5%	½W	Philips CR37	
R64	100	5%	½W	Philips CR37	
R65	174K	1%	½W	Philips MR30	
R66	18K	1%	½W	Philips MR30	
R67	174K	1%	½W	Philips MR30	
R68	174K	1%	½W	Philips MR30	
R69	3K3	5%	1/3W	Philips CR25	
R70	220K	5%	2/3W	Philips CR52	
R71	4K7	5%	2/3W	Philips CR52	500W only
R72	4K7	5%	2/3W	Philips CR52	500W only

CCT REF.	DESCRIPTION	MANUFACTURER	NOTES
8.1.1	Cont.		
RV1	5K WW Potentiometer	IRC 2W	
RV2	5K WW Potentiometer	IRC 2W	
RV3	5K WW Potentiometer	IRC 2W	
RV4	5K WW Potentiometer	IRC 2W	
RV5	10K 20% Linear Potentiometer	22-10399	multi channel only
RV6	50K 20% Linear Potentiometer	Plessey E	
RLA	4 pole C/O relay 820 Ohm coil	Siemens V23154-D0721-B110	
RLB	4 pole C/O relay 820 Ohm coil	Siemens V23154-D0721-B110	
RLC	Frequency select relay	Part of 08-00169	
RLD	4 pole C/O relay 820 Ohm coil	Siemens V23154-D0721-B110	
RLE		Part of 08-00169	
RLF	4 pole C/O relay 820 Ohm coil	Siemens V23154-D0721-B110	
RLG		Part of 08-00169	
RLH	4 pole C/O relay 820 Ohm coil	Siemens V23154-D0721-B110	
RLJ		Part of 08-00169	
RLK	4 pole C/O relay 820 Ohm coil	Siemens V23154-D0721-B110	
RLL		Part of 08-00169	
RLM	Load select relay	08-00170	
RLN	Load select relay	08-00170	
	NOTE : RLA-RLN MULTI CHANNEL ONLY		
SK1	BNC jack receptacle VG-1094/U	Acme	
SK2	C jack receptacle VG-568/U	Acme	
	Value socket with integral screen	EIMAC SK600	
	by-pass capacitor (4 off 1KW) (2 off 500W)		
	Value chimney (1 per socket)	EIMAC SK606	

CCT REF.	DESCRIPTION	MANUFACTURER	NOTES
8.1.1	Cont.		
SW1	DPDT toggle switch	MSP8373B3	
SW2	Meter switch	14-00011	
SW3	PA metering switch	14-00012	
SW4	Tune select switch	14-00013	
SW5	Microswitch	Burgess CR1K2 or CT2K2	
T1	RF input transformer	44-80052	
T2	RF current transformer	44-80053	
T3	RF current transformer	44-80053	
T4	Power transformer 40Hz	44-00963	
OR	Power transformer 50-60Hz	44-00897	
V1	Valve type 4CX250B	EIMAC	
V2	Valve type 4CX250B	EIMAC	
V3	Valve type 4CX250B	EIMAC	1KW only
V4	Valve type 4CX250B	EIMAC	1KW only
V5	Valve type E55L	Philips	
Z1	BZY88C3V3 zener diode	Philips	

CCT. REF	DESCRIPTION	MANUFACTURER	NOTES

8.1.2 LOAD, ALC AND SWR DETECTOR

All Components Prefixed 2

	Complete Sub-assy	08-00147
	Printed Circuit Board	07-00106
C1	4.7 pF ± 0.5 pF 500V NPO Ceramic	Philips 555
C2	22 pF 5% 125V Polystyrene	Allied TCS0122
C3	200 uF +50% -10% 10V Electrolytic	Philips 001
C4	0.047 uF +80% -20% 25V Ceramic	Ducon CDR
C5	0.047 uF +80% -20% 25V Ceramic	Ducon CDR
C6	33 pF 5% 100V Styroseal	Ducon DFB0133
C7	270 pF 5% 630V Styroseal	Ducon DFB 605
C8	0.047uF + 80% -20% 25V Ceramic	Ducon CDR
C9	0.047 uF +80% -20% 25V Ceramic	Ducon CDR
C10	0.047 uF +80% -20% 25V Ceramic	Ducon CDR
C11	0.047 uF +80% -20% 25V Ceramic	Ducon CDR
C12	0.01 uF + 80% -20% 100V Ceramic	Ducon CDR
C13	470 pF 5% 630V Styroseal	Ducon DFB608
C14	2200 uF + 100% -10% 25V Electrolytic	Elna RT
C15	2200 uF +100% -10% 25V Electrolytic	Elna RT
C16	3300 pF 10% 100V Ceramic	Philips 630
C17	0.047 uF +80% -20% 25V Ceramic	Ducon CDR
C18	0.047 uF +80% -20% 25V Ceramic	Ducon CDR
C19	0.047 uF + 80% -20% 25V Ceramic	Ducon CDR
C20	160uF + 50% -10% 2.5V Electrolytic	Philips 001
C22	0.047uF +80% -20% 25V Ceramic	Ducon CDR
C23	0.047uF +80% -20% 25V Ceramic	Ducon CDR
C25	160 uF +50% -10% 2.5V Electrolytic	Philips 001
C26	0.047 uF +80% -20% 25V Ceramic	Ducon CDR
C27	0.047 uF + 80% -20% 25V Ceramic	Ducon CDR
C28	3300 pF 10% 100V Ceramic	Philips 630
C29	0.047 uF +80% -20% 25V Ceramic	Ducon CDR

CCT REF.	DESCRIPTION	MANUFACTURER	NOTES
D1-D4	1N914 Silicon Diode		
D5-D8	BY126/200 Silicon Diode	Philips	
D9	IN914 Silicon Diode		
D10	EM402 Silicon Diode		
D11&D12	IN914 Silicon Diode, Matched pair to specification 10-00017		
Z1	BZY88/C6V2 Zener Diode	Philips	
Z2	BZY88/C6V2 Zener Diode	Philips	
L1	1mH RF Choke	Philips 535	
R1	22K Ohms 5% 1/3W	Philips CR25	
R2	10K Ohms 5% 1/3W	Philips CR25	
R3	22K Ohms 5% 1/3W	Philips CR25	
R4	10K Ohms 5% 1/3W	Philips CR25	
R5	10K Ohms 5% 1/3W	Philips CR25	
R6	10K Ohms 5% 1/3W	Philips CR25	
R7	33K Ohms 5% 1/3W	Philips CR25	
R8	10K Ohms 5% 1/3W	Philips CR25	
R9	120K Ohms 5% 1/3W	Philips CR25	
R10	330 Ohms 5% 1/3W	Philips CR25	
R11	4.7K Ohms 5% 1/3W	Philips CR25	
R12	10K Ohms 5% 1/3W	Philips CR25	
R14	1K Ohms 5% 1/3W	Philips CR25	
R15	100 Ohms 5% 1/3W	Philips CR25	
R17	1K Ohms 5% 1/3W	Philips CR25	
R21	10 Ohms 5% 1/3W	Philips CR25	
R22	Select-on-Test 5% 1/3W	Philips CR25	(180 Ohm)
R23	1K Ohms 5% 1/3W	Philips CR25	
R25	100 Ohms 5% 1/3W	Philips CR25	
R28	4.7K Ohms 5% 1/3W	Philips CR25	
R29	10K Ohms 5% 1/3W	Philips CR25	

CCT REF	DESCRIPTION	MANUFACTURER	NOTES

8.1.3 SERVO PRESET

	All Components Prefixed 3	
	Complete Sub-assy	08-00152
	Printed Circuit Board	07-00072
VR1-VR6	10K Ohms 20% Lin. Type MP/PC	Plessey
	Carbon Potentiometer	404/8/02857/028

CCT REF.	DESCRIPTION	MANUFACTURER	NOTES

8.1.4 SERVO AMPLIFIER

All Components Prefixed 4

	Complete Sub-assy	08-00148
	Printed Circuit Board	07-00102

C1-C5	0.047 uF + 80% - 20% 25V Ceramic	Ducon CDR
C6	0.047 uF 10% 200V Polyester	Soanar 'N'
C7-C10	0.047 uF + 80% -20% 25V Ceramic	Ducon CDR
C11	10 uF + 50% - 20% 25V Electrolytic	S.T.C. Tag
C12 - C15	0.047 uF + 80% -20% 25V Ceramic	Ducon CDR

D1-D18	IN914 Silicon Diode	

R1	470	Ohms	5%	1/3W	Philips CR25
R2	1.8K	Ohms	5%	1/3W	Philips CR25
R3	68K	Ohms	5%	1/3W	Philips CR25
R4	68K	Ohms	5%	1/3W	Philips CR25
R5	1.8K	Ohms	5%	1/3W	Philips CR25
R6	470	Ohms	5%	1/3W	Philips CR25
R7	220K	Ohms	5%	1/3W	Philips CR25
R8	4.7K	Ohms	5%	1/3W	Philips CR25
R9	1K	Ohms	5%	1/3W	Philips CR25
R10	1K	Ohms	5%	1/3W	Philips CR25
R11	10K	Ohms	5%	1/3W	Philips CR25
R12	1M	Ohms	5%	1/3W	Philips CR25
R13	100K	Ohms	5%	1/3W	Philips CR25
R14	10K	Ohms	5%	1/3W	Philips CR25
R15	2.2K	Ohms	5%	1/3W	Philips CR25
R16	1K	Ohms	5%	1/3W	Philips CR25
R17	220K	Ohms	5%	1/3W	Philips CR25
R18	4.7K	Ohms	5%	1/3W	Philips CR25

CCT. REF	DESCRIPTION				MANUFACTURER	NOTES
R19	1K	Ohm	5%	1/3W	Philips CR25	
R20	330	Ohm	5%	1/3W	Philips CR25	
R21	330	Ohm	5%	1/3W	Philips CR25	
R22	1K	Ohm	5%	1/3W	Philips CR25	
R23	4.7K	Ohm	5%	1/3W	Philips CR25	
R24	680	Ohm	5%	1/3W	Philips CR25	
R25	680	Ohm	5%	1/3W	Philips CR25	
R26	4.7	Ohm	5%	1/3W	Philips CR25	
R27	4.7	Ohm	5%	1/3W	Philips CR25	
R28	47K	Ohm	5%	1/3W	Philips CR25	
R29	4.7K	Ohm	5%	1/3W	Philips CR25	
R30	10K	Ohm	5%	1/3W	Philips CR25	
R31	10K	Ohm	5%	1/3W	Philips CR25	
R32	4.7K	Ohm	5%	1/3W	Philips CR25	
R33	10K	Ohm	5%	1/3W	Philips CR25	
R34	10K	Ohm	5%	1/3W	Philips CR25	
R35	1M	Ohm	5%	1/3W	Philips CR25	
R36	100K	Ohm	5%	1/3W	Philips CR25	
R37	10K	Ohm	5%	1/3W	Philips CR25	
R38	2.2K	Ohm	5%	1/3W	Philips CR25	
R39	1K	Ohm	5%	1/3W	Philips CR25	
R40	470K	Ohm	5%	1/3W	Philips CR25	
R41	4.7K	Ohm	5%	1/3W	Philips CR25	
R42	1K	Ohm	5%	1/3W	Philips CR25	
R43	330	Ohm	5%	1/3W	Philips CR25	
R44	330	Ohm	5%	1/3W	Philips CR25	
R45	1K	Ohm	5%	1/3W	Philips CR25	
R46	4.7K	Ohm	5%	1/3W	Philips CR25	
R47	680	Ohm	5%	1/3W	Philips CR25	
R48	680	Ohm	5%	1/3W	Philips CR25	
R49	4.7	Ohm	5%	1/3W	Philips CR25	
R50	4.7	Ohm	5%	1/3W	Philips CR25	

CCT REF	DESCRIPTION				MANUFACTURER	NOTES
R51	47K	Ohms	5%	1/3W	Philips CR25	
R52	4.7K	Ohms	5%	1/3W	Philips CR25	
R53	10K	Ohms	5%	1/3W	Philips CR25	
R54	10K	Ohms	5%	1/3W	Philips CR25	
R55	4.7K	Ohms	5%	1/3W	Philips CR25	
R56	10K	Ohms	5%	1/3W	Philips CR25	
R57	47K	Ohms	5%	1/3W	Philips CR25	
R58	1K	Ohms	5%	1/3W	Philips CR25	
R59	100K	Ohms	5%	1/3W	Philips CR25	
R60	4.7K	Ohms	5%	1/3W	Philips CR25	
R61	1K	Ohms	5%	1/3W	Philips CR25	
R62	10K	Ohms	5%	1/3W	Philips CR25	
R63	10K	Ohms	5%	1/3W	Philips CR25	
R64	10K	Ohms	5%	1/3W	Philips CR25	
R65	4.7K	Ohms	5%	1/3W	Philips CR25	
R66	4.7K	Ohms	5%	1/3W	Philips CR25	
R67	47K	Ohms	5%	1/3W	Philips CR25	
R68	10K	Ohms	5%	1/3W	Philips CR25	
R69	1K	Ohms	5%	1/3W	Philips CR25	
R70	10K	Ohms	5%	1/3W	Philips CR25	
R71	150K	Ohms	5%	1/3W	Philips CR25	
R72	10K	Ohms	5%	1/3W	Philips CR25	
R73	10K	Ohms	5%	1/3W	Philips CR25	
R74	100K	Ohms	5%	1/3W	Philips CR25	
TR1	741C Integrated Circuit				Fairchild	
TR2	2N5461 P Channel FET				Fairchild	
TR3	741C Integrated Circuit				Fairchild	
TR4	BC148 NPN Silicon				Philips	
TR5	AY1115 PNP Silicon				Fairchild	
TR6	AY1115 PNP Silicon				Fairchild	
TR7	BC148 NPN Silicon				Philips	
TR8	TIP 32 PNP Power Silicon				Texas	

CCT REF	DESCRIPTION	MANUFACTURER	NOTES
TR9	TIP 31 NPN Power Silicon	Texas	
TR10	BC148 NPN Silicon	Philips	
TR11	BC148 NPN Silicon	Philips	
TR12	AY1115 PNP Silicon	Philips	
TR13	2N5461 P Channel FET	Philips	
TR14	741C Integrated Circuit	Fairchild	
TR15	BC148 NPN Silicon	Philips	
TR16	AY1115 PNP Silicon	Fairchild	
TR17	AY1115 PNP Silicon	Fairchild	
TR18	BC148 NPN Silicon	Philips	
TR19	TIP 32 PNP Power Silicon	Texas	
TR20	TIP 31 NPN Power Silicon	Texas	
TR21	BC148 NPN Silicon	Philips	
TR22	BC148 NPN Silicon	Philips	
TR23	AY1115 PNP Silicon	Philips	
TR24	BC148 NPN Silicon	Philips	
TR25	BC148 NPN Silicon	Philips	
TR26	AY1115 PNP Silicon	Philips	
TR27	OC926 PNP Silicon	Philips	
TR28	OC946 PNP Silicon	Philips	
TR29	BC148 NPN Silicon	Philips	
TR30	BC148 NPN Silicon	Philips	
TR31	BC148 NPN Silicon	Philips	
Z1	BZY88 C7V5	Philips	
Z2	BZY88 C7V5	Philips	
Z3	BZY88 C15V	Philips	

CCT. REF	DESCRIPTION	MANUFACTURER	NOTES

8.1.5 BIAS REGULATOR

All Components Prefixed 5

	Complete Sub-assy	08-00149
C1	47 uF + 50% - 10% 160V Electrolytic	Elna RT
C2	0.047 uF 10% 400V Polyester	Philips 311
D1-D4	BY126/400	Philips
D5 & D6	IN914	
D7 & D8	BY126/400	Philips

R1	1.5K	Ohms	5%	1/3W	Philips CR25
R2	15K	Ohms	5%	1W	Philips CR68
R3	3.9K	Ohms	5%	Metal Oxide	Welwyn F33
R4	8.2K	Ohms	5%	1W	Philips CR68
R5	2.2K	Ohms	5%	1/3W	Philips CR25
R6	12K	Ohms	5%	1/3W	Philips CR25
R7	82K	Ohms	5%	½W	Philips CR37
R8	2.2K	Ohms	5%	1/3W	Philips CR25
R9	1K	Ohms	5%	1/3W	Philips CR25
R10	2.7K	Ohms	5%	1/3W	Philips CR25
R11	33K	Ohms	5%	1/3W	Philips CR25
R12	56K	Ohms	5%	1/3W	Philips CR25
R13	560	Ohms	5%	½W	Philips CR37
R14	560	Ohms	5%	½W	Philips CR37
R15	560	Ohms	5%	½W	Philips CR37
R16	22K	Ohms	5%	1/3W	Philips CR25
R17	22K	Ohms	5%	1/3W	Philips CR25
R18	22K	Ohms	5%	1/3W	Philips CR25
R19	3.3K	Ohms	5%	1/3W	Philips CR25
R20	15K	Ohms	5%	½W	Philips CR37
R21	100K	Ohms	5%	1/3W	Philips CR25

CCT REF.	DESCRIPTION	MANUFACTURER	NOTES
RLA	2 Pole C/O 7600 Ohm Cradle 'N'	Siemens	
TR1 & TR2	BC148 NPN Silicon	Philips	
TR3	AY1115 PNP Silicon	Fairchild	
TR4-TR7	OC926 PNP Silicon	Philips	
VR1	10K Ohms 20% Lin. Type MP/PC Carbon Potentiometer	Plessey 404/8/02857/028	
Z1	BZY88 C12V	Philips	
Z2	BZY88 C6V2	Philips	
Z3	BZY88 C6V2	Philips	
Z4	BZY88 C6V8	Philips	
Z5	BZX70 C51V	Philips	
	Printed Circuit Board	07-00077	

CCT. REF	DESCRIPTION	MANUFACTURER	NOTES

8.1.6 MINOR HT REGULATOR

All Components Prefixed 6

	Complete Sub-assy	08-00150
	Printed Circuit Board	07-00076
C1	250 uF + 50% -10% 25V Electrolytic	Philips 023
C2	1000 pF 5% 50V Styroseal	Ducon DFB0512
C3	0.1 uF 10% 630V Polyester	Philips 315
D1-D4	BY127/800 Silicon Diode	Philips
D5 & D6	BY126/200 Silicon Diode	Philips
D7	IN914 Silicon Diode	
D8	BY126/200 Silicon Diode	Philips
D9	BY127/800 Silicon Diode	Philips
Z1-Z4	BZX70/C12	Philips

R1	100K	Ohms	5%	½W	Philips CR37
R2	100K	Ohms	5%	½W	Philips CR37
R3	100K	Ohms	5%	½W	Philips CR37
R4	6.8K	Ohms	5%	1/3W	Philips CR25
R5	6.8K	Ohms	5%	1/3W	Philips CR25
R6	1K	Ohms	5%	1/3W	Philips CR25
R7	2.7K	Ohms	5%	1/3W	Philips CR25
R8	330K	Ohms	5%	½W	Philips CR37
R9	2.7K	Ohms	5%	1/3W	Philips CR25
R10	390	Ohms	5%	1/3W	Philips CR25
R11	2.2K	Ohms	5%	1/3W	Philips CR25
R12	27	Ohms	5%	1/3W	Philips CR25
R13	390	Ohms	5%	1/3W	Philips CR25
R14	100K	Ohms	5%	2/3W	Philips CR52
R15	100K	Ohms	5%	2/3W	Philips CR52

CCT REF	DESCRIPTION	MANUFACTURER	NOTES
TR1	723 C Integrated Circuit	Fairchild U6E 7723393	
TR2-TR4	40313 NPN Silicon Transistor	R.C.A.	
VR1	10K Ohms 20% Lin. Type MP/PC Carobon Potentiometer	Plessey 404/8/02857/028	

CCT REF.	DESCRIPTION	MANUFACTURER	NOTES

8.1.7 SWR BRIDGE

All Components Prefixed 7

	Complete Sub-assy	08-00145
	Printed Circuit Board	07-00118
C1	10 pF ± 0.5 pF 500V NPO Ceramic	Philips 555
C2	5.5-65 pF Film Dialectric Trimmers	Philips 808
C3	390 pF 5% 630V Styroseal	Ducon DFB 607
C4	1000 pF + 50% - 20% 500V Pin-up Ceramic	Philips 563
C5	1000 pF + 50% - 20% 500V Pin-up Ceramic	Philips 563
D1 & D2	1N914 Silicon Diode - Matched Pair to Specification 10-00017	
L1	1 mH RF Choke	Philips 535
R1	47 Ohms 5% ½W	Philips CR37
R2	47 Ohms 5% ½W	Philips CR37
R3	4.7K Ohms 5% ½W	Philips CR37
R4	4.7K Ohms 5% ½W	Philips CR37
T1	Toroidal Transformer	44-80051
	75 Ohm Type PT11M Coaxial Cable	Telcon 16PK1/06

CCT REF	DESCRIPTION	MANUFACTURER	NOTES

8.1.8 DIODE MATRIX

All Components Prefixed 8

	Complete Sub-assy	08-00146
	Printed Circuit Board	07-00119
D1-D24	BY126/200 Silicon Diode	Philips
R1	330 Ohms 5% 2W	Philips CR93

CCT REF.	DESCRIPTION	MANUFACTURER NOTES
8.2.1	POWER CONTROL UNIT	
	All components prefixed 1	
CB1	10 Amp Circuit Breaker	Heinemann CF1
D25	BY126/200	Philips
D26	BY126/200	Philips
D27	BY126/200	Philips
D28	BY126/200	Philips
D29	BY126/200	Philips
D30	BY126/200	Philips
D31	BY126/200	Philips
D32	BY126/200	Philips
D33	BY126/200	Philips
F1	1 Amp Delay Fuse	Australux 3AG
F2	750mA Delay Fuse	Australux 3AG
F3	2 Amp Delay Fuse	Australux 3AG
LP1	240V Neon Indicator-Red	IRH FP7/CL/NRH
LP2	240V Neon Indicator-Red	IRH FP7/CL/NRH
LP3	240V Neon Indicator-Red	IRH FP7/CL/NRH
LP4	240V Neon Indicator-Red	IRH FP7/CL/NRH
LP5	30V 20mA Liliput T6	Tanuslicht
	Lamp Holder	Widmaier 188
	Lamp Cap-Red	Widmaier 182
LP6	30V 20mA Liliput T6	Tanuslicht
LP7	30V 20mA Liliput T6	Tanuslicht
LP8	30V 20mA Liliput T6	Tanuslicht

CCT REF.	DESCRIPTION	MANUFACTURER	NOTES
8.2.1	Cont.		
RLA	3 Pole double throw 24V DC relay	ITT SL-7721319	
RLB	3 Pole double throw 24V DC relay	ITT SL-7721319	
RLC	3 Pole double throw 24V DC relay	ITT SL-7721319	
RLJ	3 Pole double throw 24V DC relay	ITT SL-7721319	
SK1	18 way chassis mounting socket	Painton S18/MFS	
SW1	2 Pole, single throw 10A toggle switch	MSP 7360 K8	
T2	Power transformer auxiliary	44-00925	

CCT REF.	DESCRIPTION	MANUFACTURER NOTES

8.2.2 RELAY INTERLOCK

All components prefixed 2

C1	2200uF +100%-10% 35V Electrolytic	Elna RT
C2	4.7uF 10% 100V Polyester	Philips 341
C3	4.7uF 10% 100V Polyester	Philips 341
D1	BY126/200 Diode	Philips
D2	BY126/200 Diode	Philips
D3	BY126/200 Diode	Philips
D4	BY126/200 Diode	Philips
D5	BY126/200 Diode	Philips
D6	BY126/200 Diode	Philips
D7	BY126/200 Diode	Philips
D8	BY126/200 Diode	Philips
D9	IN914 Diode	Philips
D10	IN914 Diode	Philips
D11	BY126/200 Diode	Philips
R1a	10 5% 1W	Philips CR68 1K only
OR	12 5% 1W	Philips CR68 500W only
R1b	Select on test 5% 1W	Philips CR68
R2	2.2M 5% 1/3W	Philips CR25
R3	10K 5% 1/3W	Philips CR25
R4	6.8M 5% ½W	Philips CR37
R5	2.2K 5% 1/3W	Philips CR25
R6	10K 5% 1/3W	Philips CR25
RLD	2 Pole C/O 1700 coil	Siemens V23154-C0722-B104
RLE	2 Pole C/O 1700 coil	Siemens V23154-C0722-B104
RLF	2 Pole C/O 1700 coil	Siemens V23154-C0722-B104
RLG	2 Pole C/O 1700 coil	Siemens V23154-C0722-B104
RLH	2 Pole C/O 18 coil	Siemens V23154-C0710-B104
Z1	BZY88/C10V Zener Diode	Philips
Z2	BZY88/C3V3 Zener Diode	Philips

CCT REF	DESCRIPTION	MANUFACTURER	NOTES
8.2.3	START DELAY PCB ASSY		
All Components prefixed 3			
	Complete Sub-assy	08-00603	
	Printed Circuit Board	07-00234	
C1-C2	2200uF + 100% - 10% 35V	ELNA RT	
R2	4.7K Ohms 5% ½W	Philips CR37	
R1-R3	47 Ohms 5% 2/3W	Philips CR52	
R4	15 Ohms 20W Type DG	I.R.C.	

CCT REF.	DESCRIPTION	MANUFACTURER NOTES
8.2.4	POWER SUPPLY CHASSIS	
	All components prefixed 4	
C1	0.22uF 10% 1200V AC Paper 50x60Hz	Ducon GPH 12022N
C2	0.22uF 10% 1200V AC Paper 40Hz only	Ducon GPH 12022N
C3	200uF 500V Electrolytic	Ducon EMG/F 2050S
C4	200uF 500V Electrolytic	Ducon EMG/F 2050S
C5	200uF 500V Electrolytic	Ducon EMG/F 2050S
C6	200uF 500V Electrolytic	Ducon EMG/F 2050S
C7	200uF 500V Electrolytic	Ducon EMG/F 2050S
C8	680uF 40V Electrolytic	Philips
C9	680uF 40V Electrolytic	Philips
D1-D24	BY100 Silicon Diode	Philips
L1	Power Choke 50Hz	44-40562
OR	Power Choke 40x60Hz	44-40565
R1-R24	Voltage Dependent Resistor "Violet"	Philips 2322-564-02622
R25	5.6 10% 10W Wire Wound	IRC PW10 (1KW)
OR	6.8 10% 10W Wire Wound	IRC PW10 (500W)
R26	220K 5% 1W	Philips CR68
R27	220K 5% 1W	Philips CR68
R28	220K 5% 1W	Philips CR68
R29	220K 5% 1W	Philips CR68
R30	220K 5% 1W	Philips CR68
R31	150K 5% vitreous wire 50W 50Hz	Welwyn AP3134
OR	110K 5% vitreous wire 50W 40Hz	Welwyn AP3134
R32	1K 5% 1W 50Hz	Philips CR68
OR	680 5% 1W 40Hz	Philips CR68
T1	Power transformer EHT 50-60Hz	44-00922
OR	Power transformer EHT 40Hz	44-00948