



| DATE | REV | REVISION RECORD | AUTH |
|------|-----|-----------------|------|
| 4/95 | A | UPDATED | KLT |
| | | | |
| | | | |

SGC SG-2000
BLOCK DIAGRAM
 J40100550 HEAD
 DOC 3-19-91 PAGE 1 OF 4 REV A

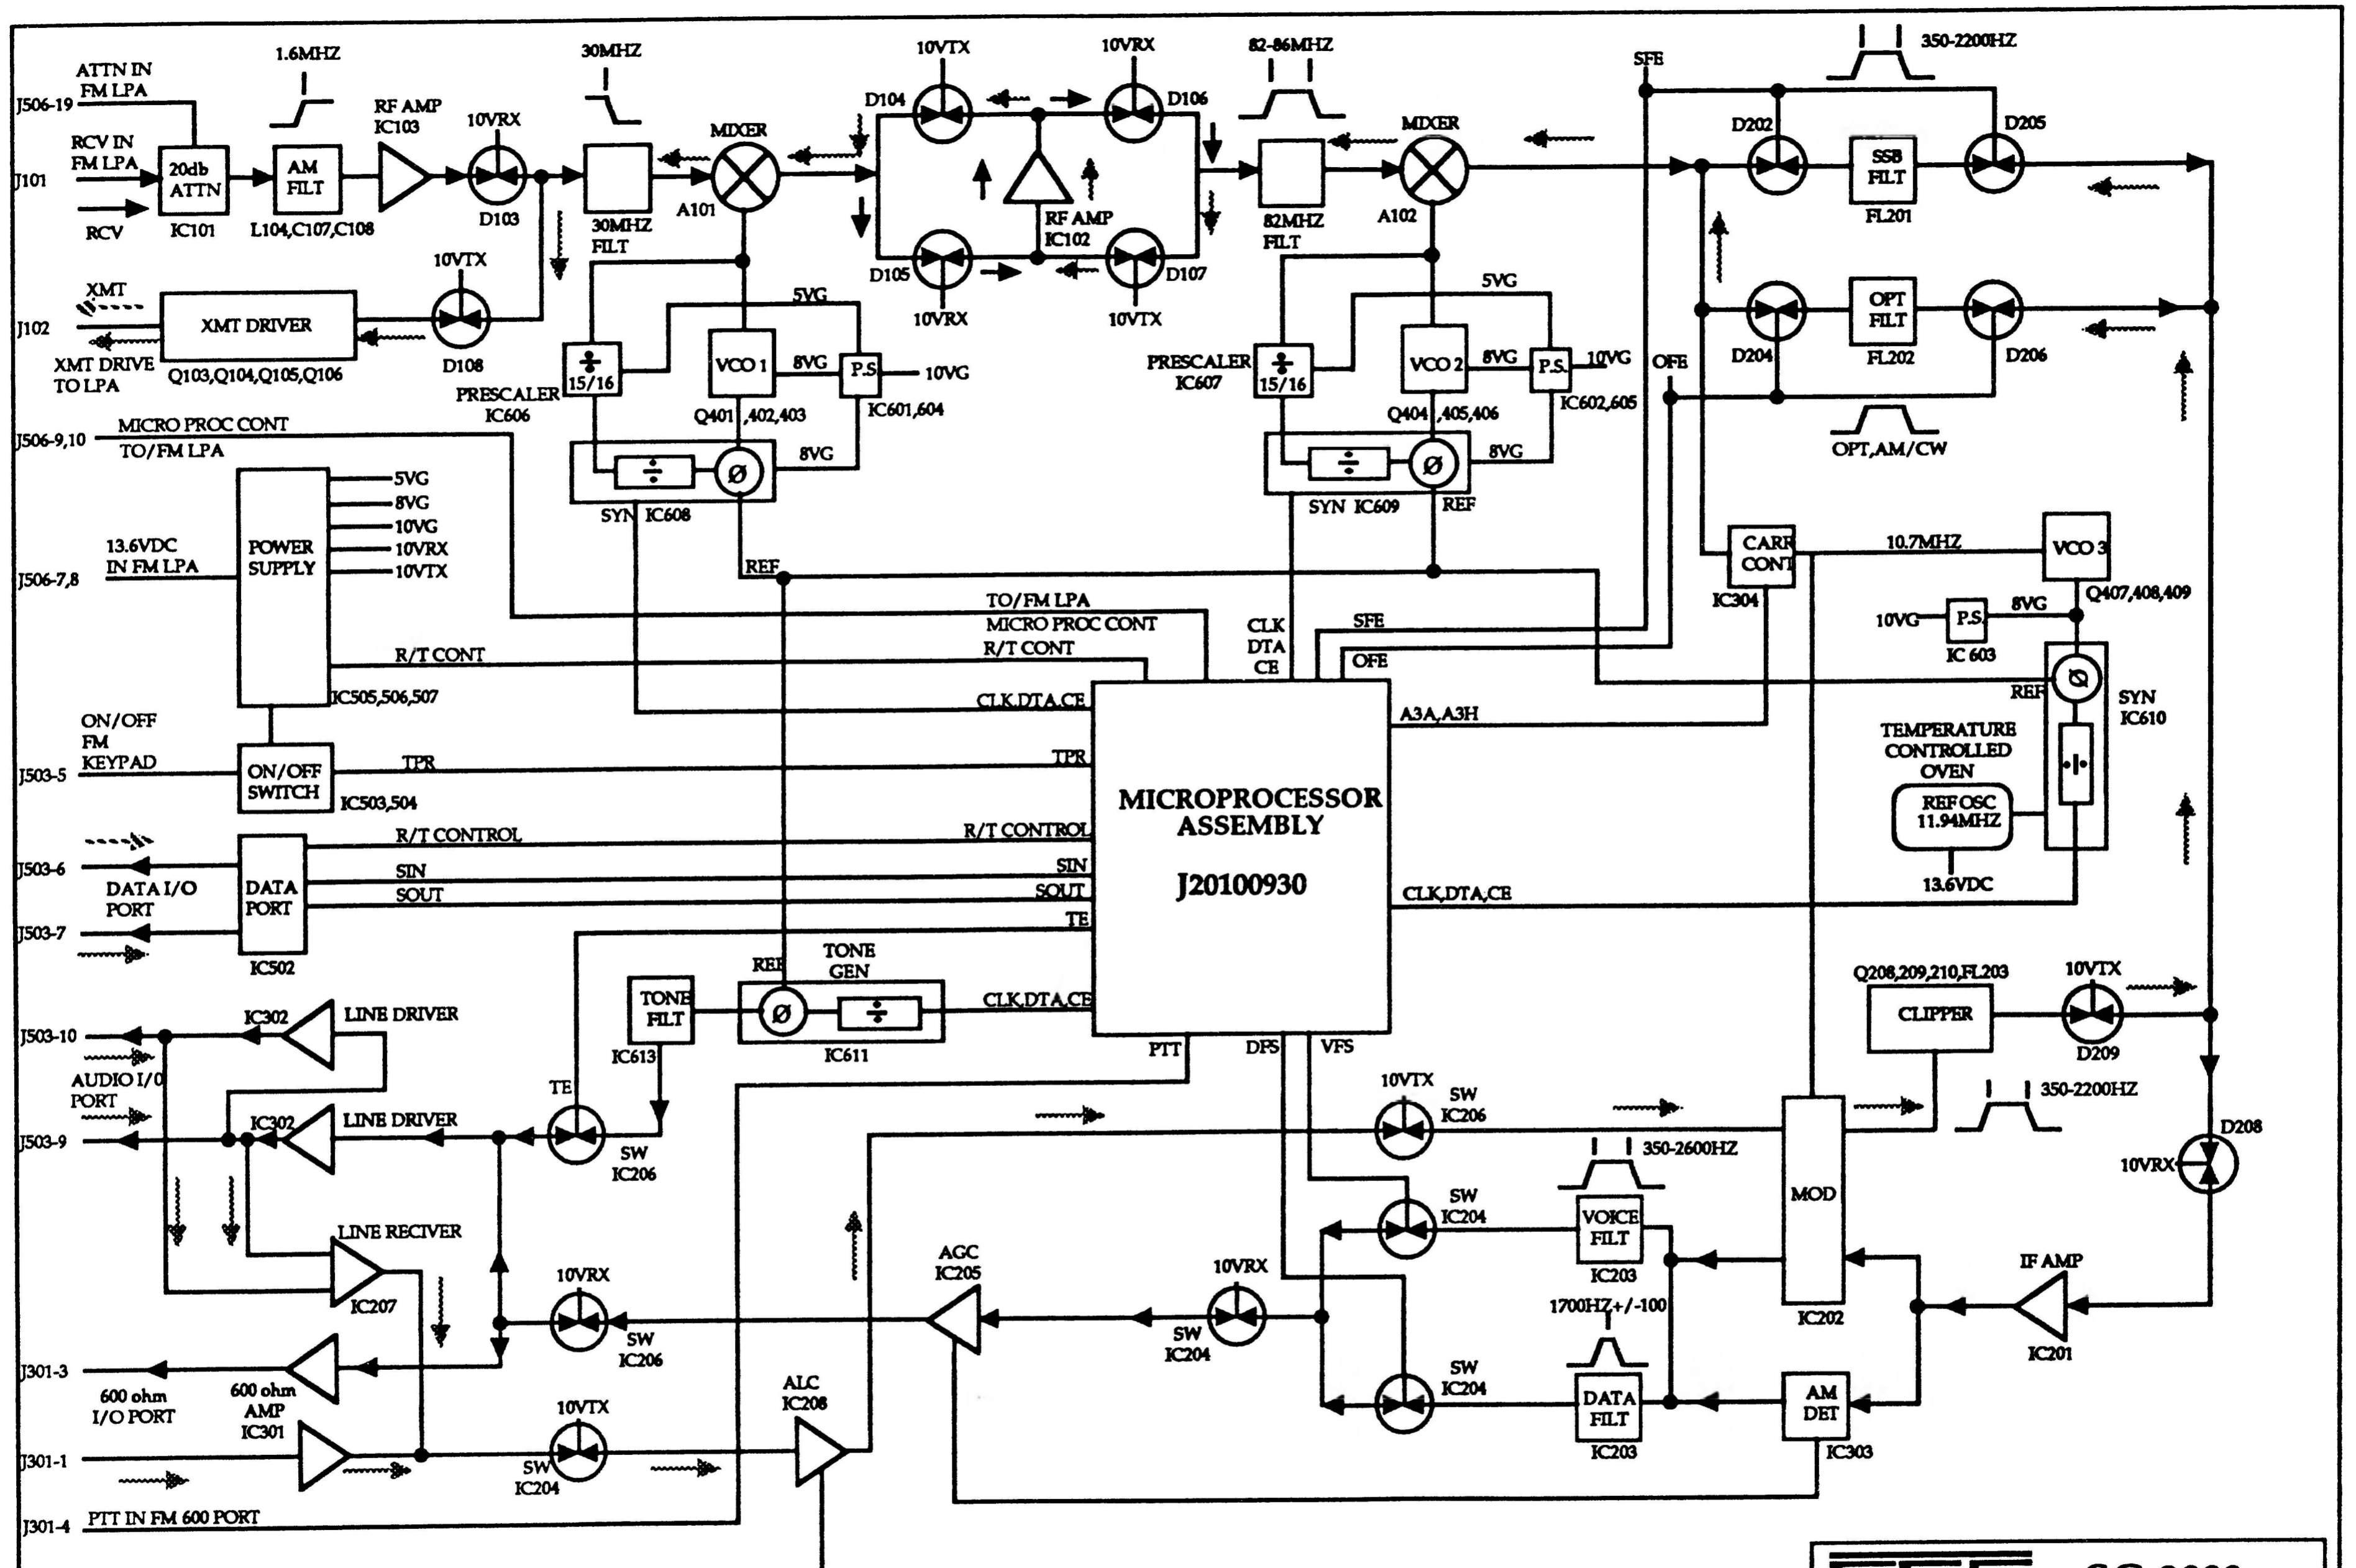


| DATE | REV | REVISION RECORD | AUTH |
|------|-----|-----------------|------|
| 4/95 | A | UPDATED | KLT |
| | | | |
| | | | |

SGC SG-2000
BLOCK DIAGRAM
J40100920 EXCITER
DOC 3-15-91 PAGE 2 OF 4 REV A

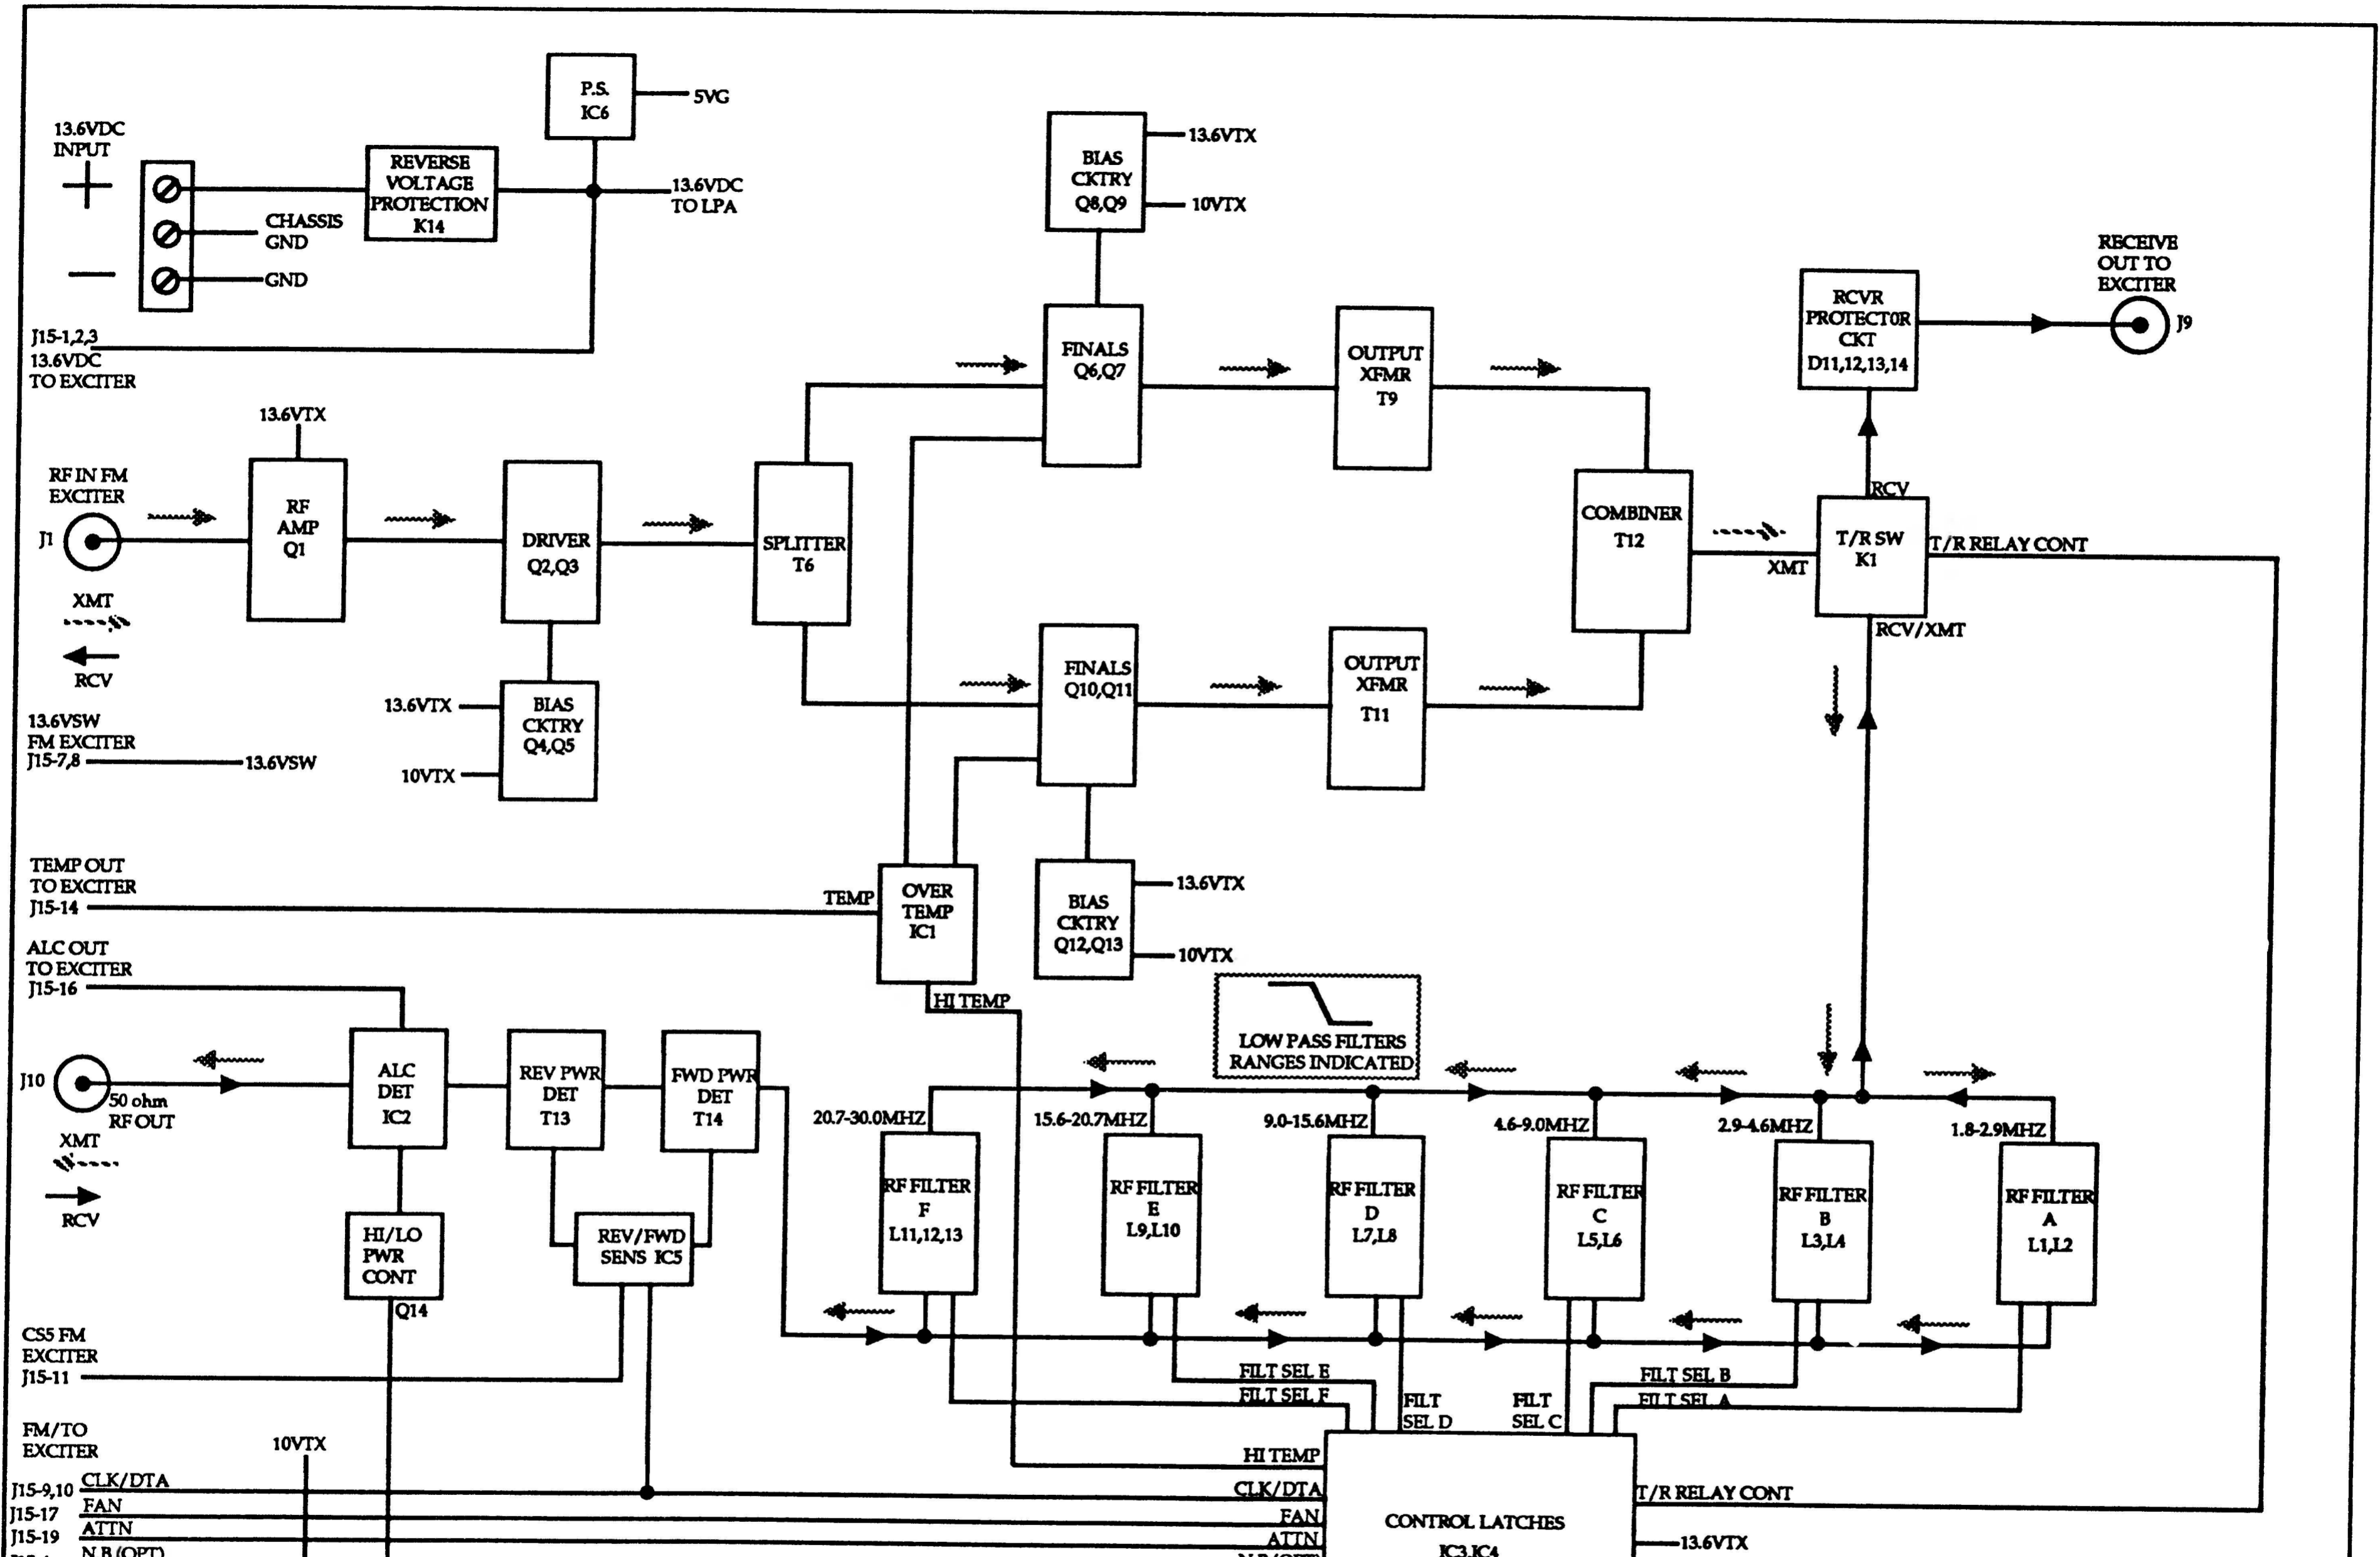

| DATE | REV | REVISION RECORD | AUTH |
|------|-----|-----------------|------|
| 4/95 | A | UPDATED | KLT |
| | | | |
| | | | |


SGC SG-2000
BLOCK DIAGRAM
 J40100500 LPA
 DOC 3-15-91 PAGE 3 OF 4 REV A

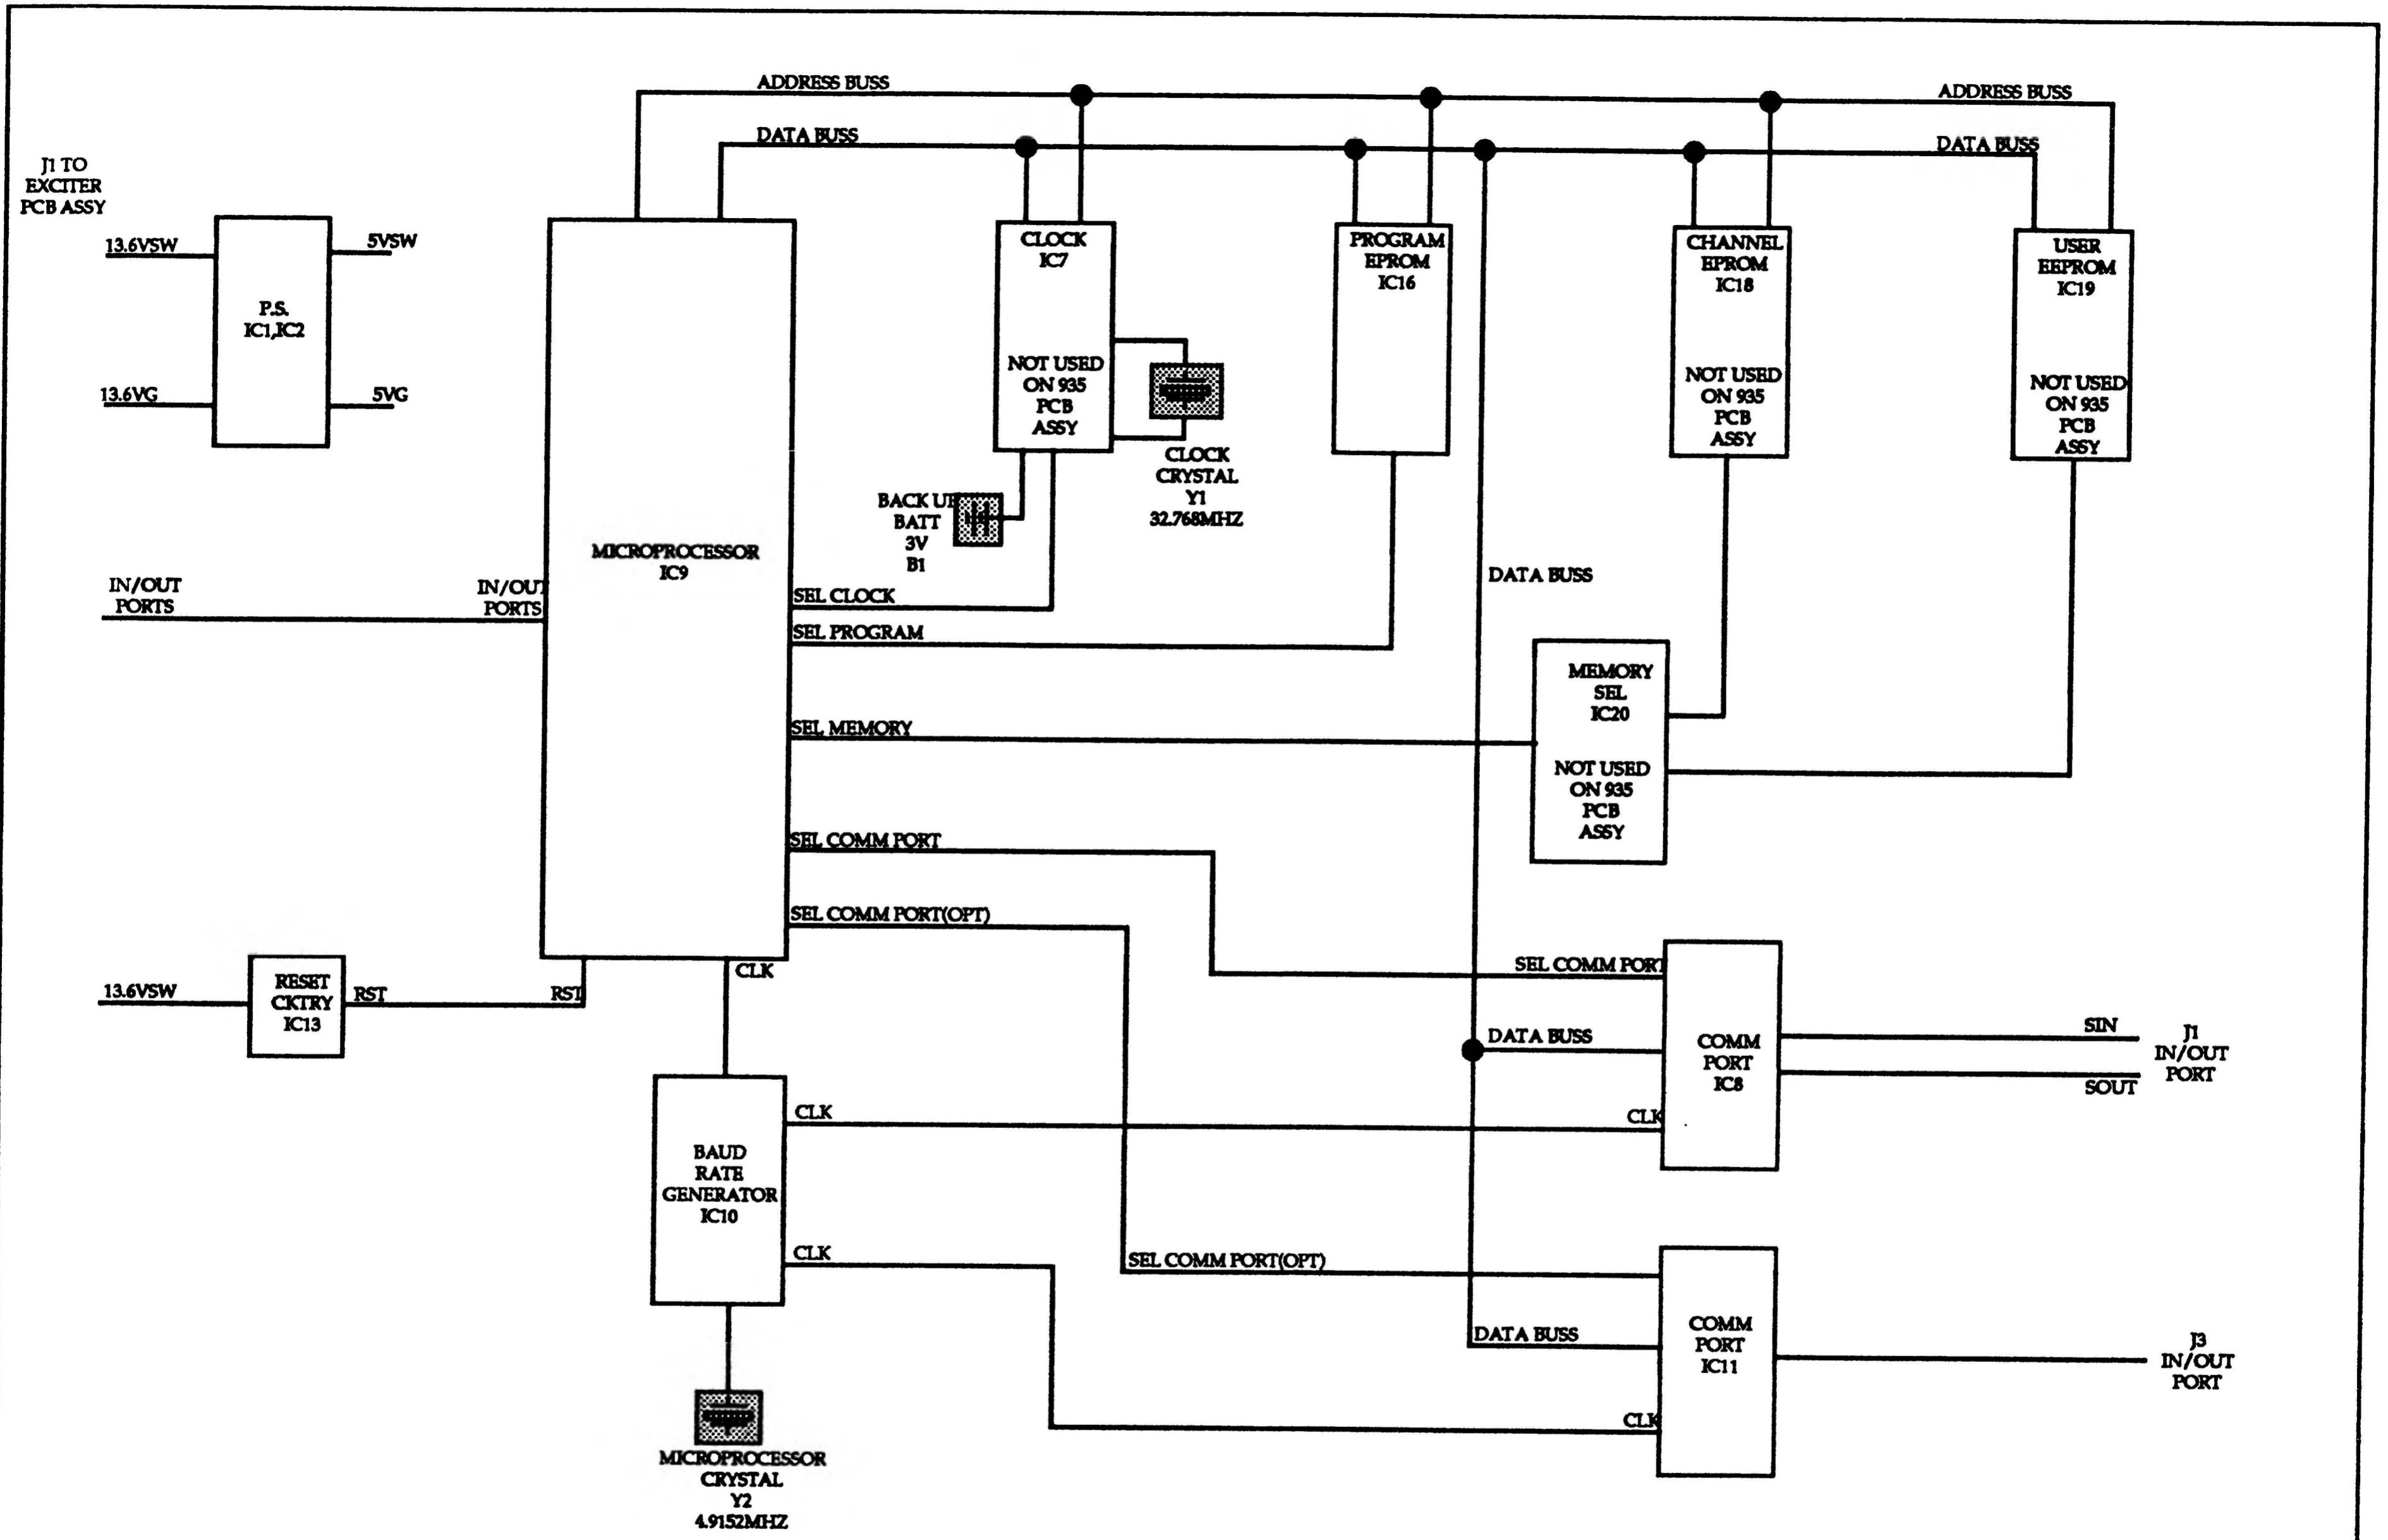

| DATE | REV | REVISION RECORD | AUTH |
|------|-----|-----------------|------|
| 4/95 | A | UPDATED | KLT |
| | | | |
| | | | |

SGC SG-2000
BLOCK DIAGRAM
J40100930,35 PROCESSOR
 DOC 3-20-91 PAGE 4 OF 4 REV A

MICROPROCESSOR MOUNTS
DIRECTLY ABOVE THIS SECTION
USING THESE SCREWS

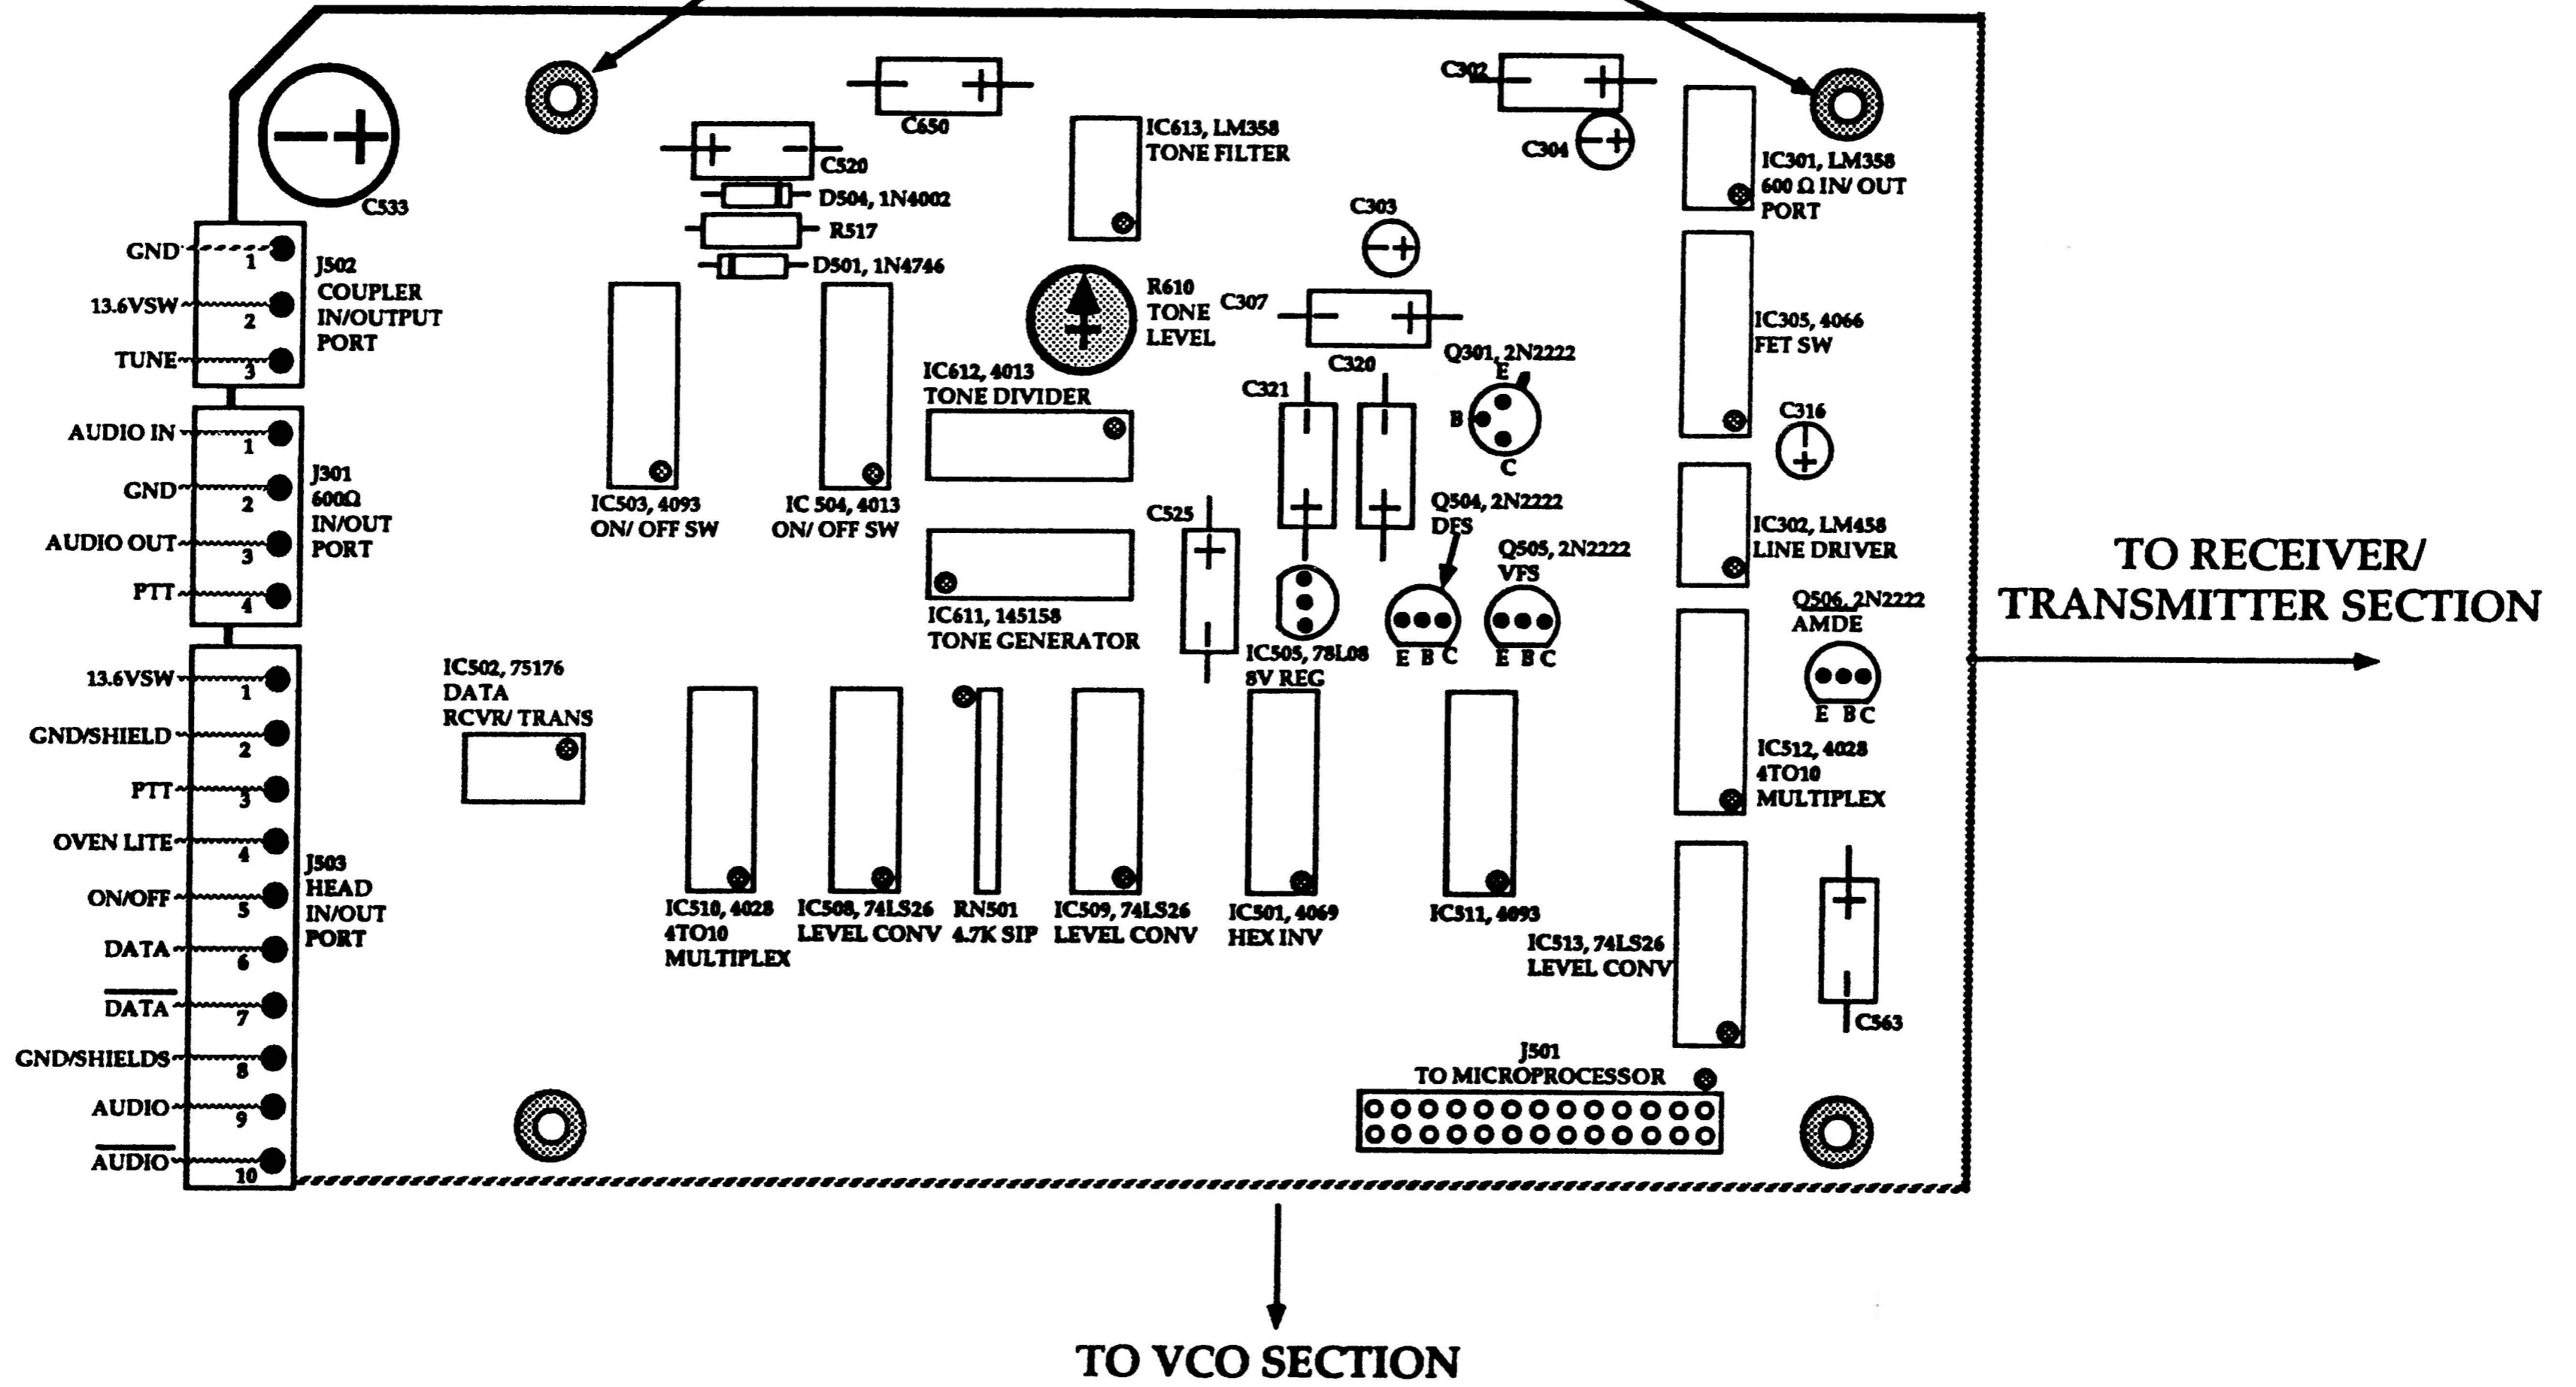

MICROPROCESSOR / EXCITER INTERFACE SECTION

| DATE | REV | REVISION | AUTH |
|------|-----|---------------|------|
| 95/4 | A | UPDATE LAYOUT | KLT |
| | | | |
| | | | |

| |
|----------------------------|
| SGC SG2000 |
| PARTS LAYOUT & ADJUSTMENTS |
| J40100920-A-1 |
| DOC 4-23-91 REV A |

THE AUX IN / OUT CONNECTOR IS A 600 ohm PORT, WITH A PTT CONNECTION, TO BE USED WITH EXTERNAL TELEREX EQUIPMENT, OR EQUIVALENT. (J301)

THE REMOTE CONNECTORS ARE USED TO CONNECT THE HEAD TO THE RADIO. THE HEAD MAY BE ATTACHED TO THE RADIO OR MOUNTED REMOTELY UP TO 150ft AWAY FROM THE CHASSIS UNIT. UP TO 8 REMOTE HEADS MAY BE USED, WITH SUPPLIED OPTIONAL INTERCONNECT BOX. (J503,504)

THIS CONNECTOR USED FOR EXTERNAL SPEAKERS (J505)

THIS SWITCH USED TO CONTROL OVEN POWER. (SW501)

BAT OVEN POWER COMES DIRECT FROM BACK PANEL CONNECTOR. OVEN IS "ON" AS LONG AS THERE IS POWER ON BACK PANEL DC POWER CONNECTOR.

SW OVEN POWER IS SWITCHED THRU FRONT PANEL ON / OFF SWITCH; IT IS "ON" WHEN RADIO IS "ON". (REQUIRES A WARM UP PERIOD BEFORE TRANSMITTING).

THE FULLY AUTOMATIC FAMILY OF ANTENNA COUPLERS PLUG INTO THIS CONNECTOR. (J502)

RS-232 CONNECTOR FOR COMPUTER CONTROL OF AND INTERFACE WITH THE RADIO

CABLE CLAMP

CONNECTOR COVER IS INSTALLED OVER CONNECTORS FOR PROTECTION

CONNECT THIS CONNECTOR TO A GOOD 50 ohm ANTENNA SYSTEM, OR TO THE SG-230 AUTOMATIC COUPLER WHEN USED.

CONNECT THIS GND LUG TO A GOOD EARTH GROUND SYSTEM

CABLE FROM REMOTE HEAD ASSY OR ATTACHED HEAD. CABLE MAY BE UP TO 150ft IN LENGTH. (REFER TO CABLE INTERCONNECT DIAGRAMS FOR PIN-OUT OF CABLE.)


DC INPUT 13.6VDC, 35A

CHASSIS GND

INTERNAL FUSED, 15A & 5A REFER TO MANUAL FOR FUSE REPLACEMENT AND RECOMMENDED WIRE SIZE

THERE ARE 3 INTERNAL FUSES, 2 EACH 15 AMPS 1 EACH 5 AMPS REMOVE BOTTOM COVER FOR FUSE REPLACEMENT, FUSES ARE LOCATED ON LPA PCB.

CONNECT THIS CONNECTOR TO A SUITABLE POWER SOURCE. USE WIRE LARGE ENOUGH TO CARRY 35 AMPS OVER THE DESIRED LENGTH, WITH NO LOSS IN VOLTAGE AT BACK OF RADIO WHEN TRANSMITTING AT 150 WATTS. WE RECOMMEND THE USE SGC CABLES AND CONNECTORS, CATALOG ITEMS; 52-61, 52-62, 52-63 AND 52-64.

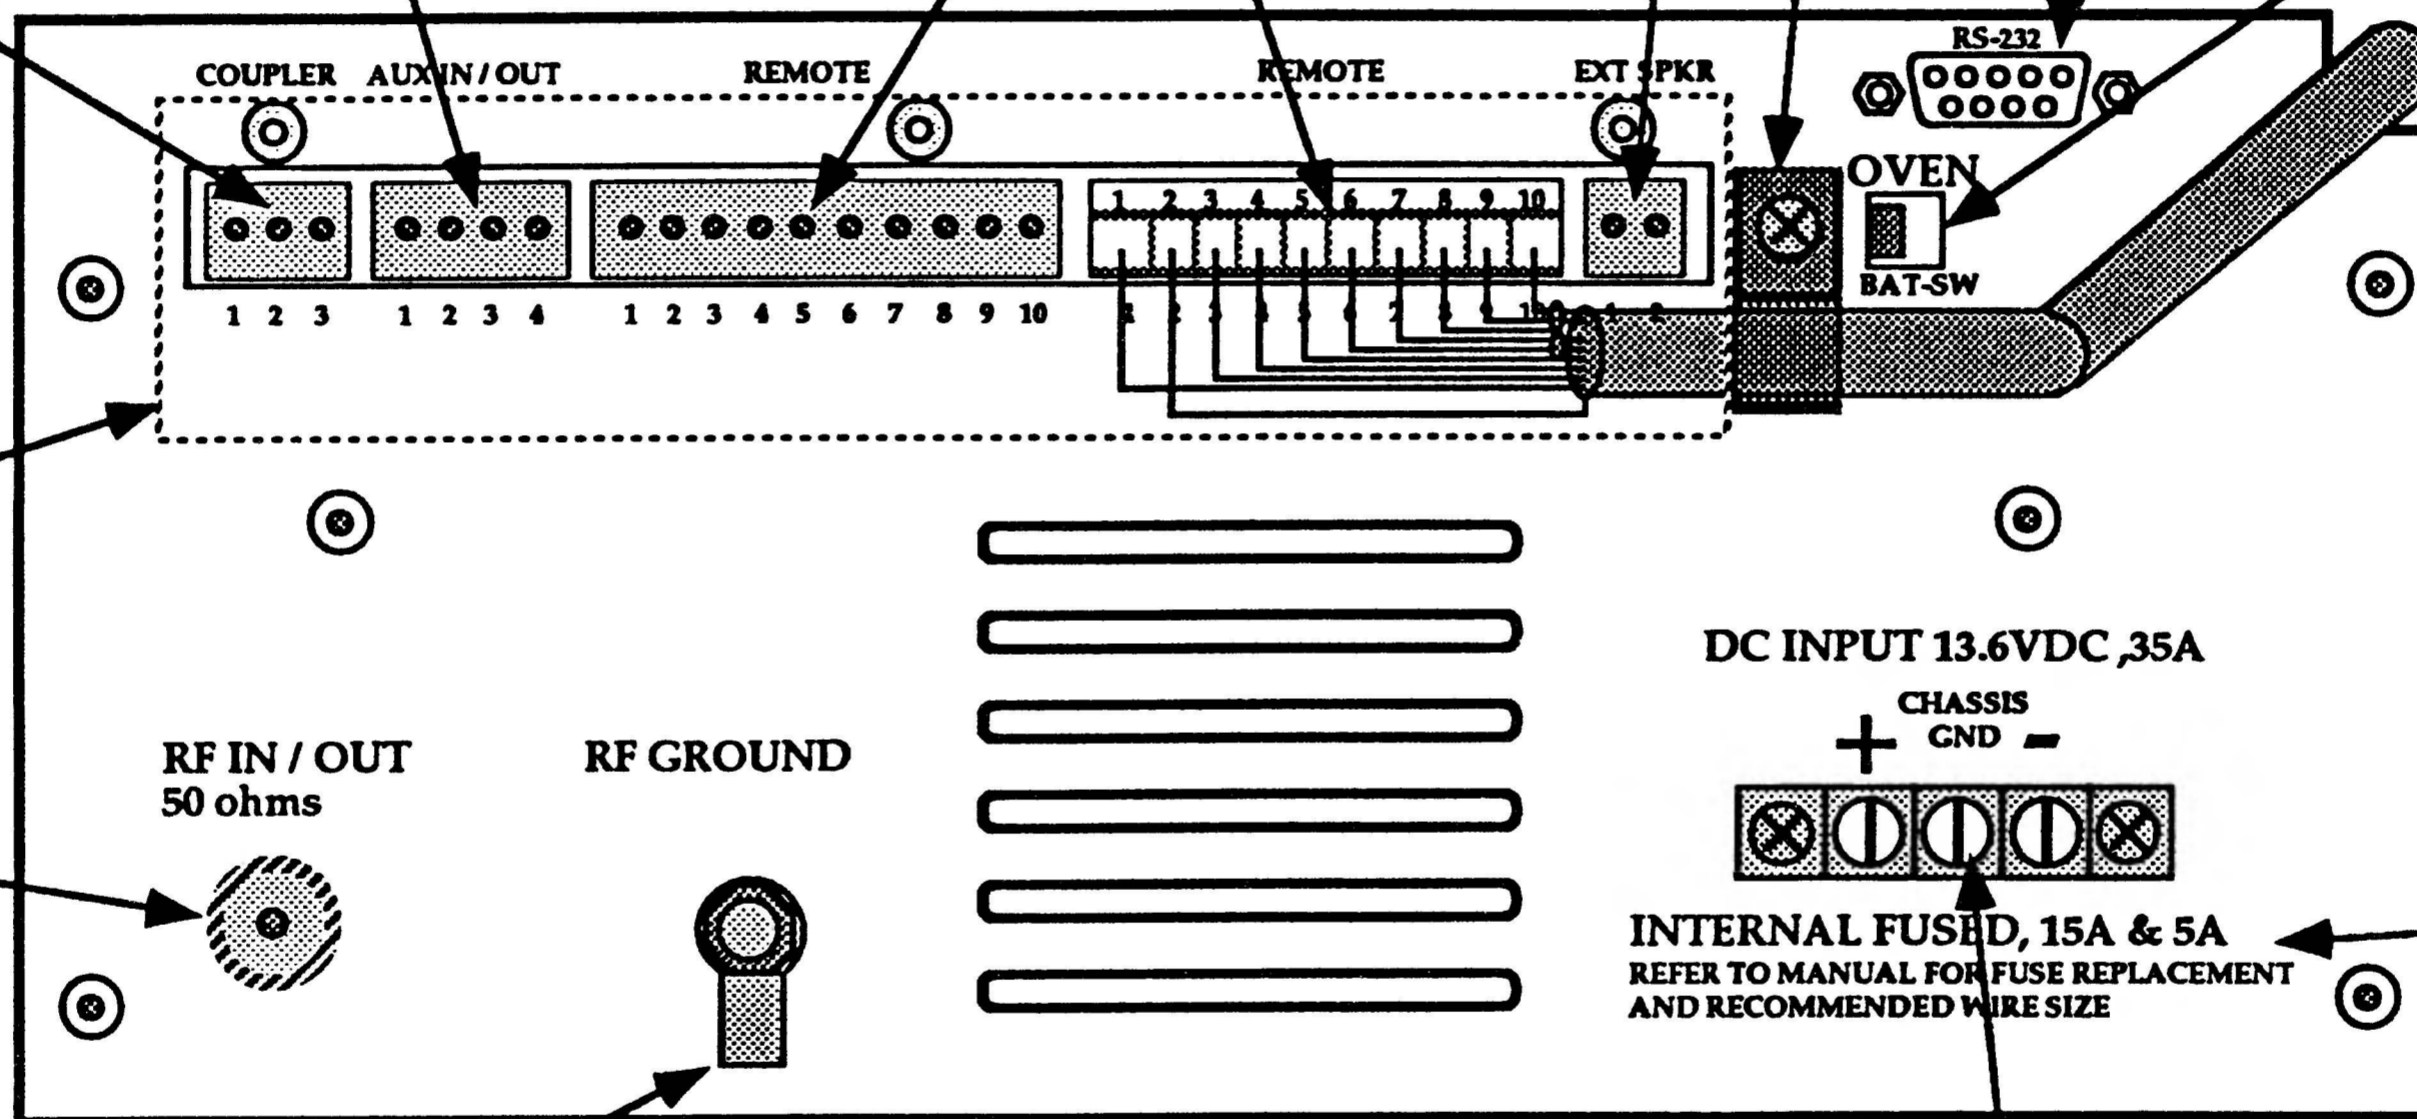


| DATE | REV | REVISION | AUTH |
|------|-----|---------------|------|
| 95/4 | B | UPDATE LAYOUT | KLT |
| | | | |
| | | | |

SG-2000 REAR PANEL PARTS LAYOUT AND INTERCONNECTIONS.

| |
|--------------------------|
| SGC SG2000 |
| REAR PANEL DES. / LAYOUT |
| J40100300 |
| DOC 3-14-91 REV B |

↑ TO MICROPROCESSOR/
EXCITER INTERFACE SECTION

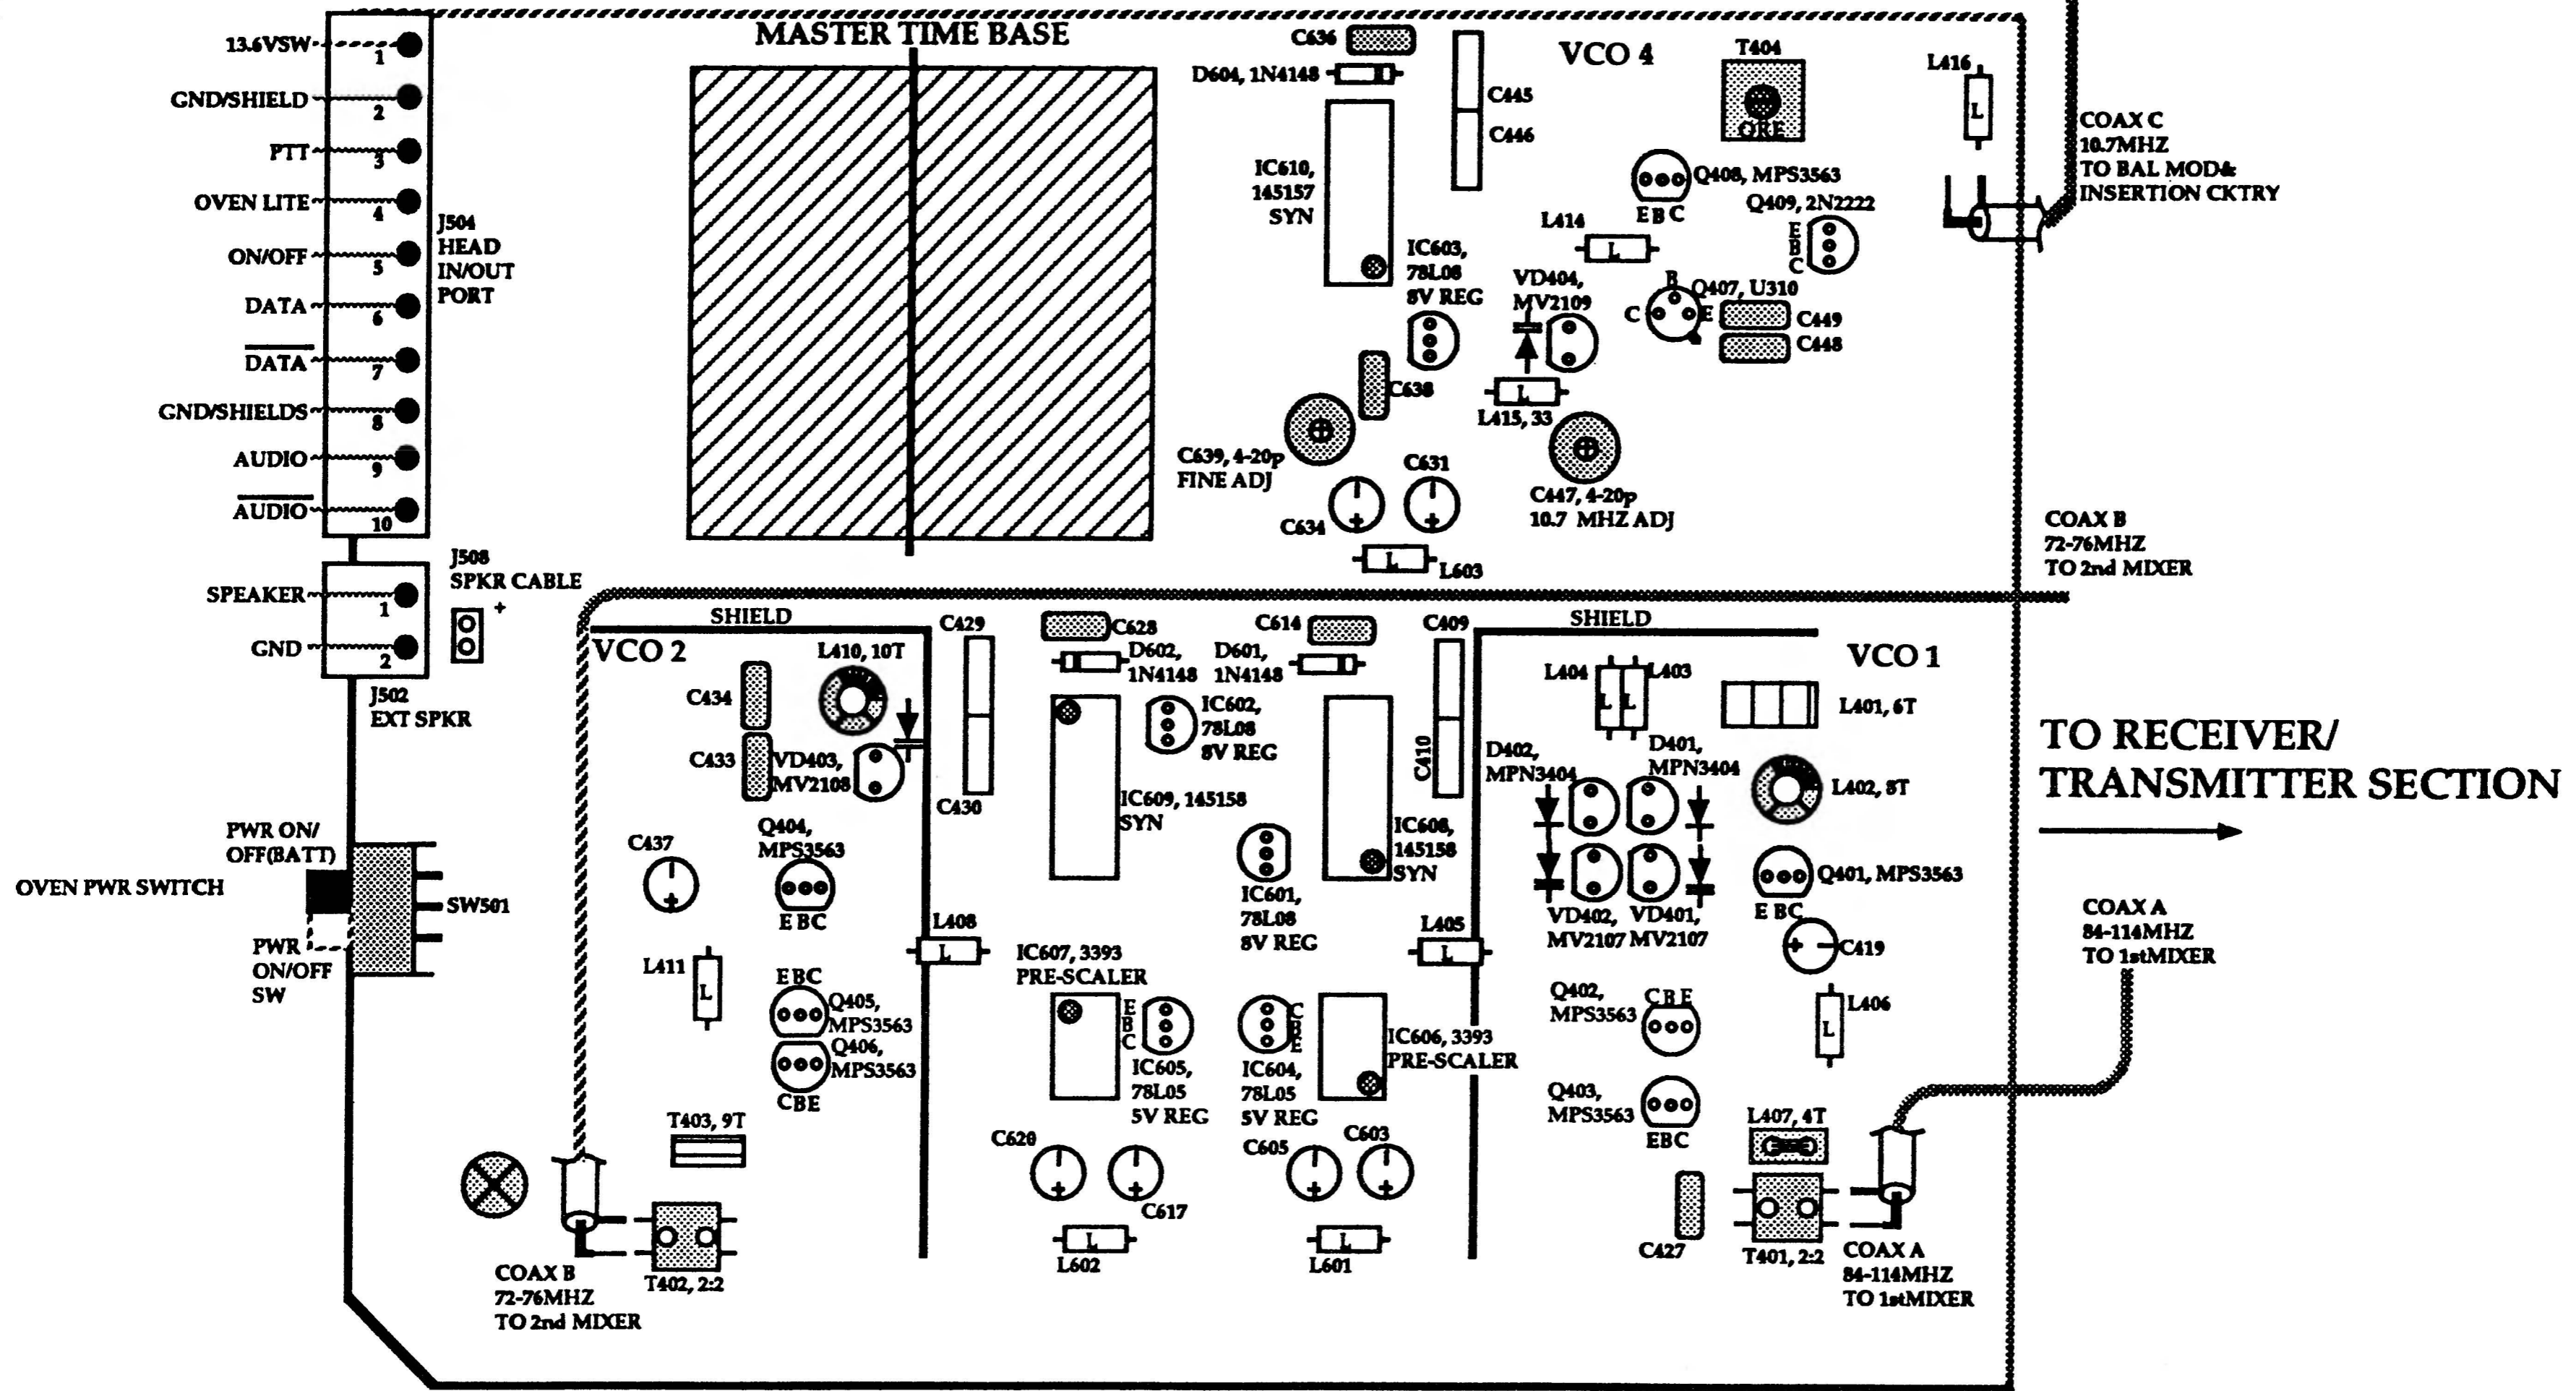


| DATE | REV | REVISION | AUTH |
|------|-----|---------------|------|
| 95/4 | A | UPDATE LAYOUT | KLT |
| | | | |
| | | | |

VOLTAGE CONTROLLED OSCILLATOR AND TIME BASE SECTION

| | |
|---------------------------------------|---------------|
| SGC | SG2000 |
| PARTS LAYOUT & ADJUSTMENTS | |
| J40100920-A-2 | |
| DOC 4-23-91 | REV A |

TO SSB FILTERS, MODULATOR
AM DET VOICE/TELEX FILTERS

TO VCO AND TIME
BASE SECTION

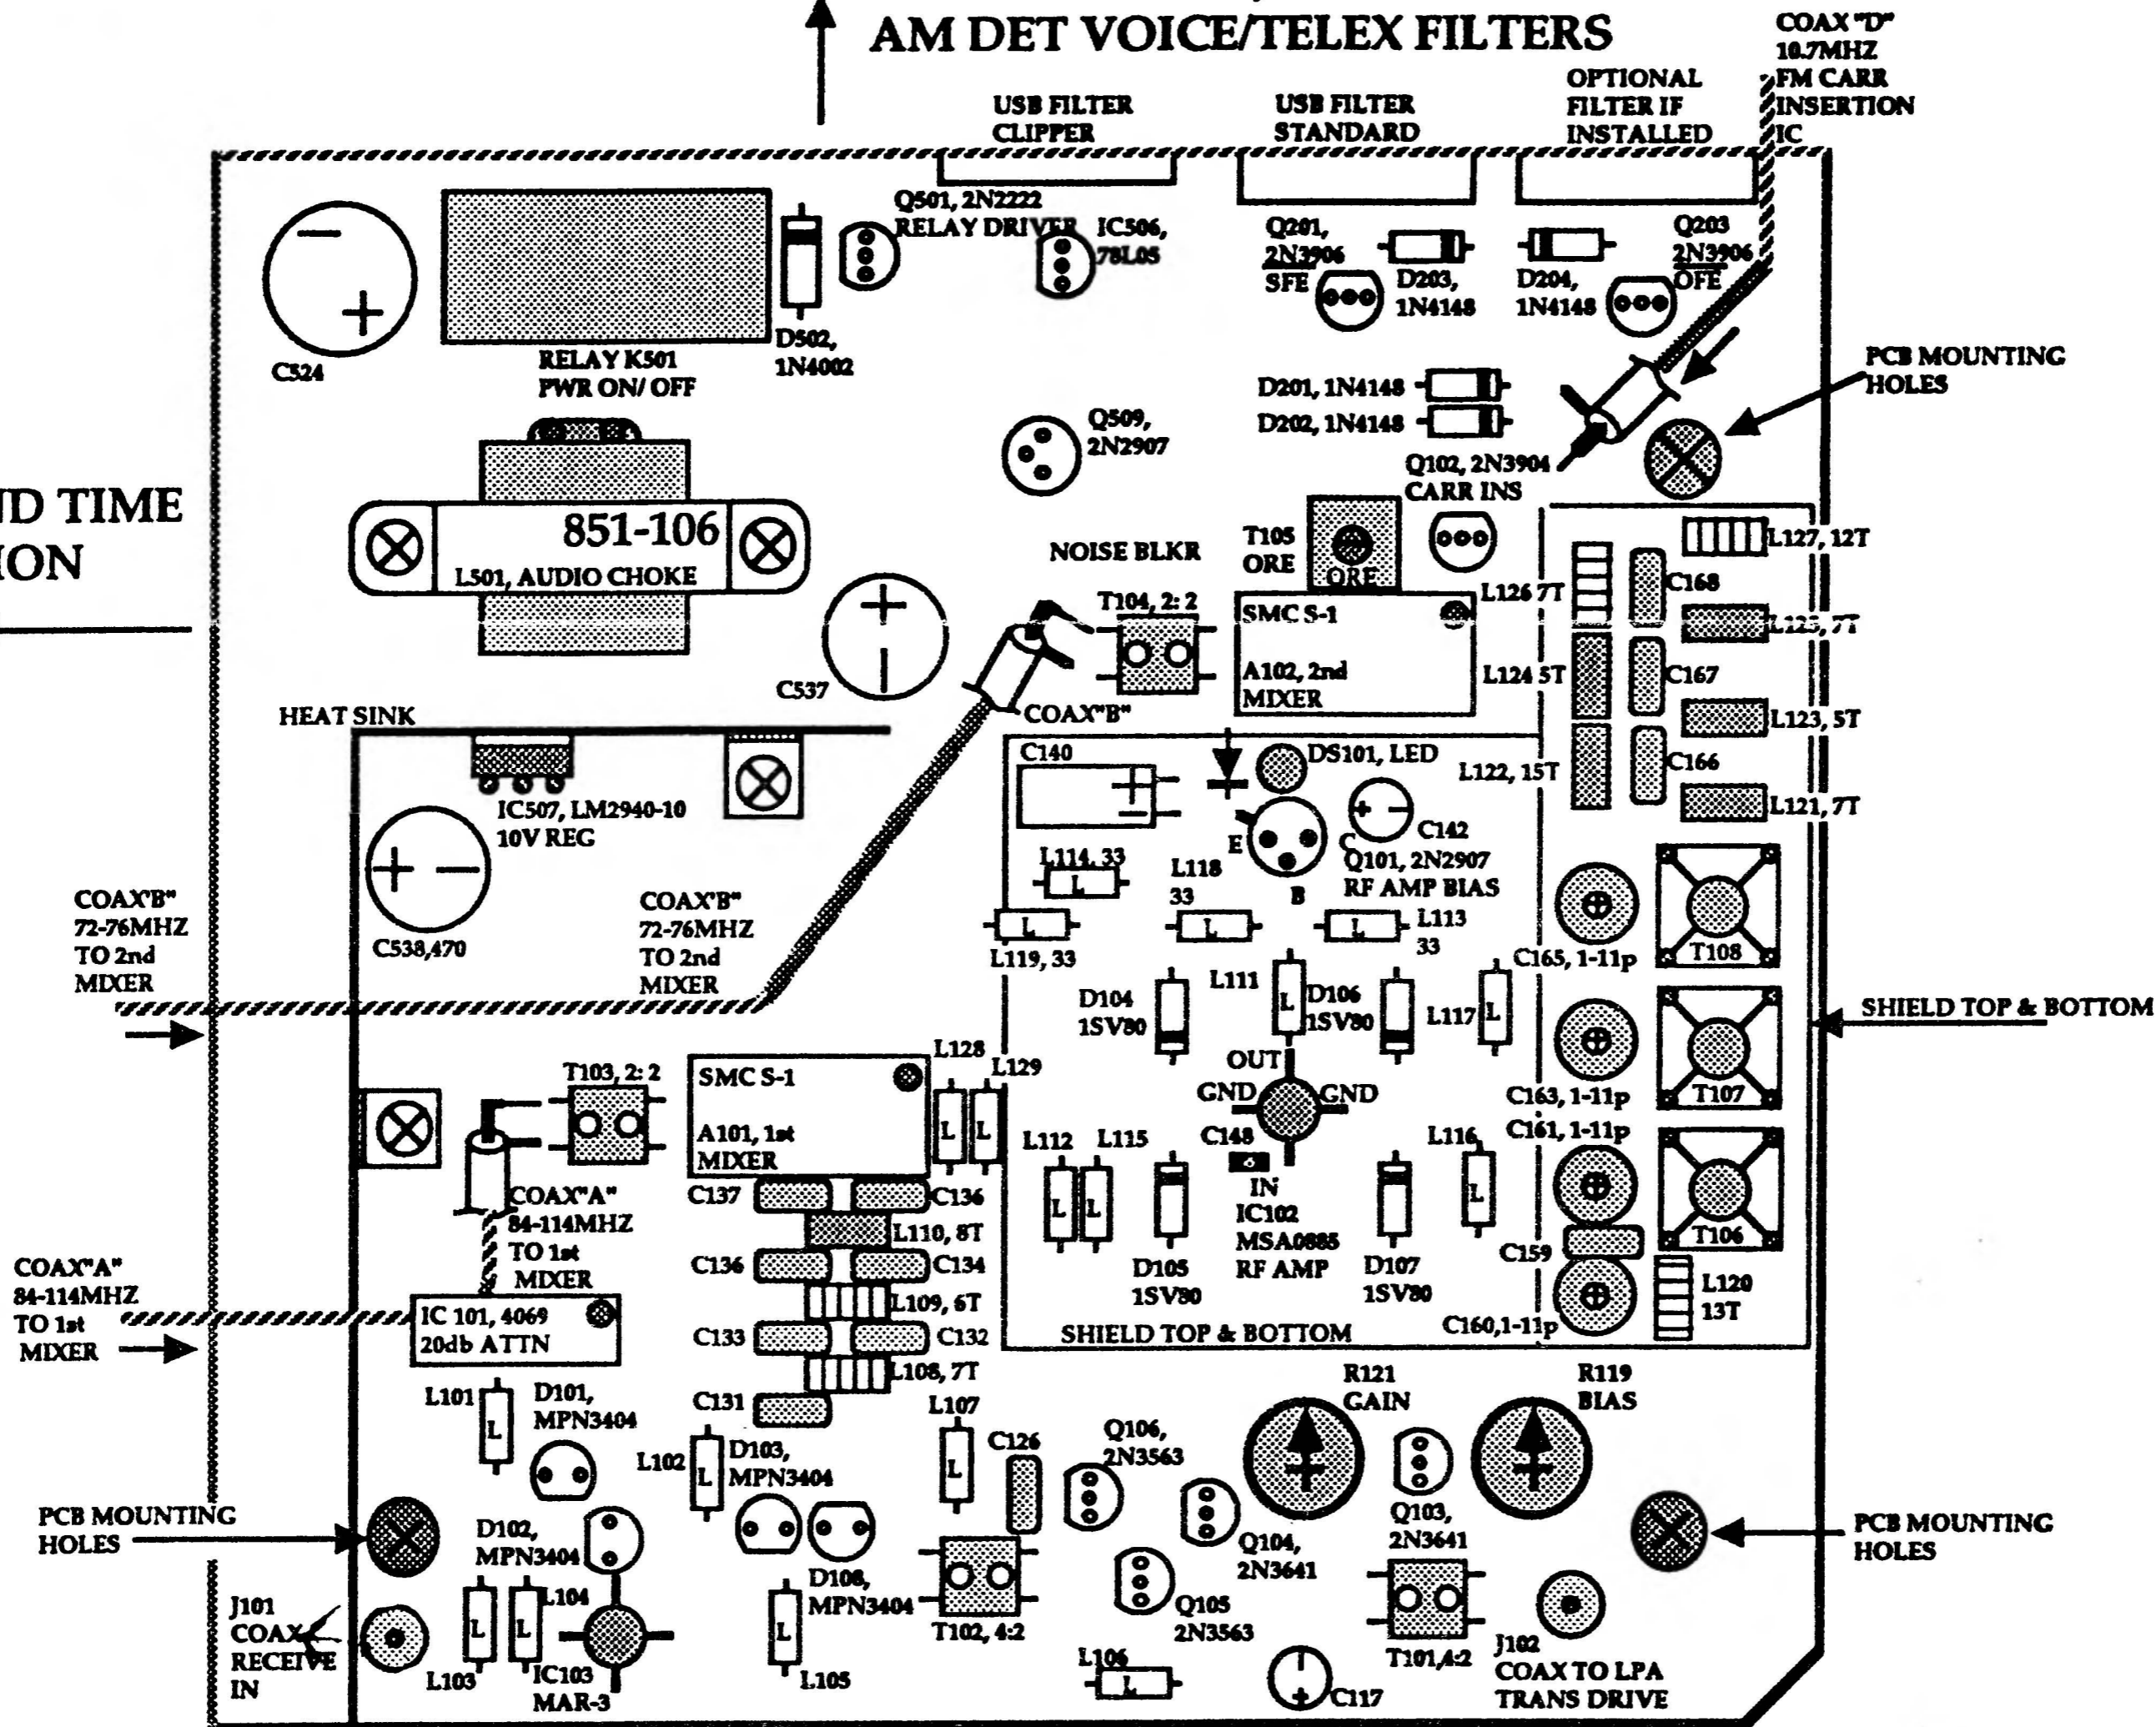


20db ATTN, RF AMP, 85MHZ FILTER, POWER SUPPLY SECTION

| | |
|----------------------------|-------|
| SGC SG2000 | |
| PARTS LAYOUT & ADJUSTMENTS | |
| J40100920-A-3 | |
| DOC 5-7-91 | REV A |

| DATE | REV | REV RECORD | AUTH |
|------|-----|---------------|------|
| 95/4 | A | UPDATE LAYOUT | KLT |
| | | | |
| | | | |


MICROPROCESSOR
/EXCITER INTERFACE
SECTION

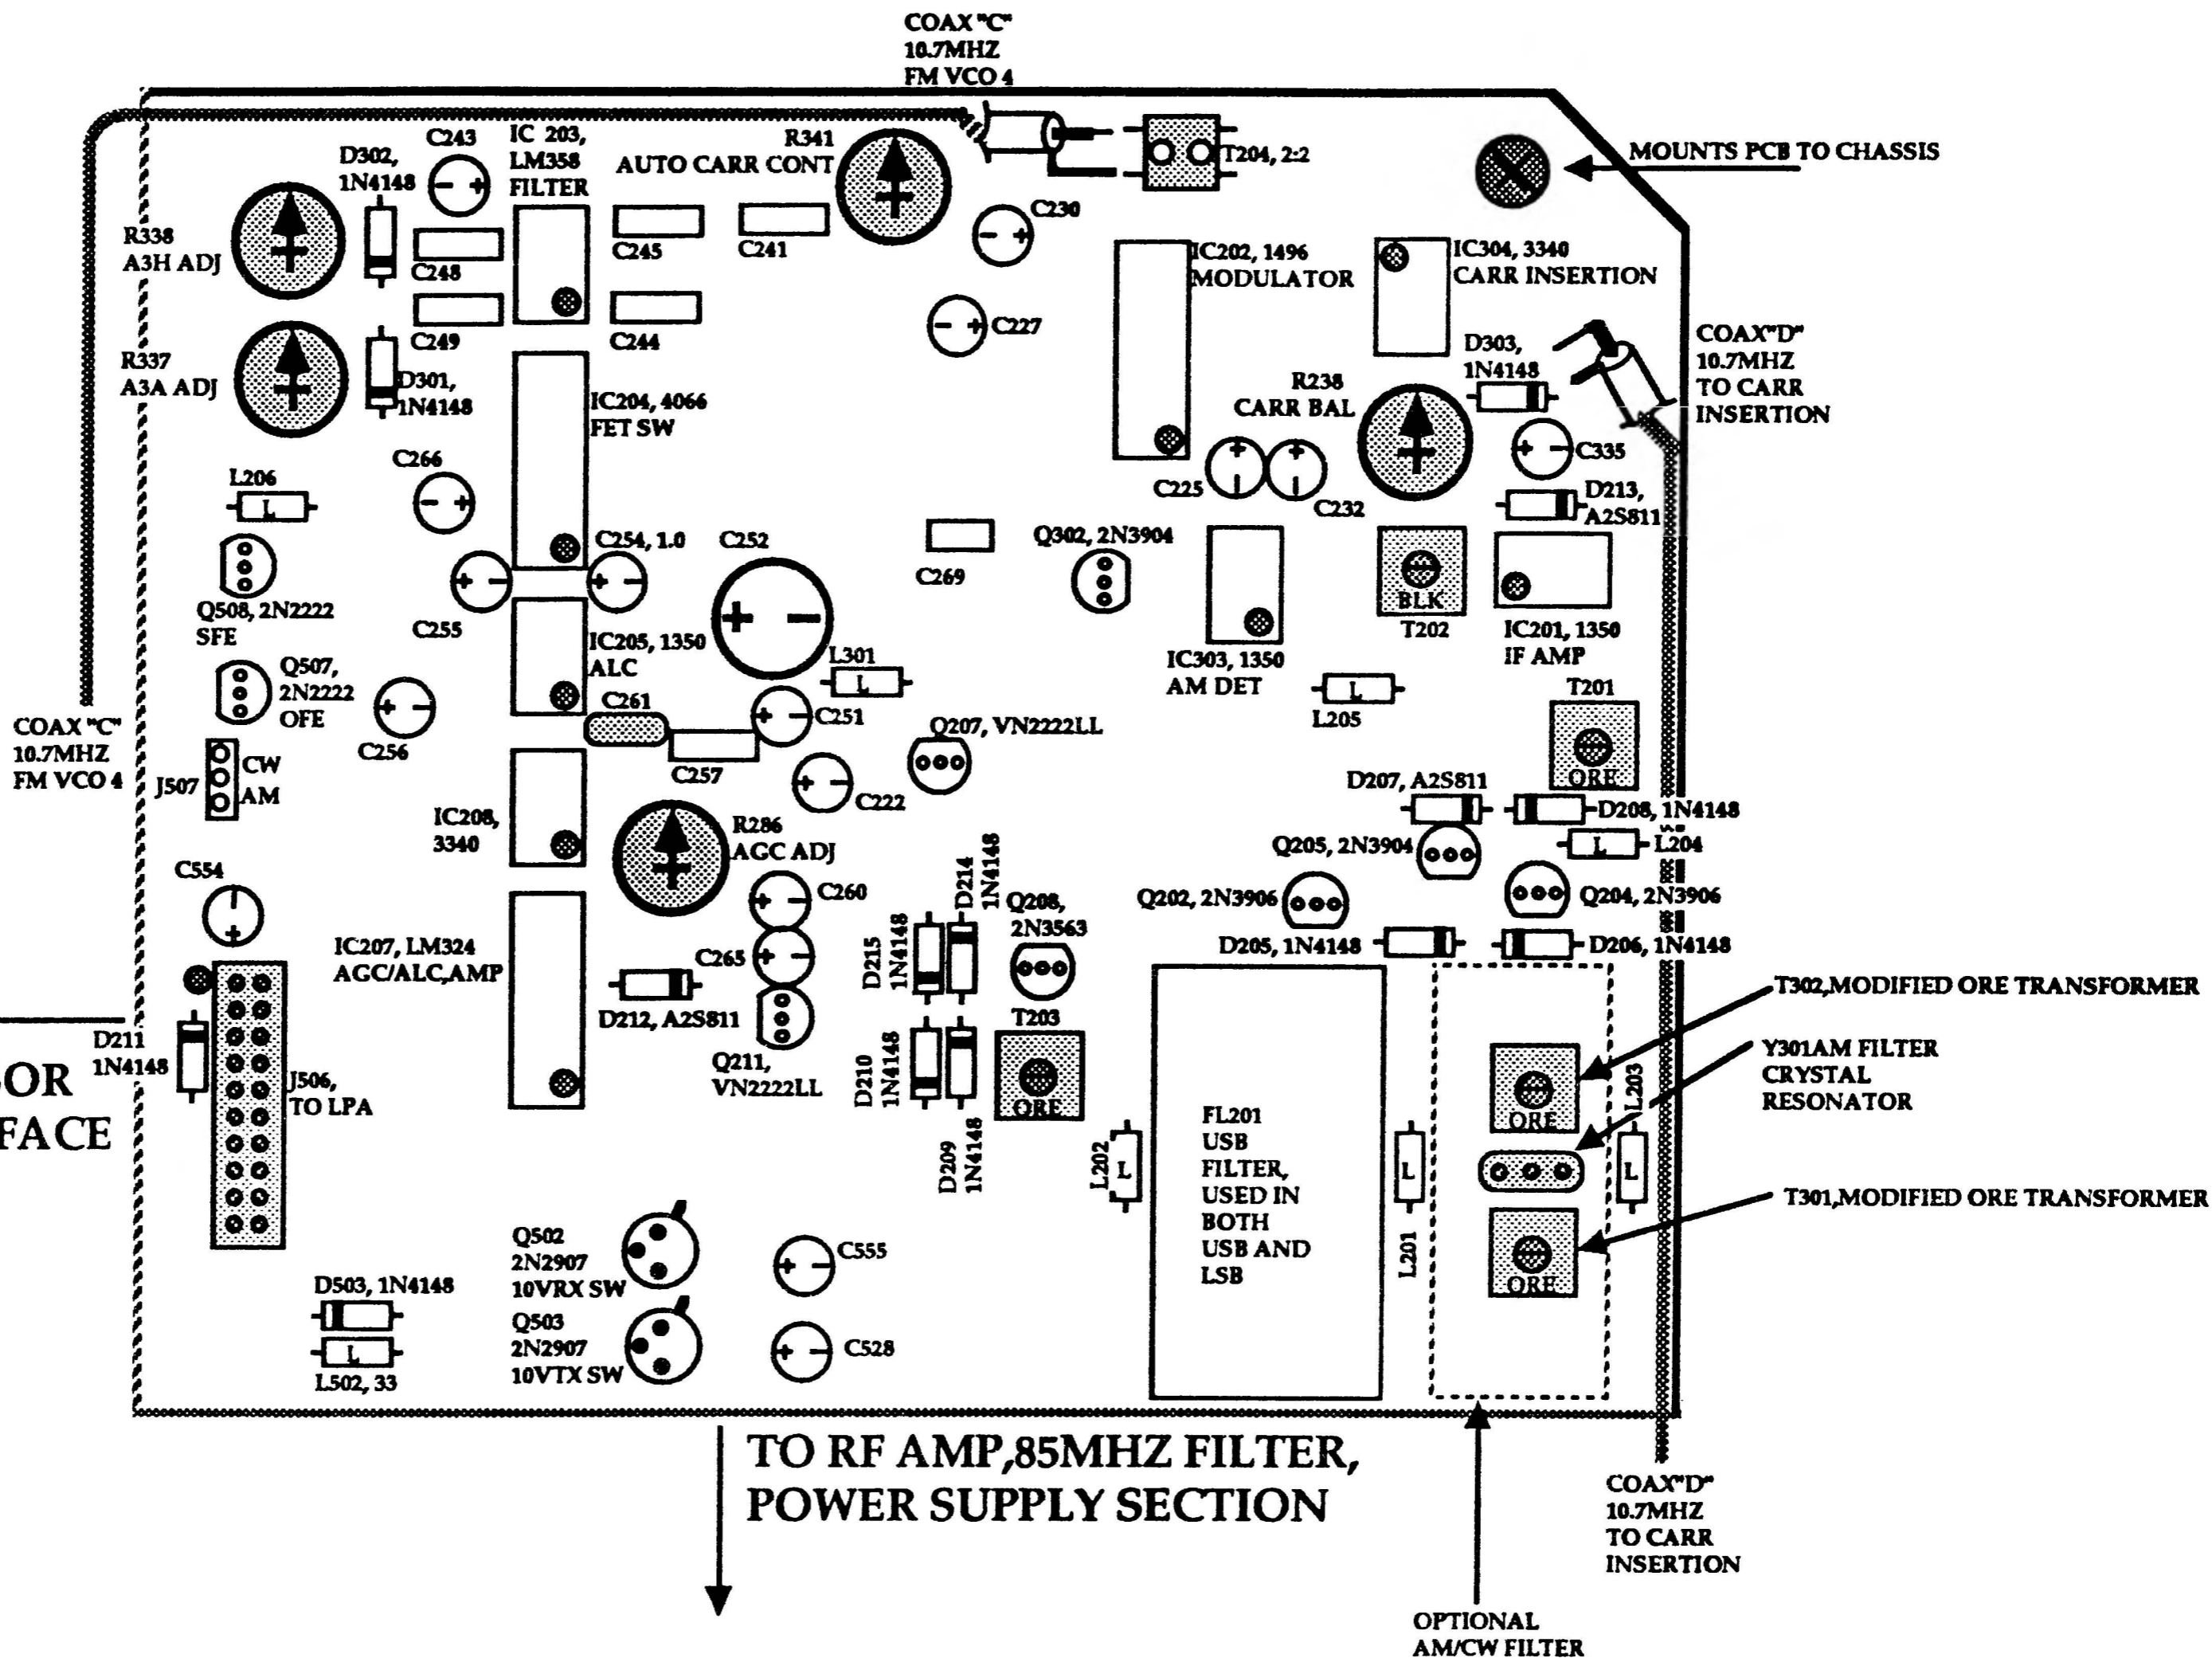



SSB FILTER, IF AMP, AM DET, MOD, CARR INS, VOICE/TELEX FILTER SECTION

| DATE | REV | REV RECORD | AUTH |
|------|-----|---------------|------|
| 95/4 | A | UPDATE LAYOUT | KLT |
| | | | |
| | | | |
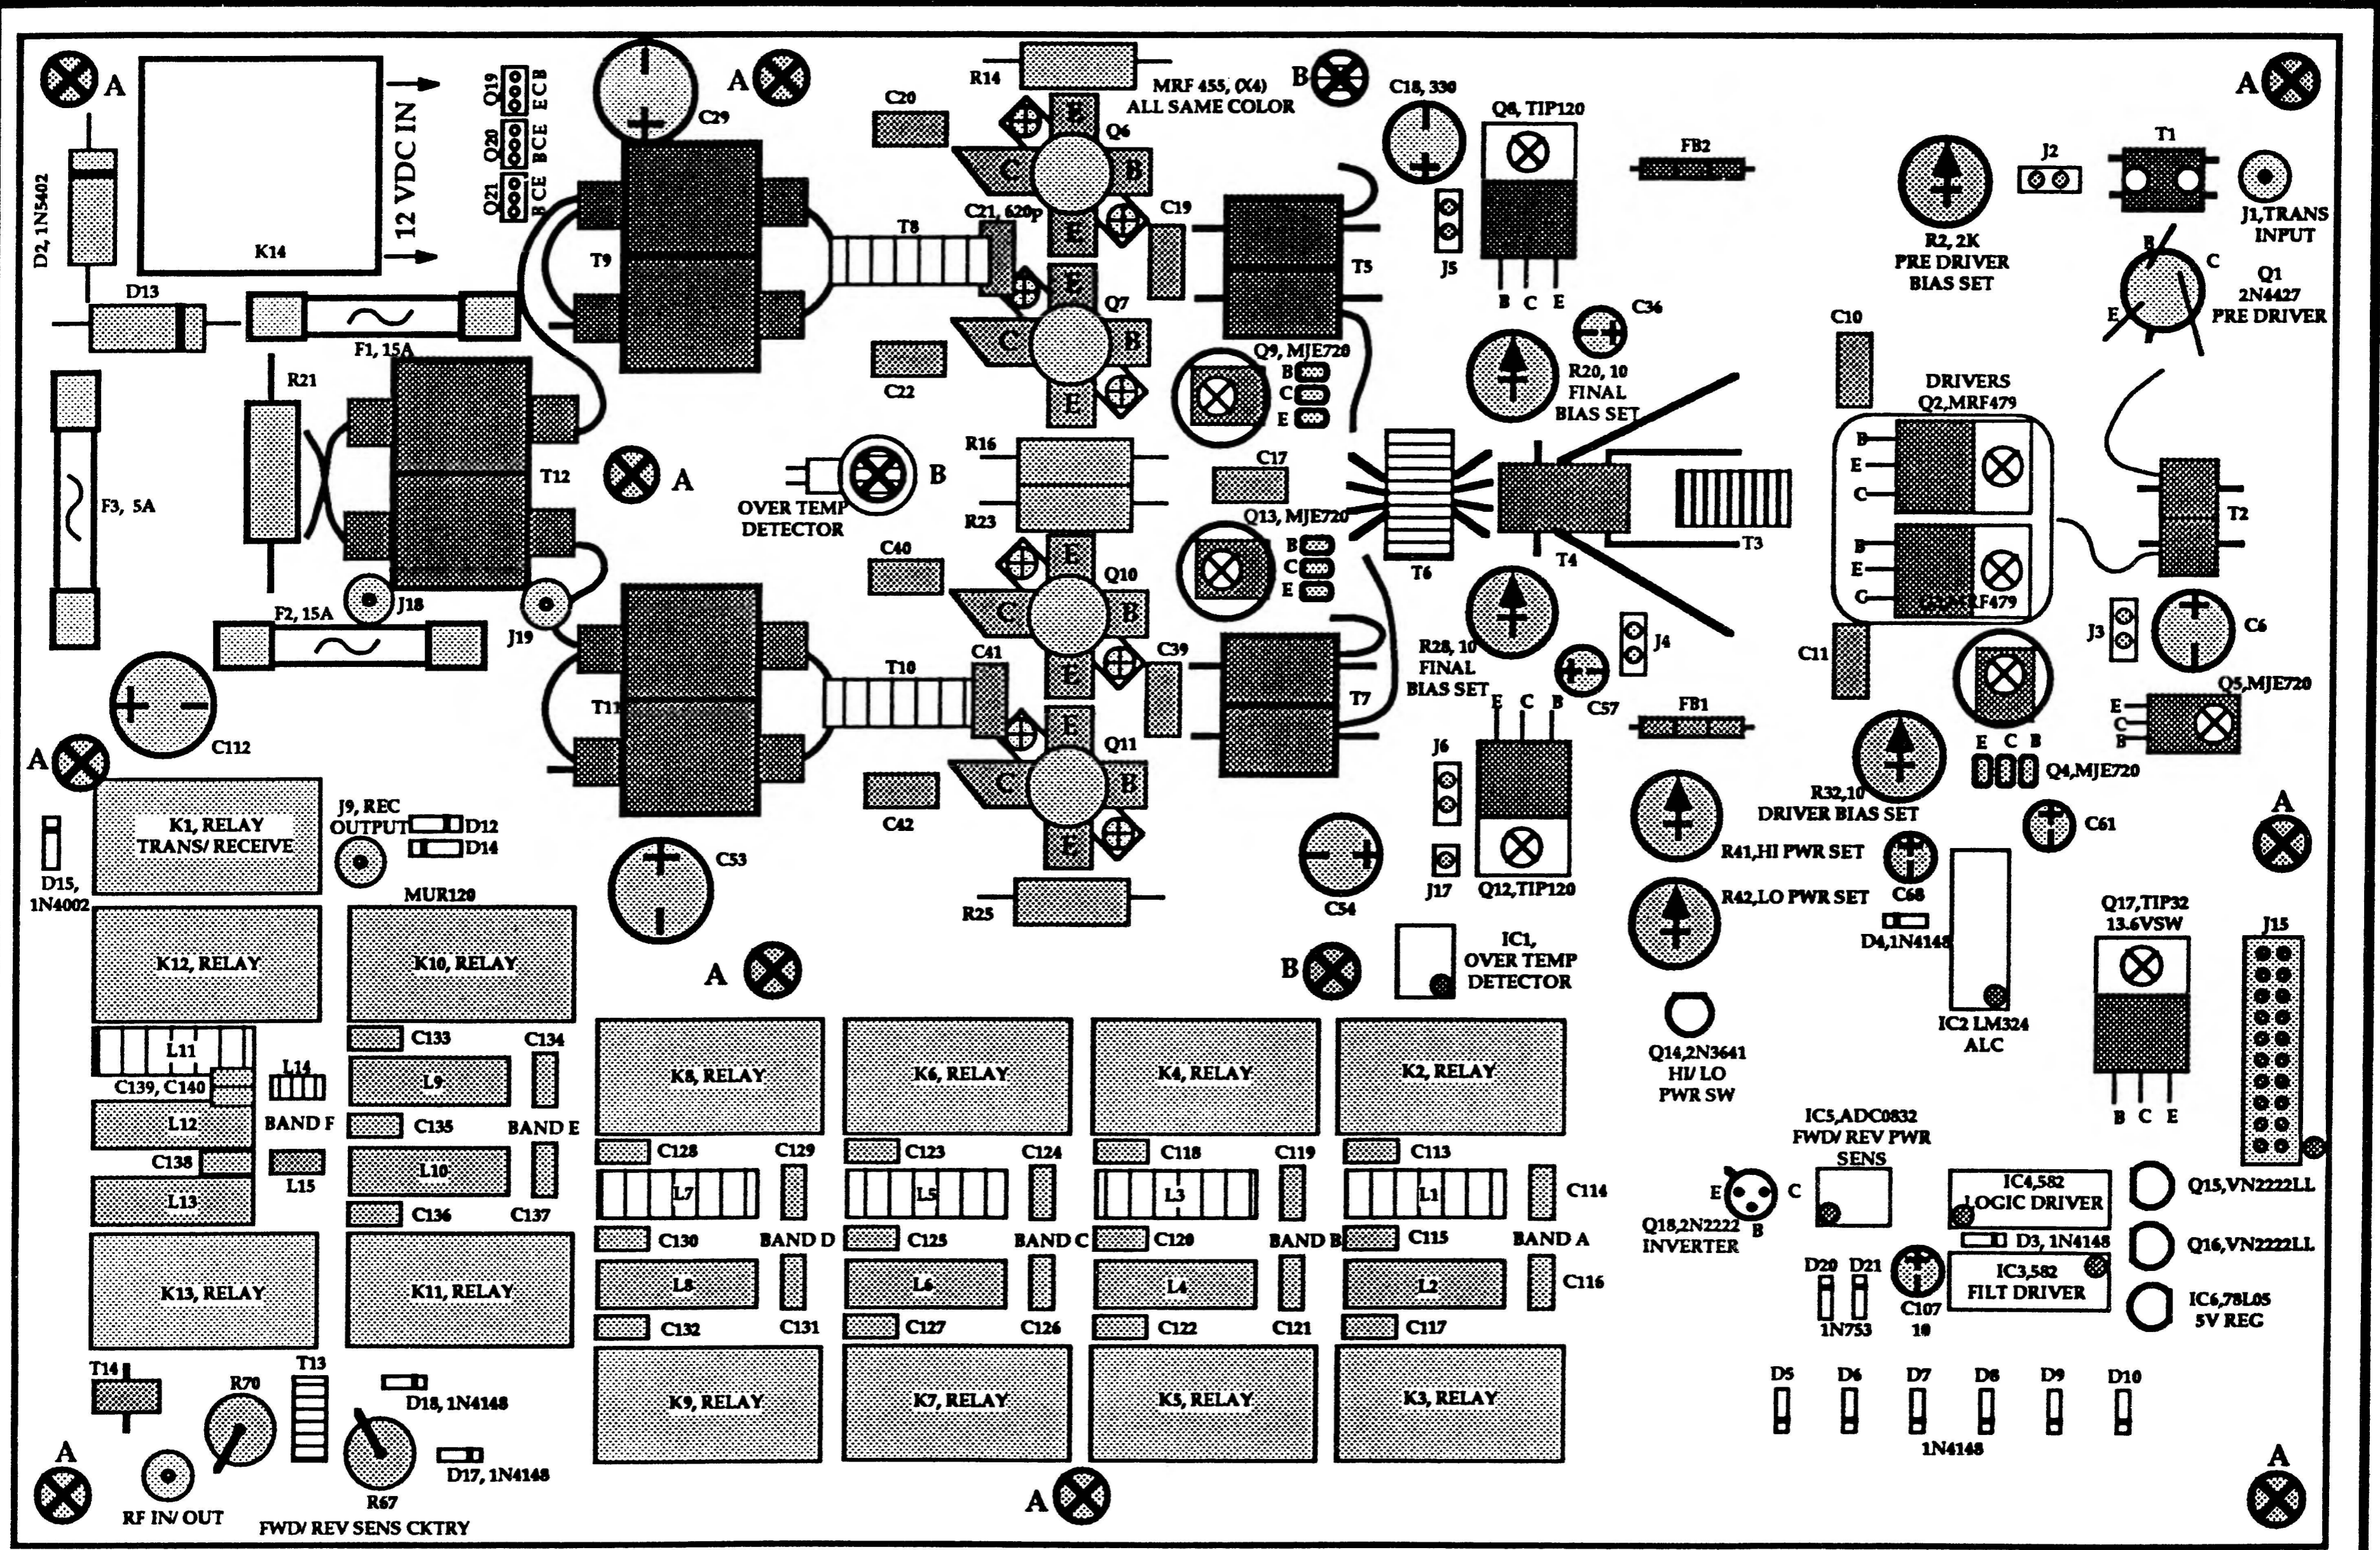
| | |
|----------------------------|-------|
| SGC SG2000 | |
| PARTS LAYOUT & ADJUSTMENTS | |
| J40100920-A-4 | |
| DOC 5-7-91 | REV A |




TOP VIEW

 NOTES: "A" MARKED HOLES,,REMOVE THESE SCREWS TO REMOVE PCB AND HEATSINK FM CHASSIS
 "B" MARKED HOLES,,REMOVE THESE SCREWS TO REMOVE HEAT SINK FROM PCB ONLY


| DATE | REV | REVISION | AUTH |
|------|-----|---------------|------|
| 95/4 | A | UPDATE LAYOUT | KLT |
| | | | |
| | | | |

| |
|------------------------|
| SGC SG2000 |
| PARTS LAYOUT & ADJMNTS |
| J40100500-B |
| DOC 4-23-91 REV A |

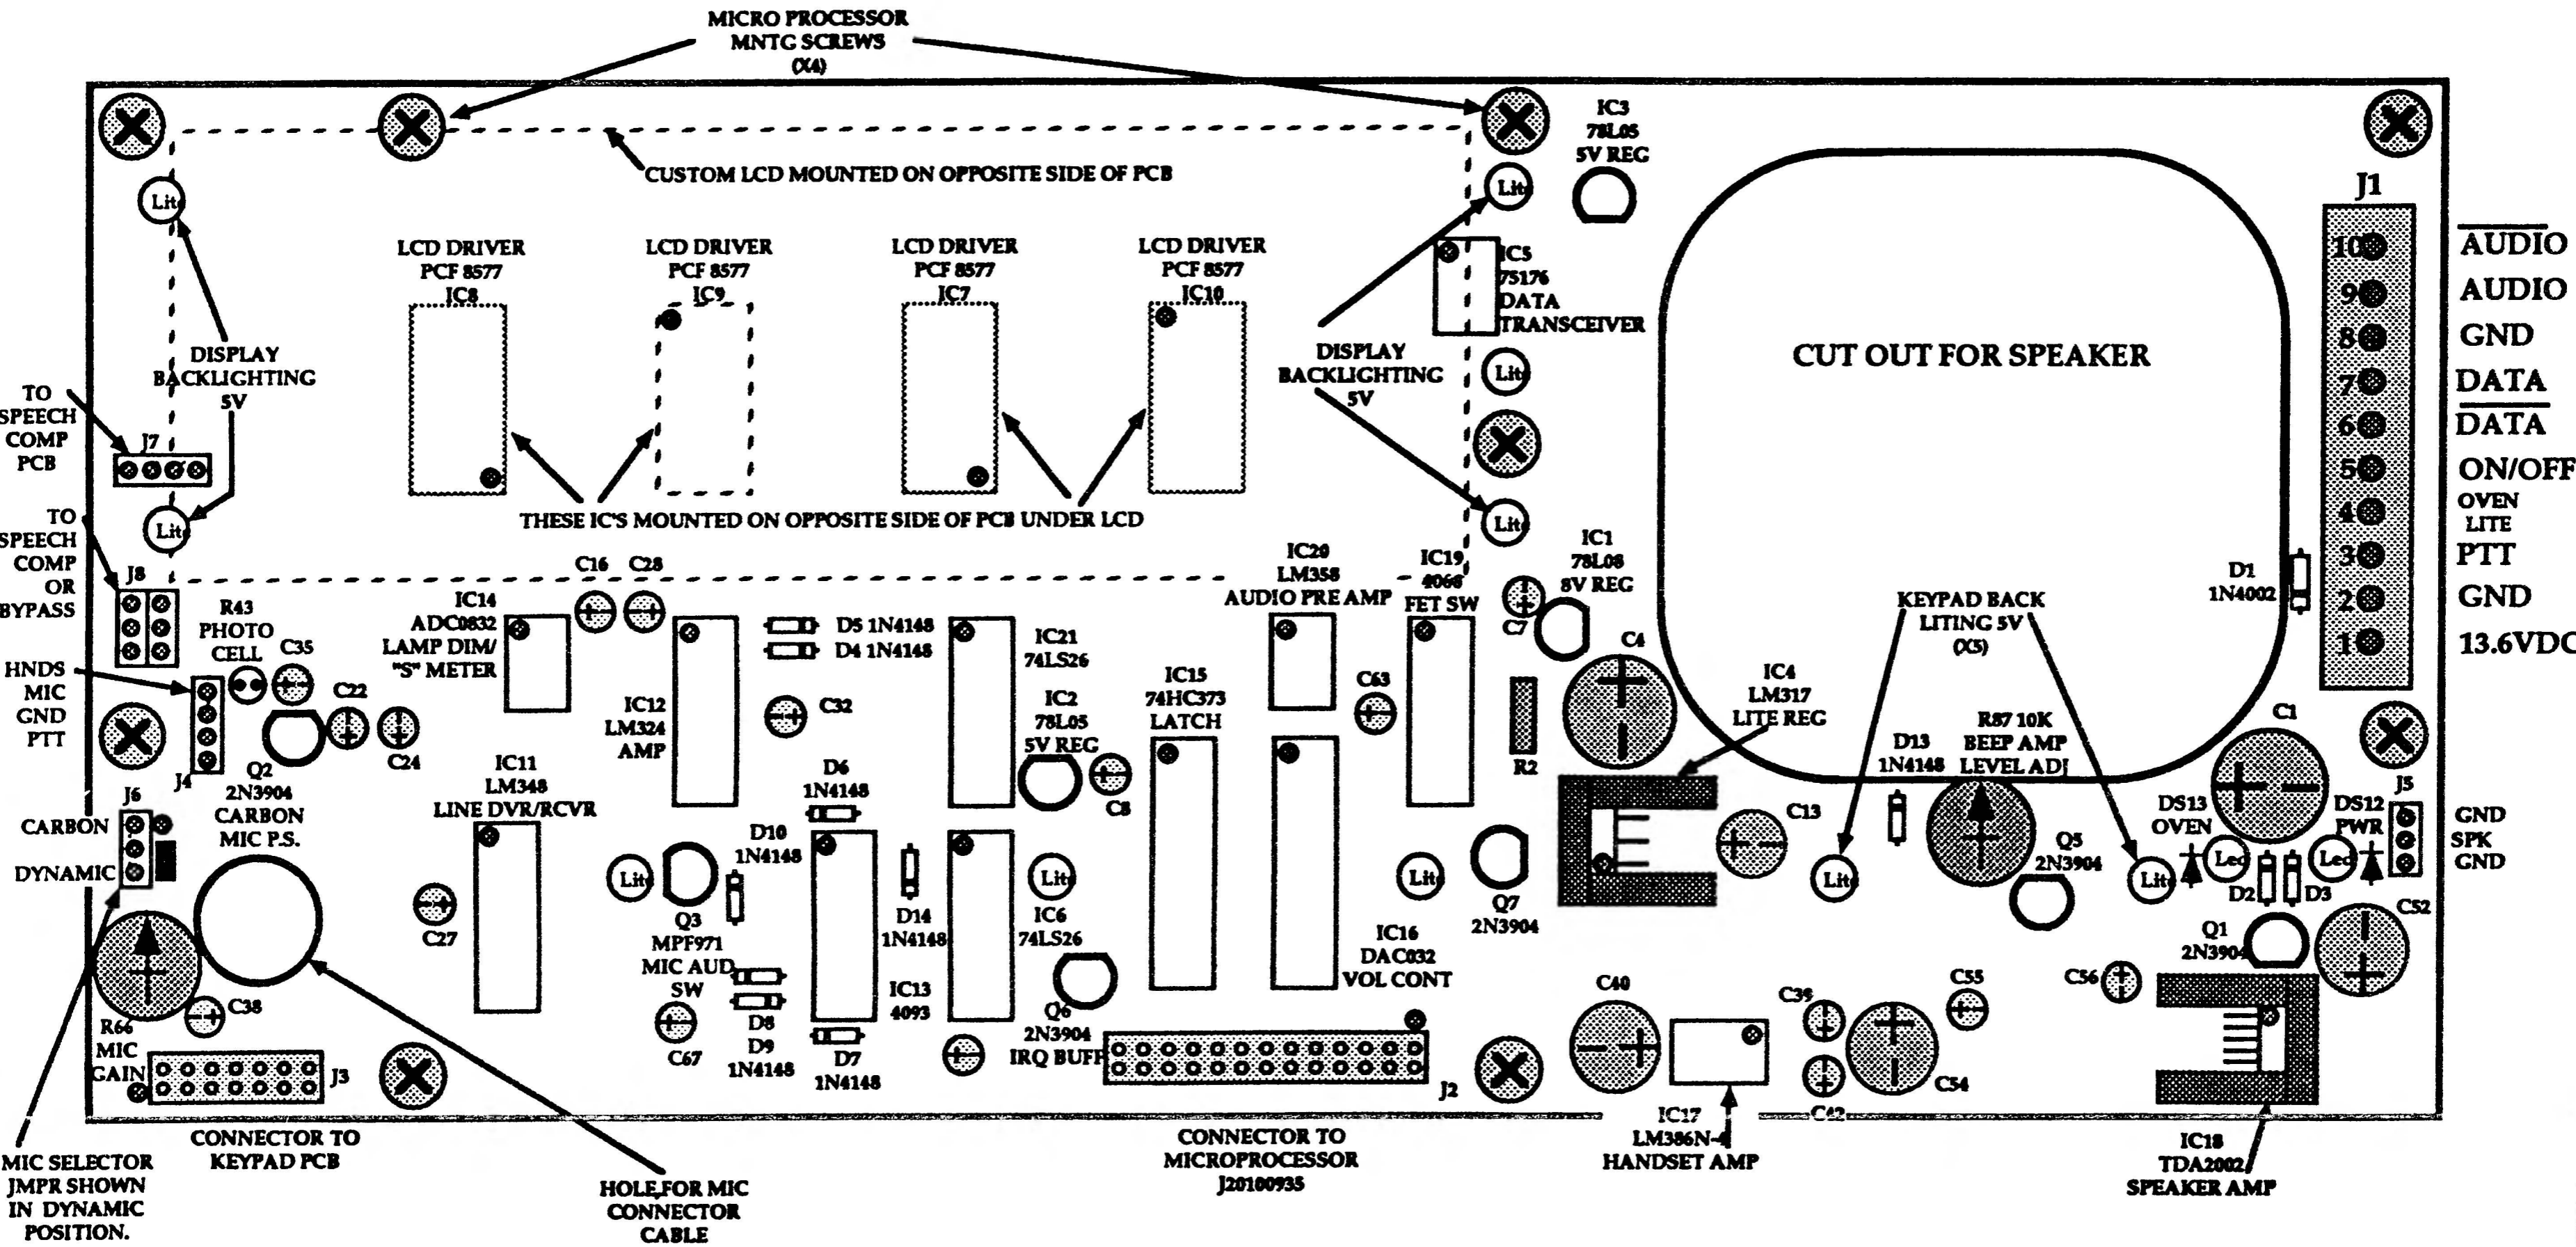


| DATE | REV | REVISION | AUTH |
|------|-----|----------|------|
| 3/92 | D | ECO20A | RK |
| 4/95 | E | ECO99 | KLT |

SGC SG2000
PARTS LAYOUT & ADJUSTMENTS
 J40100910
 DOC 4-30-91 REV E

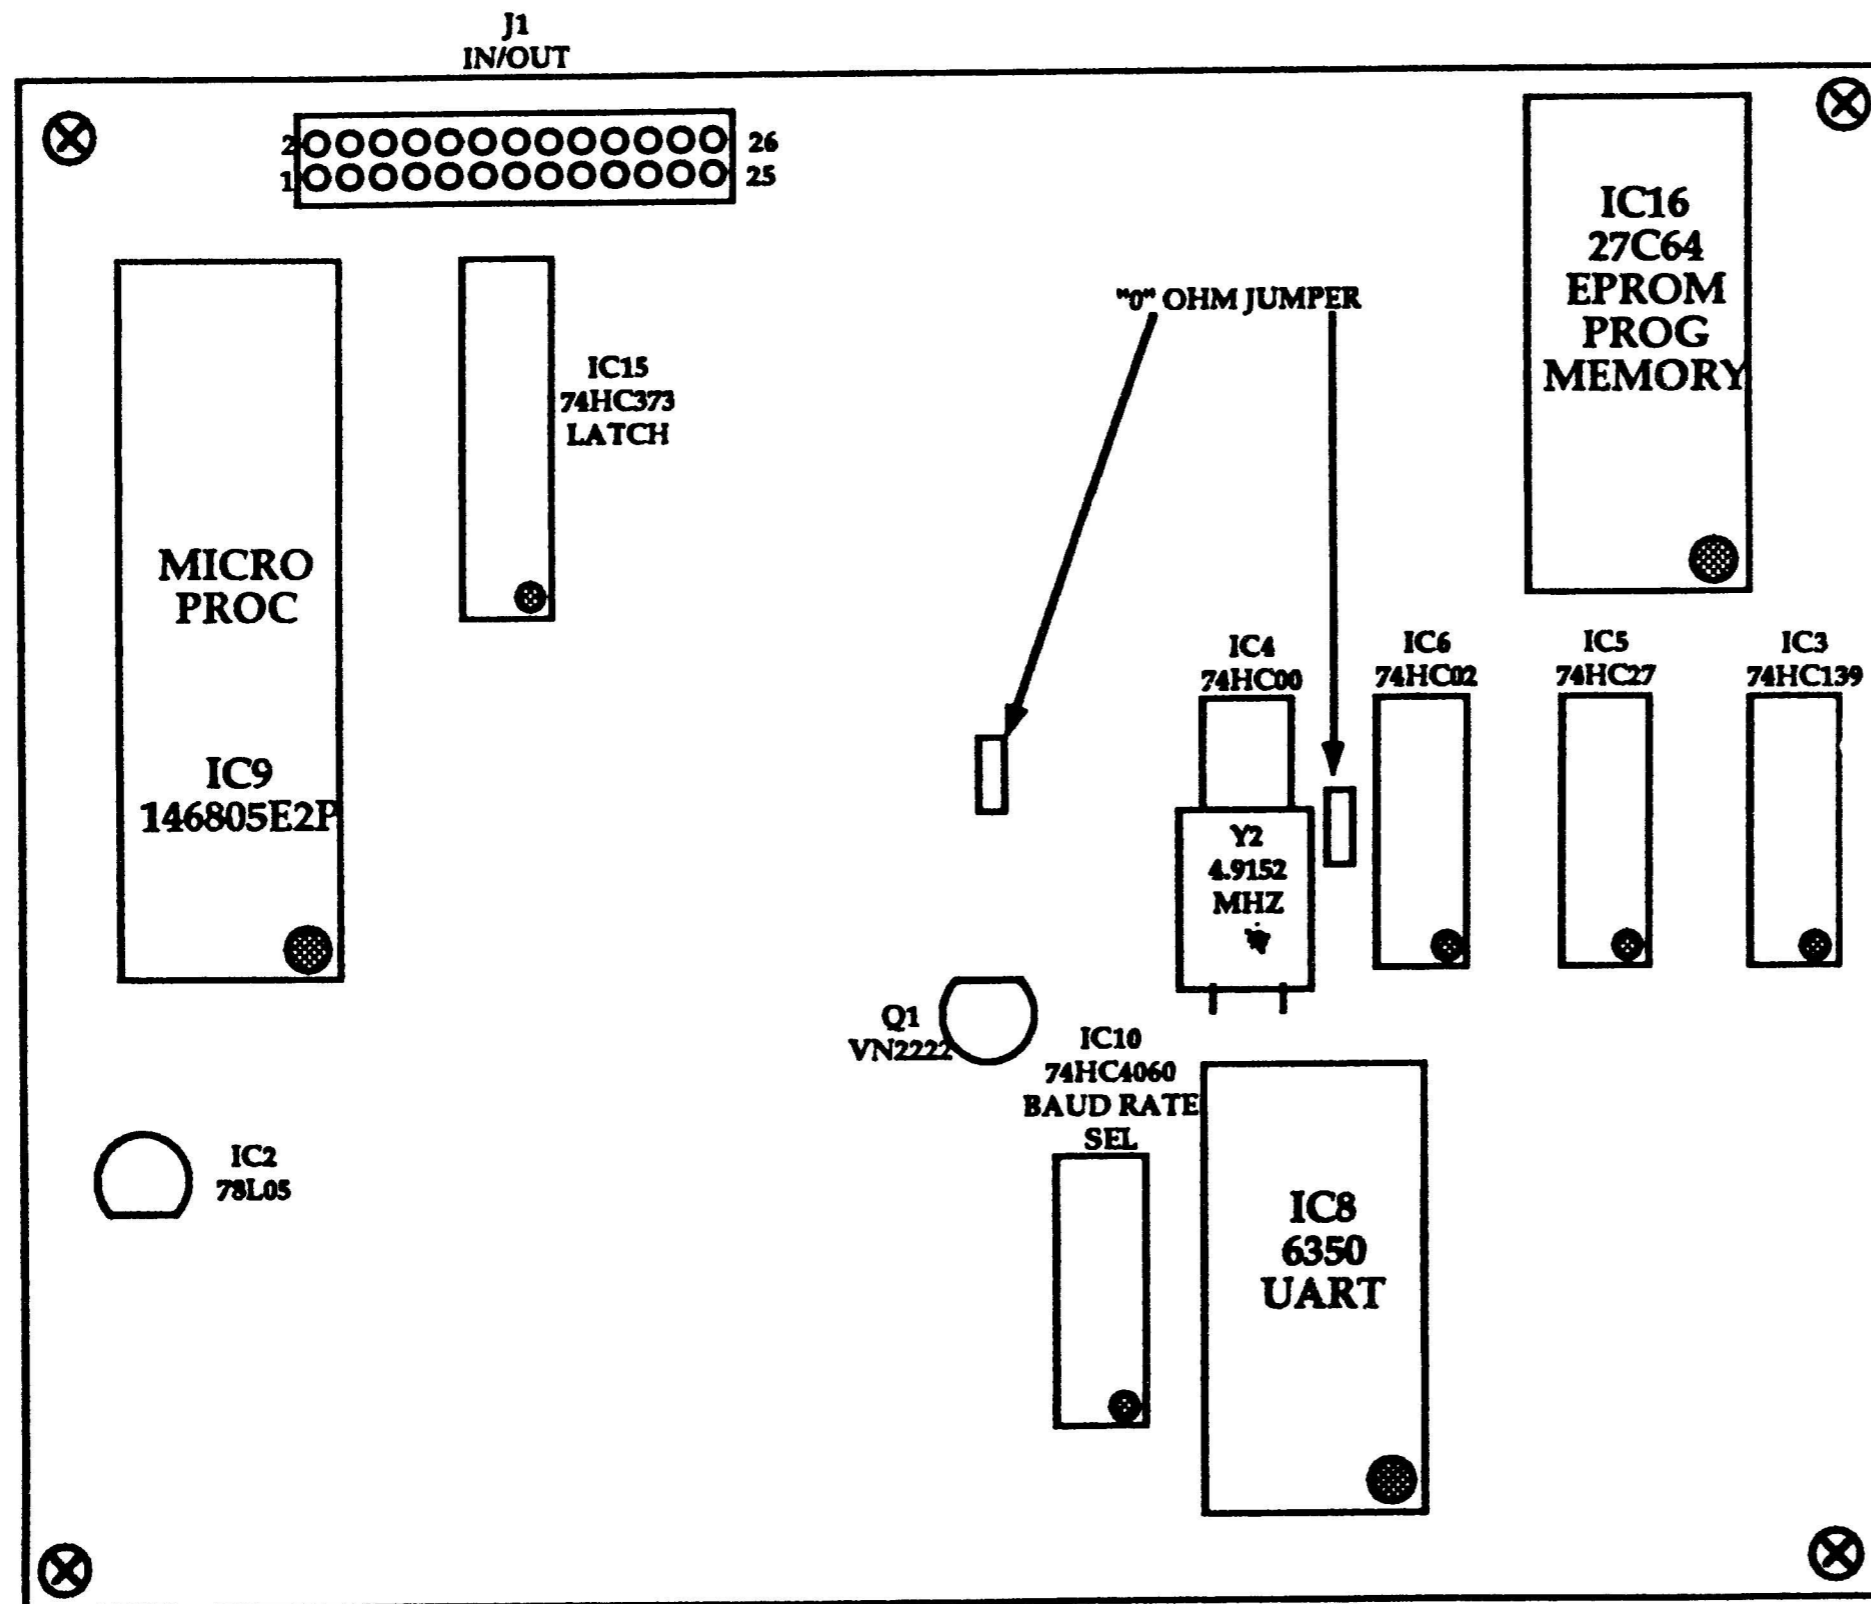

| DATE | REV | REVISION | AUTH |
|------|-----|---------------|------|
| 95/4 | C | UPDATE LAYOUT | KLT |
| | | | |
| | | | |


| |
|--|
| SGC SG2000 |
| PARTS LAYOUT & ADJMENTS |
| J40100935 |
| DOC 4-23-91 REV C |

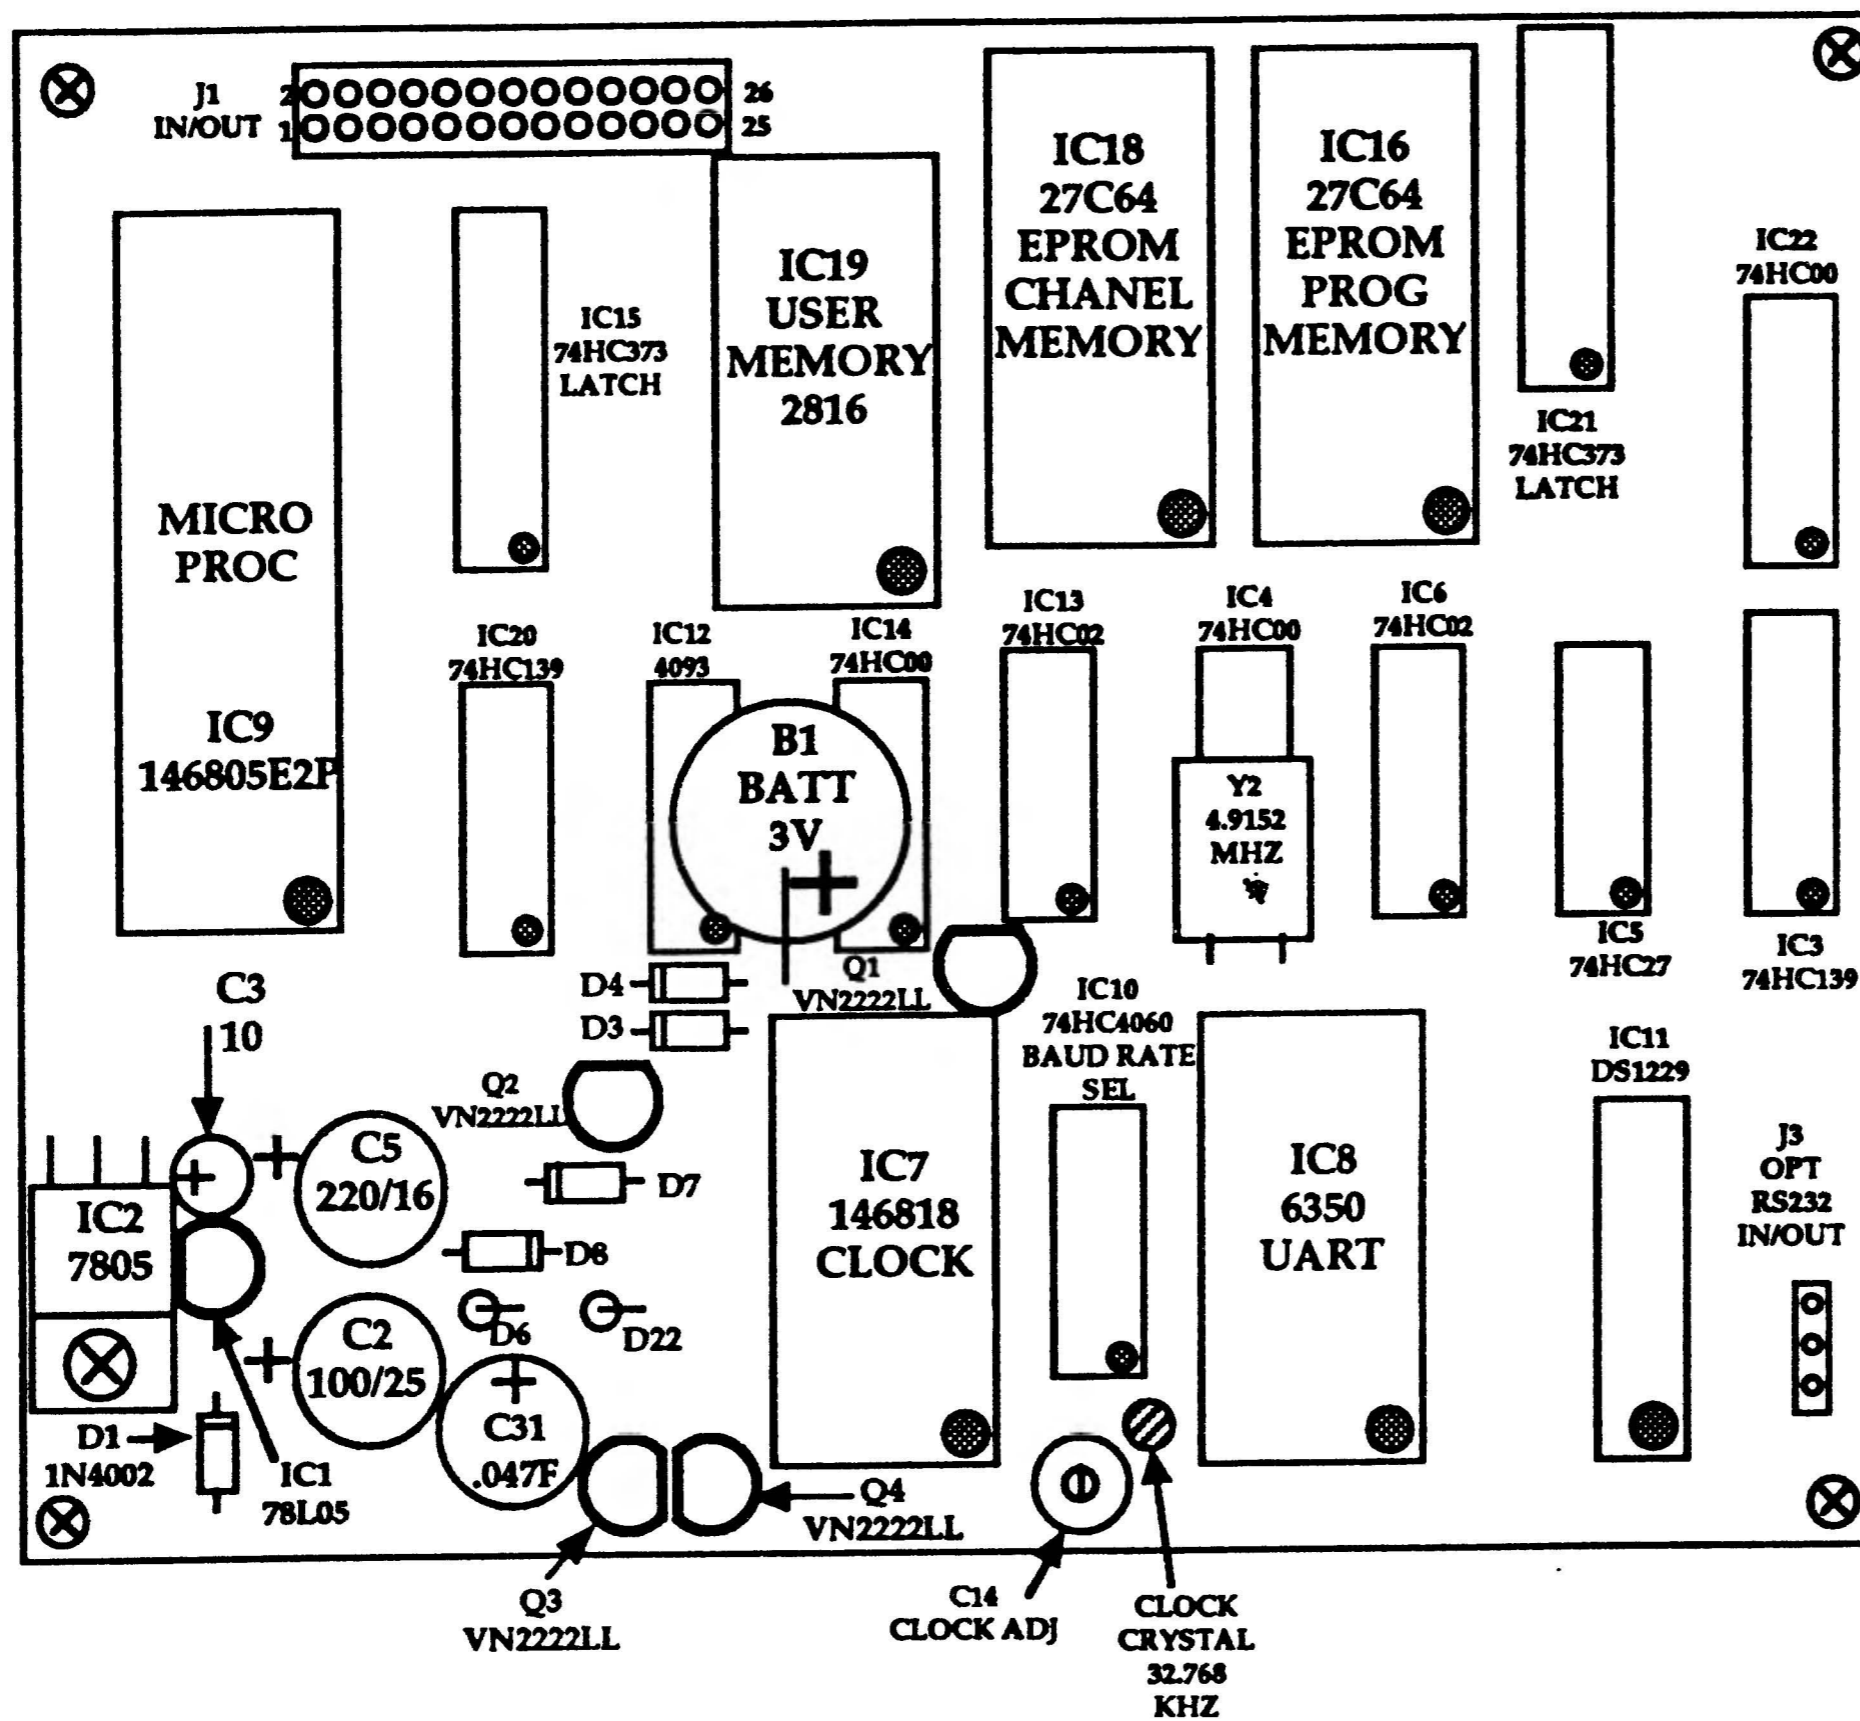

| DATE | REV | REVISION | AUTH |
|------|-----|----------|------|
| 1/92 | E | UPDATED | RK |
| 4/95 | F | UPDATED | KLT |


| | |
|----------------------------|-------|
| SGC SG2000 | |
| PARTS LAYOUT & ADJUSTMENTS | |
| J40100930 | |
| DOC 4-23-91 | REV F |

CONNECTOR

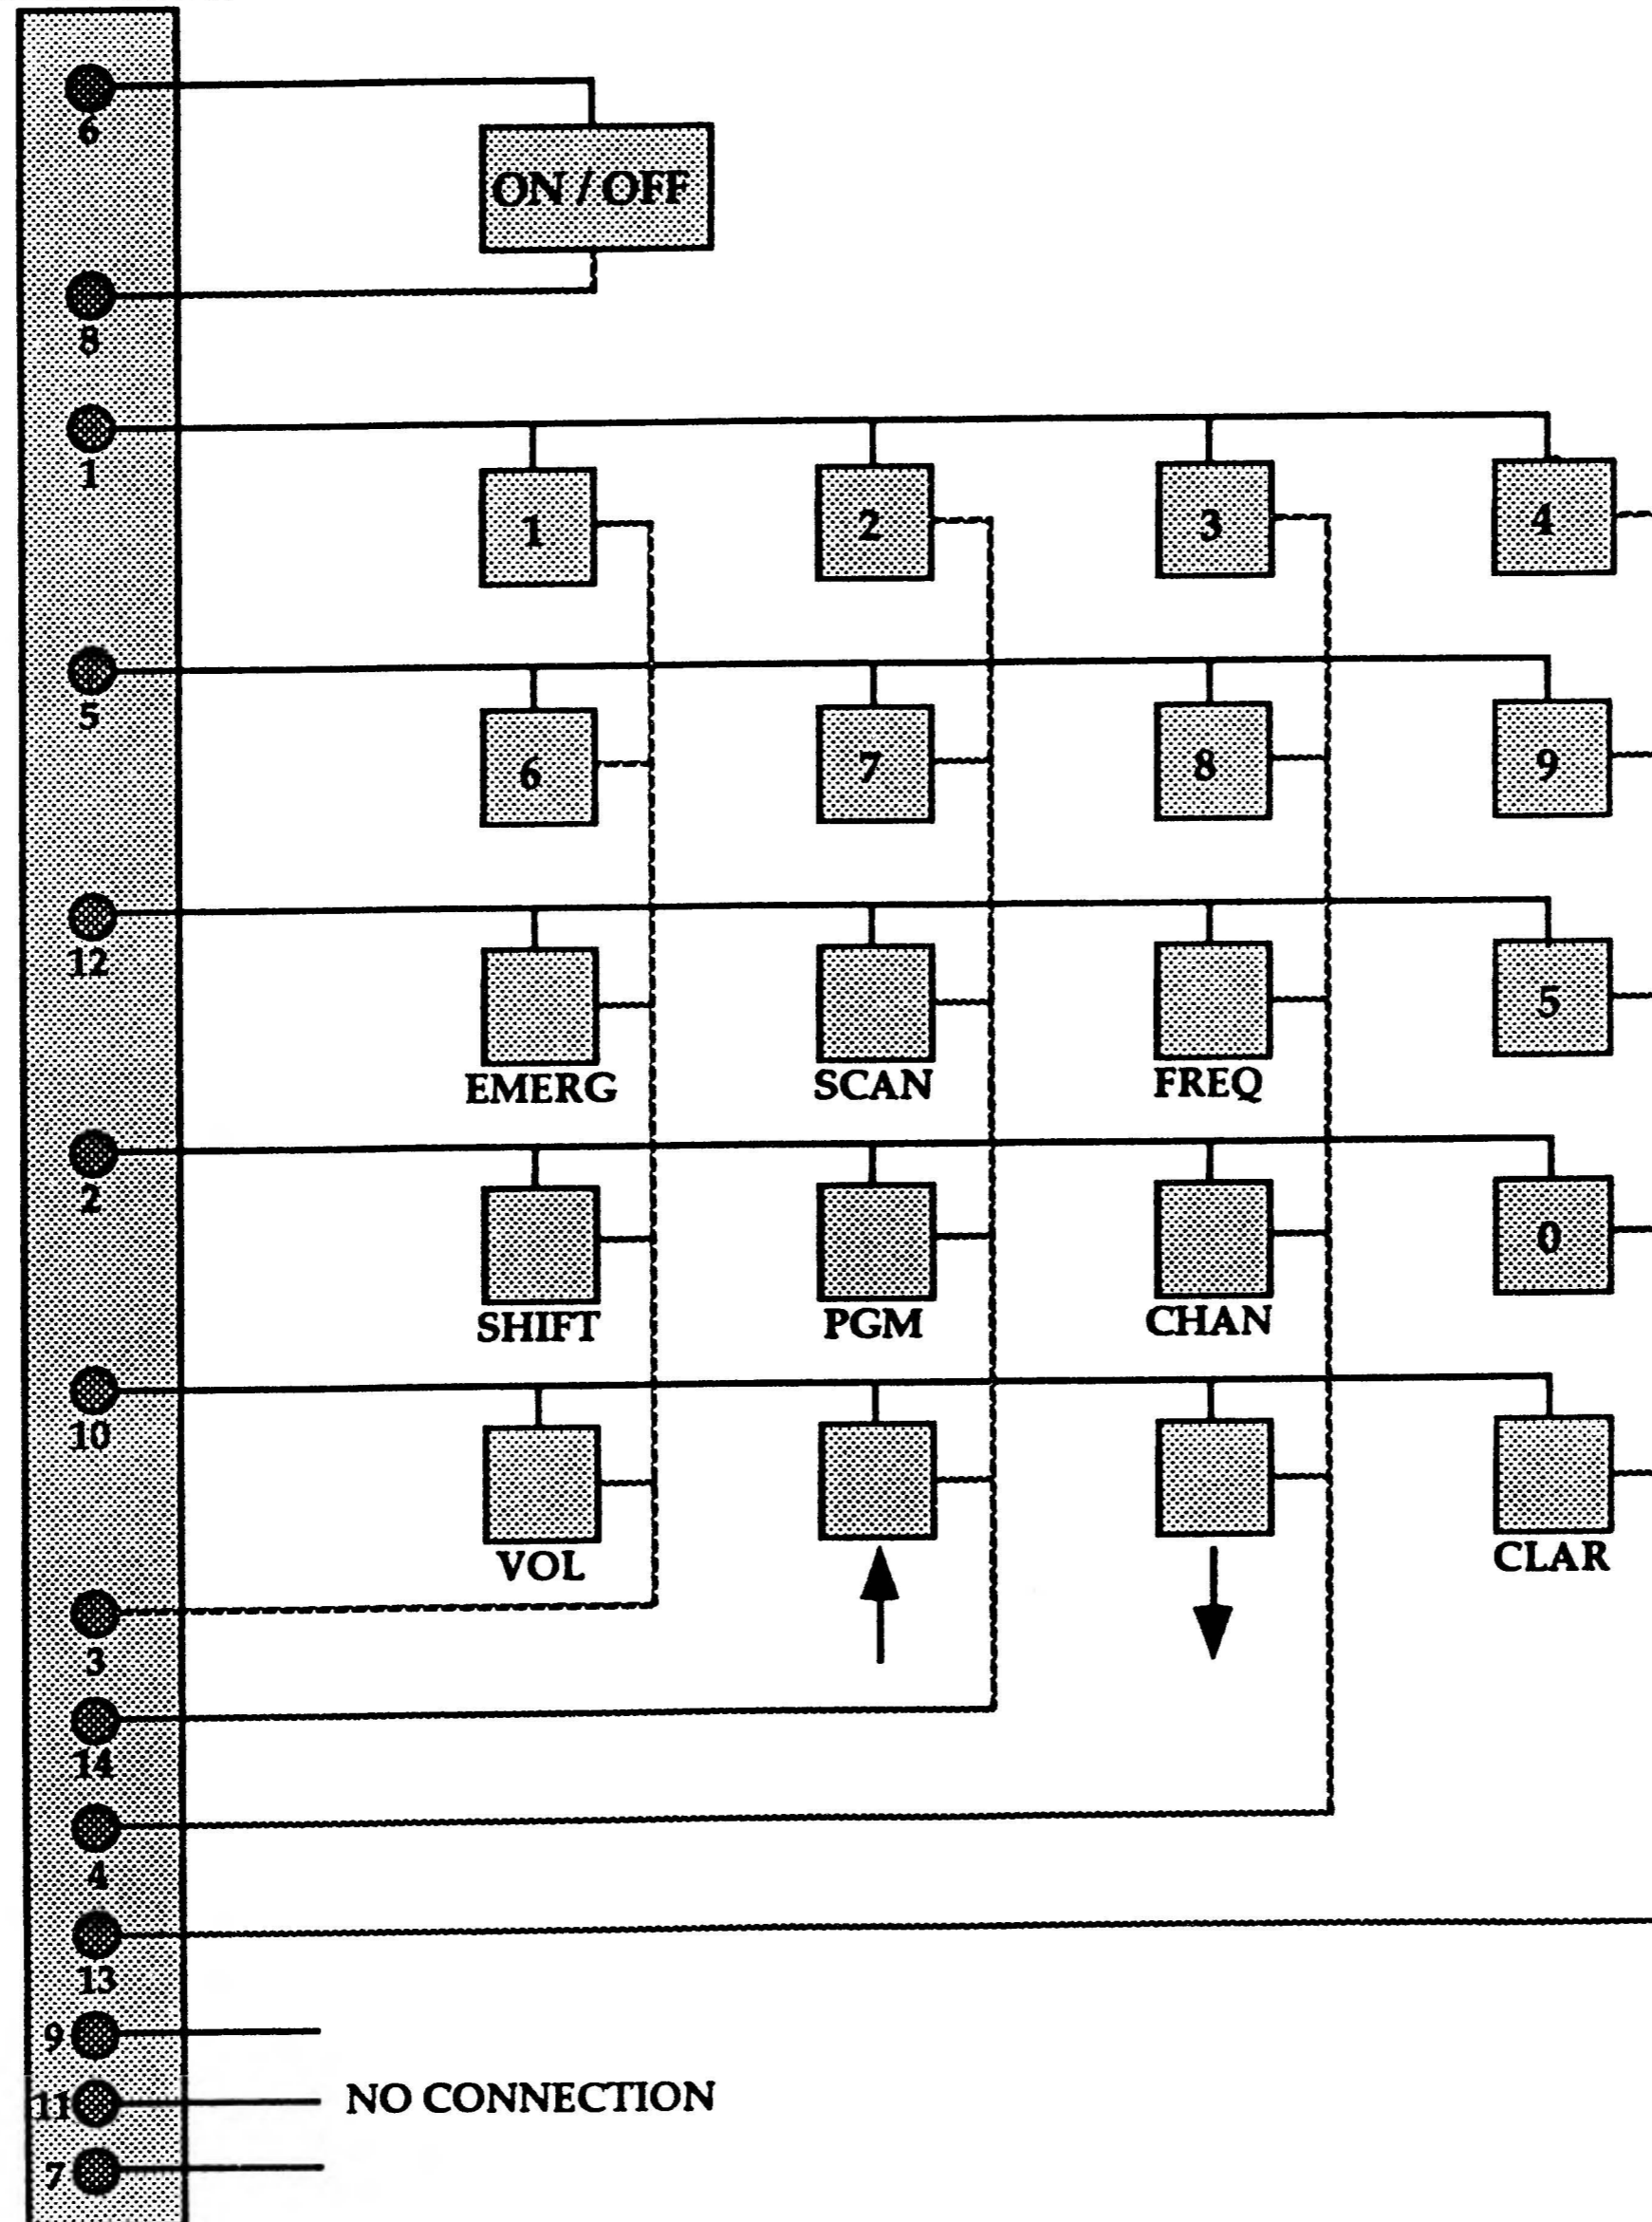

| DATE | REV | REV RECORD | AUTH |
|------|-----|------------|------|
| | | | |
| | | | |
| | | | |

| |
|-------------------|
| SGC SG2000 |
| KEY PAD MATRIX |
| J20100200-D |
| DOC 4-19-91 |

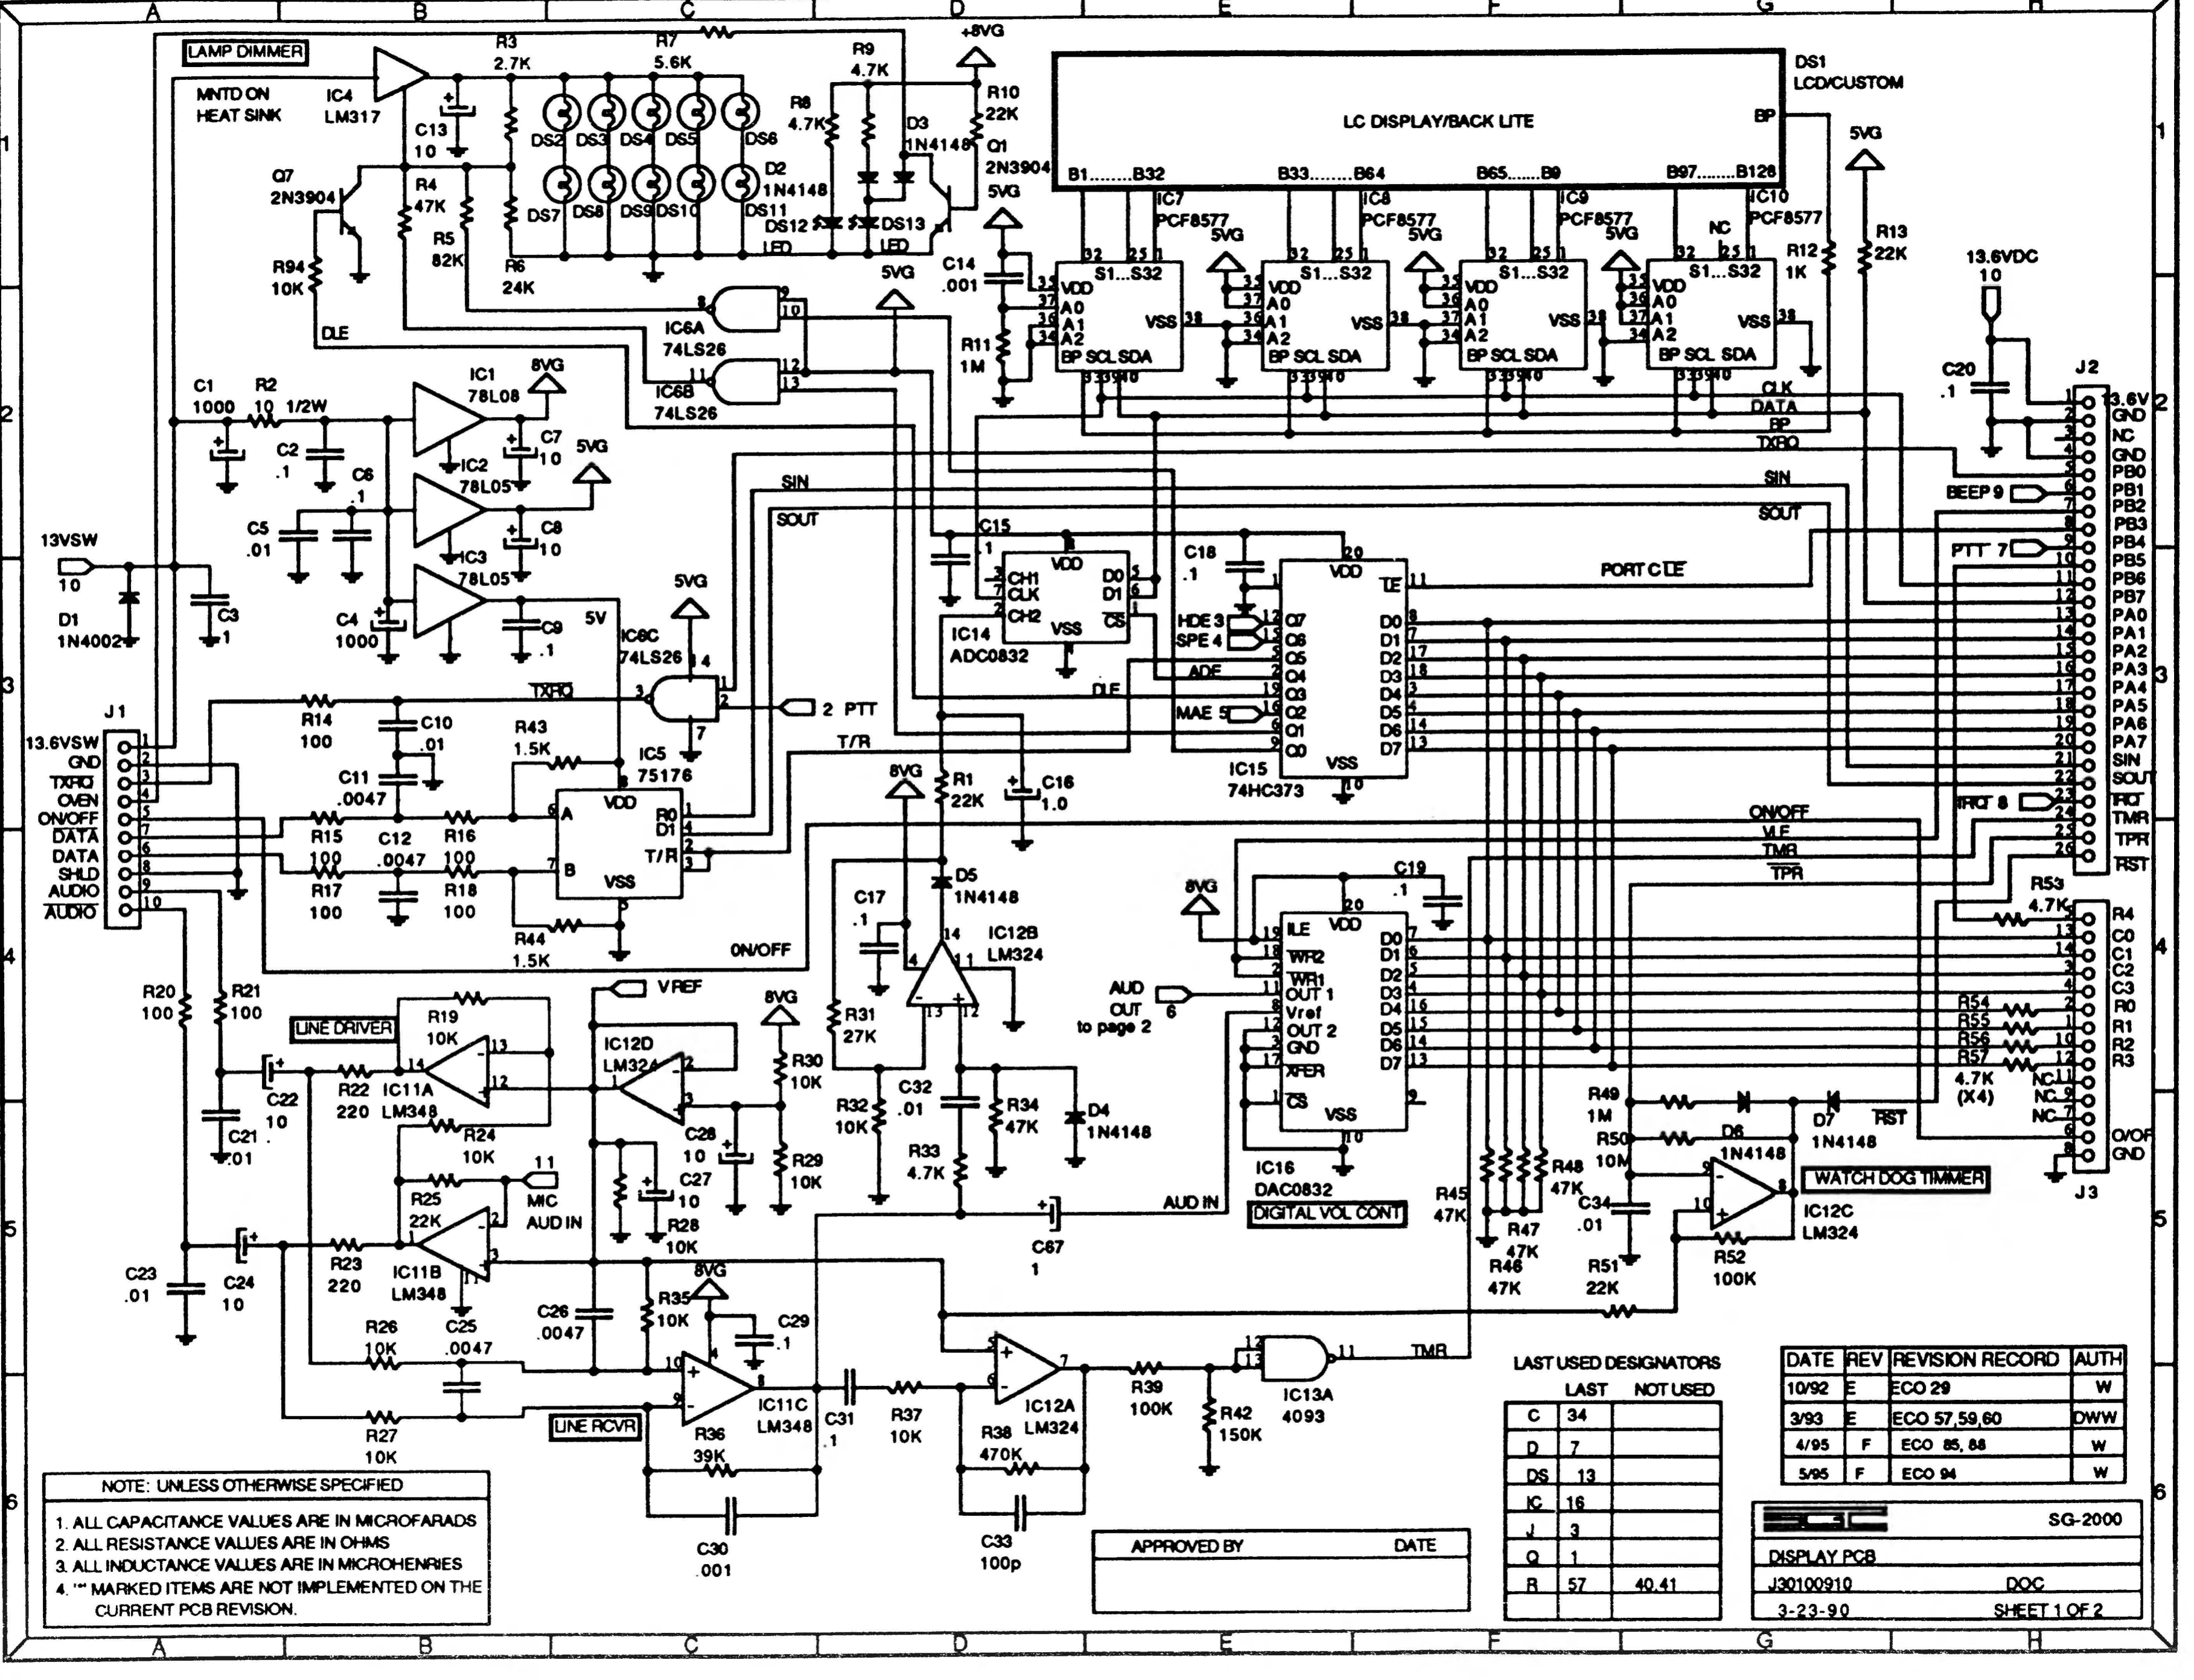

NOTE: UNLESS OTHERWISE SPECIFIED

1. ALL CAPACITANCE VALUES ARE IN MICROFARADS
2. ALL RESISTANCE VALUES ARE IN OHMS
3. ALL INDUCTANCE VALUES ARE IN MICROHENRIES
4. " MARKED ITEMS ARE NOT IMPLEMENTED ON THE CURRENT PCB REVISION.


LAST USED DESIGNATORS

| LAST | NOT USED |
|------|----------|
| C | 34 |
| D | 7 |
| DS | 13 |
| IC | 16 |
| J | 3 |
| Q | 1 |
| R | 57 |
| | 40.41 |

| DATE | REV | REVISION RECORD | AUTH |
|-------|-----|-----------------|------|
| 10/92 | E | ECO 29 | W |
| 3/93 | E | ECO 57,59,60 | DWW |
| 4/95 | F | ECO 85, 88 | W |
| 5/95 | F | ECO 94 | W |

SG-2000
 DISPLAY PCB
 J30100910
 3-23-90
 DOC
 SHEET 1 OF 2

APPROVED BY _____ DATE _____

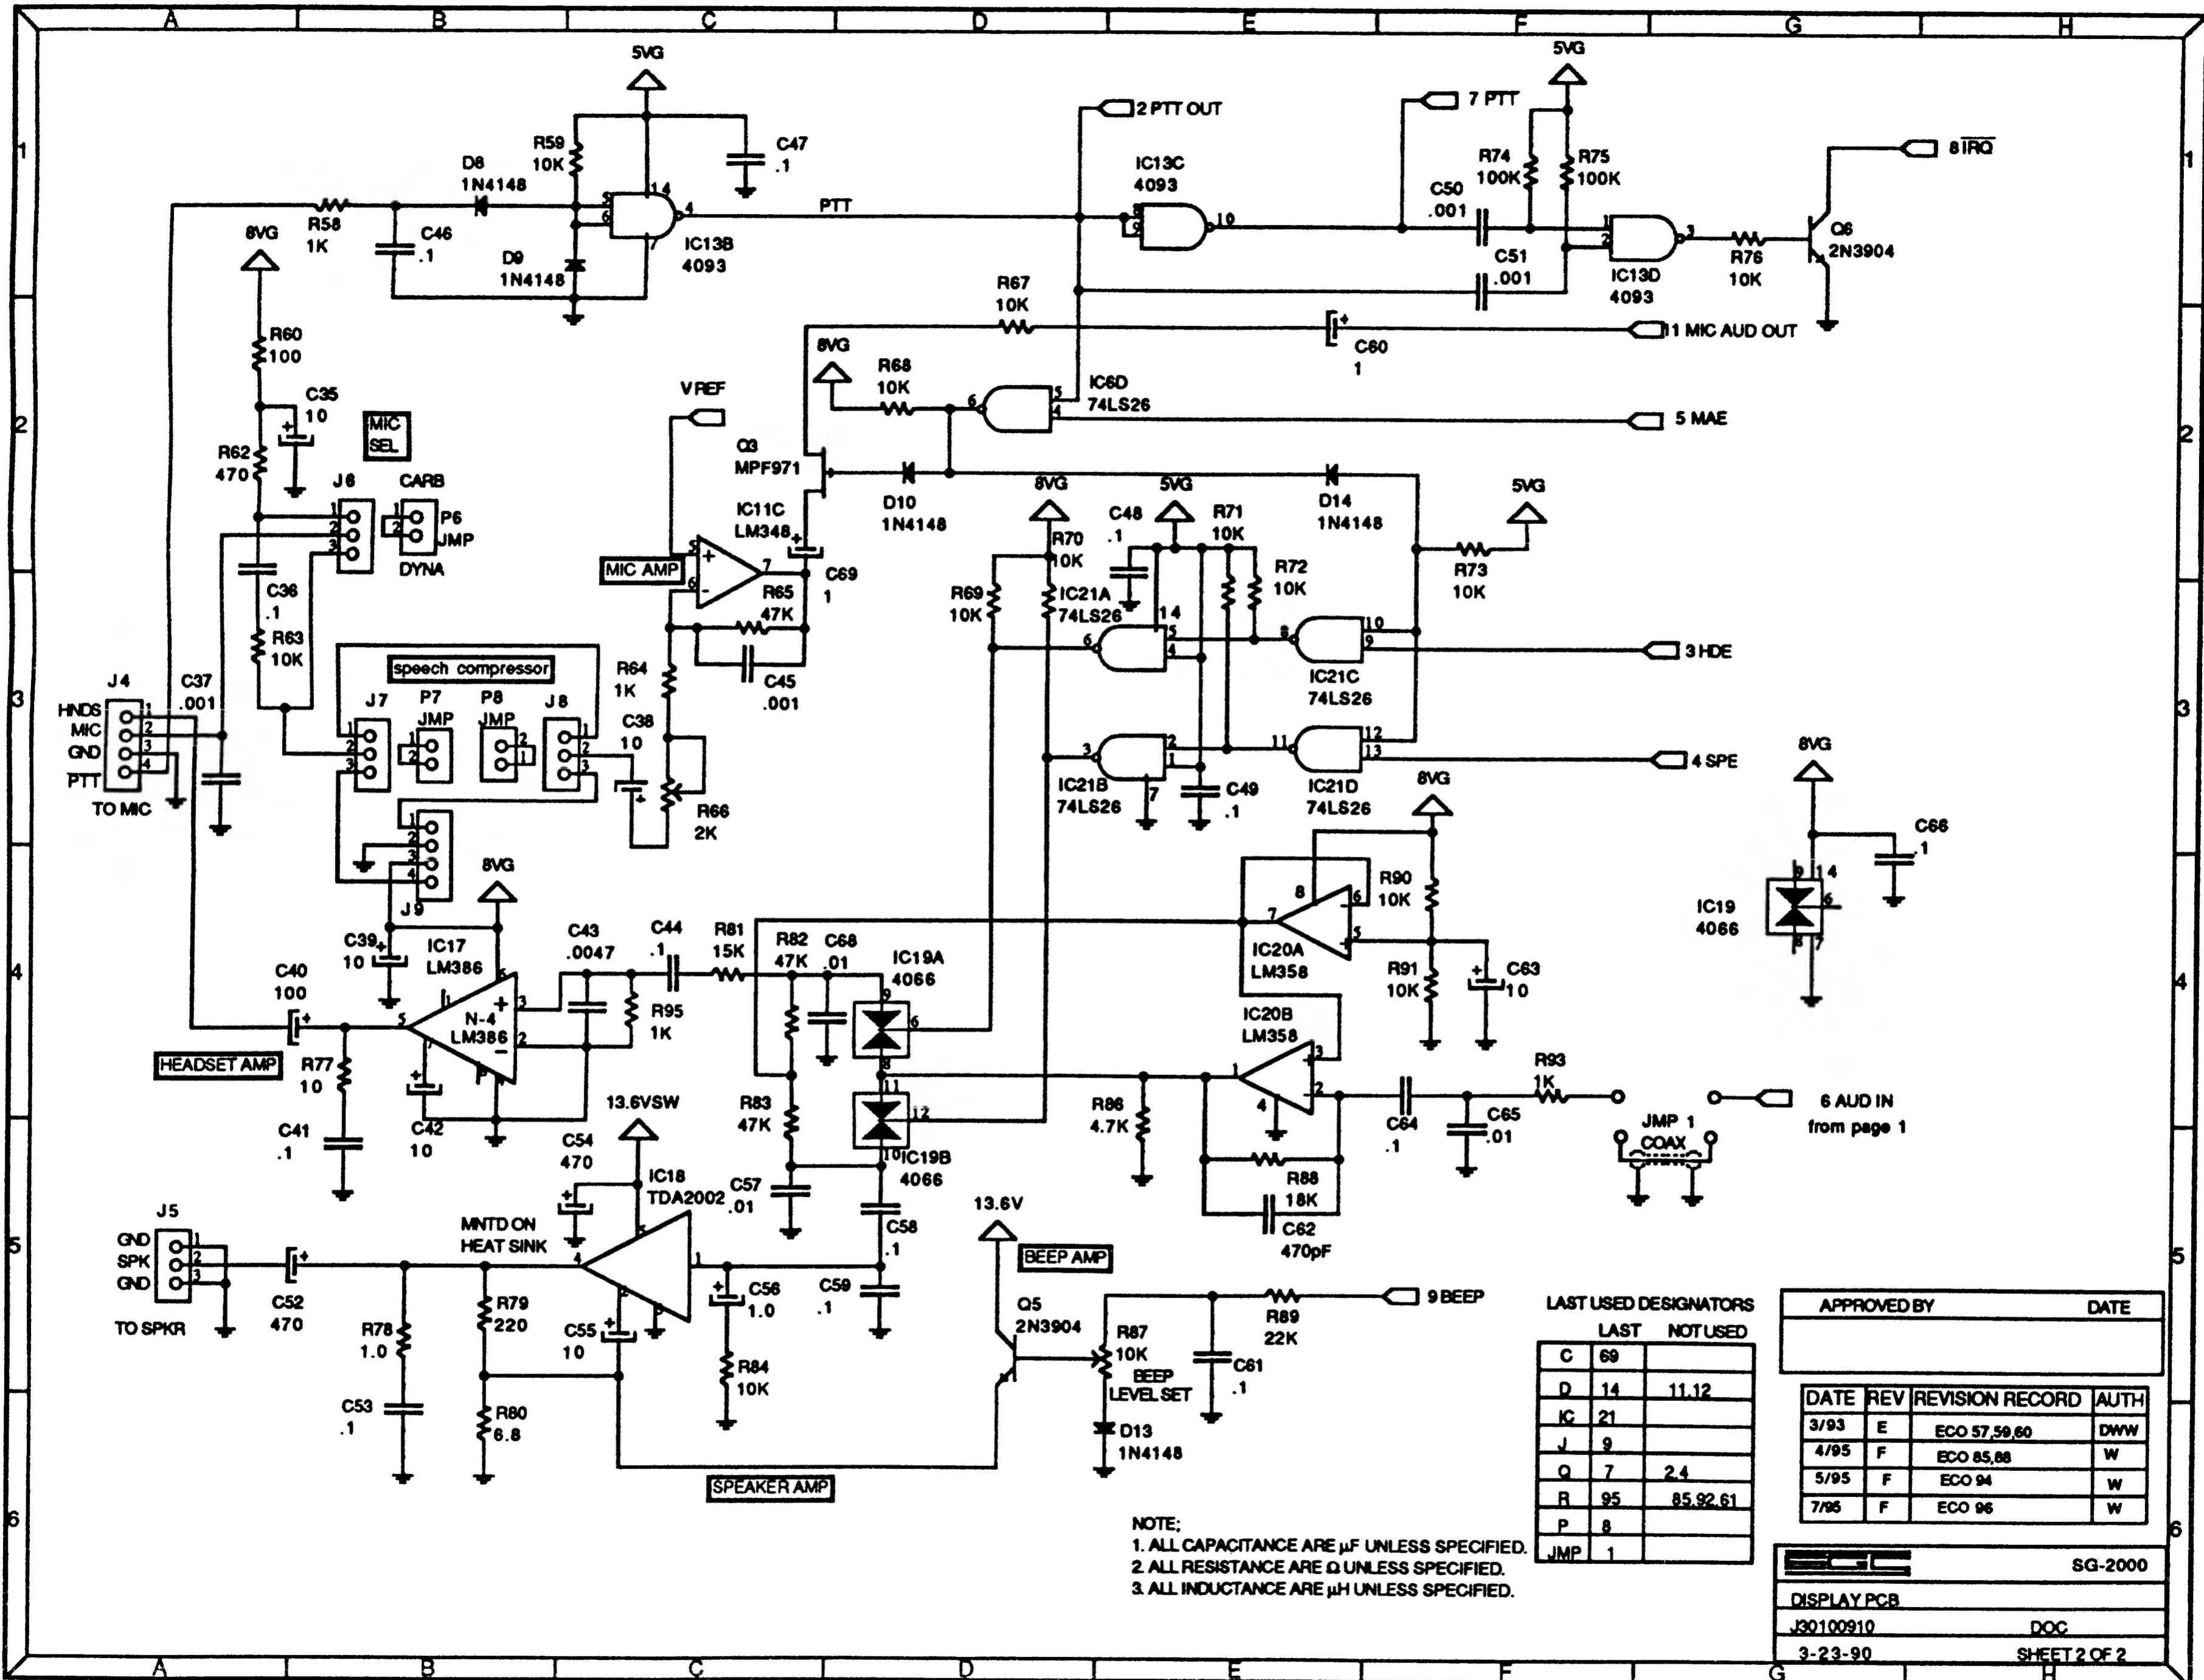

LAST USED DESIGNATORS

| | LAST | NOTUSED |
|-----|------|----------|
| C | 69 | |
| D | 14 | 11,12 |
| IC | 21 | |
| J | 9 | |
| Q | 7 | 2,4 |
| R | 95 | 85,92,61 |
| P | 8 | |
| JMP | 1 | |

| APPROVED BY | DATE |
|-------------|------|
| | |

| DATE | REV | REVISION RECORD | AUTH |
|------|-----|-----------------|------|
| 3/93 | E | ECO 57,59,60 | DWW |
| 4/95 | F | ECO 85,88 | W |
| 5/95 | F | ECO 94 | W |
| 7/95 | F | ECO 96 | W |

| | |
|-------------|--------------|
| SG-2000 | |
| DISPLAY PCB | |
| J30100910 | DOC |
| 3-23-90 | SHEET 2 OF 2 |

NOTE:
 1. ALL CAPACITANCE ARE μF UNLESS SPECIFIED.
 2. ALL RESISTANCE ARE Ω UNLESS SPECIFIED.
 3. ALL INDUCTANCE ARE μH UNLESS SPECIFIED.

*MOUNTED ON HEAT SINK


LAST USED DESIGNATORS, THIS PAGE

| | LAST | NOT USED |
|----|------|----------------------|
| C | 66 | 5,9,30,31,43 |
| D | 13 | 3-10,12 |
| F | 2 | |
| FB | 2 | |
| IC | 1 | |
| J | 14 | 7-10 |
| K | 14 | 1-13 |
| L | 0 | |
| Q | 21 | 14-18 |
| R | 78 | 37-49,53-73,75,76,77 |
| T | 12 | 3,6 |
| P | 6 | 1 |


NOTE: UNLESS OTHERWISE SPECIFIED

1. ALL CAPACITANCE VALUES ARE IN MICROFARADS
2. ALL RESISTANCE VALUES ARE IN OHMS
3. ALL INDUCTANCE VALUES ARE IN MICROHENRIES

| DATE | REV | REVISION RECORD | AUTH |
|----------|-----|-----------------|------|
| 8-91 | C | ECO 2,3,4,5 | DOC |
| 3-92 | D | ECO 18 | RK |
| 12-11-92 | E | ECO 42,43,44 | DWW |
| 06/21/93 | E | ECO 70 | DWW |
| 4-95 | G | ECO 87 | W |

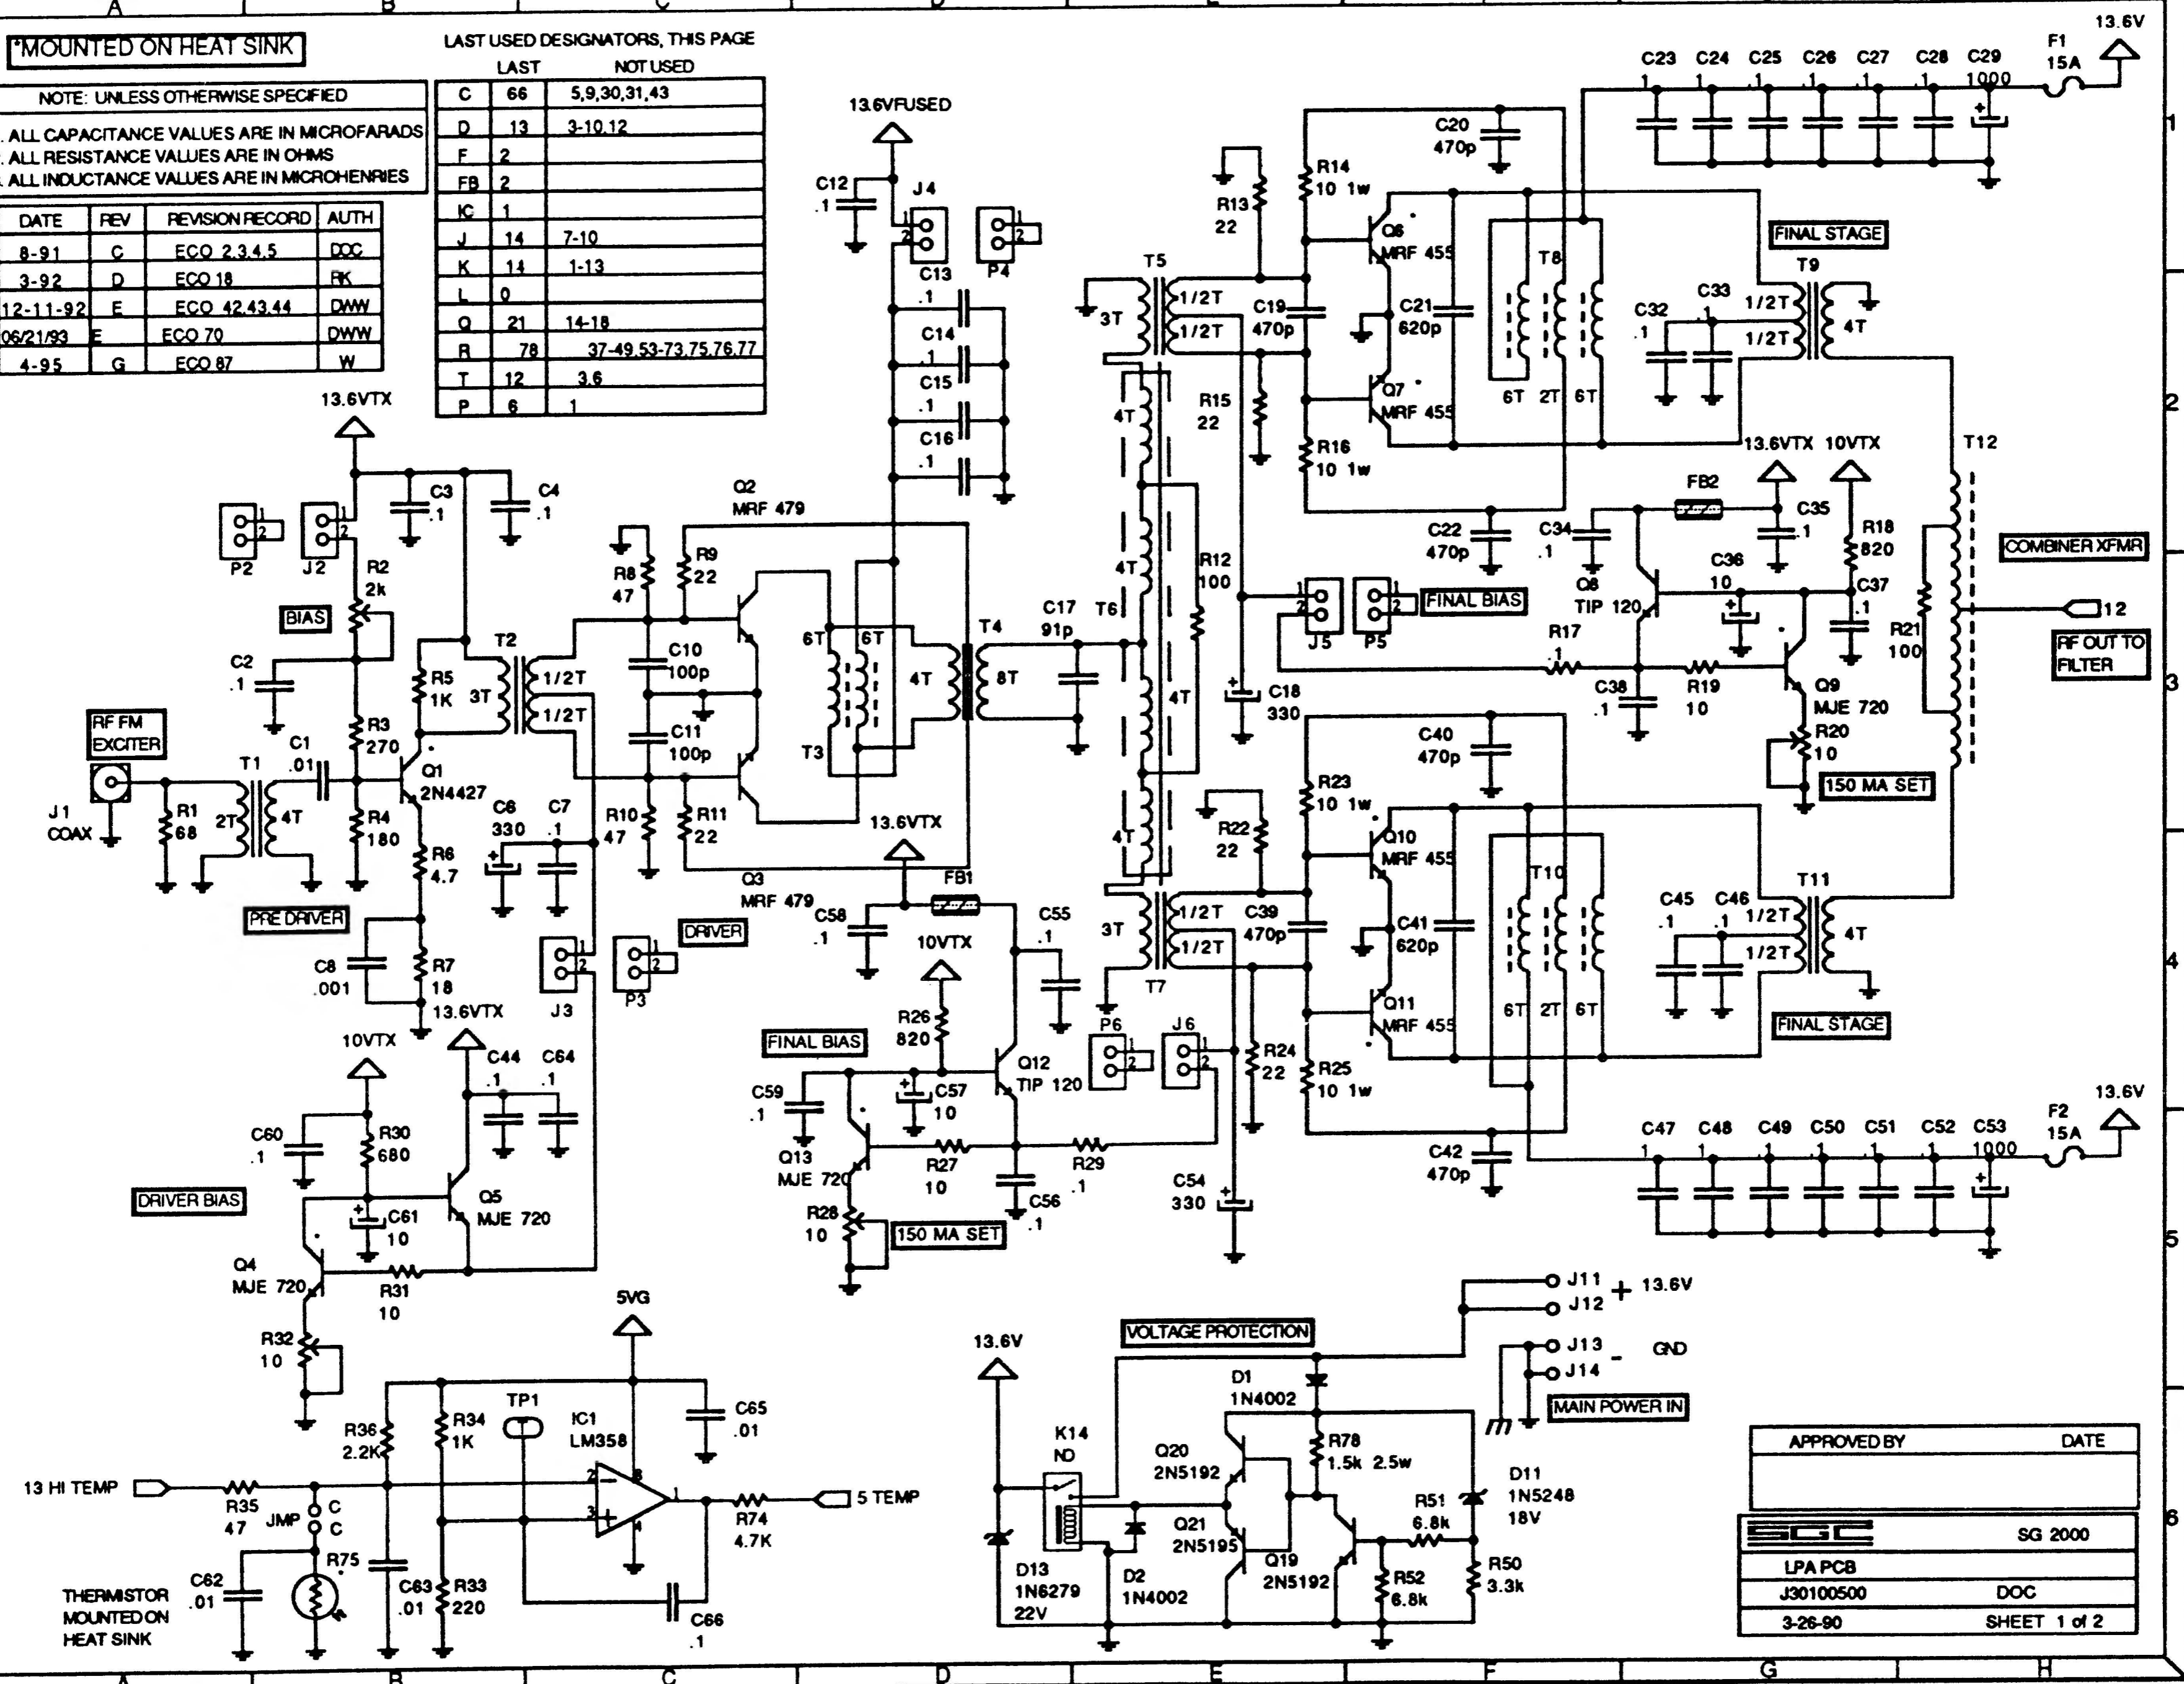

| APPROVED BY | DATE |
|-------------|--------------|
| | SG 2000 |
| LPA PCB | DOC |
| J30100500 | 3-26-90 |
| | SHEET 1 of 2 |

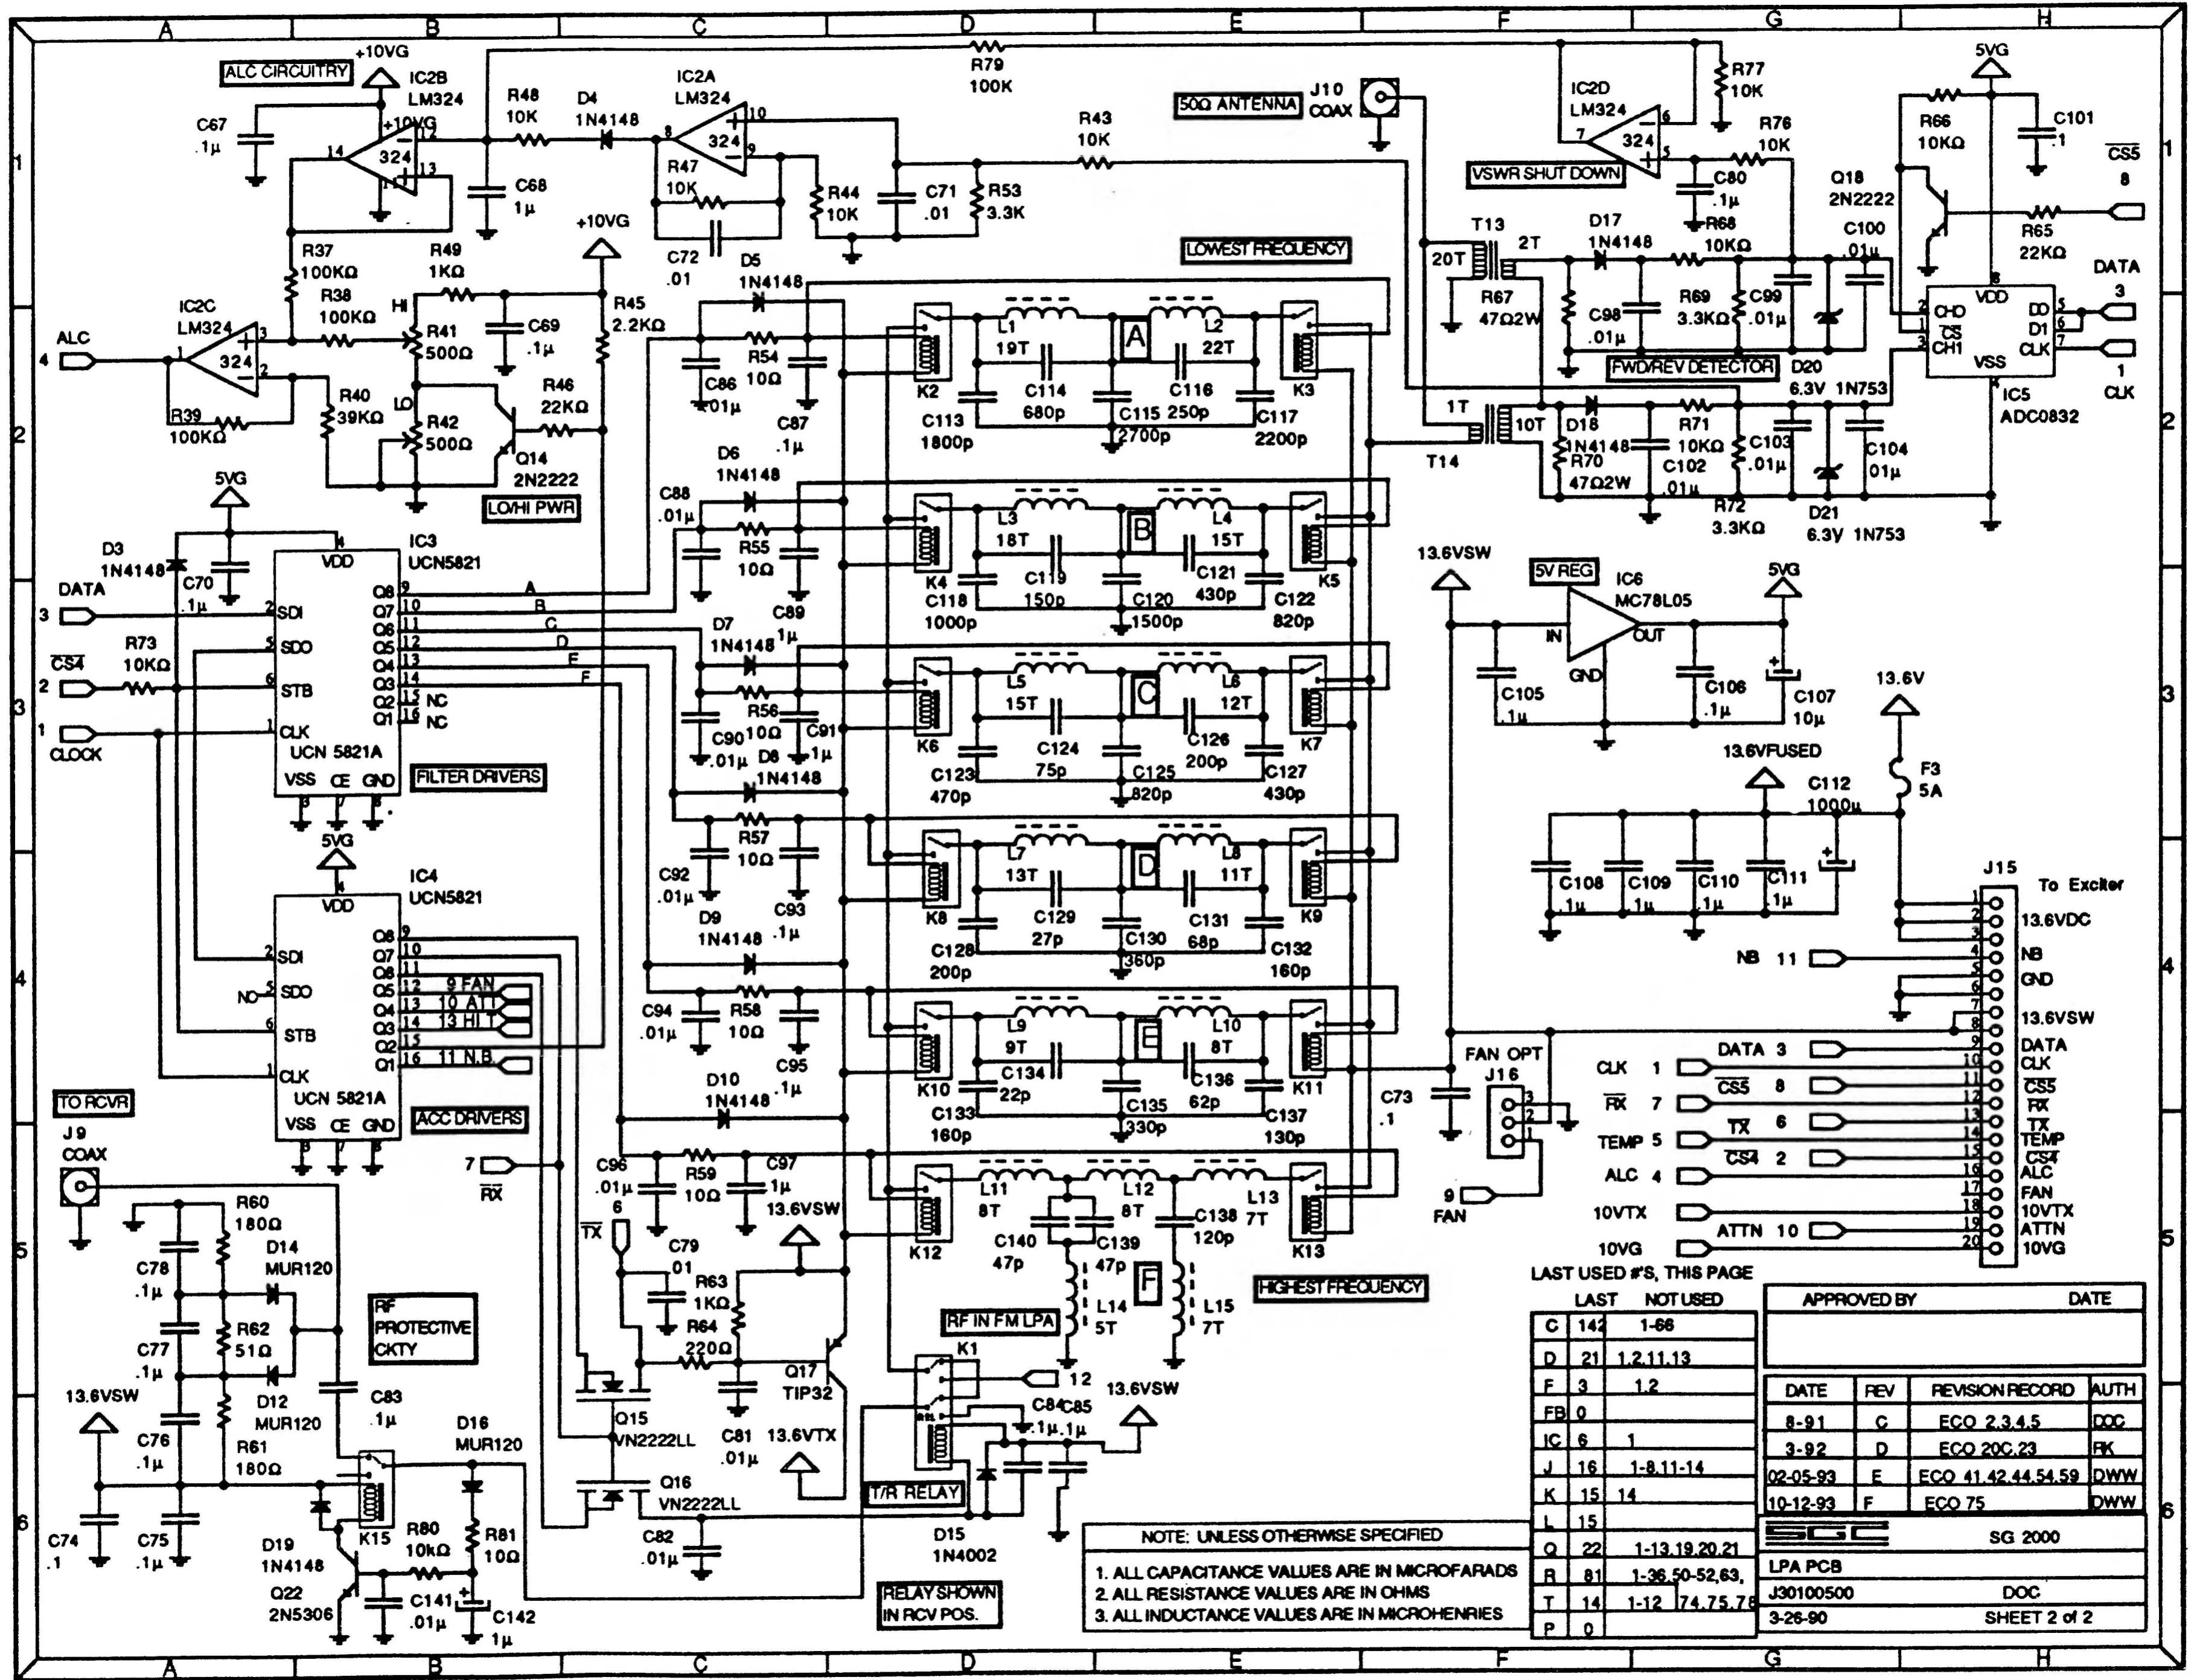


NOTE: UNLESS OTHERWISE SPECIFIED
 1. ALL CAPACITANCE VALUES ARE IN MICROFARADS
 2. ALL RESISTANCE VALUES ARE IN OHMS
 3. ALL INDUCTANCE VALUES ARE IN MICROHENRIES

LAST USED #S, THIS PAGE

| | LAST USED | NOT USED |
|----|-----------|----------------|
| C | 142 | 1-68 |
| D | 21 | 1,2,11,13 |
| F | 3 | 1,2 |
| FB | 0 | |
| IC | 6 | 1 |
| J | 16 | 1-8,11-14 |
| K | 15 | 14 |
| L | 15 | |
| Q | 22 | 1-13,19,20,21 |
| R | 81 | 1-36,50-52,63, |
| T | 14 | 1-12,74,75,78 |
| P | 0 | |

| APPROVED BY | | DATE | |
|-------------|-----|--------------------|------|
| DATE | REV | REVISION RECORD | AUTH |
| 8-91 | G | ECO 2,3,4,5 | DOC |
| 3-92 | D | ECO 20C,23 | FK |
| 02-05-93 | E | ECO 41,42,44,54,59 | DWW |
| 10-12-93 | F | ECO 75 | DWW |
| SGC | | SG 2000 | |
| LPA PCB | | DOC | |
| J30100500 | | 3-26-90 | |
| | | SHEET 2 of 2 | |

NOTE: UNLESS OTHERWISE SPECIFIED
 1. ALL CAPACITANCE VALUES ARE IN MICROFARADS
 2. ALL RESISTANCE VALUES ARE IN OHMS
 3. ALL INDUCTANCE VALUES ARE IN MICROHENRIES

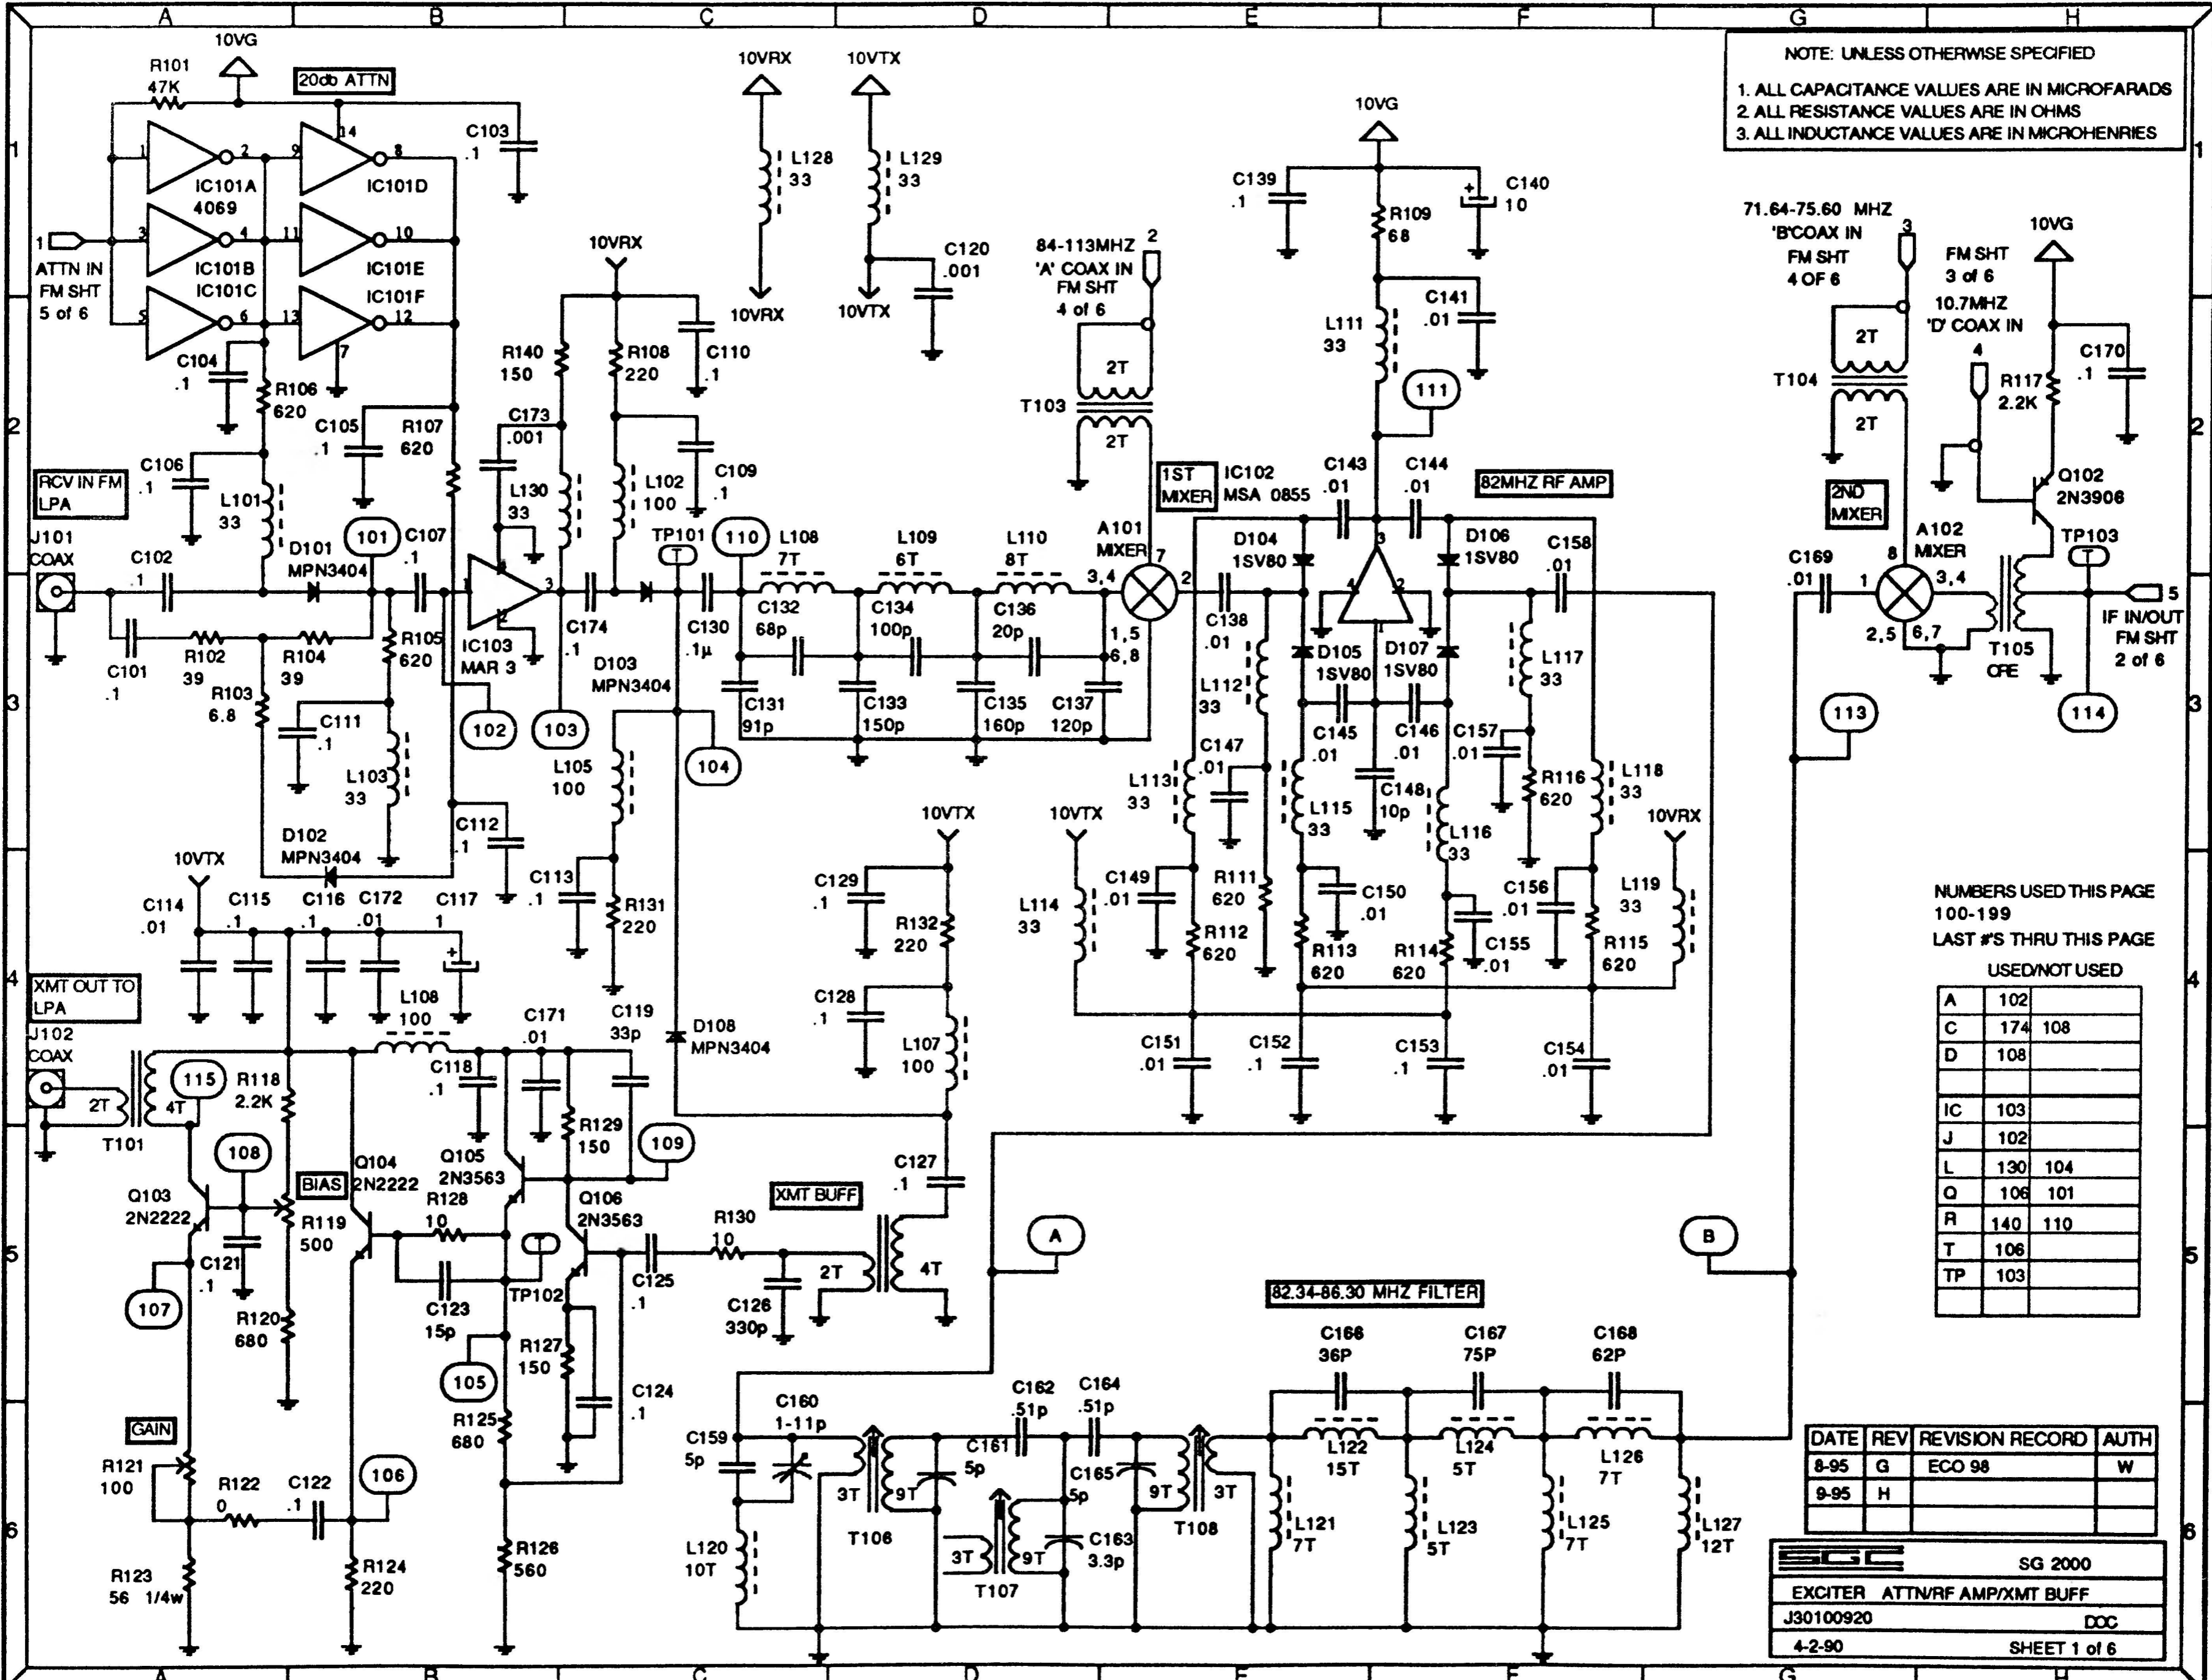

NUMBERS USED THIS PAGE
 100-199
 LAST #'S THRU THIS PAGE


| | USED/NOT USED |
|----|---------------|
| A | 102 |
| C | 174 108 |
| D | 108 |
| IC | 103 |
| J | 102 |
| L | 130 104 |
| Q | 106 101 |
| R | 140 110 |
| T | 106 |
| TP | 103 |

| DATE | REV | REVISION RECORD | AUTH |
|------|-----|-----------------|------|
| 8-95 | G | ECO 98 | W |
| 9-95 | H | | |

| | | |
|------------------------------|--------------|---------|
| SGC | | SG 2000 |
| EXCITER ATTN/RF AMP/XMT BUFF | | |
| J30100920 | DOC | |
| 4-2-90 | SHEET 1 of 6 | |

NOTE: UNLESS OTHERWISE SPECIFIED

1. ALL CAPACITANCE VALUES ARE IN MICROFARADS
2. ALL RESISTANCE VALUES ARE IN OHMS
3. ALL INDUCTANCE VALUES ARE IN MICROHENRIES
4. *** MARKED ITEMS ARE NOT IMPLEMENTED ON THE CURRENT PCB REVISION.

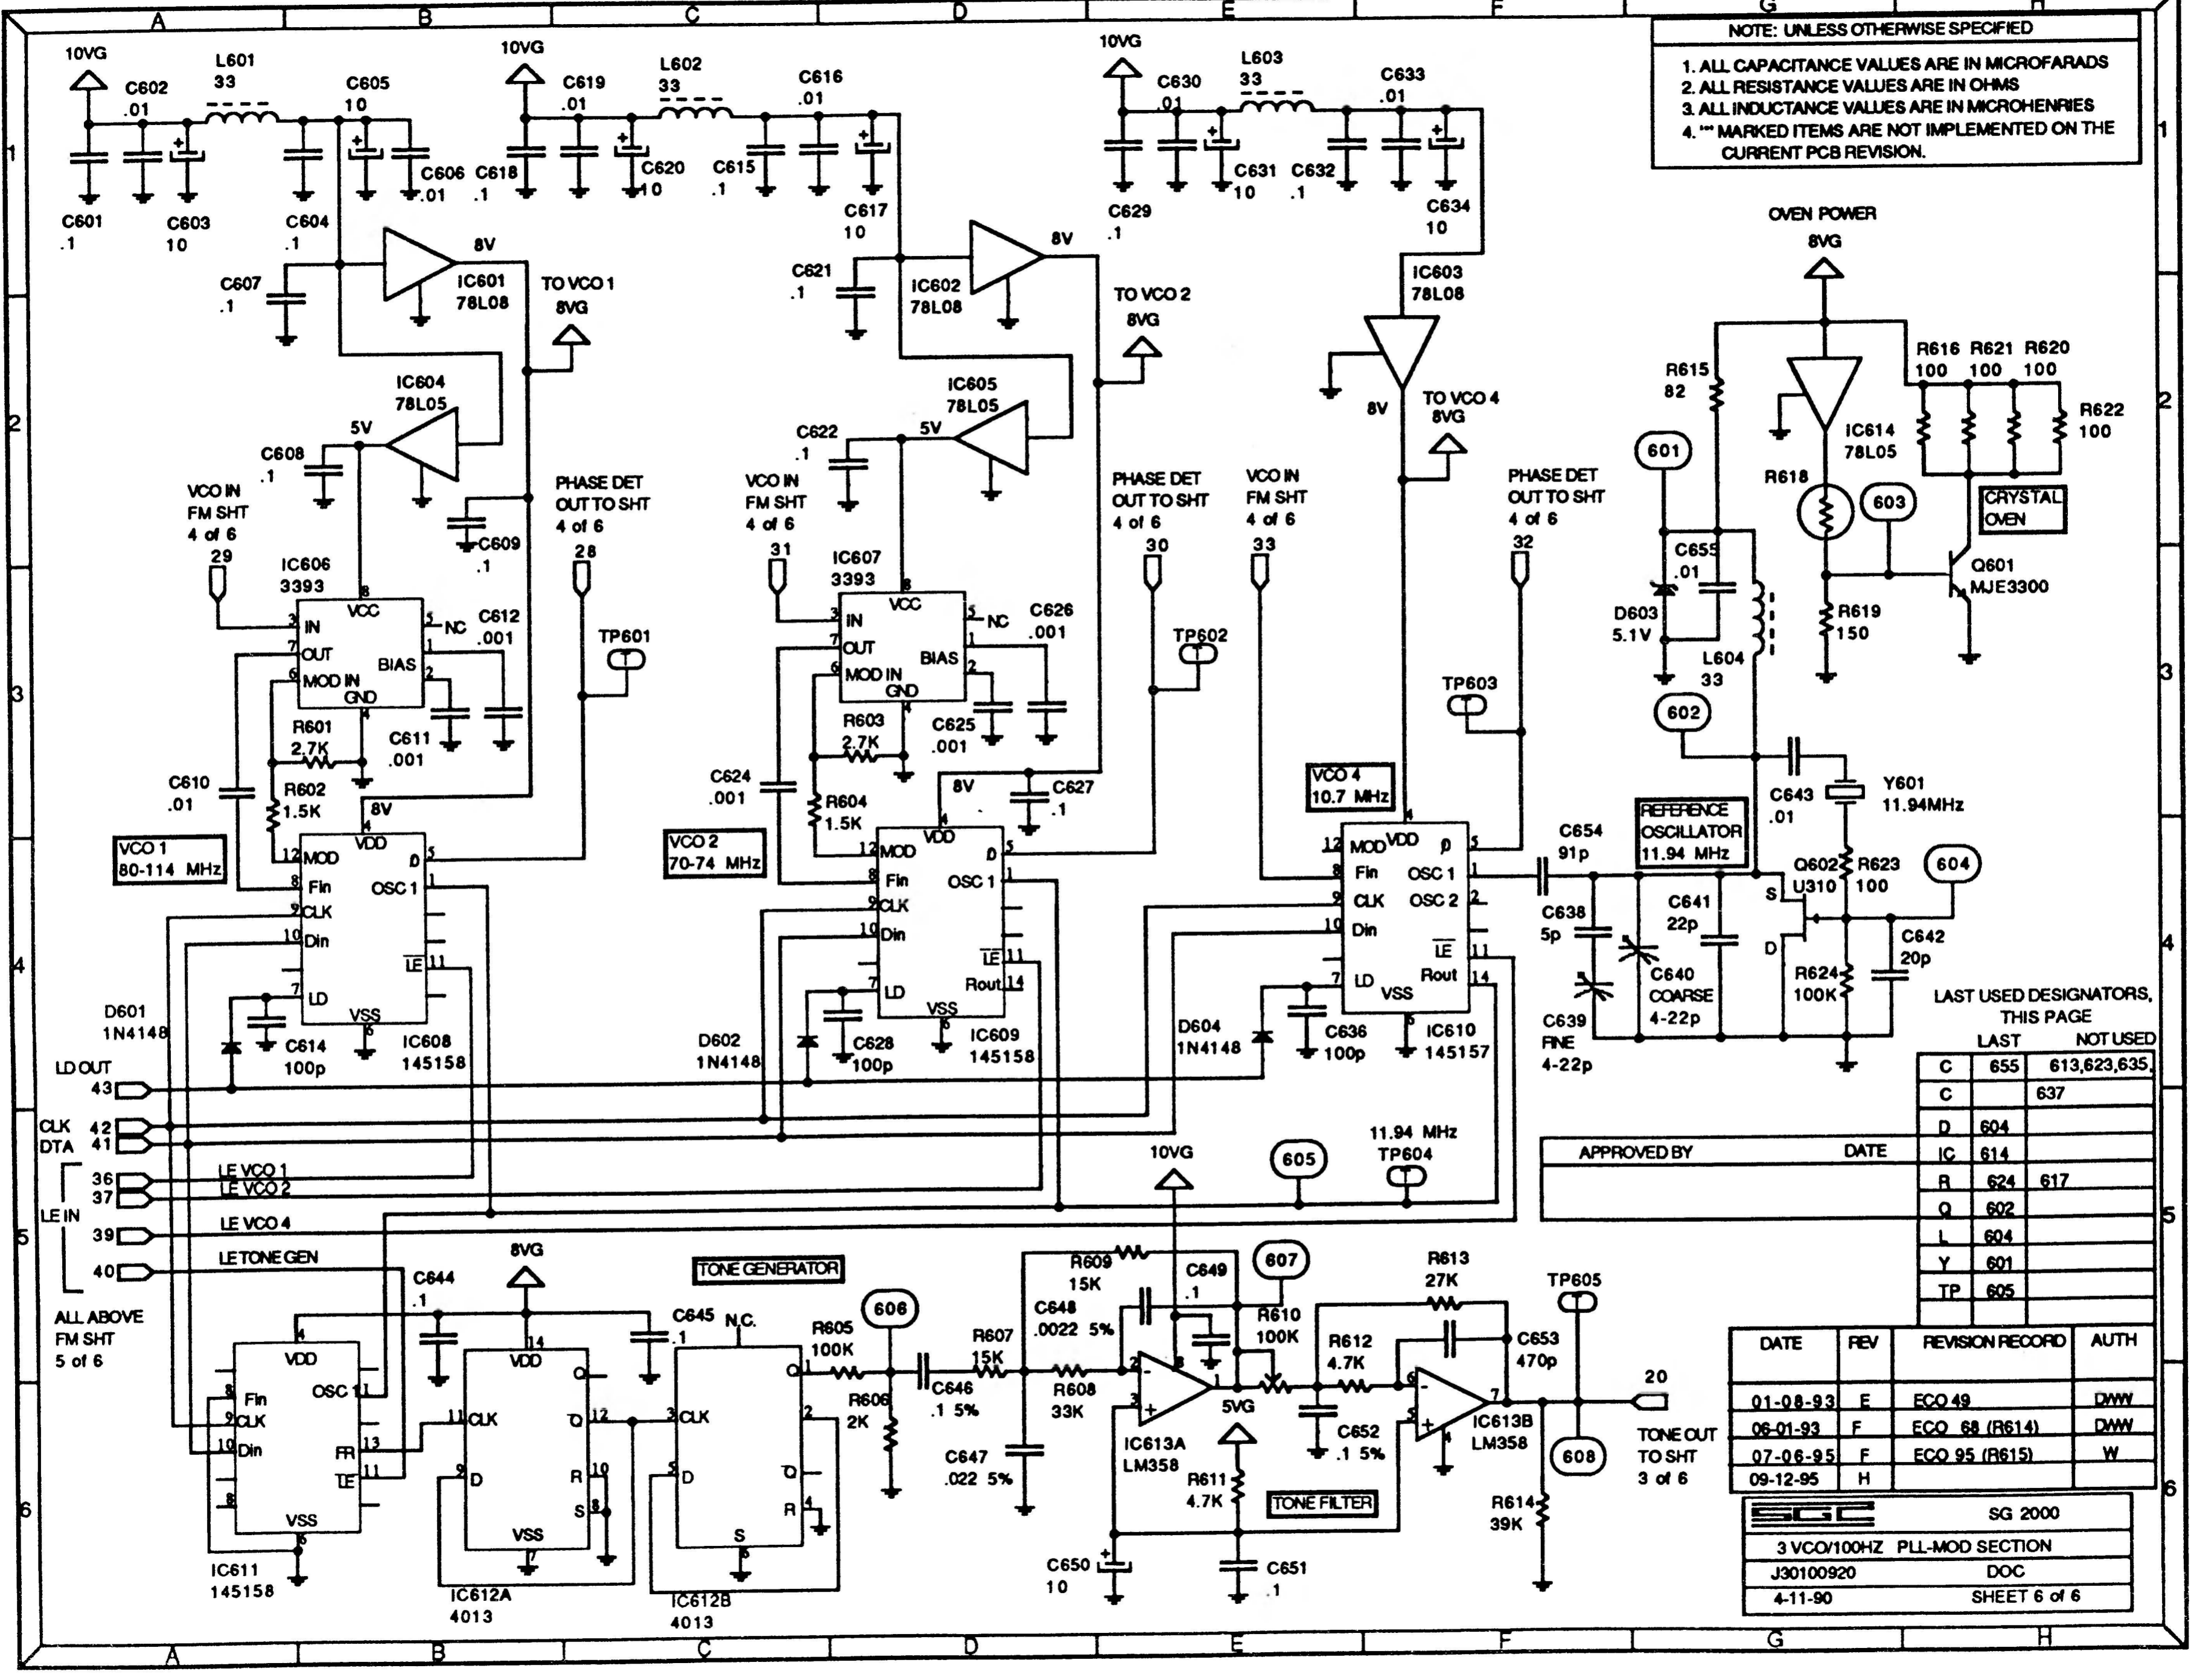


LAST USED DESIGNATORS, THIS PAGE

| | LAST | NOT USED |
|----|------|--------------|
| C | 655 | 613,623,635, |
| C | | 637 |
| D | 604 | |
| IC | 614 | |
| R | 624 | 617 |
| Q | 602 | |
| L | 604 | |
| Y | 601 | |
| TP | 605 | |

APPROVED BY _____ DATE _____

| DATE | REV | REVISION RECORD | AUTH |
|----------|-----|-----------------|------|
| 01-08-93 | E | ECO 49 | DWW |
| 06-01-93 | F | ECO 68 (R614) | DWW |
| 07-06-95 | F | ECO 95 (R615) | W |
| 09-12-95 | H | | |

| | | |
|-----------------------------|--|---------|
| SGC | | SG 2000 |
| 3 VCO/100HZ PLL-MOD SECTION | | |
| J30100920 DOC | | |
| 4-11-90 SHEET 6 of 6 | | |

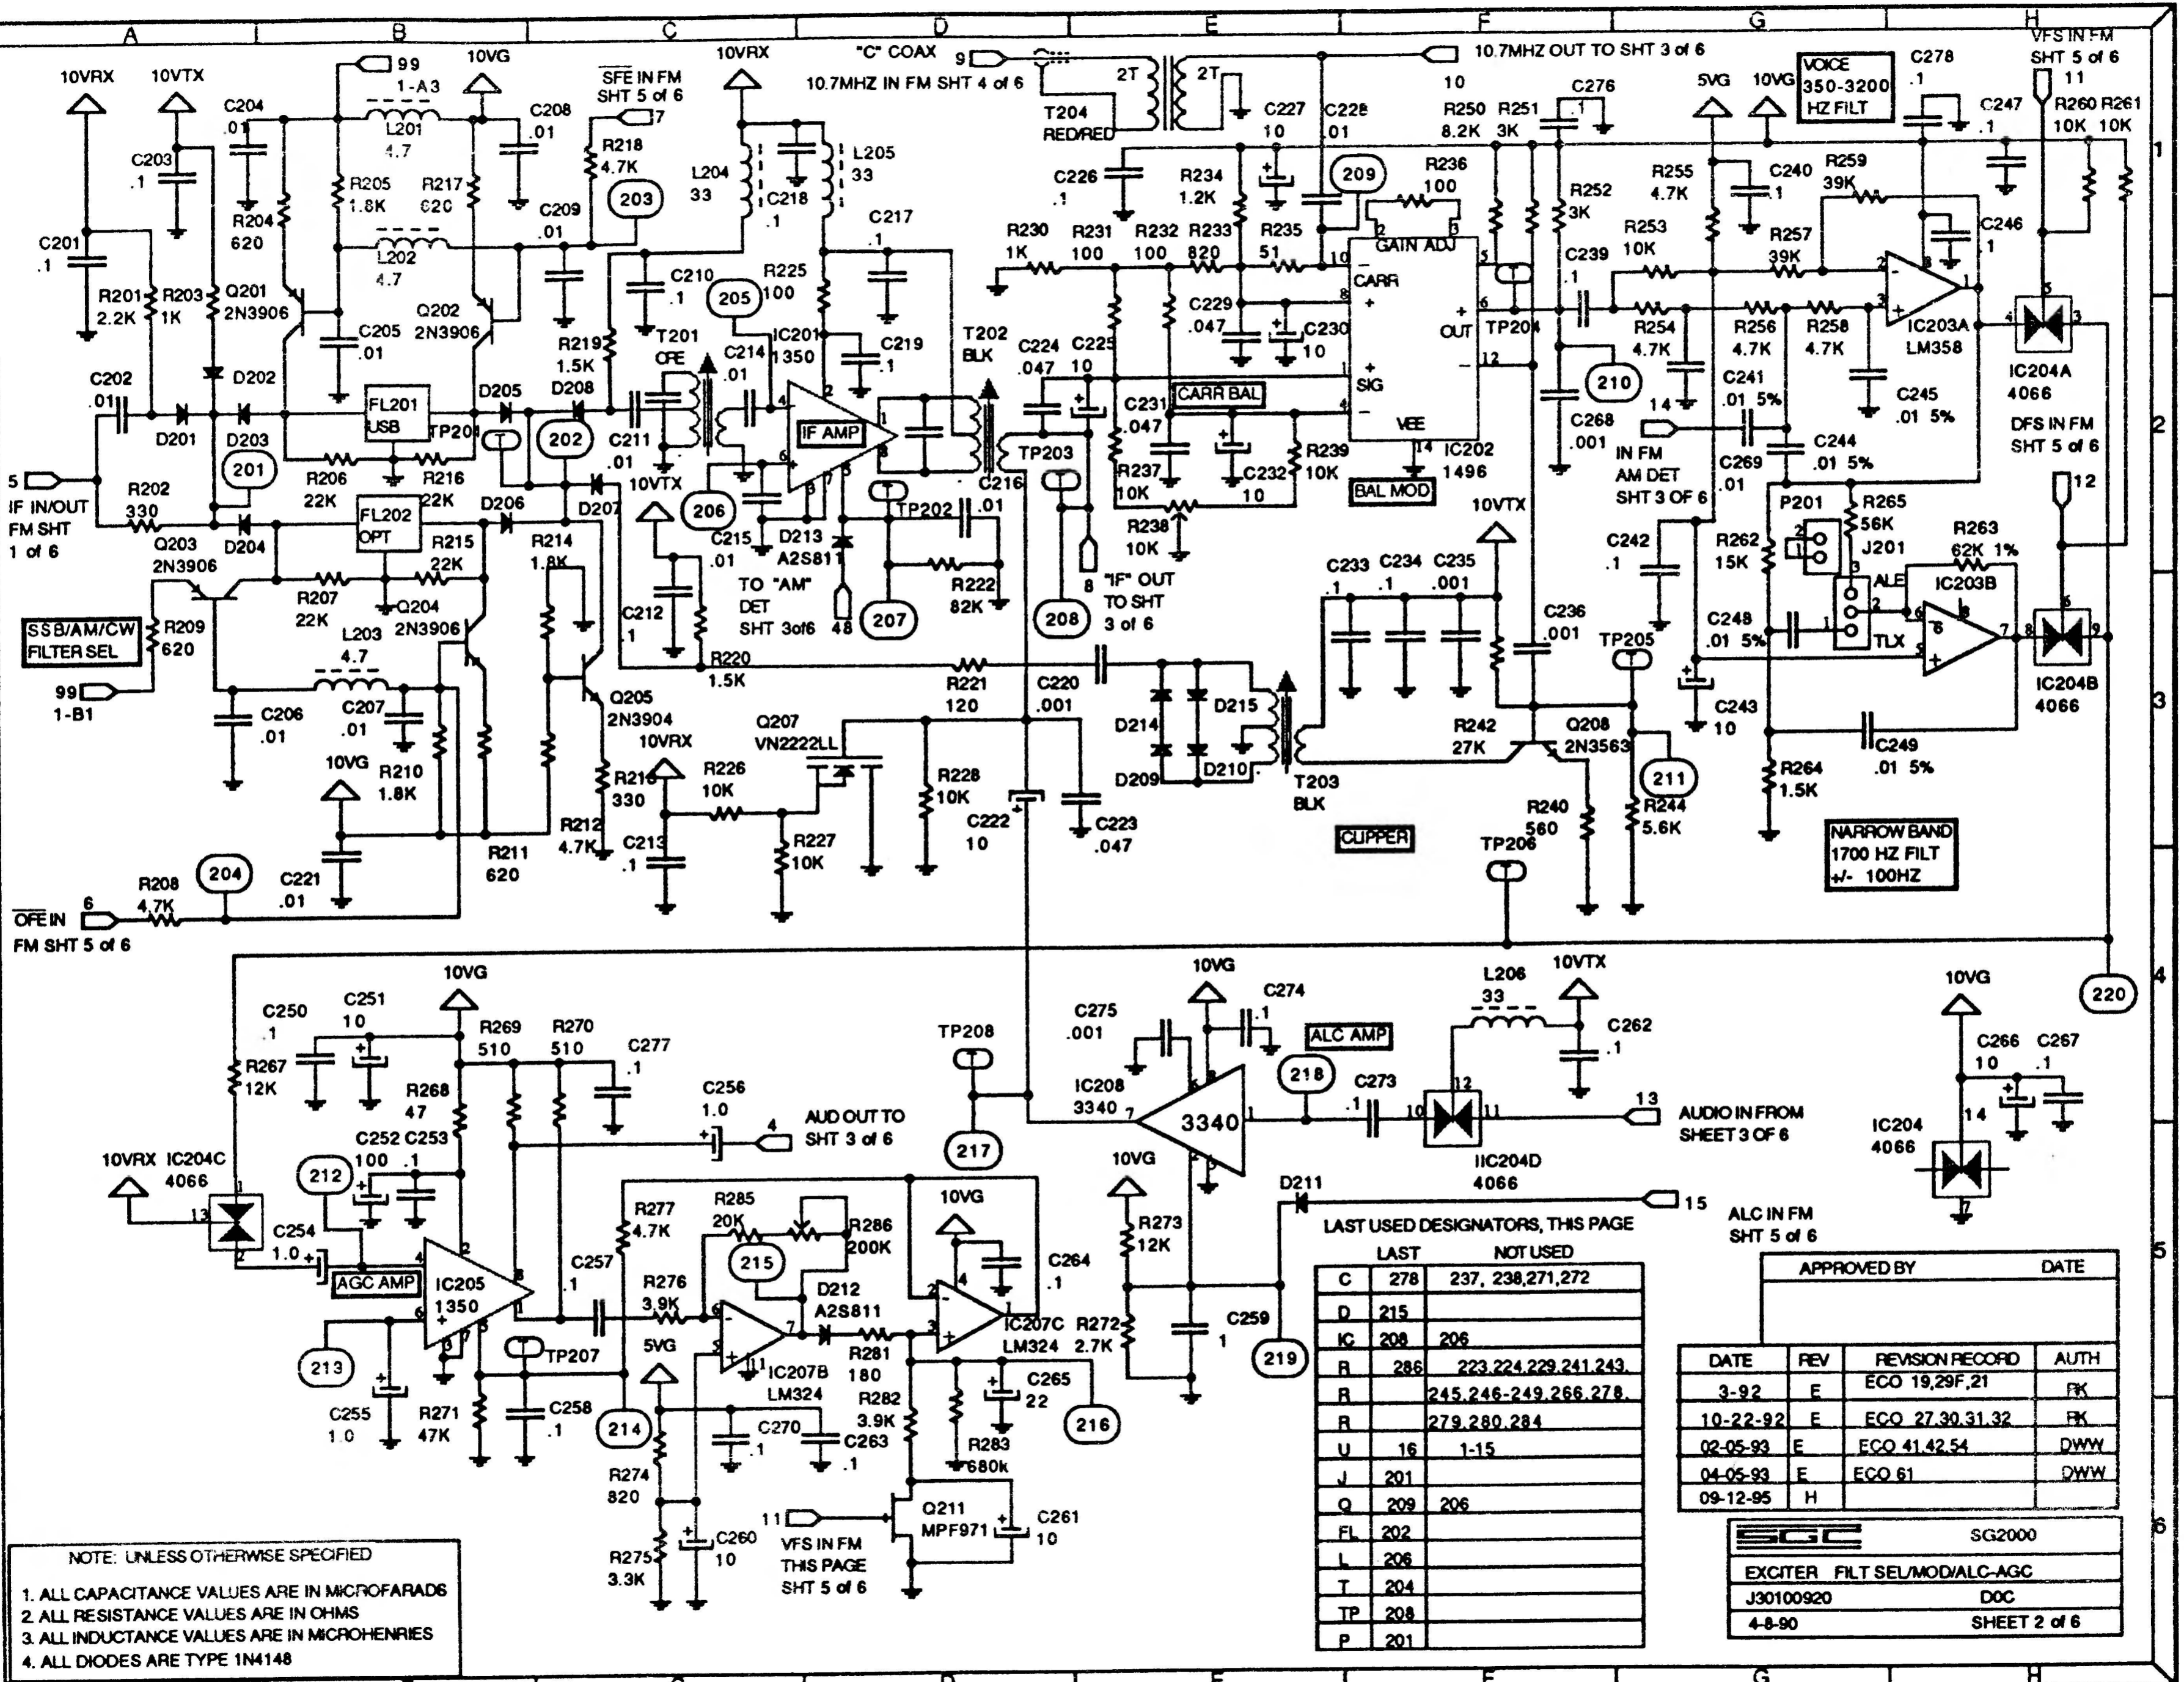

NOTE: UNLESS OTHERWISE SPECIFIED


1. ALL CAPACITANCE VALUES ARE IN MICROFARADS
2. ALL RESISTANCE VALUES ARE IN OHMS
3. ALL INDUCTANCE VALUES ARE IN MICROHENRIES
4. ALL DIODES ARE TYPE 1N4148

LAST USED DESIGNATORS, THIS PAGE


| | LAST | NOT USED |
|----|------|-------------------------|
| C | 278 | 237, 238, 271, 272 |
| D | 215 | |
| IC | 208 | 206 |
| R | 286 | 223, 224, 229, 241, 243 |
| R | | 245, 246, 249, 266, 278 |
| U | 16 | 1-15 |
| J | 201 | |
| Q | 209 | 206 |
| FL | 202 | |
| L | 206 | |
| T | 204 | |
| TP | 208 | |
| P | 201 | |

| APPROVED BY | | DATE | |
|-------------|-----|-----------------|------|
| | | | |
| DATE | REV | REVISION RECORD | AUTH |
| 3-92 | E | ECO 19,29F,21 | FK |
| 10-22-92 | E | ECO 27,30,31,32 | FK |
| 02-05-93 | E | ECO 41,42,54 | DWW |
| 04-05-93 | E | ECO 61 | DWW |
| 09-12-95 | H | | |

SGC SG2000
 EXCITER FILT SEL/MOD/ALC-AGC
 J30100920 DOC
 4-8-90 SHEET 2 of 6

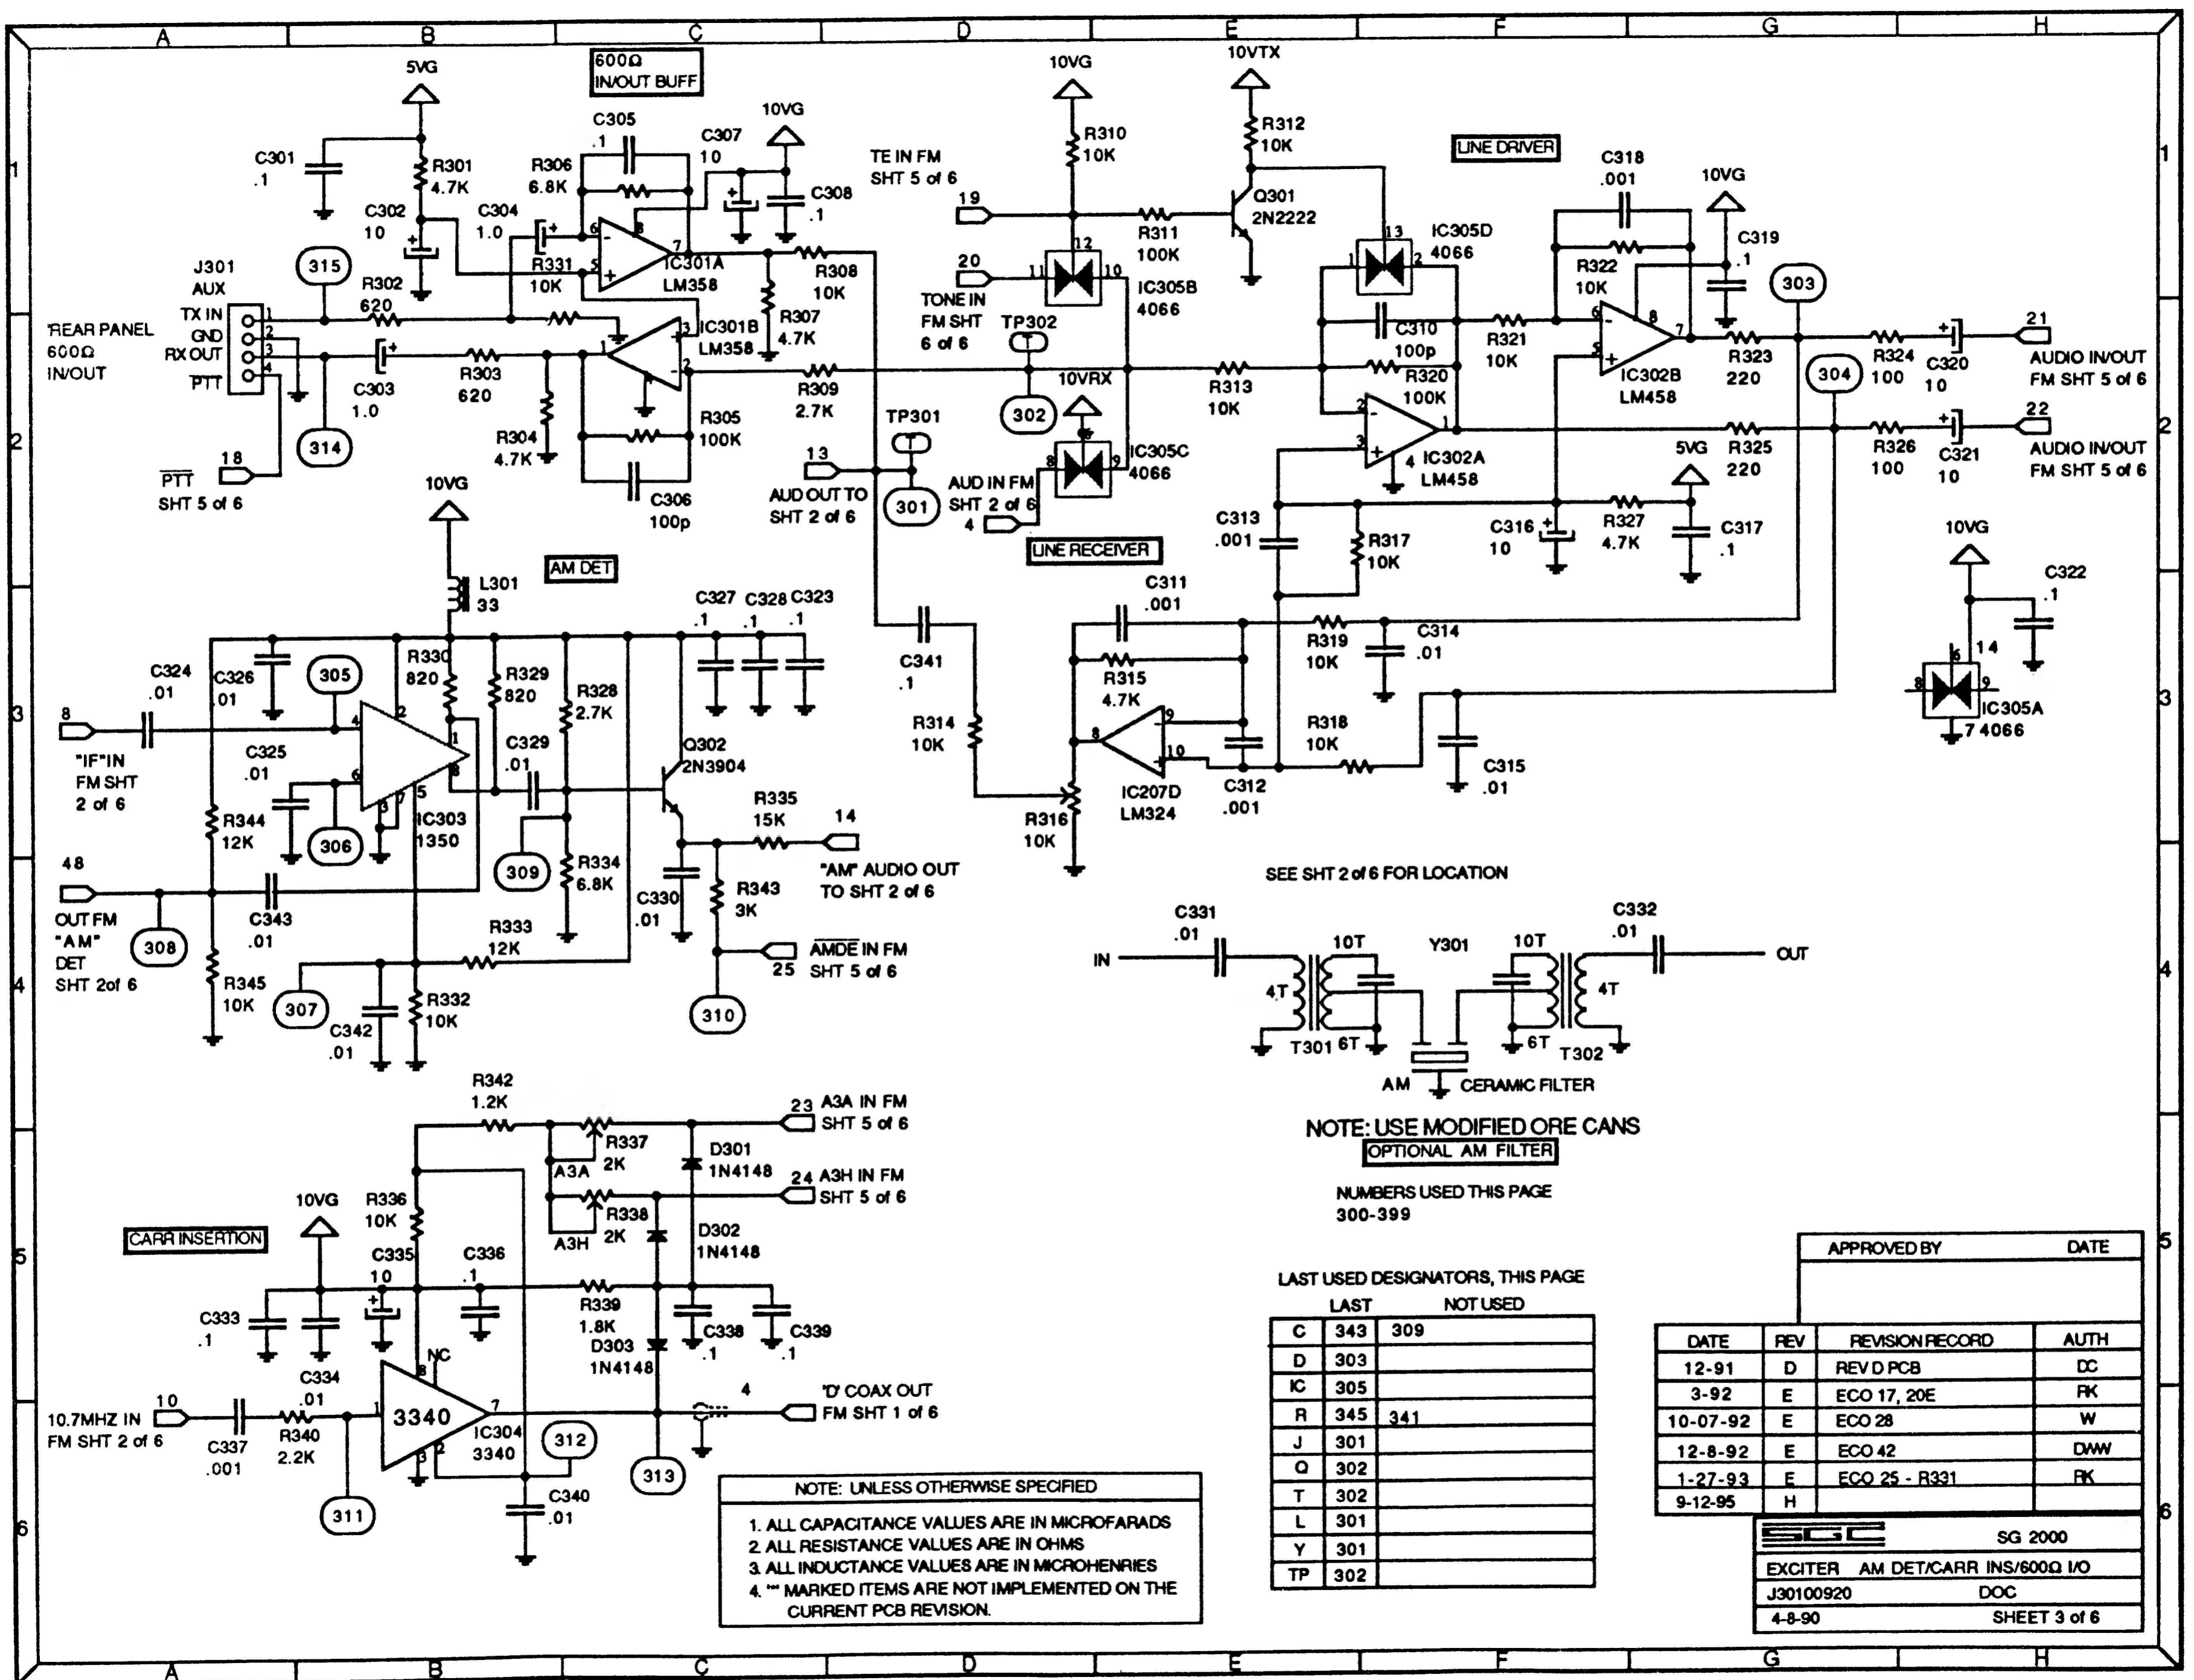

SEE SHT 2 of 6 FOR LOCATION

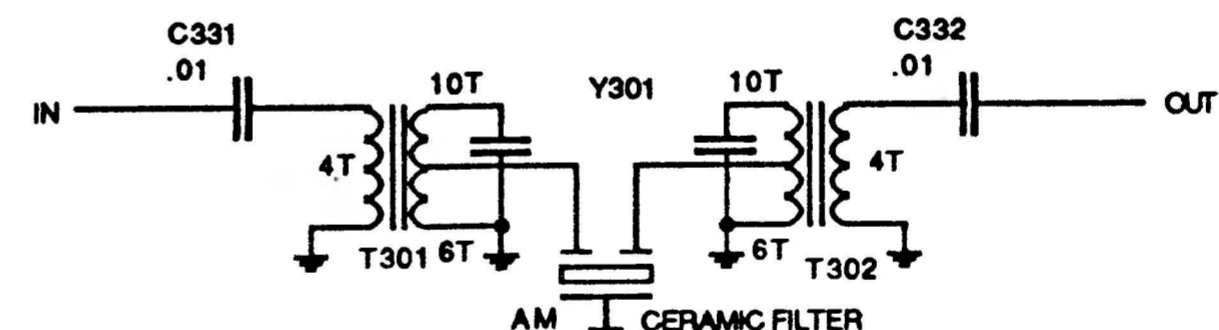

NOTE: USE MODIFIED ORE CANS
OPTIONAL AM FILTER

NUMBERS USED THIS PAGE
300-399

LAST USED DESIGNATORS, THIS PAGE


| | LAST | NOT USED |
|----|------|----------|
| C | 343 | 309 |
| D | 303 | |
| IC | 305 | |
| R | 345 | 341 |
| J | 301 | |
| Q | 302 | |
| T | 302 | |
| L | 301 | |
| Y | 301 | |
| TP | 302 | |

NOTE: UNLESS OTHERWISE SPECIFIED
1. ALL CAPACITANCE VALUES ARE IN MICROFARADS
2. ALL RESISTANCE VALUES ARE IN OHMS
3. ALL INDUCTANCE VALUES ARE IN MICROHENRIES
4. *** MARKED ITEMS ARE NOT IMPLEMENTED ON THE CURRENT PCB REVISION.

APPROVED BY _____ DATE _____

| DATE | REV | REVISION RECORD | AUTH |
|----------|-----|-----------------|------|
| 12-91 | D | REV D PCB | DC |
| 3-92 | E | ECO 17, 20E | FK |
| 10-07-92 | E | ECO 28 | W |
| 12-8-92 | E | ECO 42 | DWW |
| 1-27-93 | E | ECO 25 - R331 | FK |
| 9-12-95 | H | | |

SGC SG 2000
EXCITER AM DET/CARR INS/600Ω I/O
J30100920 DOC
4-8-90 SHEET 3 of 6

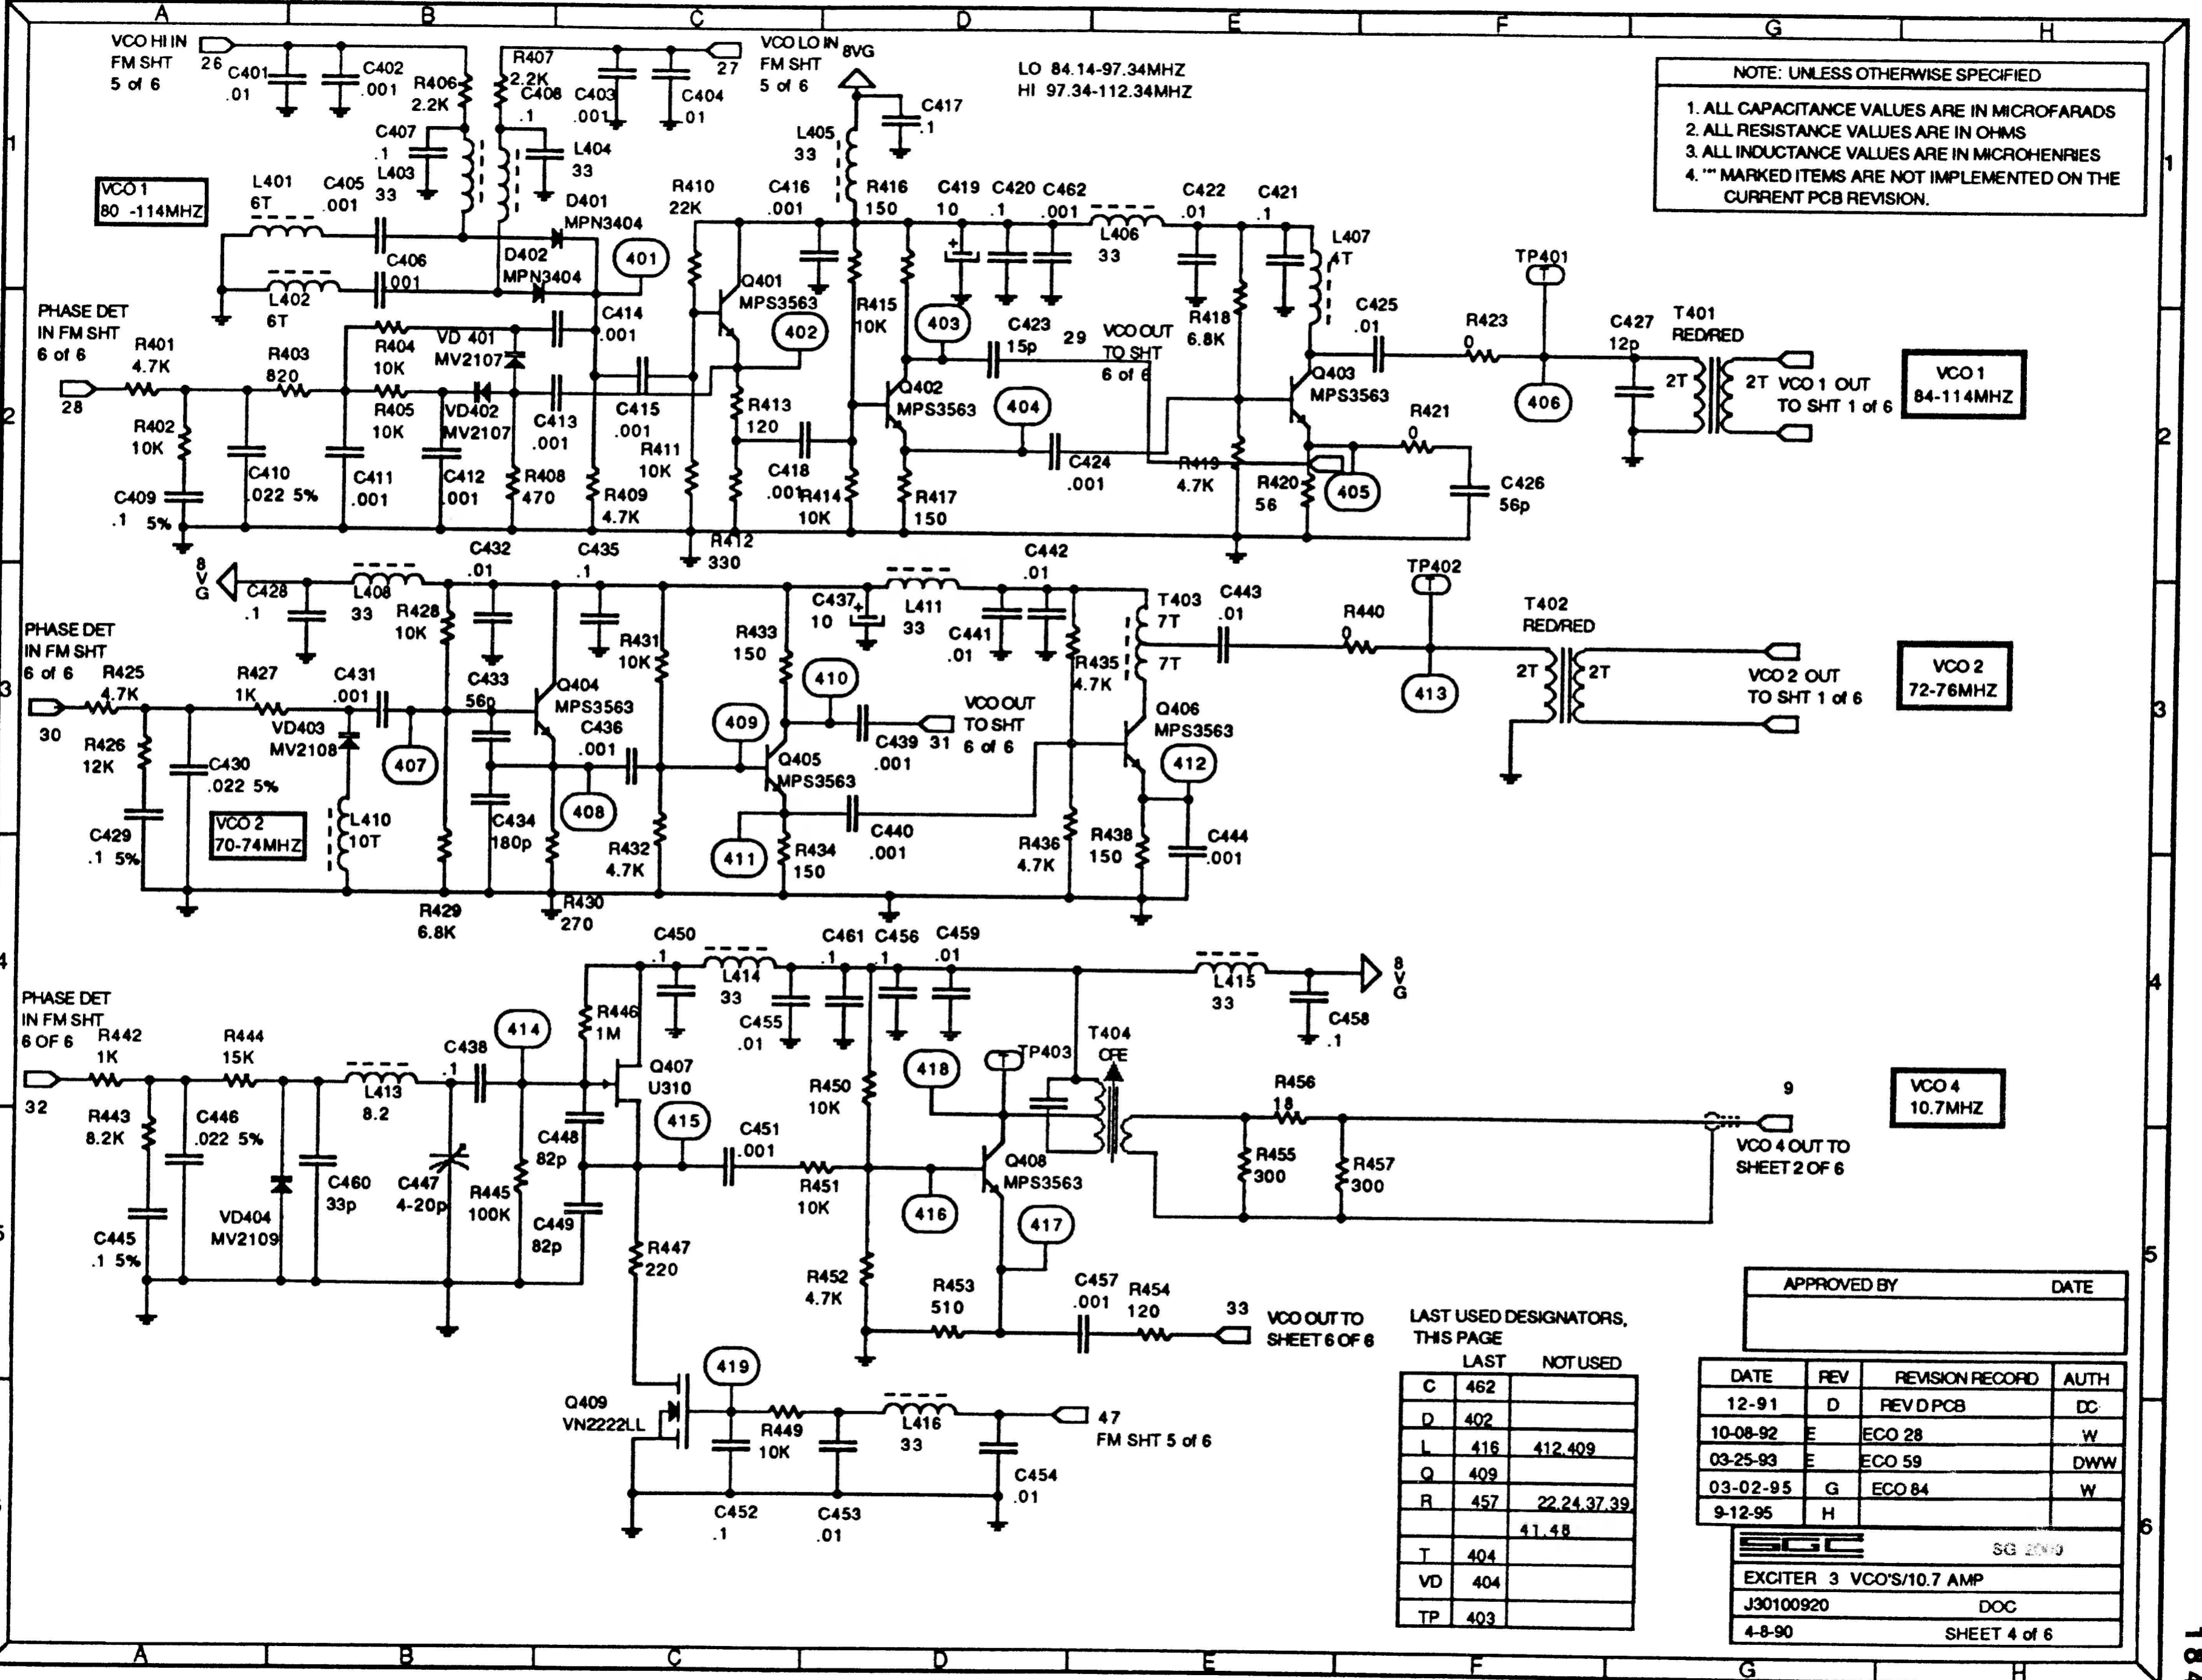

LO 84.14-97.34MHZ
HI 97.34-112.34MHZ

NOTE: UNLESS OTHERWISE SPECIFIED
1. ALL CAPACITANCE VALUES ARE IN MICROFARADS
2. ALL RESISTANCE VALUES ARE IN OHMS
3. ALL INDUCTANCE VALUES ARE IN MICROHENRIES
4. '' MARKED ITEMS ARE NOT IMPLEMENTED ON THE CURRENT PCB REVISION.

VCO 1
80-114MHZ

VCO 1
84-114MHZ

VCO 2
70-74MHZ

VCO 2
72-76MHZ

VCO 4
10.7MHZ


LAST USED DESIGNATORS, THIS PAGE

| | LAST | NOT USED |
|----|------|----------------|
| C | 462 | |
| D | 402 | |
| L | 416 | 412, 409 |
| Q | 409 | |
| R | 457 | 22, 24, 37, 39 |
| | | 41, 48 |
| T | 404 | |
| VD | 404 | |
| TP | 403 | |

APPROVED BY _____ DATE _____

| DATE | REV | REVISION RECORD | AUTH |
|----------|-----|-----------------|------|
| 12-91 | D | REV D PCB | DC |
| 10-08-92 | E | ECO 28 | W |
| 03-25-93 | E | ECO 59 | DWW |
| 03-02-95 | G | ECO 84 | W |
| 9-12-95 | H | | |

SGC SG 2010
EXCITER 3 VCO'S/10.7 AMP
J30100920 DOC
4-8-90 SHEET 4 of 6

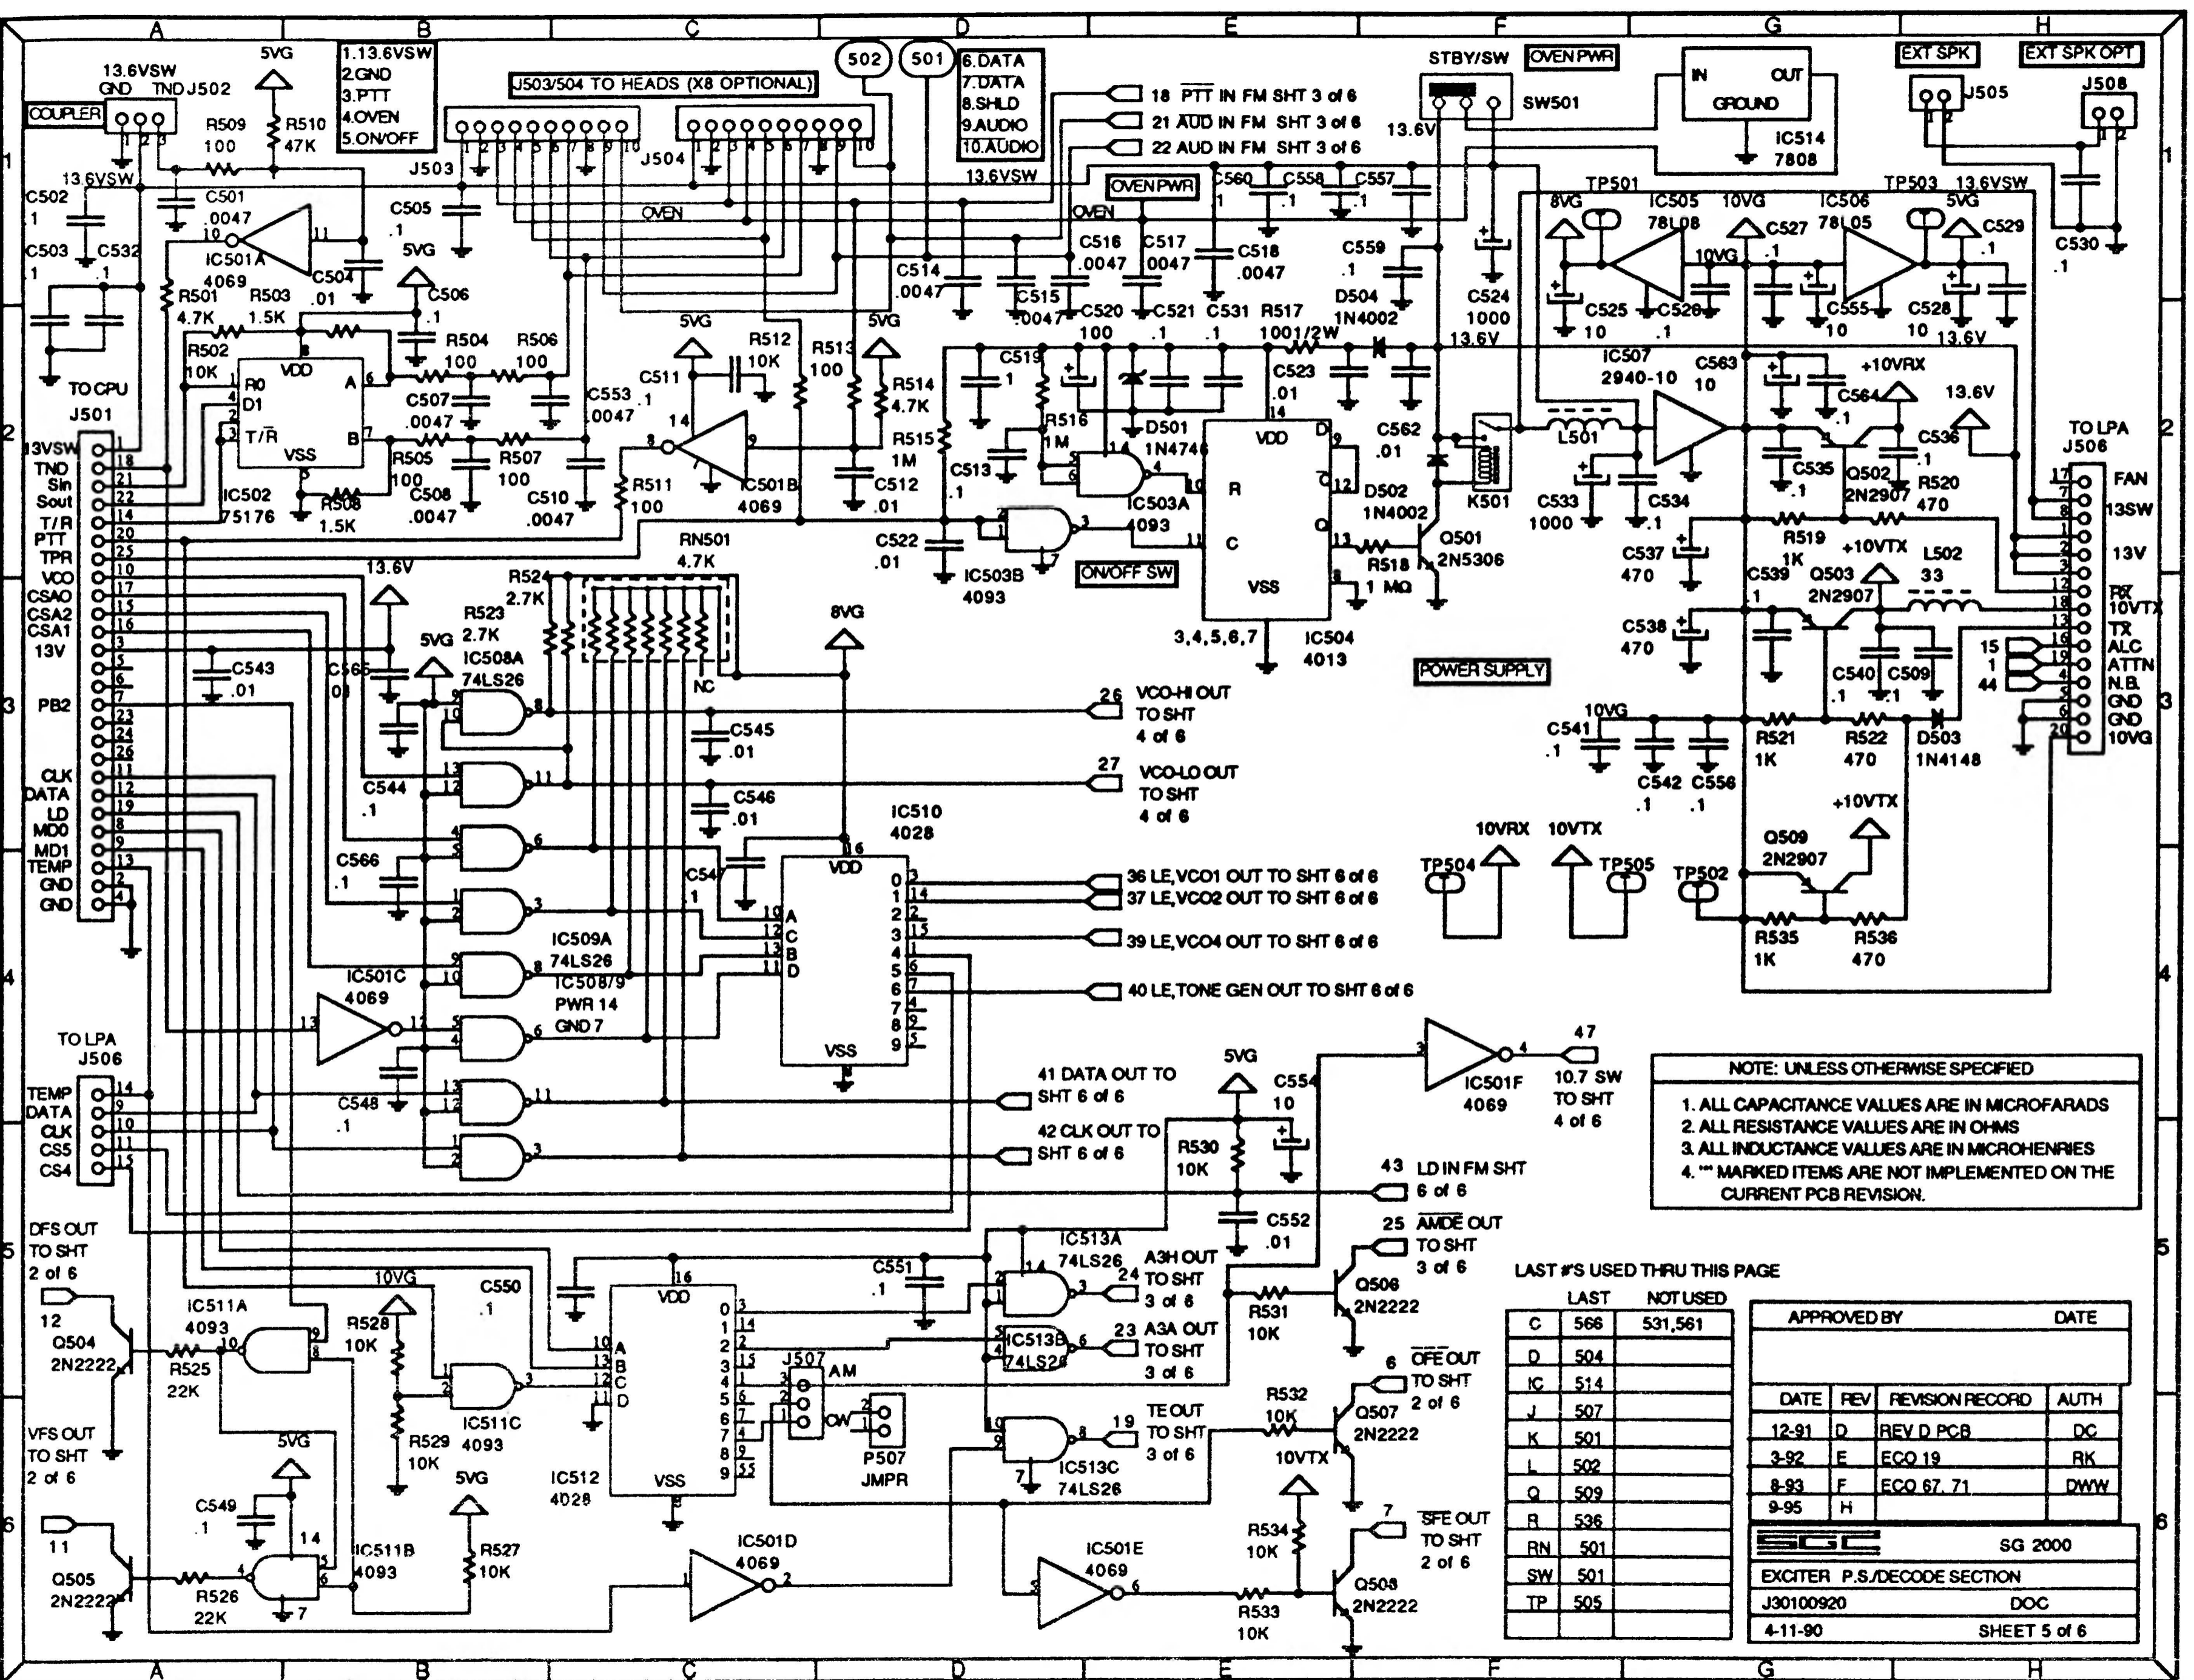


NOTE: UNLESS OTHERWISE SPECIFIED
 1. ALL CAPACITANCE VALUES ARE IN MICROFARADS
 2. ALL RESISTANCE VALUES ARE IN OHMS
 3. ALL INDUCTANCE VALUES ARE IN MICROHENRIES
 4. ** MARKED ITEMS ARE NOT IMPLEMENTED ON THE CURRENT PCB REVISION.

LAST #'S USED THRU THIS PAGE

| | LAST | NOT USED |
|----|------|----------|
| C | 566 | 531,561 |
| D | 504 | |
| IC | 514 | |
| J | 507 | |
| K | 501 | |
| L | 502 | |
| Q | 509 | |
| R | 536 | |
| RN | 501 | |
| SW | 501 | |
| TP | 505 | |

| APPROVED BY | | DATE | |
|-------------|-----|-----------------|------|
| DATE | REV | REVISION RECORD | AUTH |
| 12-91 | D | REV D PCB | DC |
| 3-92 | E | ECO 19 | RK |
| 8-93 | F | ECO 67, 71 | DWW |
| 9-95 | H | | |

SGC SG 2000
 EXCITER P.S./DECODE SECTION
 J30100920 DOC
 4-11-90 SHEET 5 of 6

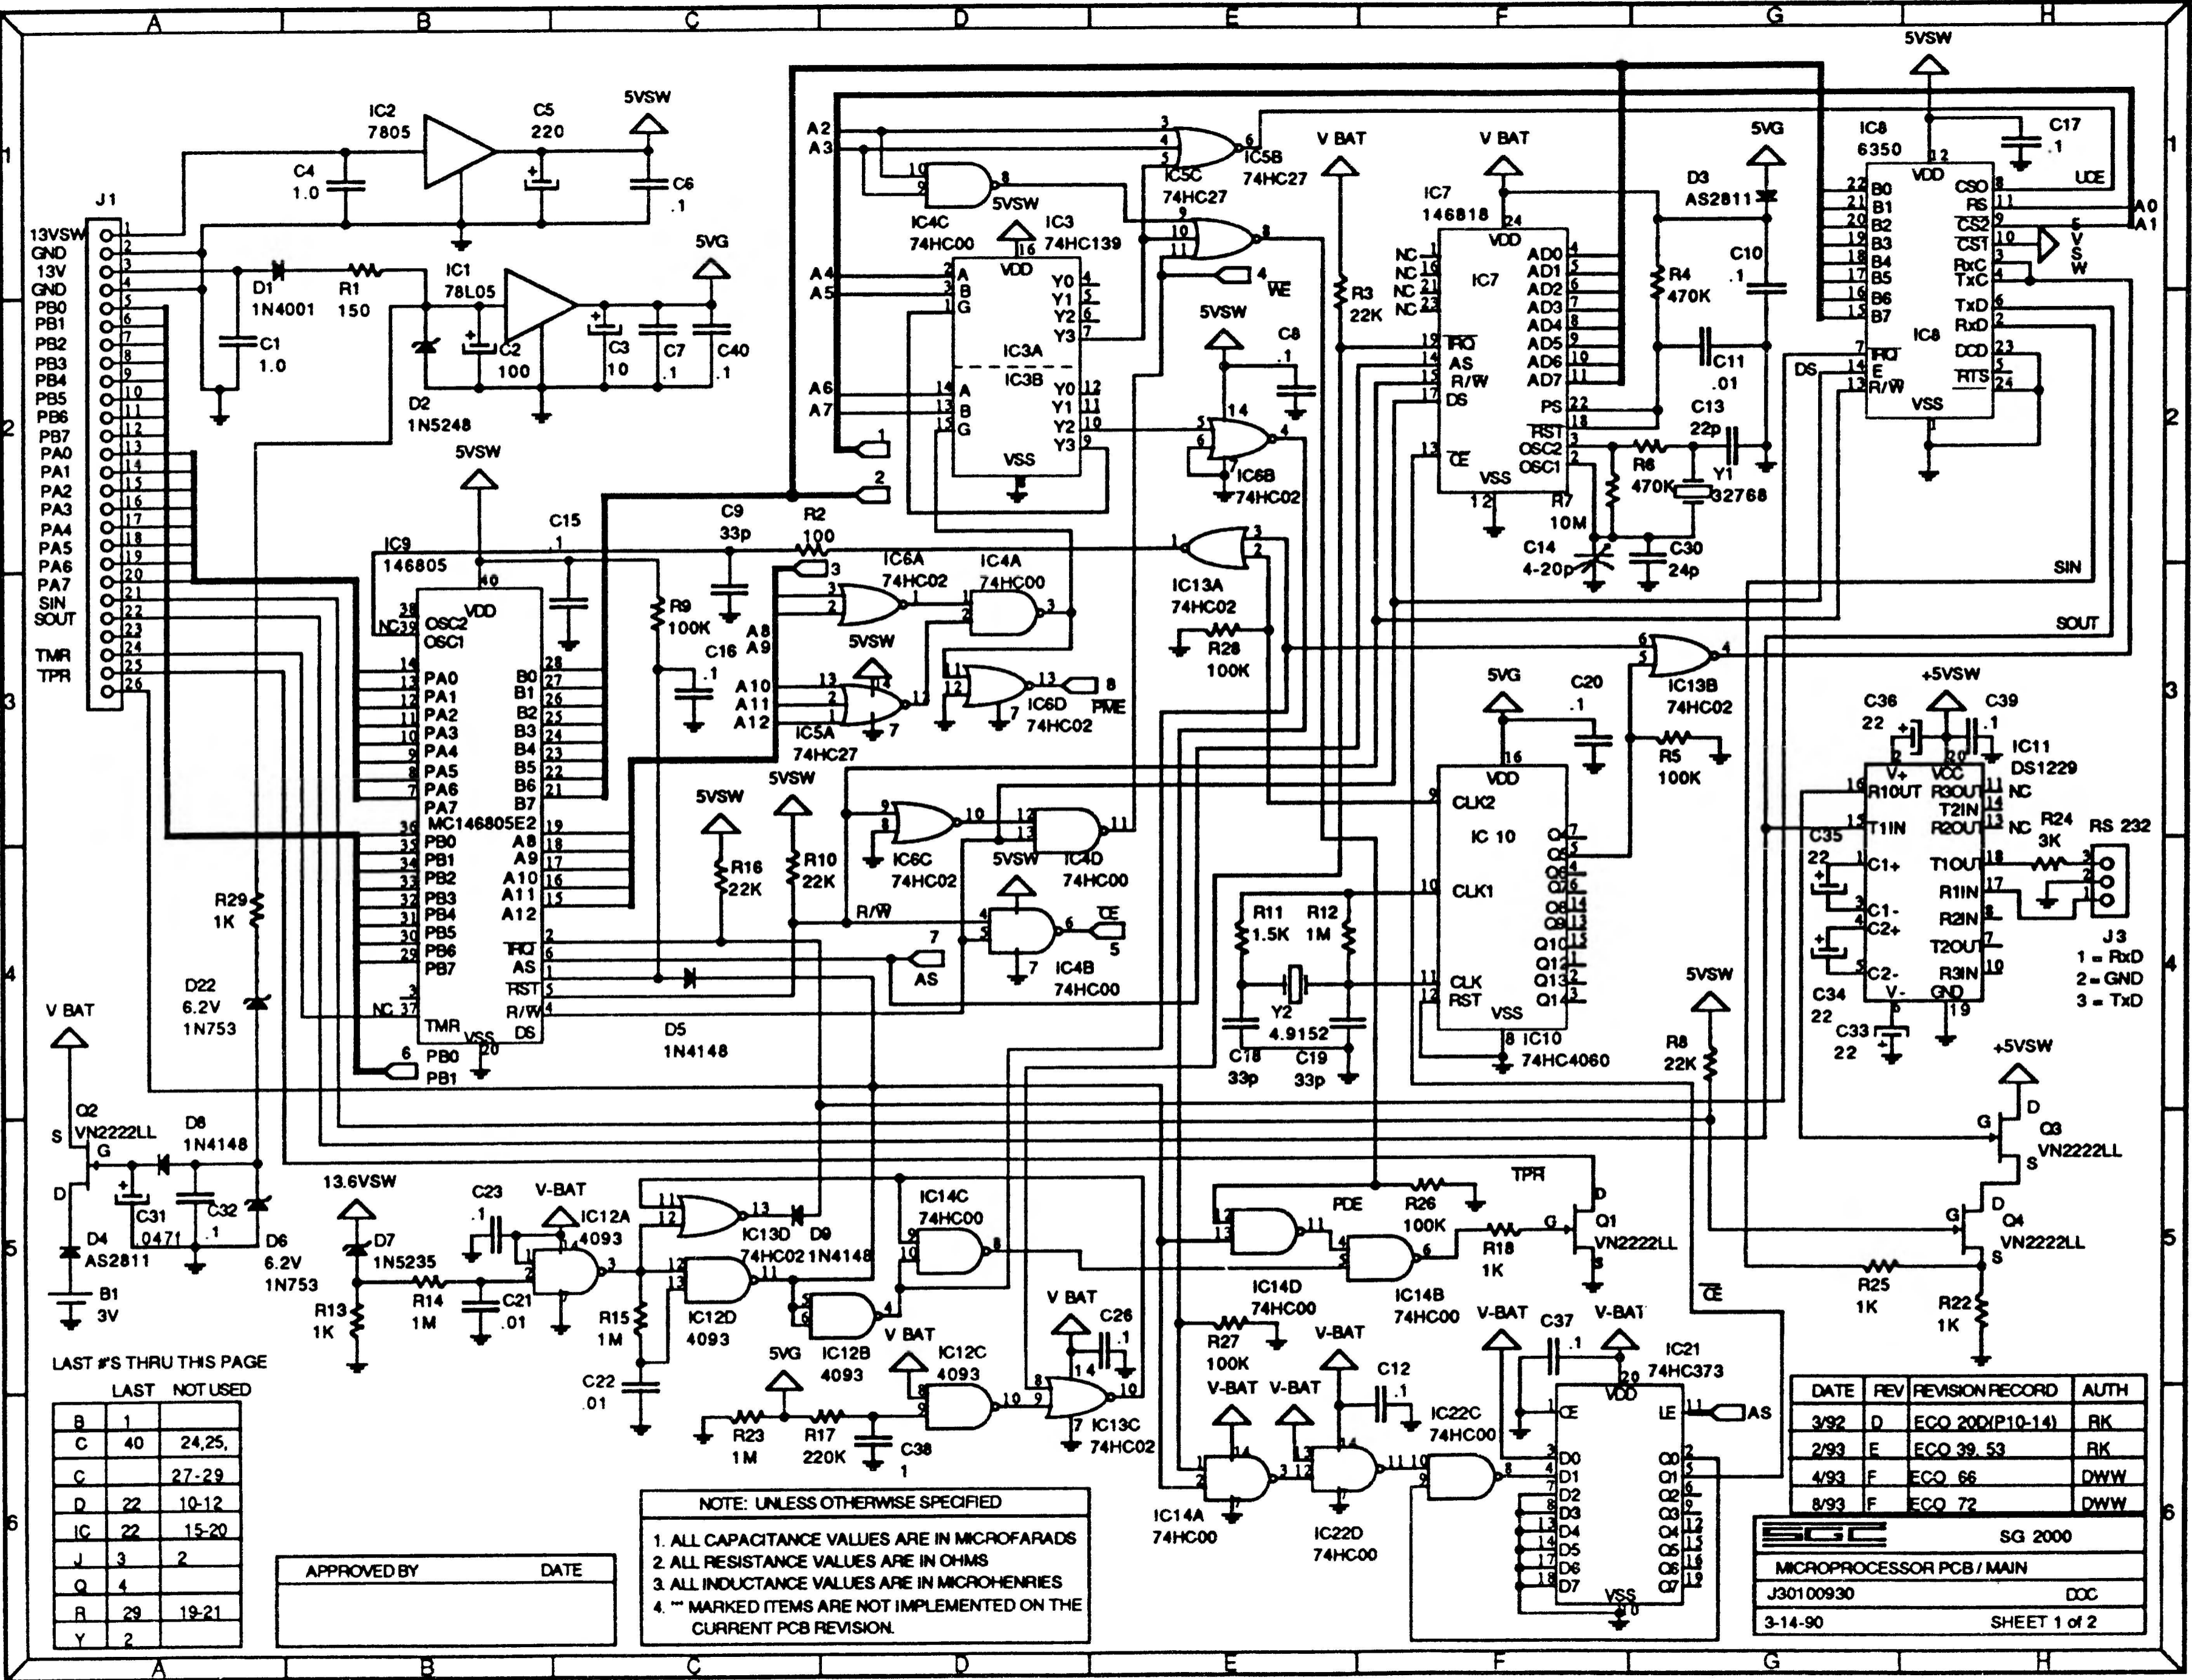

LAST #S THRU THIS PAGE

| Grid | Count | Not Used |
|------|-------|----------|
| B | 1 | |
| C | 40 | 24,25, |
| C | | 27-29 |
| D | 22 | 10-12 |
| IC | 22 | 15-20 |
| J | 3 | 2 |
| Q | 4 | |
| R | 29 | 19-21 |
| Y | 2 | |

APPROVED BY _____ DATE _____


NOTE: UNLESS OTHERWISE SPECIFIED

1. ALL CAPACITANCE VALUES ARE IN MICROFARADS
2. ALL RESISTANCE VALUES ARE IN OHMS
3. ALL INDUCTANCE VALUES ARE IN MICROHENRIES
4. * MARKED ITEMS ARE NOT IMPLEMENTED ON THE CURRENT PCB REVISION.

| DATE | REV | REVISION RECORD | AUTH |
|------|-----|-----------------|------|
| 3/92 | D | ECO 20D(P10-14) | RK |
| 2/93 | E | ECO 39, 53 | RK |
| 4/93 | F | ECO 66 | DWW |
| 8/93 | F | ECO 72 | DWW |

SGC SG 2000
 MICROPROCESSOR PCB / MAIN
 J30100930 DCC
 3-14-90 SHEET 1 of 2

| DATE | REV | REVISION RECORD | AUTH |
|----------|-----|-----------------|------|
| 3-28-94 | A | Released | CM |
| 7-29-94 | B | Revision | W |
| 12-15-94 | C | Revision | W |
| | | | |
| | | | |

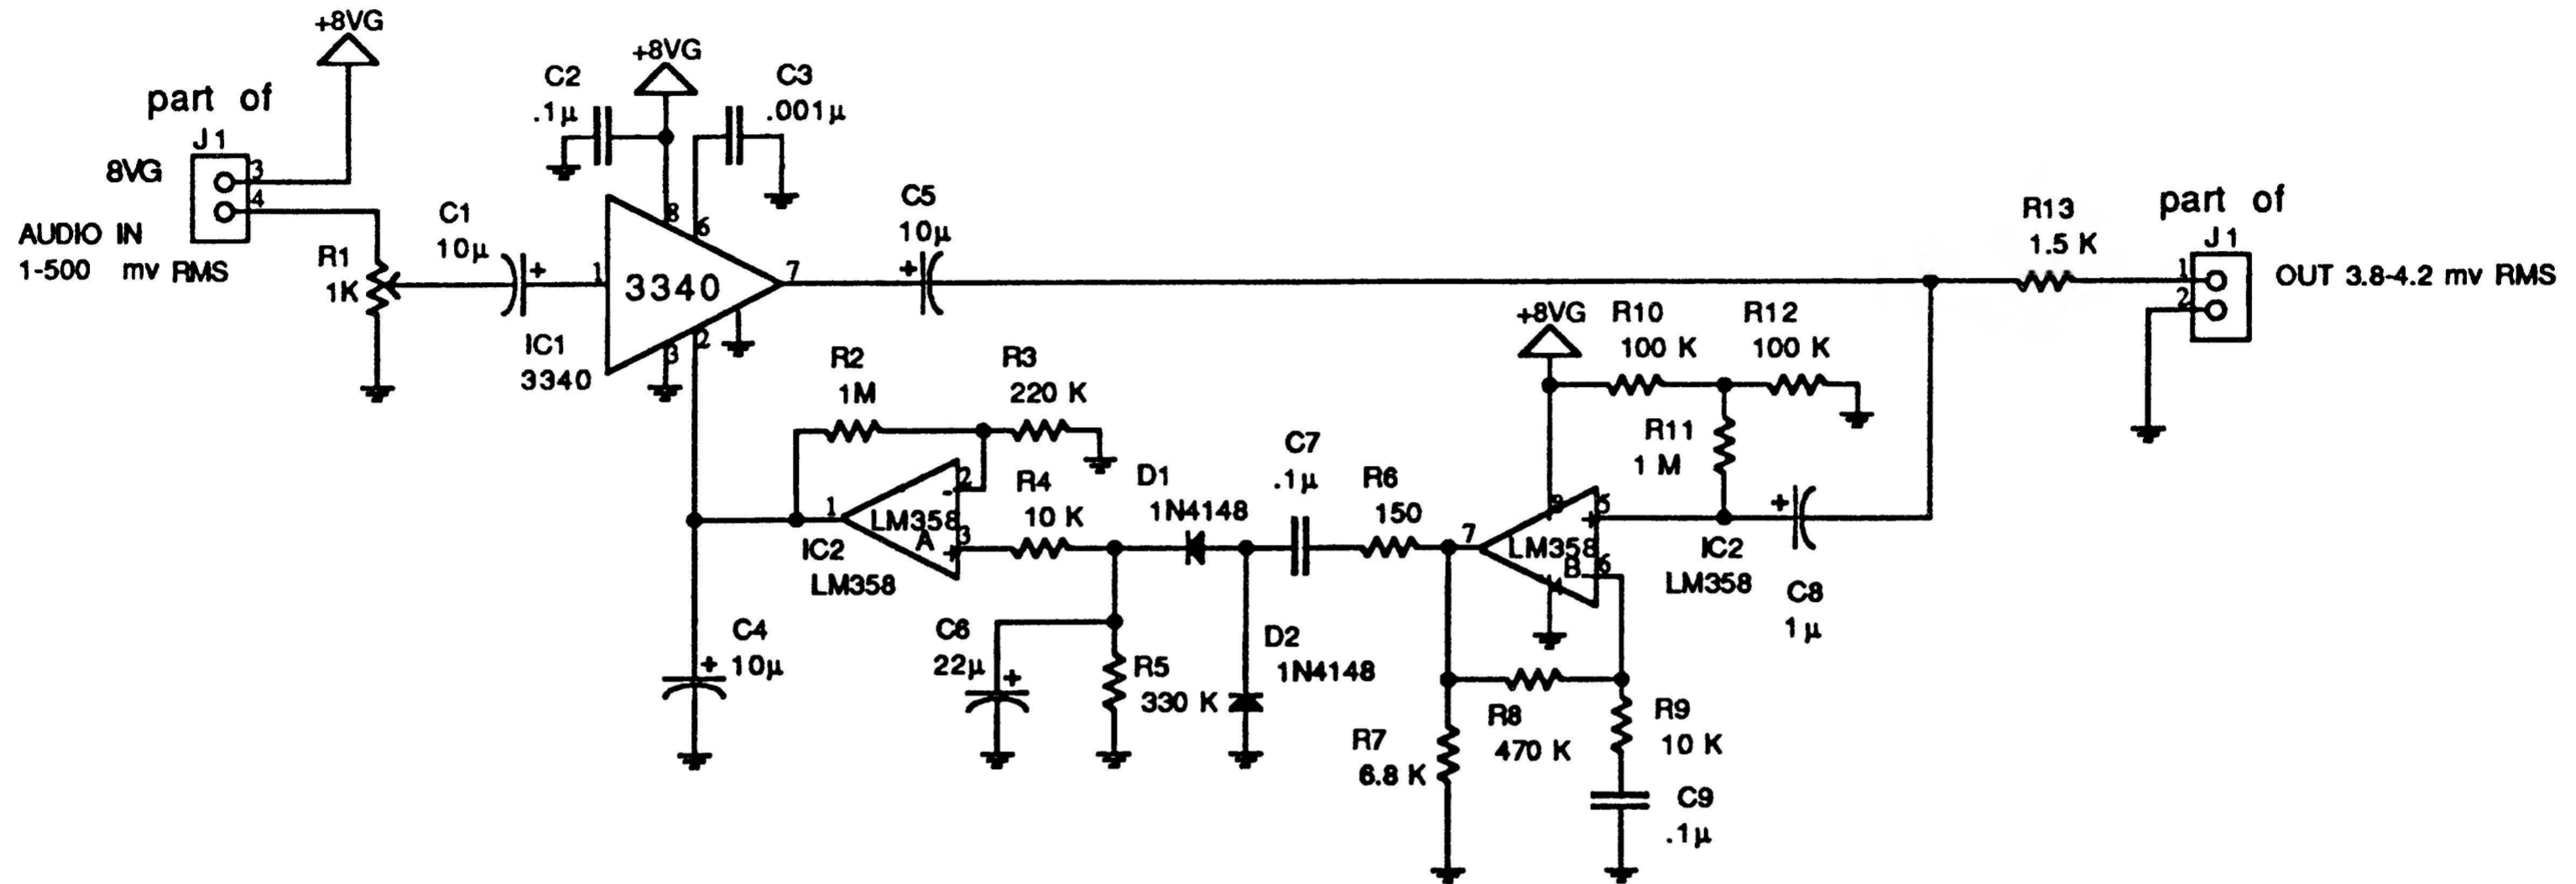

REVISION NOTES:

REV B

- C1 and C5 changed from 1 to 10 µf to improve frequency response
- C6 changed from 10 to 22 µf and R5 changed from 100 to 330 KΩ to increase discharge time to eliminate pumping
- R6 changed from 1K to 150 Ω to reduce charge time to 2 mSec
- R8 changed from 1M to 470 KΩ and R3 changed from 100K to 220KΩ to reduce sensitivity to 3 mV RMS
- R13 added to center MIC GAIN adjustment potentiometer

REVC


Exchanged A and B op amp sections to simplify PCB construction

LAST USED DESIGNATORS, THIS PAGE

| | LAST | NOTUSED |
|----|------|---------|
| C | 9 | |
| R | 13 | |
| D | 2 | |
| IC | 2 | |
| J | 2 | |

| APPROVED BY | DATE |
|-------------|------|
| | |

| | |
|------------------|--------------|
| SGC | SG2000 |
| SG2000E01 MIC IN | |
| J30100913 | CALIN |
| 3-28-1994 | SHEET 1 OF 1 |

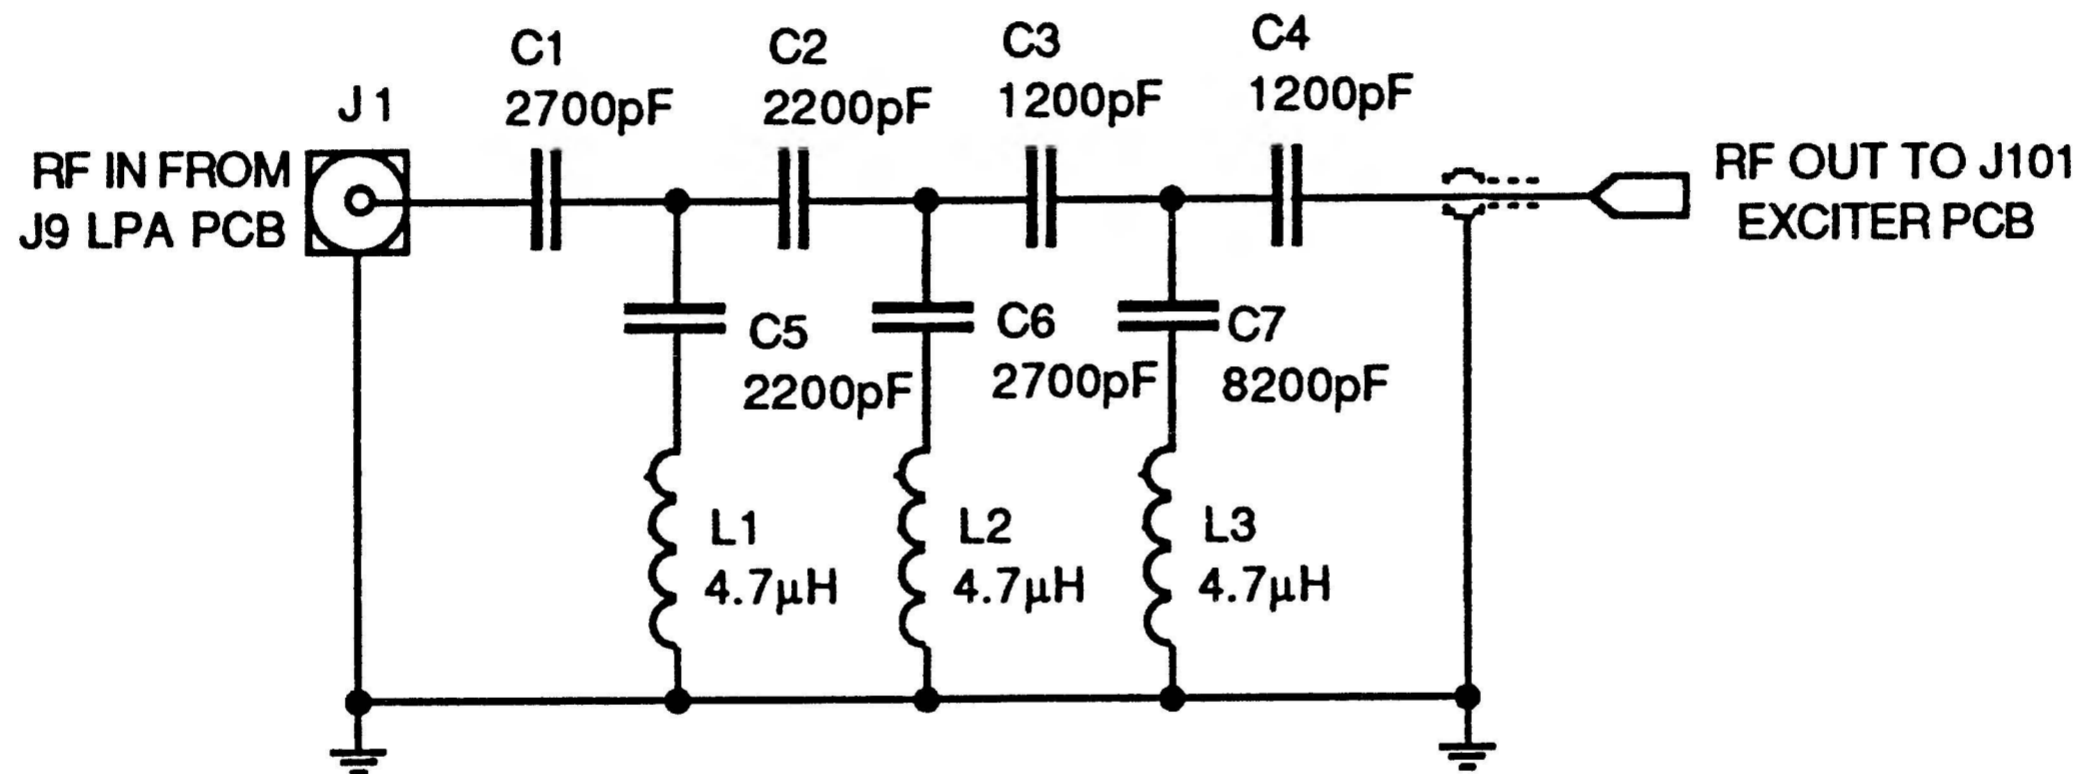

LAST #S THRU THIS PAGE
USED NOT USED

| | | | DATE | REV | REVISION RECORD | AUTH |
|---|---|--|------|-----|-----------------|------|
| C | 7 | | 8-92 | A | RELEASED | W |
| J | 1 | | | | | |
| L | 3 | | | | | |
| | | | | | | |

| | |
|------------------------------------|--------------|
| SGC | SG 2000 |
| AM RADIO REJECTION FILTER (OPTION) | |
| J30100921 | RK |
| 8 / 27 / 92 | SHEET 1 OF 1 |