# INSTRUCTION SUPPLEMENT

# FOR

# WJ-8716 HF RECEIVER

## INTRODUCTION

The WJ-8716 HF Receiver is a modified version of the WJ-8718 HF Receiver. An outline of the electrical and mechanical differences as well as supplemental parts list and schematic diagrams are included in this supplement. This manual supersedes previous supplements of the WJ-8716. All other technical information in the WJ-8718 HF Receiver Instruction Manual also pertains to the WJ-8716 HF Receiver.

WATKINS—JOHNSON COMPANY
700 Quince Orchard Road
Gaithersburg, Maryland 20878

Revision I 8/79

June 18, 1985
ADDENDUM I

## PURPOSE OF ADDENDUM

The information in this addendum is provided to correct and update the WJ-8718 Series HF Receiver Instruction Manual.

Specifically, this addendum replaces a previously issued Field Bulletin, dated February 8, 1985, concerning spare parts for the WJ-871X VCO Assembly 791629. The field bulletin delineated four possible replacement parts for IC U1 (divide-by-4) on the 1st LO VCO P.W.A., depending on the board revision level and on-hand availability of the replacement part.

This addendum describes a direct replacement part for U1, Part No. SP8610A. This 14-pin chip directly fits the 1st LO VCO P.W.A., regardless of its board revision level and without the need of a transition board. This information should be incorporated in the parts list of the WJ-8718 Series HF Receiver Instruction Manual as indicated below.

1.1 Paragraph 5.6.5.1.1.1, page 5-63, Part 34750 parts list should be corrected as follows:

1. **From:** U1, Integrated Circuit, Qty 1, Part No. MC197L, Mfr. Code 04713

   **To:** U1, Integrated Circuit, Qty 1, Part No. SP8610A, Mfr. Code 52648

June 18, 1985
ADDENDUM II

The information in this addendum is provided to correct and update the WJ-8718 Series HF Receiver Instruction Manual.

1.1 Paragraph 5.6.8, Type 791578-1 Frequency Display parts list, page 5-90, should be corrected as follows:

**From:** U8, Integrated Circuit, Qty 1, Part No. DS8857N, Mfr. Code 27014

**To:** U8, Integrated Circuit, Qty 1, Part No. MM74C48N, Mfr. Code 27014

1.2 Revise Type 791578-1 Frequency Display (A8) schematic diagram, page 6-49, as shown.

**From:**




**To:**



REVISION
WJ-8718 SERIES HF RECEIVER

| | |
|---|---|
| TITLE: | INSTRUCTION MANUAL FOR WJ-8718 SERIES RECEIVER |
| INSTRUCTION MANUAL DATE: | OCTOBER 1983 |
| REVISION DATE: | AUGUST 1, 1988 |
| APPLICABILITY: | All WJ-8718 Series Receivers |
| CHANGE INFORMATION: | Modification of the 3rd LO Output Level |
| CHANGE: | Change the second sentence of step number 5 of paragraph 4.3.5.18.1, on page 4-50 of the WJ-8718 HF Receiver Instruction Manual |

FROM:

"The voltmeter should indicate -6 dBm +/-2 dB."

TO:

"The voltmeter should indicate -8 dBm minimum".

ERRATA: None

# WJ-8718 SERIES HF RECEIVER
# CHANGE 1

| | |
|---|---|
| TITLE: | INSTRUCTION MANUAL FOR THE WJ-8718 SERIES HF RECEIVER |
| MANUAL DATE: | October 1983 |
| CHANGE 1 DATE: | July 1990 |
| APPLICABILITY: | All units. |
| CHANGES/ERRATA INFORMATION: | Changes refer to updates of the manual to cover design modifications. Errata refer to corrections and clarifications of information in the manual. |
| CHANGE SUMMARY: | This change covers a correction to Section IV of the manual regarding measured signal levels in the RF Filter assembly. It also reflects minor, non-electrical modifications to schematic diagram 51198 for the Type 791629 Voltage-Controlled Oscillator, A5A1A1. |

ERRATA:

**Paragraph 4.3.5.2.1**, step 6, correct the sentence to read as follows:

6. The RF Voltmeter should indicate a level between 0 dBm and -2.0 dBm.

CHANGES:

Replace **Figure 6-16, Type 791629 1st LO VCO Assembly (A5A1A1),** with the attached drawing.

# TABLE OF CONTENTS


| Paragraph | | Page |
|---|---|---|
| 7.1 | General | 7-1 |
| 7.2 | Electrical Differences | 7-1 |
| 7.3 | Mechanical Differences | 7-1 |
| 7.4 | Replacement Parts List and Schematic Diagrams | 7-1 |

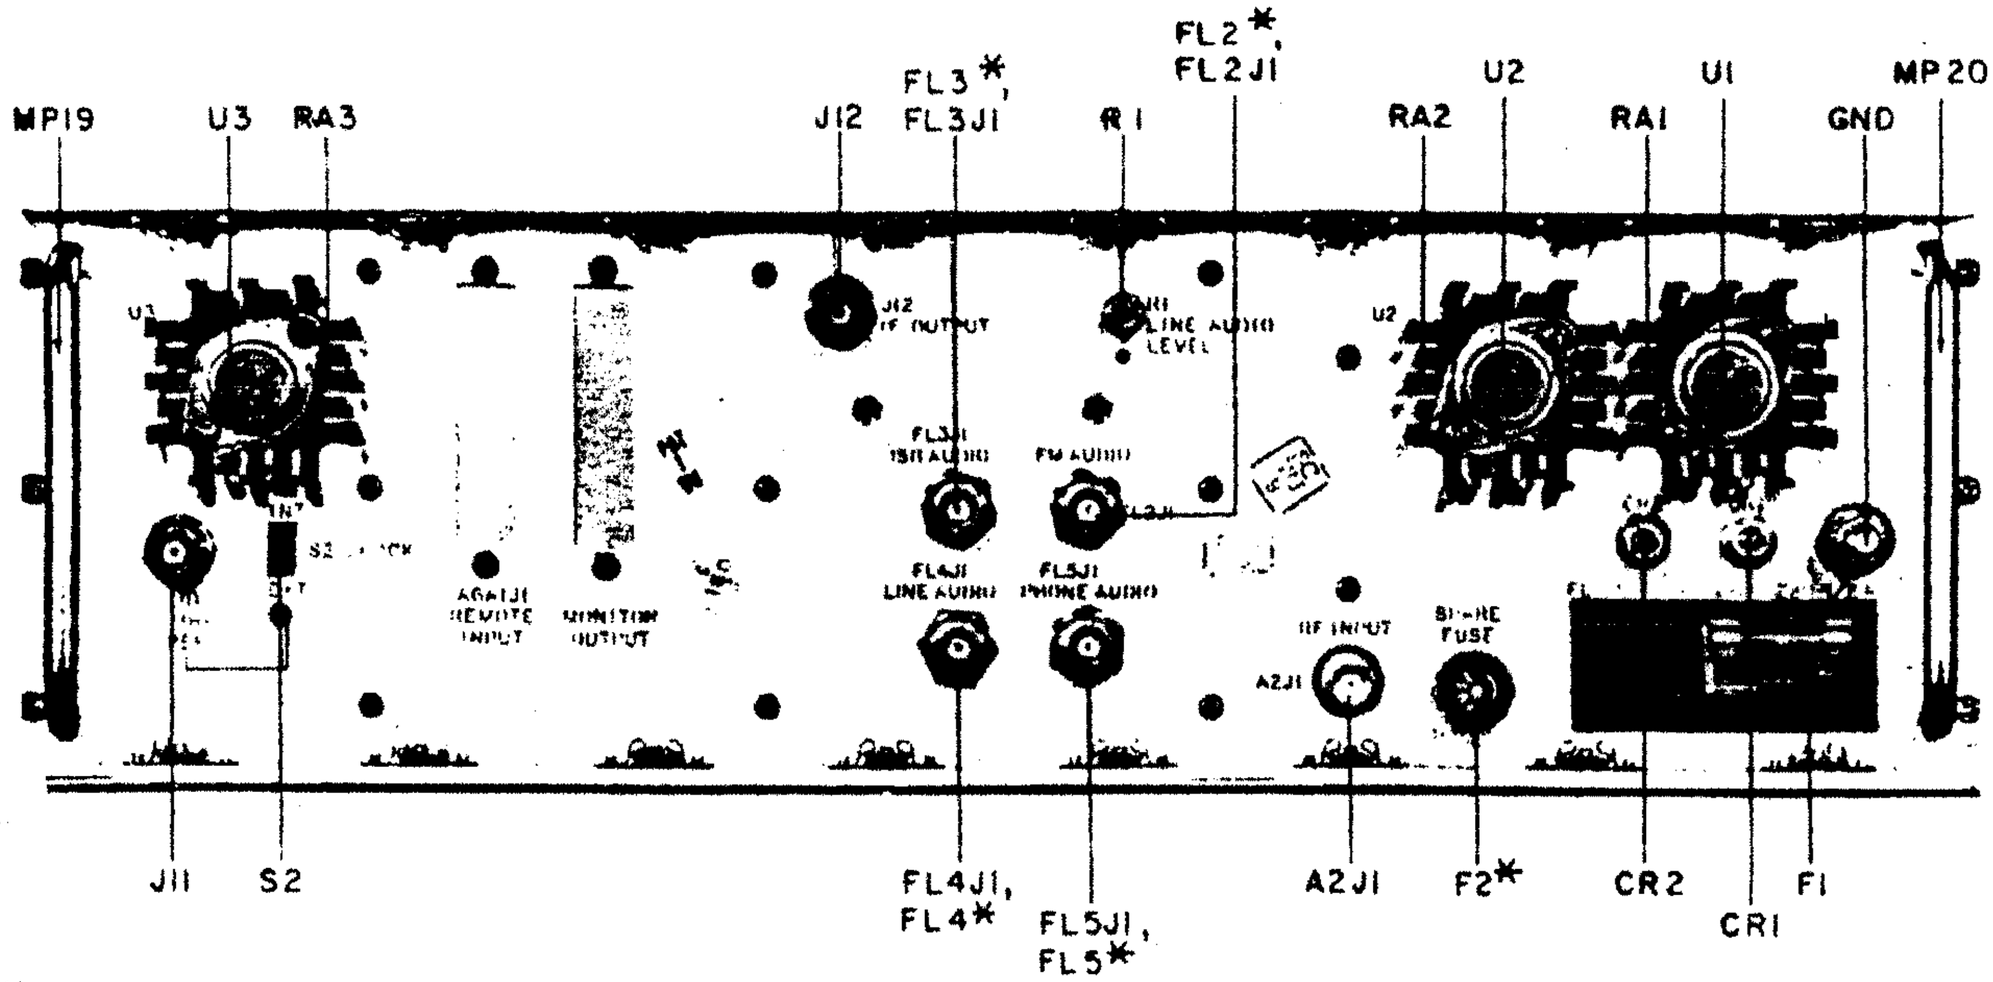

# LIST OF ILLUSTRATIONS


| Figure | | Page |
|---|---|---|
| 7-1 | WJ-8716 Main Chassis Rear Panel View | 7-4 |
| 7-2 | Type 796010 RF Filter | 7-6 |
| 7-3 | Phone Jack Assembly | 7-10 |
| 7-4 | Type 280017 Audio Attenuator | 7-11 |

| Mfr. Code | Name and Addresss |
|---|---|
| 04013 | Taurus Corporation<br>1 Academy Hill<br>Lambertville, NJ 08530 |

7.5 TYPE WJ-8716 HF RECEIVER, MAIN CHASSIS

| REF DESIG | DESCRIPTION | QTY. PER ASSY. | MANUFACTURER'S PART NO. | MFR. CODE | RECM. VENDOR |
|---|---|---|---|---|---|
| | With the exception of those items listed below, the WJ-8716 HF Receiver is electrically identical to the WJ-8718 HF Receiver. | | | | |
| A2 | RF Filter | 1 | 796010 | 14632 | |
| A10 | Front Panel Control | 1 | 791684-3 | 14632 | |
| A11 | Phone Jack Assembly | 1 | 796011 | 14632 | |
| A12 | Audio Attenuator | 1 | 280017 | 14632 | |
| E5 | Terminal, Feedthru | 4 | SFU16Y | 04013 | |
| E6 | Same as E5 | | | | |
| E7 | Same as E5 | | | | |
| E8 | Same as E5 | | | | |
| FL2 | Filter, LP | 4 | 52-713-301 | 33095 | |
| FL3 | Same as FL2 | | | | |
| FL4 | Same as FL2 | | | | |
| FL5 | Same as FL2 | | | | |
| J13 | Not Used | | | | |
| P21 | Faston Receptacle | 6 | 42236-1 | 00779 | |
| P25 | Connector, Plug, Receptacle | 4 | 2-350804-2 | 00779 | |
| P26 | Same as P21 | | | | |
| P27 | Same as P25 | | | | |
| P28 | Same as P21 | | | | |
| P29 | Same as P21 | | | | |
| P32 | Same as P21 | | | | |
| P49 | Same as P25 | | | | |
| P50 | Same as P21 | | | | |
| P51 | Same as P25 | | | | |
| T1 | Transformer | 1 | SCD34518 | 14632 | |
| T2 | Not Used | | | | |
| TB1 | Not Used | | | | |
| TB2 | Not Used | | | | |




*DENOTES HIDDEN PART

Figure 7-1. WJ-8716 Main Chassis Rear Panel View
Location of Components

7.5.1 TYPE 796010 RF FILTER REF DESIG PREFIX A2

| REF DESIG | DESCRIPTION | QTY. PER ASSY. | MANUFACTURER'S PART NO. | MFR. CODE | RECM. VENDOR |
|---|---|---|---|---|---|
| C1 | Capacitor, Ceramic, Disc: 0.47 μF, 20%, 100 V | 2 | 8131M100-651-474M | 72982 | |
| C2 | Same as C1 | | | | |
| C3 | Capacitor, Mica, Dipped: 20 pF, 5%, 500 V | 1 | CM05ED200J03 | 81349 | 72136 |
| C4 | Capacitor, Mica, Dipped: 68 pF, 2%, 500 V | 1 | CM05ED680G03 | 81349 | 72136 |
| C5 | Capacitor, Mica, Dipped: 10 pF ± 0.5 pF, 500 V | 2 | CM05CD100D03 | 81349 | 72136 |
| C6 | Capacitor, Mica, Dipped: 180 pF, 2%, 500 V | 3 | CM05FD181G03 | 81349 | 72136 |
| C7 | Same as C5 | | | | |
| C8 | Same as C6 | | | | |
| C9 | Capacitor, Mica, Dipped: 27 pF, 2%, 500 V | 1 | CM05ED270G03 | 81349 | 72136 |
| C10 | Same as C6 | | | | |
| C11 | Capacitor, Mica, Dipped: 15 pF, 5%, 500 V | 2 | CM05CD150J03 | 81349 | 72136 |
| C12 | Capacitor, Mica, Dipped: 200 pF, 2%, 500 V | 2 | CM05FD201G03 | 81349 | 72136 |
| C13 | Capacitor, Mica, Dipped: 220 pF, 2%, 500 V | 1 | CM05FD221G03 | 81349 | 72136 |
| C14 | Same as C11 | | | | |
| C15 | Same as C12 | | | | |
| C16 | Capacitor, Mica, Dipped: 120 pF, 2%, 500 V | 1 | CM05FD121G03 | 81349 | 72136 |
| C17 | Capacitor, Mica, Dipped: 47 pF, 2%, 500 V | 2 | CM05ED470G03 | 81349 | 72136 |
| C18 | Same as C17 | | | | |
| CR1 | Diode | 2 | 1N4449 | 80131 | 93332 |
| CR2 | Same as CR1 | | | | |
| E1 | Terminal, Forked | 1 | 140-1941-02-01 | 71279 | |
| J1 | Connector, Receptacle | 1 | UG1094/U | 80058 | 74868 |
| L1 | Coil, Torroidal | 2 | 20681-186 | 14632 | |
| L2 | Coil, Torroidal | 1 | 20681-187 | 14632 | |
| L3 | Same as L1 | | | | |
| L4 | Coil, Torroidal | 2 | 20681-188 | 14632 | |
| L5 | Coil, Torroidal | 2 | 20681-189 | 14632 | |
| L6 | Same as L5 | | | | |
| L7 | Same as L4 | | | | |
| L8 | Inductor | 1 | 21209-37 | 14632 | |
| L9 | Coil, Torroidal | 1 | 20681-202 | 14632 | |
| P1 | Connector, Plug | 1 | UG1466/U | 80058 | 19505 |
| R1 | Resistor, Fixed, Composition: 10 kΩ, 5%, 1/4 W | 1 | RCR07G103JS | 81349 | 01121 |
| VR1 | Diode, Zener: 6.2 V | 2 | 1N753A | 80131 | 04713 |
| VR2 | Same as VR1 | | | | |

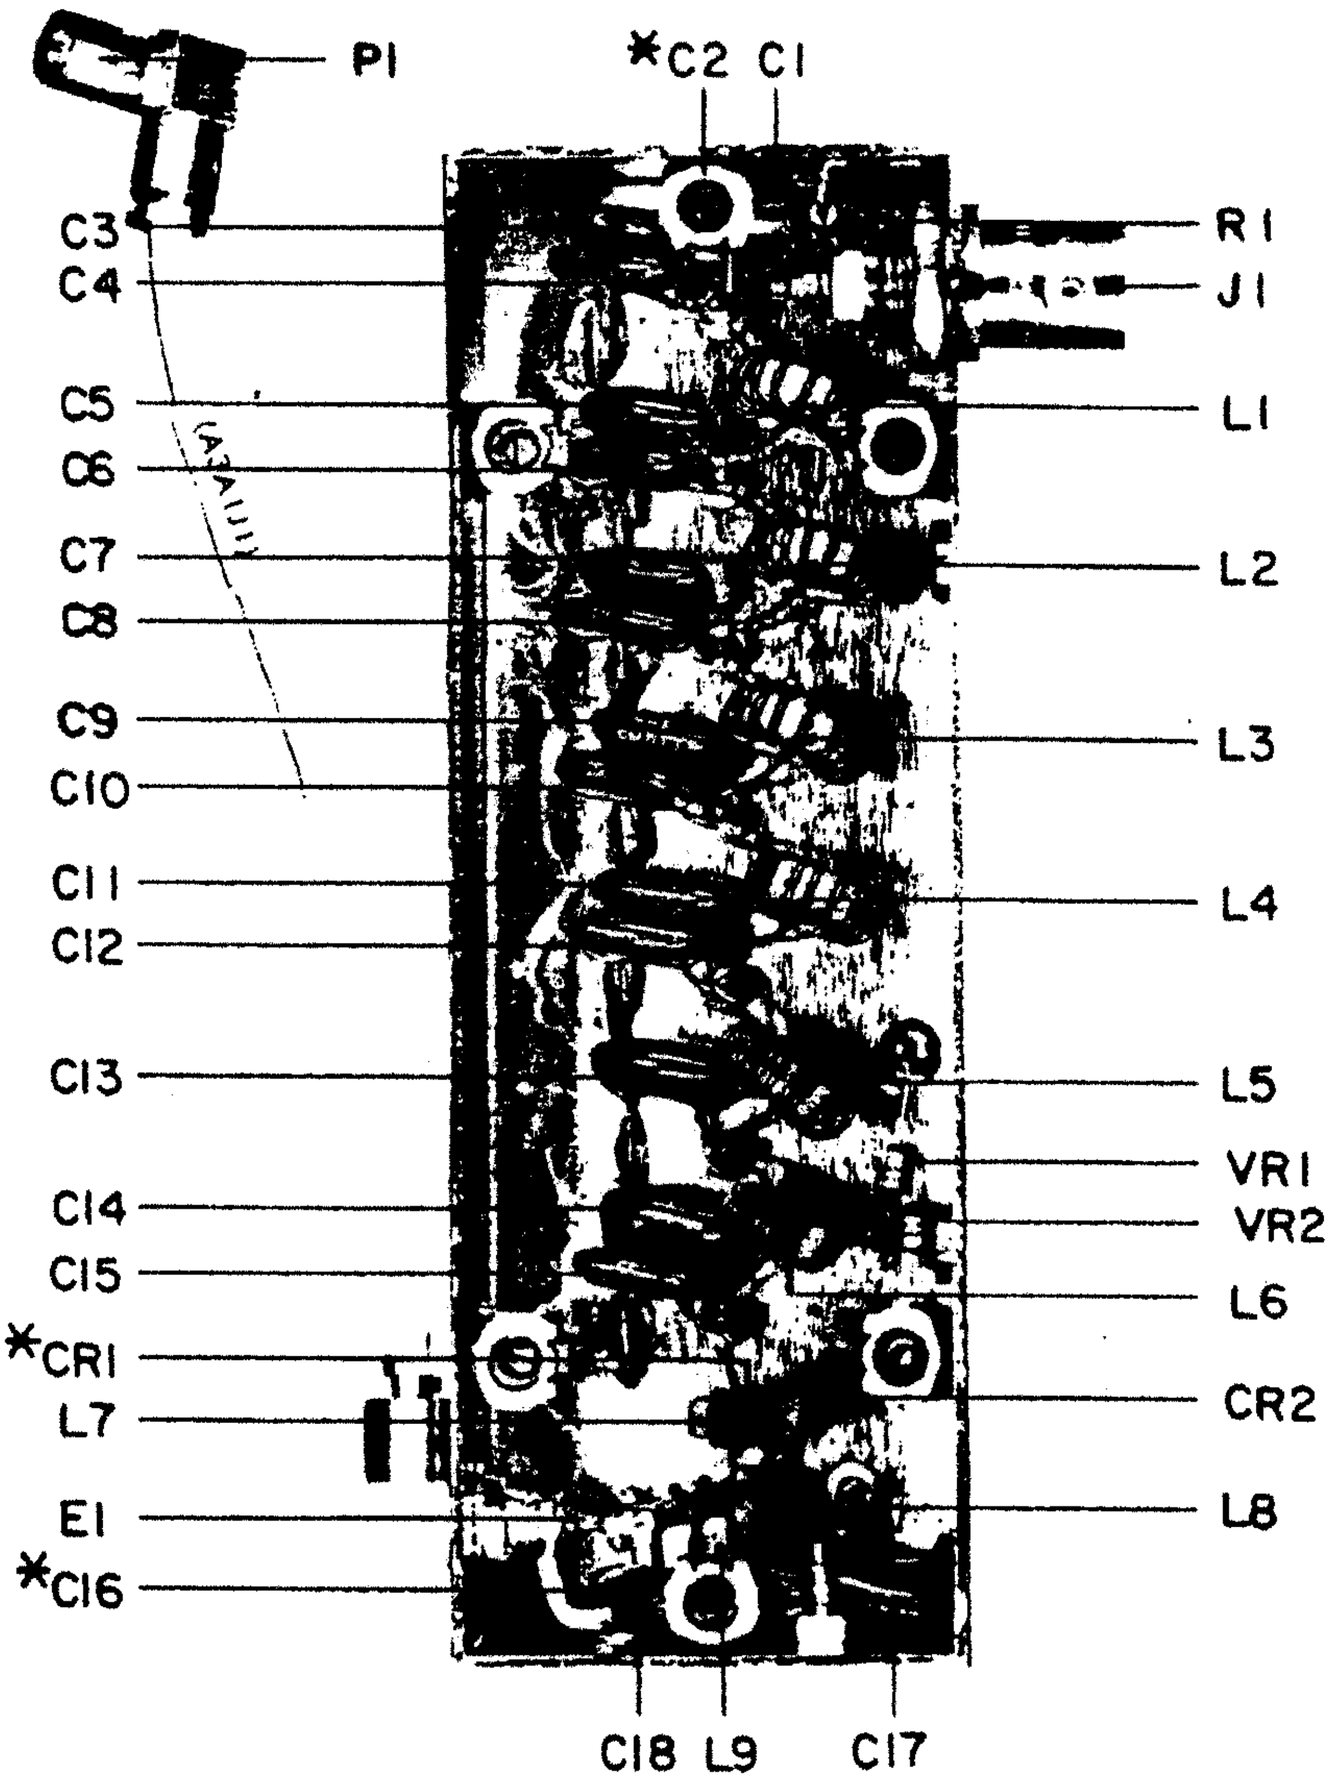



Figure 7-2. Type 796010 RF Filter,
Location of Components

7.5.2 TYPE 791684-3 FRONT PANEL CONTROL REF DESIG PREFIX A10

| REF DESIG | DESCRIPTION | QTY. PER ASSY. | MANUFACTURER'S PART NO. | MFR. CODE | RECM. VENDOR |
|---|---|---|---|---|---|
| | With the exception of the item listed below, type number 791684-3 is electrically identical to type number 791684-2 designated as A10 in the WJ-8718 HF Receiver. | | | | |
| A2 | Lower Panel Control | 1 | 791826-2 | 14632 | |

7.5.2.1 Type 791826-2 Lower Panel Control REF DESIG PREFIX A10A2

| REF DESIG | DESCRIPTION | QTY. PER ASSY. | MANUFACTURER'S PART NO. | MFR. CODE | RECM. VENDOR |
|---|---|---|---|---|---|
| | With the exception of those items listed below, type number 791826-2 is electrically identical to type number 791826-1 designated as A10A2 in the WJ-8718 HF Receiver. | | | | |
| R3 | Resistor, Fixed, Composition: 620 Ω, 5%, 1/4 W | 2 | RCR07G621JS | 81349 | 01121 |
| R4 | Same as R3 | | | | |
| R5 | Resistor, Fixed, Composition: 10 kΩ, 5%, 1/4 W | 2 | RCR07G103JS | 81349 | 01121 |
| R7 | Same as R5 | | | | |

7.5.3 TYPE 796011 PHONE JACK ASSEMBLY REF DESIG PREFIX A11

| REF DESIG | DESCRIPTION | QTY. PER ASSY. | MANUFACTURER'S PART NO. | MFR. CODE | RECM. VENDOR |
|---|---|---|---|---|---|
| CR1 | Diode (Not Shown) | 4 | 1N4449 | 80131 | 93332 |
| CR2 | Same as CR1 (Not Shown) | | | | |
| CR3 | Same as CR1 (Not Shown) | | | | |
| CR4 | Same as CR1 (Not Shown) | | | | |
| E1 | Terminal, Standoff: Ground | 1 | 160-2380-01-05-00 | 71279 | |
| FL1 | Filter, EMI | 2 | 51-353-314 | 33095 | |
| FL2 | Same as FL1 | | | | |
| J1 | Connector, Phone Jack | 1 | L12B | 82389 | |

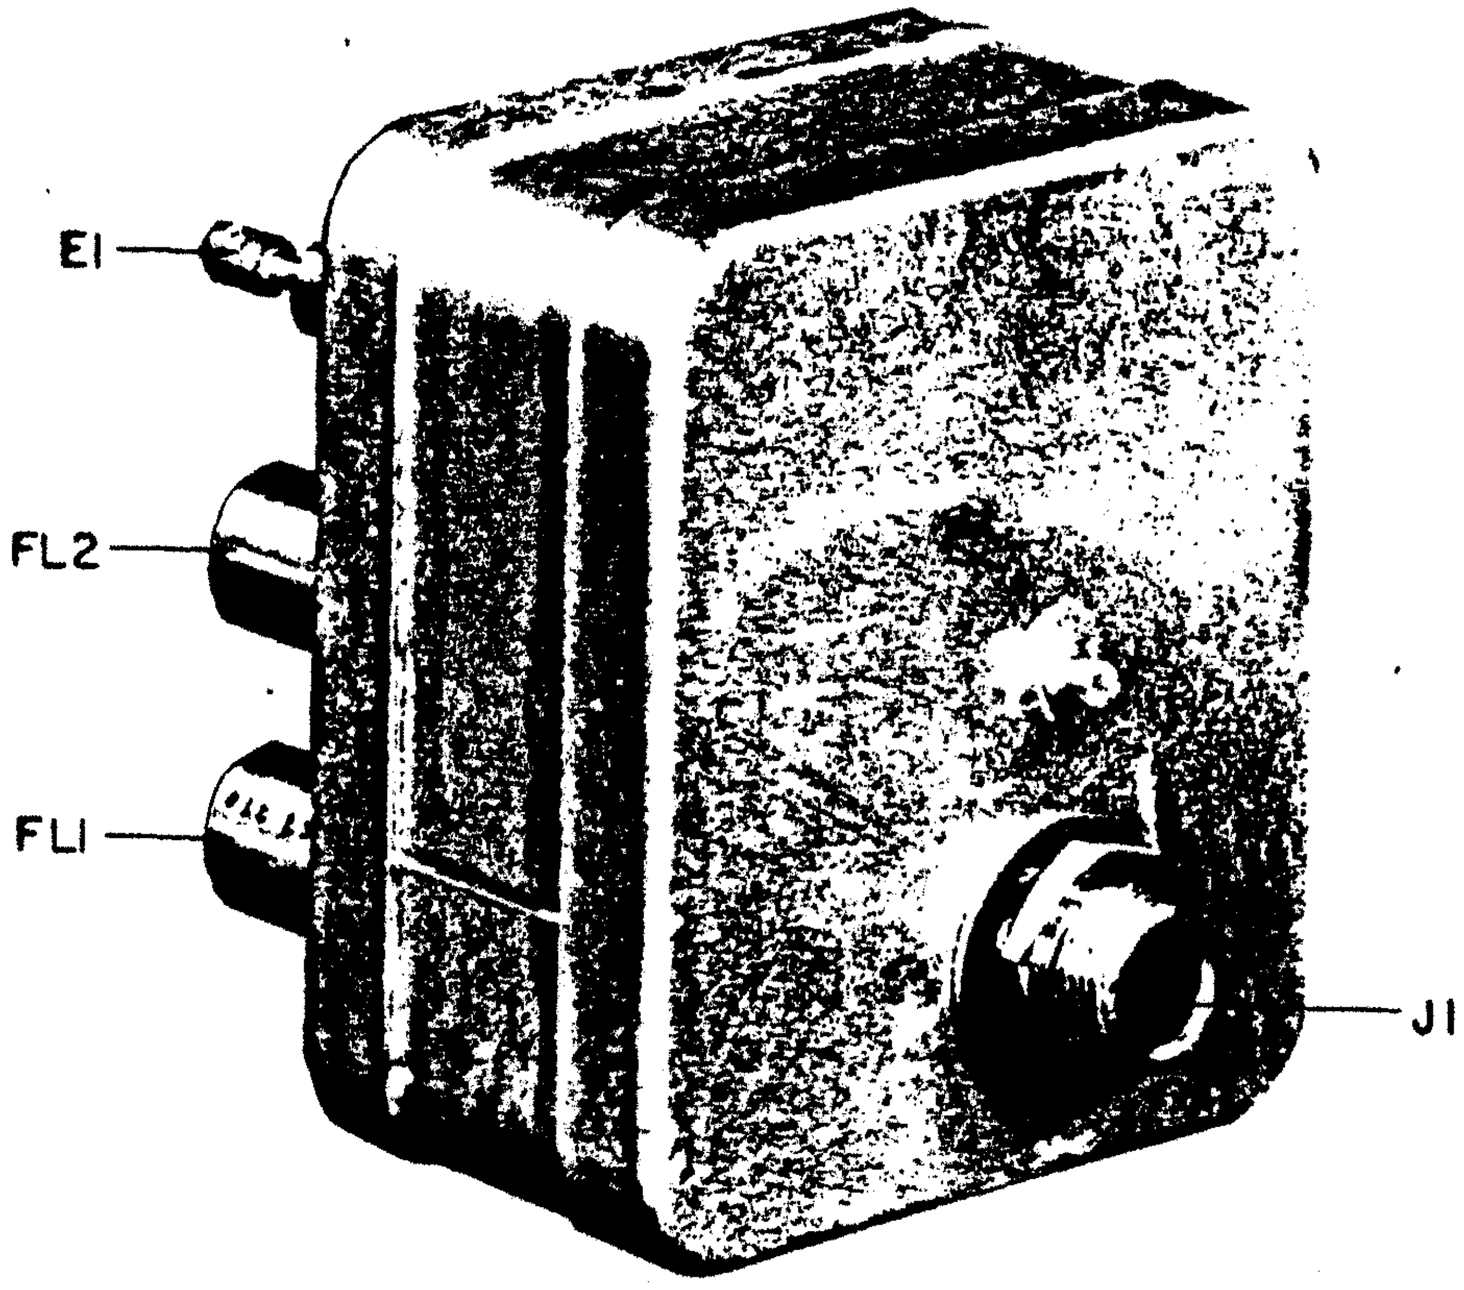



Figure 7-3. Phone Jack Assembly,
Location of Components

7.5.4 TYPE 280017 AUDIO ATTENUATOR REF DESIG PREFIX A12

| REF DESIG | DESCRIPTION | QTY. PER ASSY. | MANUFACTURER'S PART NO. | MFR. CODE | RECM. VENDOR |
|---|---|---|---|---|---|
| C1 | Capacitor, Electrolytic, Tantalum: 4.7 μF, 10%, 35 V | 1 | CS13BF475K | 81349 | 56289 |
| E1 | Terminal | 10 | 140-1941-02-01 | 71279 | |
| E2 Thru E10 | Same as E1 | | | | |
| R1 | Resistor, Fixed, Composition: 750 Ω, 5%, 1/4 W | 6 | RCR07G751JS | 81349 | 01121 |
| R2 | Resistor, Fixed, Composition: 560 Ω, 5%, 1/4 W | 3 | RCR07G561JS | 81349 | 01121 |
| R3 | Same as R1 | | | | |
| R4 | Same as R1 | | | | |
| R5 | Same as R2 | | | | |
| R6 | Same as R1 | | | | |
| R7 | Same as R1 | | | | |
| R8 | Same as R2 | | | | |
| R9 | Same as R1 | | | | |
| R10 | Resistor, Fixed, Composition: 10 kΩ, 5%, 1/4 W | 1 | RCR07G103JS | 81349 | 01121 |

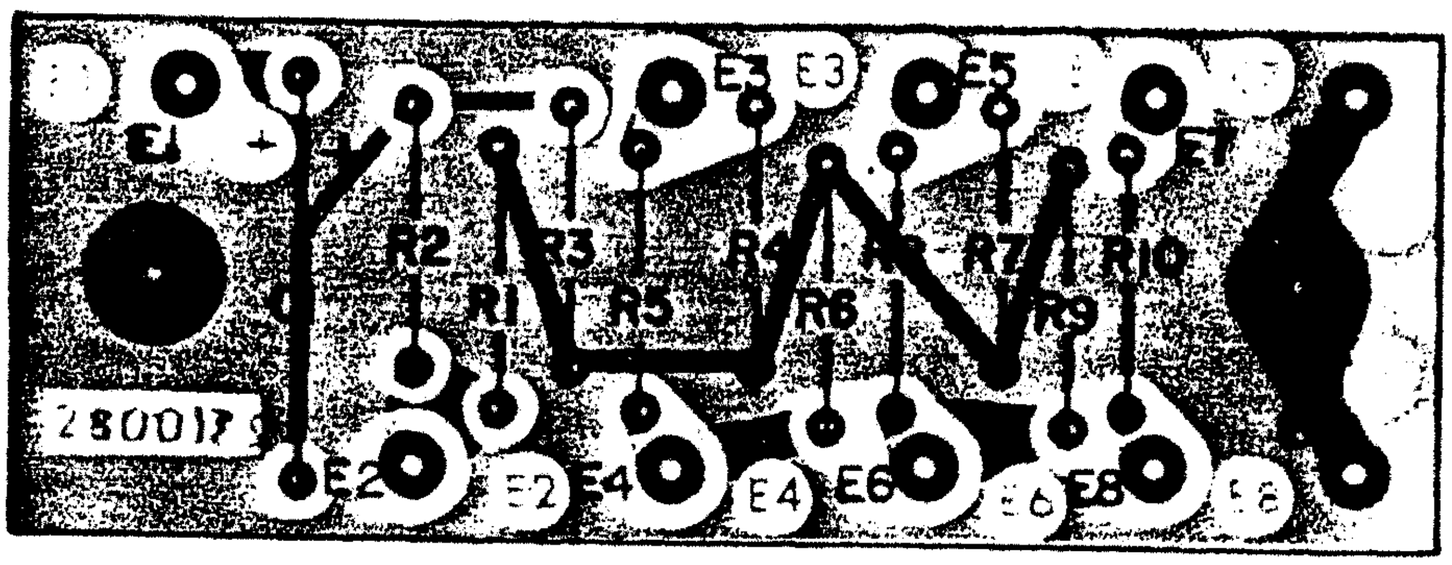



Figure 7-4. Type 280017 Audio Attenuator, Location of Components

# WJ-8718 SERIES HF RECEIVER
# CHANGE 1

**TITLE:** INSTRUCTION MANUAL FOR THE WJ-8718 SERIES HF RECEIVER

**MANUAL DATE:** October 1983

**CHANGE 1 DATE:** July 1990

**APPLICABILITY:** All units.

**CHANGES/ERRATA INFORMATION:** Changes refer to updates of the manual to cover design modifications. Errata refer to corrections and clarifications of information in the manual.

**CHANGE SUMMARY:** This change covers a correction to Section IV of the manual regarding measured signal levels in the RF Filter assembly. It also reflects minor, non-electrical modifications to schematic diagram 51198 for the Type 791629 Voltage-Controlled Oscillator, A5A1A1.

**ERRATA:** **Paragraph 4.3.5.2.1**, step 6, correct the sentence to read as follows:

6. The RF Voltmeter should indicate a level between 0 dBm and -2.0 dBm.

**CHANGES:** Replace **Figure 6-16, Type 791629 1st LO VCO Assembly (A5A1A1)**, with the attached drawing.

REVISION
WJ-8718 SERIES HF RECEIVER

TITLE: INSTRUCTION MANUAL FOR WJ-8718 SERIES RECEIVER

INSTRUCTION MANUAL DATE: OCTOBER 1983

REVISION DATE: AUGUST 1, 1988

APPLICABILITY: All WJ-8718 Series Receivers

CHANGE INFORMATION: Modification of the 3rd LO Output Level

CHANGE: Change the second sentence of step number 5 of paragraph 4.3.5.18.1, on page 4-50 of the WJ-8718 HF Receiver Instruction Manual

FROM:

"The voltmeter should indicate -6 dBm +/-2 dB."

TO:

"The voltmeter should indicate -8 dBm minimum".

ERRATA: None

June 18, 1985
ADDENDUM I

## PURPOSE OF ADDENDUM

The information in this addendum is provided to correct and update the WJ-8718 Series HF Receiver Instruction Manual.

Specifically, this addendum replaces a previously issued Field Bulletin, dated February 8, 1985, concerning spare parts for the WJ-871X VCO Assembly 791629. The field bulletin delineated four possible replacement parts for IC U1 (divide-by-4) on the 1st LO VCO P.W.A., depending on the board revision level and on-hand availability of the replacement part.

This addendum describes a direct replacement part for U1, Part No. SP8610A. This 14-pin chip directly fits the 1st LO VCO P.W.A., regardless of its board revision level and without the need of a transition board. This information should be incorporated in the parts list of the WJ-8718 Series HF Receiver Instruction Manual as indicated below.

1.1 Paragraph 5.6.5.1.1.1, page 5-63, Part 34750 parts list should be corrected as follows:

1. **From:** U1, Integrated Circuit, Qty 1, Part No. MC197L, Mfr. Code 04713

   **To:** U1, Integrated Circuit, Qty 1, Part No. SP8610A, Mfr. Code 52648

June 18, 1985
ADDENDUM II

The information in this addendum is provided to correct and update the WJ-8718 Series HF Receiver Instruction Manual.

1.1 Paragraph 5.6.8, Type 791578-1 Frequency Display parts list, page 5-90, should be corrected as follows:

**From:** U8, Integrated Circuit, Qty 1, Part No. DS8857N, Mfr. Code 27014

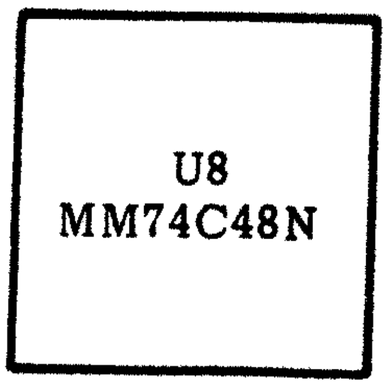
**To:** U8, Integrated Circuit, Qty 1, Part No. MM74C48N, Mfr. Code 27014

1.2 Revise Type 791578-1 Frequency Display (A8) schematic diagram, page 6-49, as shown.

**From:**




**To:**



# INSTRUCTION MANUAL

# FOR

# WJ-8718 SERIES HF RECEIVER

This document and subject matter disclosed herein are proprietary items to which Watkins-Johnson Company retains the exclusive right of dissemination, reproduction, manufacture and sale.

This document is provided to the individual or using organization for their use alone in the direct support of the associated equipment unless permission for further disclosure is expressly granted in writing.

**WATKINS-JOHNSON COMPANY**
**700 QUINCE ORCHARD ROAD**
**GAITHERSBURG, MARYLAND 20878**

10/83

# TABLE OF CONTENTS

## SECTION I

## GENERAL DESCRIPTION


| Paragraph | | Page |
|---|---|---|
| 1.1 | Electrical Characteristics | 1-1 |
| 1.2 | Mechanical Characteristics | 1-2 |
| 1.3 | Equipment Supplied | 1-2 |
| 1.4 | Equipment Required But Not Supplied | 1-3 |
| 1.5 | Optional Equipment | 1-3 |


## SECTION II

## INSTALLATION AND OPERATION


| | | |
|---|---|---|
| 2.1 | Unpacking and Inspection | 2-1 |
| 2.2 | Preparation for Reshipment and Storage | 2-1 |
| 2.3 | Installation | 2-1 |
| 2.3.1 | Voltage Selector/Fuse Block and Line Cord Receptacle (FL1J1) | 2-2 |
| 2.3.2 | RF Input (A2J1) | 2-2 |
| 2.3.3 | Alternate Fuseholder (XF2) | 2-2 |
| 2.3.4 | IF Output (J12) | 2-2 |
| 2.3.5 | Terminal Board (TB1) | 2-2 |
| 2.3.6 | Terminal Board (TB2) | 2-9 |
| 2.3.7 | Clock Switch (S2) | 2-9 |
| 2.3.8 | 1 MHz REF (J11) | 2-9 |
| 2.3.9 | Phones Jack (J13) | 2-9 |
| 2.3.10 | Remote Input (A6A1J1) | 2-10 |
| 2.4 | Operation | 2-10 |
| 2.4.1 | Push On/Off Power (S1) | 2-10 |
| 2.4.2 | Meter (M1) | 2-10 |
| 2.4.3 | Meter Switches | 2-10 |
| 2.4.4 | Gain Mode | 2-12 |
| 2.4.5 | RF Gain Control | 2-12 |
| 2.4.6 | Detection Mode | 2-12 |
| 2.4.7 | IF Bandwidth (kHz) | 2-13 |
| 2.4.8 | BFO Offset | 2-13 |
| 2.4.9 | Tuned Frequency Readout | 2-13 |
| 2.4.10 | Tuning Knob | 2-13 |
| 2.4.11 | Tuning Resolution (A7) | 2-14 |
| 2.4.12 | Line Audio Level (R1) | 2-14 |
| 2.4.13 | Phone Level Control | 2-14 |
| 2.4.14 | ISB Audio Switch | 2-14 |

## TABLE OF CONTENTS (Cont'd)

## SECTION III

## CIRCUIT DESCRIPTION


| Paragraph | | Page |
|---|---|---|
| 3.3.6 | Power Supply Section | 3-13 |
| 3.3.6.1 | Type 76240 Power Distribution (A1) | 3-13 |
| 3.3.6.2 | Power Supply Regulators | 3-14 |
| 3.3.6.3 | Power Supply Voltage Distribution | 3-14 |
| 3.4 | Circuit Descriptions | 3-14 |
| 3.4.1 | Type 791616-1 RF Input Filter (A2) | 3-21 |
| 3.4.2 | Type 791592-1 Input Converter (A3) | 3-21 |
| 3.4.2.1 | Circuit Description | 3-22 |
| 3.4.3 | Type 791569-1 IF Motherboard (A4) | 3-22 |
| 3.4.4 | Type 791594-1 10.7 MHz Filter Switch (A4A1) | 3-23 |
| 3.4.4.1 | Circuit Description | 3-23 |
| 3.4.5 | Type 71430-1 10.7 MHz/455 kHz Converter (A4A2) | 3-24 |
| 3.4.5.1 | Circuit Description | 3-24 |
| 3.4.6 | Type 791595-1 455 MHz Filter Switch (A4A3) | 3-24 |
| 3.4.6.1 | Circuit Description | 3-25 |
| 3.4.7 | Type 791596-1 USB Filter Switch (A4A4) | 3-26 |
| 3.4.7.1 | Circuit Description | 3-26 |
| 3.4.8 | Type 791597-1 ISB/LSB Filter Switch (A4A5) | 3-27 |
| 3.4.8.1 | Circuit Description | 3-27 |
| 3.4.9 | Type 78112-1 AGC Amplifier (A4A6) | 3-28 |
| 3.4.9.1 | Circuit Description | 3-29 |
| 3.4.10 | Type 72488-1 455 kHz Amplifier/AM Detector (A4A7) | 3-31 |
| 3.4.10.1 | Circuit Description | 3-31 |
| 3.4.11 | Type 791598-1 ISB Detector/Audio (A4A8) | 3-32 |
| 3.4.11.1 | Circuit Description | 3-33 |
| 3.4.12 | Type 791599-1 FM/CW/SSB Detector (A4A9) | 3-33 |
| 3.4.12.1 | Circuit Description | 3-34 |
| 3.4.13 | Type 746001-1 Audio Amplifier (A4A10) | 3-35 |
| 3.4.13.1 | Circuit Description | 3-35 |
| 3.4.14 | Synthesizer Circuit Descriptions | 3-36 |
| 3.4.15 | General Phase Lock Loop Theory | 3-37 |
| 3.4.15.1 | Basic Phase Lock Loop | 3-37 |
| 3.4.15.2 | Programmable Phase Lock Loop | 3-37 |
| 3.4.15.3 | Prescaling Technique | 3-38 |
| 3.4.15.4 | Phase Detector | 3-40 |
| 3.4.16 | Type 791600-1 1st LO Synthesizer (A5A1A2) | 3-42 |
| 3.4.16.1 | Functional Description | 3-42 |
| 3.4.16.2 | Circuit Description | 3-44 |
| 3.4.16.2.1 | Counting Cycle | 3-44 |
| 3.4.16.2.2 | Prescaler, U1 and U2A | 3-45 |
| 3.4.16.2.3 | Digital Code Converter U4 | 3-46 |
| 3.4.16.2.4 | Programmable Counter U9, U10, U11 | 3-46 |

## TABLE OF CONTENTS (Cont'd)

## SECTION III

## CIRCUIT DESCRIPTION


| Paragraph | | Page |
|---|---|---|
| 3.4.16.2.5 | Swallow Counter U8, U9 | 3-46 |
| 3.4.16.2.6 | Carry Condition U12A, U6B | 3-47 |
| 3.4.16.2.7 | Count Sequence | 3-48 |
| 3.4.16.2.8 | Divider Section Terminal Count | 3-50 |
| 3.4.16.2.9 | VCO Band Select Code | 3-51 |
| 3.4.17 | Type 791629 Voltage Controlled Oscillator (A5A1A1) | 3-51 |
| 3.4.17.1 | Function Description | 3-51 |
| 3.4.17.2 | Circuit Description | 3-52 |
| 3.4.18 | Type 791601 2nd LO Synthesizer (A5A2) | 3-53 |
| 3.4.18.1 | Functional Description | 3-53 |
| 3.4.18.2 | Circuit Description | 3-53 |
| 3.4.19 | Type 791600-1 3rd LO Synthesizer (A5A1A2) | 3-56 |
| 3.4.19.1 | Functional Description | 3-56 |
| 3.4.19.2 | Circuit Description | 3-57 |
| 3.4.20 | Type 791576-1 BFO Synthesizer (A5A3) | 3-57 |
| 3.4.20.1 | Functional Description | 3-57 |
| 3.4.20.2 | Circuit Description | 3-58 |
| 3.4.21 | Type 791600-1 Time Base Circuits (A5A1A2) | 3-60 |
| 3.4.21.1 | Functional Description | 3-60 |
| 3.4.21.2 | Circuit Description | 3-61 |
| 3.4.22 | Type 791630-1 1st and 3rd LO Synthesizer/Time Base (A5A1) | 3-63 |
| 3.4.23 | Type 791575-1 Manual Tuning Up/Down Counter (A6A1) | 3-63 |
| 3.4.23.1 | Integrated Circuit Data | 3-63 |
| 3.4.23.2 | Circuit Description | 3-65 |
| 3.4.24 | Type 791828-1 Front Panel Interconnect (A6A2) | 3-67 |
| 3.4.25 | Type 791874-1 Manual Tuning Module (A7) | 3-68 |
| 3.4.25.1 | Type 791589 Tuning Resolution (A7A1) | 3-69 |
| 3.4.25.2 | Encoder Assembly (A7U1) | 3-69 |
| 3.4.26 | Type 791578-1 Frequency Display (A8) | 3-70 |
| 3.4.27 | Type 791827 BFO Switch (A9) | 3-71 |
| 3.4.28 | Type 796053 Front Panel Control (A10) | 3-71 |
| 3.4.29 | Type 791583 Upper Panel Control (A10A1) | 3-72 |
| 3.4.30 | Type 796054 Lower Panel Control (A10A2) | 3-72 |
| 3.4.31 | Type 791826 Lower Panel Control (A10A2) | 3-73 |
| 3.4.32 | Main Chassis Regulator, U4 | 3-73 |
| 3.4.33 | Main Chassis Battery, BT1 | 3-73 |

## TABLE OF CONTENTS (Cont'd)

## SECTION IV

## MAINTENANCE


| Paragraph | | Page |
|---|---|---|
| 4.1 | General | 4-1 |
| 4.2 | Preventive Maintenance | 4-1 |
| 4.2.1 | Visual Inspection | 4-1 |
| 4.2.2 | Cleaning | 4-2 |
| 4.2.3 | Lubrication | 4-2 |
| 4.3 | Corrective Maintenance | 4-3 |
| 4.3.1 | General | 4-3 |
| 4.3.2 | Test Equipment Required | 4-3 |
| 4.3.3 | Receiver Checkout Procedures | 4-4 |
| 4.3.3.1 | Procedure Guidelines | 4-5 |
| 4.3.3.2 | Preliminary Set-Up Procedure | 4-5 |
| 4.3.4 | Receiver Troubleshooting Procedures | 4-10 |
| 4.3.5 | Module Troubleshooting Procedures | 4-15 |
| 4.3.5.1 | Procedure Guidelines | 4-15 |
| 4.3.5.2 | RF Filter Testing and Troubleshooting | 4-16 |
| 4.3.5.2.1 | RF Filter Checkout Procedure | 4-16 |
| 4.3.5.2.2 | RF Filter Fault Isolation | 4-17 |
| 4.3.5.3 | Input Converter Testing and Troubleshooting | 4-17 |
| 4.3.5.3.1 | Input Converter Checkout Procedure | 4-17 |
| 4.3.5.3.2 | Input Converter, A3, Fault Isolation | 4-18 |
| 4.3.5.4 | 10.7 MHz Filter Switch Testing and Troubleshooting | 4-19 |
| 4.3.5.4.1 | 10.7 MHz Filter Switch Checkout Procedure | 4-19 |
| 4.3.5.4.2 | 10.7 MHz Filter Switch, A4A1, Fault Isolation | 4-20 |
| 4.3.5.5 | 10.7 MHz/455 kHz Converter Testing and Troubleshooting | 4-21 |
| 4.3.5.5.1 | 10.7 MHz/455 kHz Converter Checkout Procedure | 4-21 |
| 4.3.5.5.2 | 10.7 MHz/455 kHz Converter, A4A2, Fault Isolation | 4-22 |
| 4.3.5.6 | 455 kHz Filter Switch Testing and Troubleshooting | 4-22 |
| 4.3.5.6.1 | 455 kHz Filter Switch Checkout Procedure | 4-23 |
| 4.3.5.6.2 | 455 kHz Filter Switch, A4A3, Fault Isolation | 4-23 |
| 4.3.5.7 | USB Filter Switch Testing and Troubleshooting | 4-25 |
| 4.3.5.7.1 | USB Filter Switch Checkout Procedure | 4-25 |
| 4.3.5.7.2 | USB Filter Switch, A4A4, Fault Isolation | 4-26 |
| 4.3.5.8 | ISB/LSB Filter Switch Testing and Troubleshooting | 4-26 |
| 4.3.5.8.1 | ISB/LSB Filter Switch Checkout Procedure | 4-27 |
| 4.3.5.8.2 | ISB/LSB Filter Switch, A4A5, Fault Isolation | 4-27 |
| 4.3.5.9 | 455 kHz Amplifier/AM Detector Testing and Troubleshooting | 4-28 |
| 4.3.5.9.1 | 455 kHz Amplifier/AM Detector Checkout Procedure | 4-28 |
| 4.3.5.9.2 | 455 kHz Amplifier/AM Detector, A4A7, Fault Isolation | 4-29 |
| 4.3.5.10 | FM/CW/SSB Detector Testing and Troubleshooting | 4-30 |
| 4.3.5.10.1 | CW/SSB Detector Checkout Procedure | 4-30 |
| 4.3.5.10.2 | FM Detector Checkout Procedure | 4-31 |
| 4.3.5.10.3 | FM/CW/SSB Detector, A4A9, Fault Isolation | 4-31 |

## TABLE OF CONTENTS (Cont'd)

## SECTION IV

## MAINTENANCE


| Paragraph | | Page |
|---|---|---|
| 4.3.5.11 | Audio Amplifier Testing and Troubleshooting | 4-33 |
| 4.3.5.11.1 | Audio Amplifier Checkout Procedure | 4-33 |
| 4.3.5.11.2 | Audio Amplifier, A4A10, Fault Isolation | 4-34 |
| 4.3.5.12 | ISB Detector/Audio Testing and Troubleshooting | 4-35 |
| 4.3.5.12.1 | ISB Detector/Audio Checkout Procedure | 4-35 |
| 4.3.5.12.2 | ISB Detector/Audio, A4A8, Fault Isolation | 4-35 |
| 4.3.5.13 | AGC Testing and Troubleshooting | 4-37 |
| 4.3.5.13.1 | AGC Checkout Procedure | 4-37 |
| 4.3.5.13.2 | AGC, A4A6, Fault Isolation | 4-38 |
| 4.3.5.14 | Front Panel Interconnect Testing and Troubleshooting | 4-40 |
| 4.3.5.14.1 | Front Panel Interconnect Checkout Procedure | 4-40 |
| 4.3.5.14.2 | Front Panel Interconnect Fault Isolation | 4-41 |
| 4.3.5.15 | Lower Panel Control Testing and Troubleshooting | 4-42 |
| 4.3.5.15.1 | Lower Panel Control Checkout Procedure | 4-42 |
| 4.3.5.15.2 | Lower Panel Control Fault Isolation | 4-43 |
| 4.3.5.16 | 1st LO Synthesizer Testing and Troubleshooting | 4-43 |
| 4.3.5.16.1 | 1st LO Synthesizer Checkout Procedure | 4-43 |
| 4.3.5.16.2 | 1st LO Synthesizer, P/O A5A1, Fault Isolation | 4-43 |
| 4.3.5.16.3 | 1st LO Synthesizer Supplementary Troubleshooting Data | 4-45 |
| 4.3.5.17 | 2nd LO Synthesizer Testing and Troubleshooting | 4-46 |
| 4.3.5.17.1 | 2nd LO Synthesizer Checkout Procedure | 4-46 |
| 4.3.5.17.2 | 2nd LO Synthesizer, A5A2, Fault Isolation | 4-46 |
| 4.3.5.17.3 | 2nd LO Synthesizer Supplementary Troubleshooting Data | 4-49 |
| 4.3.5.18 | 3rd LO Synthesizer Testing and Troubleshooting | 4-49 |
| 4.3.5.18.1 | 3rd LO Synthesizer Checkout Procedure | 4-50 |
| 4.3.5.18.2 | 3rd LO Synthesizer, P/O A5A1, Fault Isolation | 4-50 |
| 4.3.5.18.3 | 3rd LO Synthesizer Supplementary Troubleshooting Data | 4-51 |
| 4.3.5.19 | BFO Synthesizer Testing and Troubleshooting | 4-51 |
| 4.3.5.19.1 | BFO Synthesizer Checkout Procedure | 4-51 |
| 4.3.5.19.2 | BFO Synthesizer, A5A3, Fault Isolation | 4-51 |
| 4.3.5.19.3 | BFO Synthesizer Supplementary Troubleshooting Data | 4-53 |
| 4.3.5.20 | Time Base Testing and Troubleshooting | 4-53 |
| 4.3.5.20.1 | Time Base Checkout Procedure | 4-53 |
| 4.3.5.20.2 | Time Base, P/O A5A1, Fault Isolation | 4-54 |
| 4.3.5.20.3 | Time Base Supplementary Troubleshooting Data | 4-54 |
| 4.3.6 | Parts Replacement Guidelines | 4-55 |
| 4.3.6.1 | Soldering Techniques | 4-55 |
| 4.3.6.2 | Component Replacement | 4-55 |
| 4.3.6.3 | Realignment | 4-55 |
| 4.3.7 | Adjustment/Alignment Procedures | 4-56 |
| 4.3.7.1 | General | 4-56 |
| 4.3.7.2 | Synthesizer Alignment | 4-56 |

## TABLE OF CONTENTS (Cont'd)

### SECTION IV

### MAINTENANCE


| Paragraph | | Page |
|---|---|---|
| 4.3.7.2.1 | 1st LO Synthesizer Alignment | 4-56 |
| 4.3.7.2.2 | 2nd LO Synthesizer Alignment (A5A2) | 4-57 |
| 4.3.7.2.3 | 2nd LO Filter Adjustment | 4-59 |
| 4.3.7.2.4 | 3rd LO Synthesizer Alignment | 4-60 |
| 4.3.7.2.5 | 2 MHz Time Base Adjustment | 4-60 |
| 4.3.7.2.6 | BFO Synthesizer Alignment | 4-60 |
| 4.3.7.3 | Receiver Alignment | 4-61 |
| 4.3.7.3.1 | Input Converter Alignment | 4-61 |
| 4.3.7.3.2 | 10.7 MHz Filter Switch Adjustment | 4-62 |
| 4.3.7.3.3 | 455 MHz Amplifier/AM Detector Response Alignment | 4-63 |
| 4.3.7.3.4 | 455 kHz Amplifier/AM Detector Gain Adjustment | 4-66 |
| 4.3.7.3.5 | USB Filter Switch and ISB/LSB Filter Switch Adjustment | 4-66 |
| 4.3.7.3.6 | ISB Detector/Audio Adjustment | 4-67 |
| 4.3.7.3.7 | FM Discriminator Alignment | 4-68 |
| 4.3.7.4 | LED Intensity Adjustment | 4-70 |


### SECTION

### REPLACEMENT PARTS LIST


| | | |
|---|---|---|
| 5.1 | Unit Numbering Method | 5-1 |
| 5.2 | Reference Designation Prefix | 5-1 |
| 5.3 | List of Manufacturers | 5-1 |
| 5.4 | Parts List | 5-5 |
| 5.5 | Assembly Revision Level | 5-5 |
| 5.6 | Types WJ-8718, WJ-8718-9 and WJ-8718A HF Receiver, Main Chassis | 5-7 |
| 5.6.1 | Type 76240 Power Distribution | 5-17 |
| 5.6.2 | Type 791616-1 RF Filter | 5-19 |
| 5.6.2.1 | Part 280093 30 MHz Low Pass Filter | 5-20 |
| 5.6.3 | Type 791592-1 Input Converter | 5-21 |
| 5.6.3.1 | Part 370611-1 1st Mixer, 1st IF | 5-22 |
| 5.6.3.2 | Part 370646-1 2nd Mixer, 2nd IF | 5-23 |
| 5.6.4 | Type 791569-1 IF Motherboard | 5-26 |
| 5.6.4.1 | Type 791594-1 10.7 MHz Filter Switch | 5-29 |
| 5.6.4.2 | Type 71430-1 10.7 MHz/455 kHz Converter | 5-33 |
| 5.6.4.3 | Type 791595-1 455 kHz Filter Switch | 5-35 |
| 5.6.4.4 | Type 791596-1 USB Filter Switch | 5-37 |
| 5.6.4.5 | Type 791597-1 ISB/LSB Filter Switch | 5-39 |
| 5.6.4.6 | Type 78112-1 AGC Amplifier | 5-41 |
| 5.6.4.7 | Type 72488-1 455 kHz Amplifier/AM Detector | 5-44 |

## TABLE OF CONTENTS (Cont'd)

## SECTION V

## REPLACEMENT PARTS LIST


| Paragraph | | Page |
|---|---|---|
| 5.6.4.8 | Type 791598-1 ISB Detector/Audio | 5-47 |
| 5.6.4.9 | Type 791599-1 FM, CW, & SSB Detector/Audio | 5-51 |
| 5.6.4.10 | Type 746001-1 Audio Amplifier | 5-54 |
| 5.6.5 | Type 791570-1 Synthesizer Motherboard | 5-56 |
| 5.6.5.1 | Type 791630-1 1st and 3rd LO Synthesizer | 5-59 |
| 5.6.5.1.1 | Type 791629 1st LO VCO Assembly | 5-62 |
| 5.6.5.1.1.1 | Part 34750 1st LO Voltage Controlled Oscillator | 5-63 |
| 5.6.5.1.2 | Type 791600-1 1st & 3rd LO Synthesizer | 5-66 |
| 5.6.5.2 | Type 791601 2nd LO Synthesizer | 5-72 |
| 5.6.5.3 | Type 791576-1 BFO Synthesizer | 5-78 |
| 5.6.6 | Type 791580 I/O Motherboard | 5-83 |
| 5.6.6.1 | Type 791575-3 Manual Tuning Up/Down Counter | 5-85 |
| 5.6.6.2 | Type 791828-1 Front Panel Interconnect | 5-86 |
| 5.6.7 | Type 791874-1 Manual Tuning Module | 5-87 |
| 5.6.7.1 | Type 791589 Tuning Resolution | 5-89 |
| 5.6.8 | Type 791578-1 Frequency Display | 5-90 |
| 5.6.9 | Type 791827 BFO Switch | 5-91 |
| 5.6.10 | Types 791684-2 and 796053 Front Panel Control | 5-92 |
| 5.6.10.1 | Type 791583 Upper Panel Control | 5-94 |
| 5.6.10.2 | Types 791826 and 796054 Lower Panel Control | 5-95 |


## SECTION VI

## SCHEMATIC DIAGRAM

## LIST OF ILLUSTRATIONS


| Figure | | Page |
|---|---|---|
| 1-1 | WJ-8718 Series HF Receiver | 1-0 |
| 1-2 | Tip-Ring-Sleeve Plug Outline Drawing | 1-7 |

# TABLE OF CONTENTS (Cont'd)

## SECTION VI

## LIST OF ILLUSTRATIONS


| Figure | | Page |
|---|---|---|
| | **Section II** | |
| 2-1 | WJ-8718 Series HF Receiver, Critical Dimensions | 2-0 |
| 2-2 | WJ-8718 Series HF Receiver, Front Panel View | 2-3 |
| 2-3 | WJ-8718 Series HF Receiver, Rear Panel View | 2-4 |
| 2-4 | WJ-8718A HF Receiver, Front Panel View | 2-5 |
| 2-5 | WJ-8718A HF Receiver, Rear Panel View | 2-6 |
| 2-6 | WJ-8718-9 HF Receiver, Front Panel View | 2-7 |
| 2-7 | WJ-8718-9 HF Receiver, Rear Panel View | 2-8 |
| | **Section III** | |
| 3-1 | Receiver Overall Block Diagram | 3-2 |
| 3-2 | Receiver Functional Block Diagram | 3-4 |
| 3-3 | Receiver Frequency Conversion | 3-5 |
| 3-4 | Power Supply Section Functional Block Diagram | 3-14 |
| 3-5 | Power Supply Voltage Distribution Diagram (Sheet 1 of 3) | 3-15 |
| 3-5 | Power Supply Voltage Distribution Diagram (Sheet 2 of 3) | 3-17 |
| 3-5 | Power Supply Voltage Distribution Diagram (Sheet 3 of 3) | 3-19 |
| 3-6 | Input Converter Functional Block Diagram | 3-21 |
| 3-7 | 10.7 MHz Filter Switch Functional Block Diagram | 3-23 |
| 3-8 | 10.7 MHz/455 kHz Converter Functional Block Diagram | 3-24 |
| 3-9 | 455 kHz Filter Switch Functional Block Diagram | 3-25 |
| 3-10 | USB Filter Switch Block Diagram | 3-26 |
| 3-11 | ISB/LSB Filter Switch Functional Block Diagram | 3-27 |
| 3-12 | AGC Amplifier Functional Block Diagram | 3-28 |
| 3-13 | 455 kHz Amplifier/AM Detector Functional Block Diagram | 3-31 |
| 3-14 | ISB Detector/Audio Functional Block Diagram | 3-32 |
| 3-15 | FM/CW/SSB Detector Functional Block Diagram | 3-34 |
| 3-16 | Audio Amplifier Functional Block Diagram | 3-35 |
| 3-17 | Basic Phase Lock Loop Configuration | 3-37 |
| 3-18 | Programmable Phase Lock Loop | 3-38 |
| 3-19 | Two-Modulus Prescaling in the Phase Lock Loop | 3-39 |
| 3-20 | Prescaler Dividing Technique | 3-40 |
| 3-21 | Phase Detector Timing Diagram | 3-41 |
| 3-22 | 1st LO Functional Block Diagram | 3-43 |
| 3-23 | 1st LO Counting Cycle | 3-45 |

# TABLE OF CONTENTS (Cont'd)

## LIST OF ILLUSTRATIONS


| Figure | | Page |
|---|---|---|
| | **Section III** | |
| 3-24 | 1st LO Prescaler Timing Diagram | 3-45 |
| 3-25 | Two-Pulse Early Decode, Count Termination | 3-50 |
| 3-26 | VCO Functional Block Diagram | 3-52 |
| 3-27 | 2nd LO Functional Block Diagram | 3-53 |
| 3-28 | 2nd LO Prescaler Timing Diagram | 3-55 |
| 3-29 | 3rd LO Functional Block Diagram | 3-57 |
| 3-30 | BFO Functional Block Diagram | 3-58 |
| 3-31 | Time Base Circuits Functional Block Diagram | 3-61 |
| 3-32 | Tri-State Buffers | 3-62 |
| 3-33 | Manual Tuning Up/Down Counter Block Diagram | 3-64 |
| 3-34 | Up/Down Counter Integrated Circuit Data | 3-64 |
| 3-35 | Front Panel Interconnect Integrated Circuit Data | 3-67 |
| 3-36 | Encoder Assembly Timing Diagram | 3-70 |
| 3-37 | Simplified Headphone Audio Routing | 3-73 |
| | **Section IV** | |
| 4-1 | Receiver Checkout Procedure, Test Setup | 4-6 |
| 4-2 | Phase Detector Timing Diagram | 4-45 |
| 4-3 | Input Converter Alignment Test Setup | 4-61 |
| 4-4 | 10.7 MHz Filter Switch Adjustment, Test Setup | 4-62 |
| 4-5 | 455 kHz Amplifier/AM Detector Response Alignment, Test Setup | 4-64 |
| 4-6 | 455 kHz Amplifier/AM Detector Response Alignment, Typical Response | 4-65 |
| 4-7 | 455 kHz Amplifier/AM Detector Gain Adjustment, Test Setup | 4-65 |
| 4-8 | ISB Detector/Audio Adjustment, Test Setup | 4-67 |
| 4-9 | FM Discriminator Alignment, Test Setup | 4-69 |
| 4-10 | FM Discriminator Alignment, Typical Response | 4-70 |
| | **Section V** | |
| 5-1 | WJ-8718 HF Receiver, Front Panel, Location of Components | 5-8 |
| 5-2 | WJ-8718 HF Receiver, Rear Panel, Location of Components | 5-8 |
| 5-3 | WJ-8718-9 HF Receiver, Front Panel, Location of Components | 5-9 |
| 5-4 | WJ-8718-9 HF Receiver, Rear Panel, Location of Components | 5-9 |
| 5-5 | WJ-8718A HF Receiver, Front Panel, Location of Components | 5-10 |
| 5-6 | WJ-8718A HF Receiver, Rear Panel, Location of Components | 5-10 |
| 5-7 | WJ-8718 Series HF Receiver, Top View, Location of Components | 5-12 |
| 5-8 | WJ-8718 Series HF Receiver, Bottom View, Location of Component | 5-14 |

# TABLE OF CONTENTS (Cont'd)

## LIST OF ILLUSTRATIONS


| Figure | | Page |
|---|---|---|
| | **Section V** | |
| 5-9 | Type 76240 Power Distribution (A1), Location of Components ..... | 5-18 |
| 5-10 | Type 791616-1 Input Filter (A2), Location of Components ..... | 5-19 |
| 5-11 | Part 280093 30 MHz Low Pass Filter (A2A1), Location of Components..... | 5-20 |
| 5-12 | Type 791592-1 Input Converter (A3), Location of Components..... | 5-21 |
| 5-13 | Part 370611-1 1st Mixer, 1st IF (A3A1), Location of Components ..... | 5-22 |
| 5-14 | Part 370646-1 2nd Mixer, 2nd IF (A3A2), Location of Components ..... | 5-24 |
| 5-15 | Type 791569-1 IF Motherboard (A4), Location of Components ..... | 5-27 |
| 5-16 | Type 791594-1 10.7 MHz Filter Switch (A4A1), Location of Components .... | 5-30 |
| 5-17 | Type 71430-1 10.7 MHz/455 kHz Converter (A4A2), Location of Components ..... | 5-34 |
| 5-18 | Type 791595-1 455 kHz Filter Switch (A4A3), Location of Components ..... | 5-36 |
| 5-19 | Type 791596-1 USB Filter Switch (A4A4), Location of Components ..... | 5-38 |
| 5-20 | Type 791597-1 ISB, LSB Filter Switch (A4A5), Location of Components..... | 5-40 |
| 5-21 | Type 78112-1 AGC Amplifier (A4A6), Location of Components ..... | 5-42 |
| 5-22 | Type 72488-1 455 kHz Amplifier/AM Detector (A4A7), Location of Components ..... | 5-45 |
| 5-23 | Type 791598-1 ISB Detector/Audio (A4A8), Location of Components ..... | 5-48 |
| 5-24 | Type 791599-1 FM, CW, and SSB Detector (A4A9), Location of Components ..... | 5-52 |
| 5-25 | Type 746001-1 Audio Amplifier (A4A10), Location of Components ..... | 5-55 |
| 5-26 | Type 791570-1 Synthesizer Motherboard (A5), Location of Components ..... | 5-57 |
| 5-27 | Type 791630-1 1st and 3rd LO Synthesizer/Timebase (A5A1), Location of Components (Sheet 1 of 2) ..... | 5-60 |
| 5-27 | Type 791630-1 1st and 3rd LO Synthesizer/Timebase (A5A1), Location of Components (Sheet 2 of 2) ..... | 5-61 |
| 5-28 | Type 791629 1st LO VCO Assembly (A5A1A1), Location of Components .... | 5-62 |
| 5-29 | Part 34750 1st LO Voltage Controlled Oscillator (A5A1A1A1), Location of Components ..... | 5-65 |
| 5-30 | Type 791600-1 1st and 3rd LO Synthesizer (A5A1A2), Location of Components ..... | 5-67 |
| 5-31 | Type 791601 2nd LO Synthesizer (A5A2), Location of Components ..... | 5-73 |
| 5-32 | Type 791576-1 BFO Synthesizer (A5A3), Location of Components..... | 5-79 |
| 5-33 | Type 791580 I/O Motherboard (A6), Location of Components ..... | 5-82 |
| 5-34 | Type 791575-3 Manual Tuning Up/Down Counter (A6A1), Location of Components ..... | 5-84 |
| 5-35 | Type 791828-1 Front Panel Interconnect (A6A2), Location of Components ..... | 5-86 |
| 5-36 | Type 791874-1 Manual Tuning Module (A7), Location of Components ..... | 5-87 |
| 5-37 | Type 791874-1 Manual Tuning Module (A7), Rear View, Location of Components ..... | 5-88 |
| 5-38 | Type 791589 Tuning Resolution (A7A1), Location of Components ..... | 5-89 |
| 5-39 | Type 791578-1 Frequency Display (A8), Location of Components ..... | 5-90 |
| 5-40 | Type 791827 BFO Switch (A9), Location of Components ..... | 5-91 |

# TABLE OF CONTENTS (Cont'd)

## LIST OF ILLUSTRATIONS

Figure — Page

**Section V** (Cont'd)

5-41 Type 791684-2 Front Panel Control (A10), Location of Components (WJ-8718 only) ..... 5-92
5-42 Type 796053 Front Panel Control (A10), Location of Components ..... 5-93
5-43 Type 791583 Upper Panel Control (A10A1), Location of Components ..... 5-94
5-44 Type 791826 Lower Panel Control (A10A2), Location of Components (WJ-8718 only) ..... 5-95
5-45 Type 796054 Lower Panel Control (A10A2), Location of Components (WJ-8718-9 and WJ-8718A) ..... 5-96

**Section VI**

6-1 Type 791616-1 Input Filter (A2), Schematic Diagram 380082 ..... 6-3
6-2 Type 791592-1 Input Converter (A3), Schematic Diagram 570202 ..... 6-5
6-3 Type 791569-1 IF Motherboard (A4), Schematic Diagram 570191 ..... 6-7
6-4 Type 791594-1 10.7 MHz Filter Switch (A4A1), Schematic Diagram 480103 ..... 6-9
6-5 Type 71430-1 10.7 MHz/455 kHz Converter (A4A2), Schematic Diagram 34384 ..... 6-11
6-6 Type 791595-1 455 kHz Filter Switch (A4A3), Schematic Diagram 43561 ..... 6-13
6-7 Type 791596-1 USB Filter Switch (A4A4), Schematic Diagram 480102 ..... 6-15
6-8 Type 791597-1 ISB/LSB Filter Switch (A4A5), Schematic Diagram 480105 ..... 6-17
6-9 Type 78112-1 AGC Amplifier (A4A6), Schematic Diagram 43229 ..... 6-19
6-10 Type 72488-1 455 kHz Amplifier/AM Detector (A4A7), Schematic Diagram 51168 ..... 6-21
6-11 Type 791598-1 ISB Detector/Audio (A4A8), Schematic Diagram 43231 ..... 6-23
6-12 Type 791599-1 FM, CW & SSB Detector (A4A9), Schematic Diagram 43198 ..... 6-25
6-13 Type 746001-1 Audio Amplifier (A4A10), Schematic Diagram 480089 ..... 6-27
6-14 Type 791570-1 Synthesizer Motherboard (A5), Schematic Diagram 470518 ..... 6-29
6-15 Type 791630-1 1st & 3rd LO Synthesizer/Time Base (A5A1), Schematic Diagram 43305 ..... 6-31
6-16 Type 791629 1st LO/VCO Assembly (A5A1A1), Schematic Diagram 51198 ..... 6-33
6-17 Type 791600-1 1st & 3rd LO Synthesizer (A5A1A2), Schematic Diagram 61247 (Sheet 1 of 2) ..... 6-35

## TABLE OF CONTENTS (Cont'd)

## LIST OF ILLUSTRATIONS


| Figure | | Page |
|---|---|---|
| | **Section VI** | |
| 6-17 | Type 791600-1 1st & 3rd LO Synthesizer (A5A1A2), Schematic Diagram 61247 (Sheet 2 of 2) | 6-37 |
| 6-18 | Type 791601 2nd LO Synthesizer (A5A2), Schematic Diagram 61256 | 6-39 |
| 6-19 | Type 791576-1 BFO Synthesizer (A5A3), Schematic Diagram 51183 | 6-41 |
| 6-20 | Type 791580 I/O Motherboard (A6), Schematic Diagram 470233 | 6-43 |
| 6-21 | Type 791575-3 Manual Tuning Up/Down Counter (A6A1), Schematic Diagram 51180 | 6-45 |
| 6-22 | Type 791828-1 Front Panel Interconnect (A6A2), Schematic Diagram 470522 | 6-47 |
| 6-23 | Type 791578-1 Frequency Display (A8), Schematic Diagram 43242 | 6-49 |
| 6-24 | Type WJ-8718 Series HF Receiver, Main Chassis Schematic Diagram 670058 | 6-51 |


## LIST OF TABLES


| Table | | Page |
|---|---|---|
| | **Section I** | |
| 1-1 | Type WJ-8718 Series HF Receiver, Specifications | 1-5 |
| | **Section II** | |
| 2-1 | Remote Input Lines Identification | 2-11 |
| | **Section III** | |
| 3-1 | 2nd and 3rd IF Bandwidth Selection | 3-10 |
| 3-2 | Detection Mode Selection | 3-10 |
| 3-3 | WJ-8718 Series Phase-Lock Loop Characteristics | 3-41 |
| 3-4 | Code Converter U4, Truth Table | 3-46 |
| 3-5 | Count Sequence, 1st LO Swallow Counter | 3-47 |
| 3-6 | 1st LO Divider Count-Down Cycles | 3-49 |
| 3-7 | Band Select Coding | 3-51 |
| 3-8 | Data Selector 14512, Digit Control Codes | 3-66 |
| 3-9 | BFO Switch Truth Tables | 3-71 |

## TABLE OF CONTENTS (Cont'd)

## LIST OF TABLES


| Table | | Page |
|---|---|---|
| 4-1 | Test Equipment Required | 4-4 |
| 4-2 | WJ-8718 Series HF Receiver Checkout Procedure | 4-7 |
| 4-3 | WJ-8718 Series HF Receiver Troubleshooting Procedures | 4-11 |
| 4-4 | Input Converter Fault Isolation Chart | 4-18 |
| 4-5 | Input Converter Voltage Table | 4-19 |
| 4-6 | 10.7 MHz Filter Switch Fault Isolation Chart | 4-20 |
| 4-7 | 10.7 MHz Filter Switch Voltage Chart | 4-21 |
| 4-8 | 10.7 MHz/455 kHz Converter Fault Isolation Chart | 4-22 |
| 4-9 | 10.7 MHz/455 kHz Converter Voltage Table | 4-22 |
| 4-10 | 455 kHz Filter Switch Fault Isolation Chart | 4-24 |
| 4-11 | 455 kHz Filter Switch Voltage Table | 4-25 |
| 4-12 | USB Filter Switch Fault Isolation | 4-26 |
| 4-13 | USB Filter Switch, A4A4, Voltage Table | 4-26 |
| 4-14 | ISB/LSB Filter Switch Fault Isolation | 4-27 |
| 4-15 | ISB/LSB Filter Switch, A4A5, Voltage Table | 4-28 |
| 4-16 | Amplifier/AM Detector Fault Isolation Chart | 4-29 |
| 4-17 | 455 kHz Amplifier/AM Detector Voltage Table | 4-30 |
| 4-18 | FM/CW/SSB Detector Fault Isolation Chart | 4-32 |
| 4-19 | FM/CW/SSB Detector Voltage Table | 4-32 |
| 4-20 | Audio Amplifier Fault Isolation Chart | 4-34 |
| 4-21 | Audio Amplifier Voltage Table | 4-34 |
| 4-22 | ISB Detector/Audio Fault Isolation Chart | 4-36 |
| 4-23 | ISB Detector/Audio Voltage Table | 4-37 |
| 4-24 | AGC Fault Isolation Chart | 4-38 |
| 4-25 | AGC Voltage Table | 4-39 |
| 4-26 | Front Panel Interconnect Voltage Table | 4-41 |
| 4-27 | VCO Band Select Code | 4-44 |
| 4-28 | 1st LO Frequency Chart | 4-44 |
| 4-29 | 2nd LO Frequency Chart | 4-49 |
| 4-30 | BFO Frequency Chart | 4-52 |
| 4-31 | Output Divider U10 Frequency Chart | 4-53 |
| 4-32 | Time Base Frequency Chart | 4-54 |
| 4-33 | VCO Alignment Parameters | 4-56 |
| 4-34 | Loop Test Point Voltages | 4-58 |
| 4-35 | 2nd LO Synthesizer Tuning Parameters | 4-59 |

**Section V**

| | | |
|---|---|---|
| 5-1 | Equipment Assembly Revision Level Record | 5-6 |

# SECTION I

# GENERAL DESCRIPTION

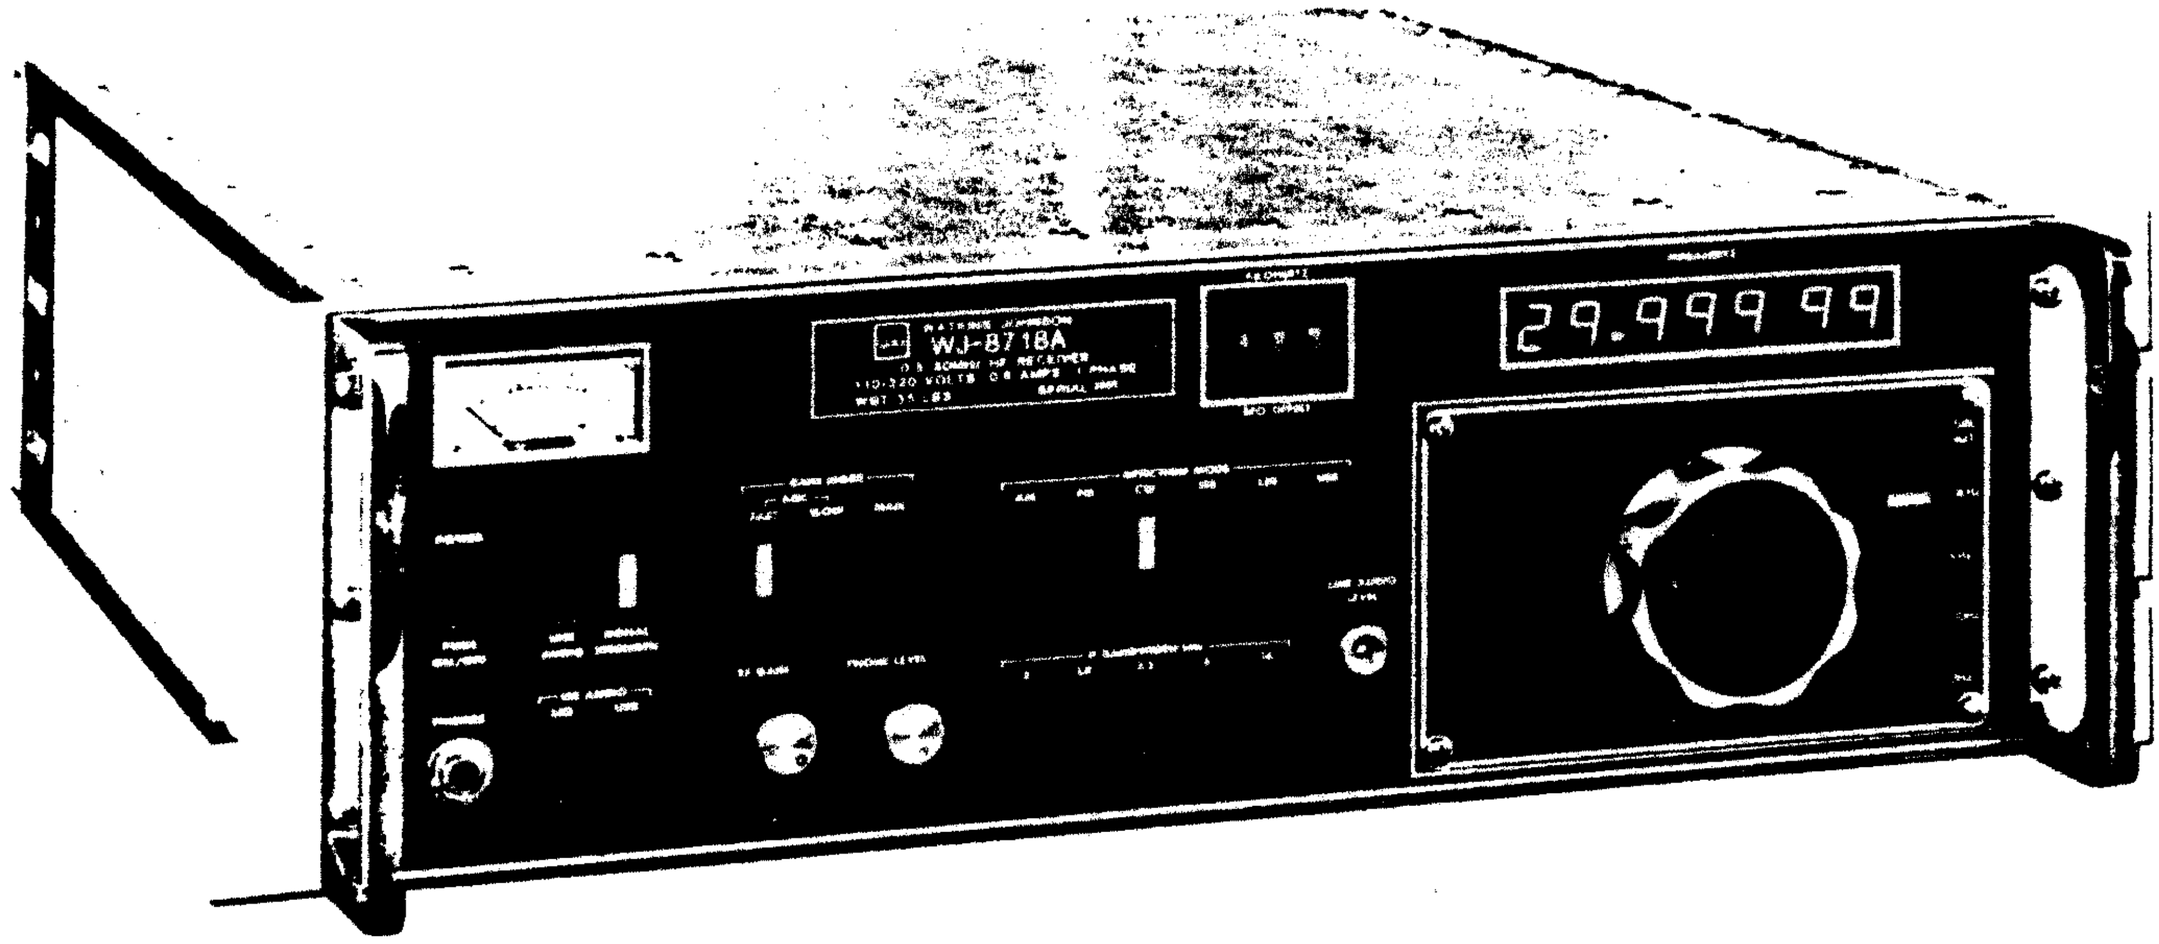



**Figure 1-1. WJ-8718 Series HF Receiver**

# SECTION I

# GENERAL DESCRIPTION

## 1.1 ELECTRICAL CHARACTERISTICS

The WJ-8718 Series HF Receiver (**Figure 1-1**) detects AM, FM, CW, USB, LSB, and ISB signals emissions over the frequency range of 5 kHz to 29.99999 MHz. Receiver functions may be controlled manually through the front panel, or remotely through the rear panel remote input connector. In the manual mode, operating parameters are selected by depressing appropriate pushbutton/indicators. The depressed button indicates the operators selection by a brightly colored display behind the transparent front surface. Seven digits composed of light emitting diodes (LED's) indicate the tuned frequency to a resolution of 10 Hz. The large tuning knob and four tuning rate pushbuttons provide frequency tuning capability. A tuning disable pushbutton locks the receiver to a specific frequency, thereby preventing accidental frequency changes. The remote control mode is enabled by one of two methods: depressing the TUNING DISABLE pushbutton, or a control change activated by the remote device. A jumper wire on the Manual Tuning Up/Down Counter card determines the method employed. In the remote mode, the receiver responds to parallel input data, consisting of frequency and bandwidth information, and is compatible with buffered CMOS levels.

Pushbutton-selectable parameters in addition to the operating modes are IF Bandwidths, Gain Mode and Meter Select. Selectable IF bandwidths of 0.3 kHz, 1.0 kHz, 3.2 kHz, 6 kHz, and 16 kHz operate in conjunction with the AM, FM, or CW detection modes. When the ISB, LSB, or USB detection modes are chosen, IF bandwidth selection is ineffective due to the automatic override by the detection mode control. RF gain is controlled manually or by Fast or Slow AGC. A dual-purpose meter indicates Signal Strength or Line Audio level.

Internal frequency tuning circuitry of the receiver includes the 1st, 2nd, and 3rd LO and BFO Synthesizers. The phase lock loop frequency synthesizers determine tuned frequency to a resolution of 10 Hz. The synthesized BFO tunes ±8.9 kHz from 455 kHz in 100 Hz and 1 kHz steps. A non-volatile memory stores the tuned frequency for a minimum of 48 hours after power interruption (i.e., power failure or manually turning power off).

Rear panel features include BNC connectors for a 50 Ω RF input, a 455 kHz IF output and a 1 MHz reference input/output selected by a related slide switch. Two five-lug terminal boards provide audio outputs that include: a 600 Ω floating center-tapped ISB output (for the lower sideband), a single-ended phone output, a center-tapped line audio output and an FM/CW/SSB detector output for monitoring. Line voltage selection for high and low voltage conditions may be accomplished in a few seconds by inserting the printed circuit (PC) wafer in one of four positions in the line cord assembly.

Maintenance operations are straightforward due to clean mechanical packaging and placement of nearly all components on plug-in circuit boards. These circuit boards mount on motherboards which have all pins accessible from the bottom of the receiver. Removing the top cover exposes the assemblies, which may be unplugged from their sockets or freed from the main chassis by quick disconnect plugs. The dc power supplies are thermal and short circuit protected, requiring no adjustments, and are easily replaced. A printed circuit wafer, accessible on the rear panel, enables matching the power transformer to line voltages of 110 Vac (±15%) and 220 Vac (±15%).

## 1.2 MECHANICAL CHARACTERISTICS

The receiver mounts in a standard 19-inch equipment rack, occupies 5.25 inches of vertical space, and extends 19.6 inches into the rack. The main chassis, front, rear, top, and internal compartment panels are constructed of aluminum. Side panels are cast aluminum, the front panel is a 0.19-inch thick aluminum plate, and the rear panel, main deck, and internal partitions are stamped aluminum. The side panels, top and bottom covers are perforated allowing flow-through ventilation. All operating controls and indicators are on the front panel, while all input and output cables are connected to the rear panel (except for the phone jack). This package meets the radiation specification of MIL-STD-461A.

The front panel is overlaid with a black bezel etched with control markings. All pushbuttons are mounted on a printed circuit card positioned behind the front panel, and extend through cutouts in the front panel. The remaining controls and line audio/signal strength meter are mounted directly on the front panel. The tuned frequency numeric display is mounted on a card positioned behind a cutout in the front panel, over which a polarized filter is installed. The audio phones jack, RF gain control and phone level controls are also mounted on the front panel. The WJ-8718A Line Audio control is also mounted on the front panel.

The rear panel mounts all input, output, and accessories, except for the phones jack. BNC connectors are supplied for the RF input, IF output and 1 MHz reference input/output. The INT/EXT clock switch for selecting internal or external timebase reference is located next to the 1 MHz reference input/output. Two terminal blocks supply an output for Line Audio, Phone Audio, ISB Audio, and FM Audio. Two fuseholders are found on the rear panel. The circular fuseholder holds the alternate line voltage fuse, while the rectangular fuseholder has the additional functions of line filter, voltage selection and ac line cord receptacle. Also on the rear panel are +15 V, -15 V, and +5 V heat sinked regulators, and 37-pin female connectors for remote control. The WJ-8718 and 8718-9 Line Audio controls are also mounted on the rear panel.

Loosening 34 quarter-turn fasteners allows the top cover to be lifted from the receiver exposing four main compartments. A power distribution circuit, input converter and optional preselector mount in one compartment and three synthesizer boards mount in another. The IF modules and the digital control circuits are in separate compartments for mechanical support and shielding purposes.

Removing the bottom cover via 34 quarter-turn fasteners, exposes three mother-boards that mount a total of 27 modules and the components mounted on the front panel. All connections to the motherboards are push-on plugs so replacement of a motherboard consists of removing less than 10 screws and the plugs.

## 1.3 EQUIPMENT SUPPLIED

The equipment supplied consists of the receiver and a detachable line cord.

## 1.4 EQUIPMENT REQUIRED BUT NOT SUPPLIED

Select equipment from the following general classifications to obtain full use of the receiver.

- Antenna, 50 Ω
- Audio monitoring equipment such as the following: (for monitoring ISB signals, two units will be required except for headphones, which monitors both sidebands.)
  a) Speaker panel, 600 Ω
  b) Stereo headphones, 600 Ω
  c) Tape recorder
- Wideband tape recorder for 455 kHz IF amplifier predetection output.
- IF-to-tape converter for 455 kHz-to-video signal conversion.
- Remote Input Interface - for receivers utilizing remote control operation. Refer to the **Installation Section** of this manual for definitions of the input lines.

## 1.5 OPTIONAL EQUIPMENT

The following optional equipment is available for use with the WJ-8718 Series HF Receiver. For additional information concerning these options and others, contact Watkins-Johnson Company, Gaithersburg, Maryland, or your Watkins-Johnson representative.

| | |
|---|---|
| ● 10 Hz BFO Synthesizer | WJ-8718/B10 |
| ● Built-in Test Equipment | WJ-8718/BITE |
| ● Command Input | WJ-8718/COM |
| ● Carrier Operated Relay | WJ-8718/COR |
| ● Dual Diversity Combiner | WJ-8718/DDC |
| ● Frequency Extender | WJ-8718/FE |
| ● Frequency Shift Keying | WJ-8718/FSK |
| ● Green LED Frequency Display | WJ-8718/GRN |
| ● Low Level Audio | WJ-8718/LLA |
| ● Microprocessor Front Panel | WJ-8718/MFP |
| ● Monitor Output | WJ-8718/MON |
| ● Sub-Octave Preselector | WJ-8718/PRE |
| ● Independent Sideband (ISB) (WJ-8718 only) | WJ-8718/ISB |

- Red LED Frequency Display
- Signal Monitor Output
- 1 Hz Tuning
- RS-232 Interface (Talk/Listen)
- IEEE-488 Bus Interface (Talk/Listen)

WJ-8718/RED
WJ-8718/SMO
WJ-8718/1 Hz
WJ-8718/232
WJ-8718/488-2

## Table 1-1. Type WJ-8718 Series HF Receiver, Specifications

| | |
|---|---|
| Tuning Range | 5 kHz to 29.99999 MHz. |
| Detection Modes | Standard: AM, FM, CW. |
| Optional: LSB, USB, ISB. | |
| Frequency Display | 7 digit, LED's. |
| Frequency Resolution/Readout | 10 Hz. |
| Frequency Stability | $6 \times 10^{-8}$ per day, $2 \times 10^{-6}$ per year. |
| Input Impedance | 50 Ω, unbalanced, nominal. |
| Antenna Input Protection | The antenna input withstands the effects of RF power to +15 dBm and static build-up. |
| IF Bandwidths (3 dB) | Standard: 0.3, 1, 3.2, 6, and 16 kHz. |
| IF Shape Factor | IF BW — 60 dB: 3 dB, Typical<br>0.3 kHz — 7.0:1<br>1 kHz — 4.5:1<br>3.2 kHz — 2.5:1<br>6 kHz — 2.3:1<br>16 kHz — 2.0:1 |
| Sensitivity | (0.2-30 MHz, see CW Sensitivity for extended frequency range) |
| AM Sensitivity (6 kHz IF Bandwidth) | A 1.7 µV signal 50% AM modulated at a 400 Hz rate produces at least a 10 dB (S+N)/N ratio at the audio output. |
| FM Sensitivity (16 kHz IF Bandwidth) | A 2.5 µV signal FM modulated at a 400 Hz rate to a 4.8 kHz peak deviation produces at least a 17 dB (S+N)/N ratio at the audio output. |
| CW Sensitivity (0.3 kHz IF Bandwidth) | |
| 200 kHz-30 MHz | A 0.4 µV signal produces a 16 dB (S+N)/N ratio at the audio output. |
| 50 kHz-200 kHz | A 0.63 µV signal produces a 16 dB (S+N)/N ratio at the audio output. |
| 15 kHz-50 kHz | A 1.4 µV signal produces a 16 dB (S+N)/N ratio at the audio cutput. |
| 5 kHz-15 kHz | A 63 µV signal produces a 16 dB (S+N)/N ratio, typically at the audio output. |
| ISB, (USB, LSB) Sensitivity (3 kHz SSB Bandwidth) | A 0.56 µV signal produces a 10 dB (S+N)/N ratio at the audio output. |
| Gain Control Modes | Manual, Fast AGC, Slow AGC. |
| AGC and Manual Range | 100 dB, minimum. |
| AGC Threshold | 3.0 µV, typical. |
| AGC Attack Time | 15 ms, maximum. |
| AGC Release Time | Fast AGC: 25 ms, maximum.<br>Slow AGC: 4 sec, maximum. |

**Table 1-1. Type WJ-8718 Series HF Receiver, Specifications** (Continued)

| | |
|---|---|
| Audio Outputs: | |
| ISB Output | 100 mW, maximum across 600 Ω. |
| Line Audio | 1 W minimum, across 600 Ω for an input signal of 3 µV, 30% AM modulated at a 400 Hz ratio. |
| Headphone Output* | 30 mW, minimum, for an input signal of 3 µV, 30% AM modulated at a 400 Hz rate. |
| Audio Distortion | Less than 5% at rated audio output. |
| Audio Frequency Response | ±1.5 dB from 100 Hz to 8 kHz, 1 kHz reference frequency. |
| Final IF Output | 20 mV, minimum, into 50 Ω for input signals greater than 3.0 µV. |
| Frequency Control | Manual or Remote options. |
| Synthesizer Lock-Up Time | 3 ms, typical; 10 ms, maximum. |
| Synthesized BFO | 455 kHz ±8.9 kHz in 100 Hz steps. |
| IF Rejection | Greater than 90 dB. |
| Image Rejection | Greater than 90 dB. |
| Intermodulation Distortion: | |
| 3rd Order Input Intercept Point | +20 dBm, minimum for signals separated by 30 kHz, (performance may degrade below 3 MHz). |
| Unwanted Sideband Rejection | 50 dB at 350 Hz into unwanted sideband. |
| Reciprocal Mixing | With a desired signal of 25 µV in the 3.2 kHz IF bandwidth, the desired signal-to-noise ratio is greater than 20 dB, when an undesired signal 70 dB higher in amplitude and 30 kHz removed in frequency is present. |
| Cross Modulation | With a desired signal of 10 µV an undesired signal 70 dB higher, 30% AM modulated produces less than 10% cross modulation for frequency separation of greater than 50 kHz in the 1 kHz IF bandwidth. |
| Antenna Conducted Oscillator Radiation | -87 dBm, maximum. |
| Signal Meter | Indicates carrier level or line audio level. |
| Operating Temperature Range | 0°C to 50°C. |
| Power Consumption | 0.6 A at 115 Vac, approximately. |
| Power Requirements | 110/220 Vac ±15% 48-420 Hz. |
| Power Interrupt | With Manual Control Module option, storage of frequency data automatically occur. Upon restoration of power, the receiver returns to the previously tuned frequency. |

**Table 1-1. Type WJ-8718 Series HF Receiver, Specification** (Continued)

| | |
|---|---|
| Size ..... | 5.25 inches high, 19 inches wide and 19.4 inches deep. |
| Weight ..... | 35 pounds (15.75 kilograms), approximately. |

*** Note:** The stereo headphone output provides 30 mW for each output on on stereo phone plug. Refer to **Figure 1-2.**

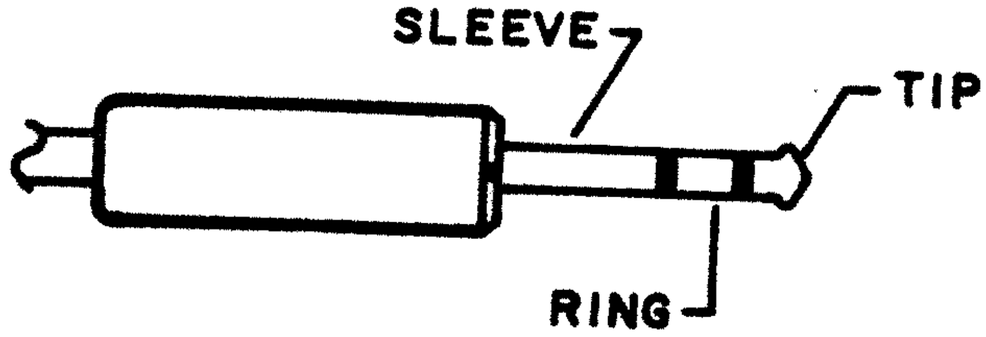



**Figure 1-2. Tip-Ring-Sleeve Plug Outline Drawing.**

# SECTION II

# INSTALLATION AND OPERATION

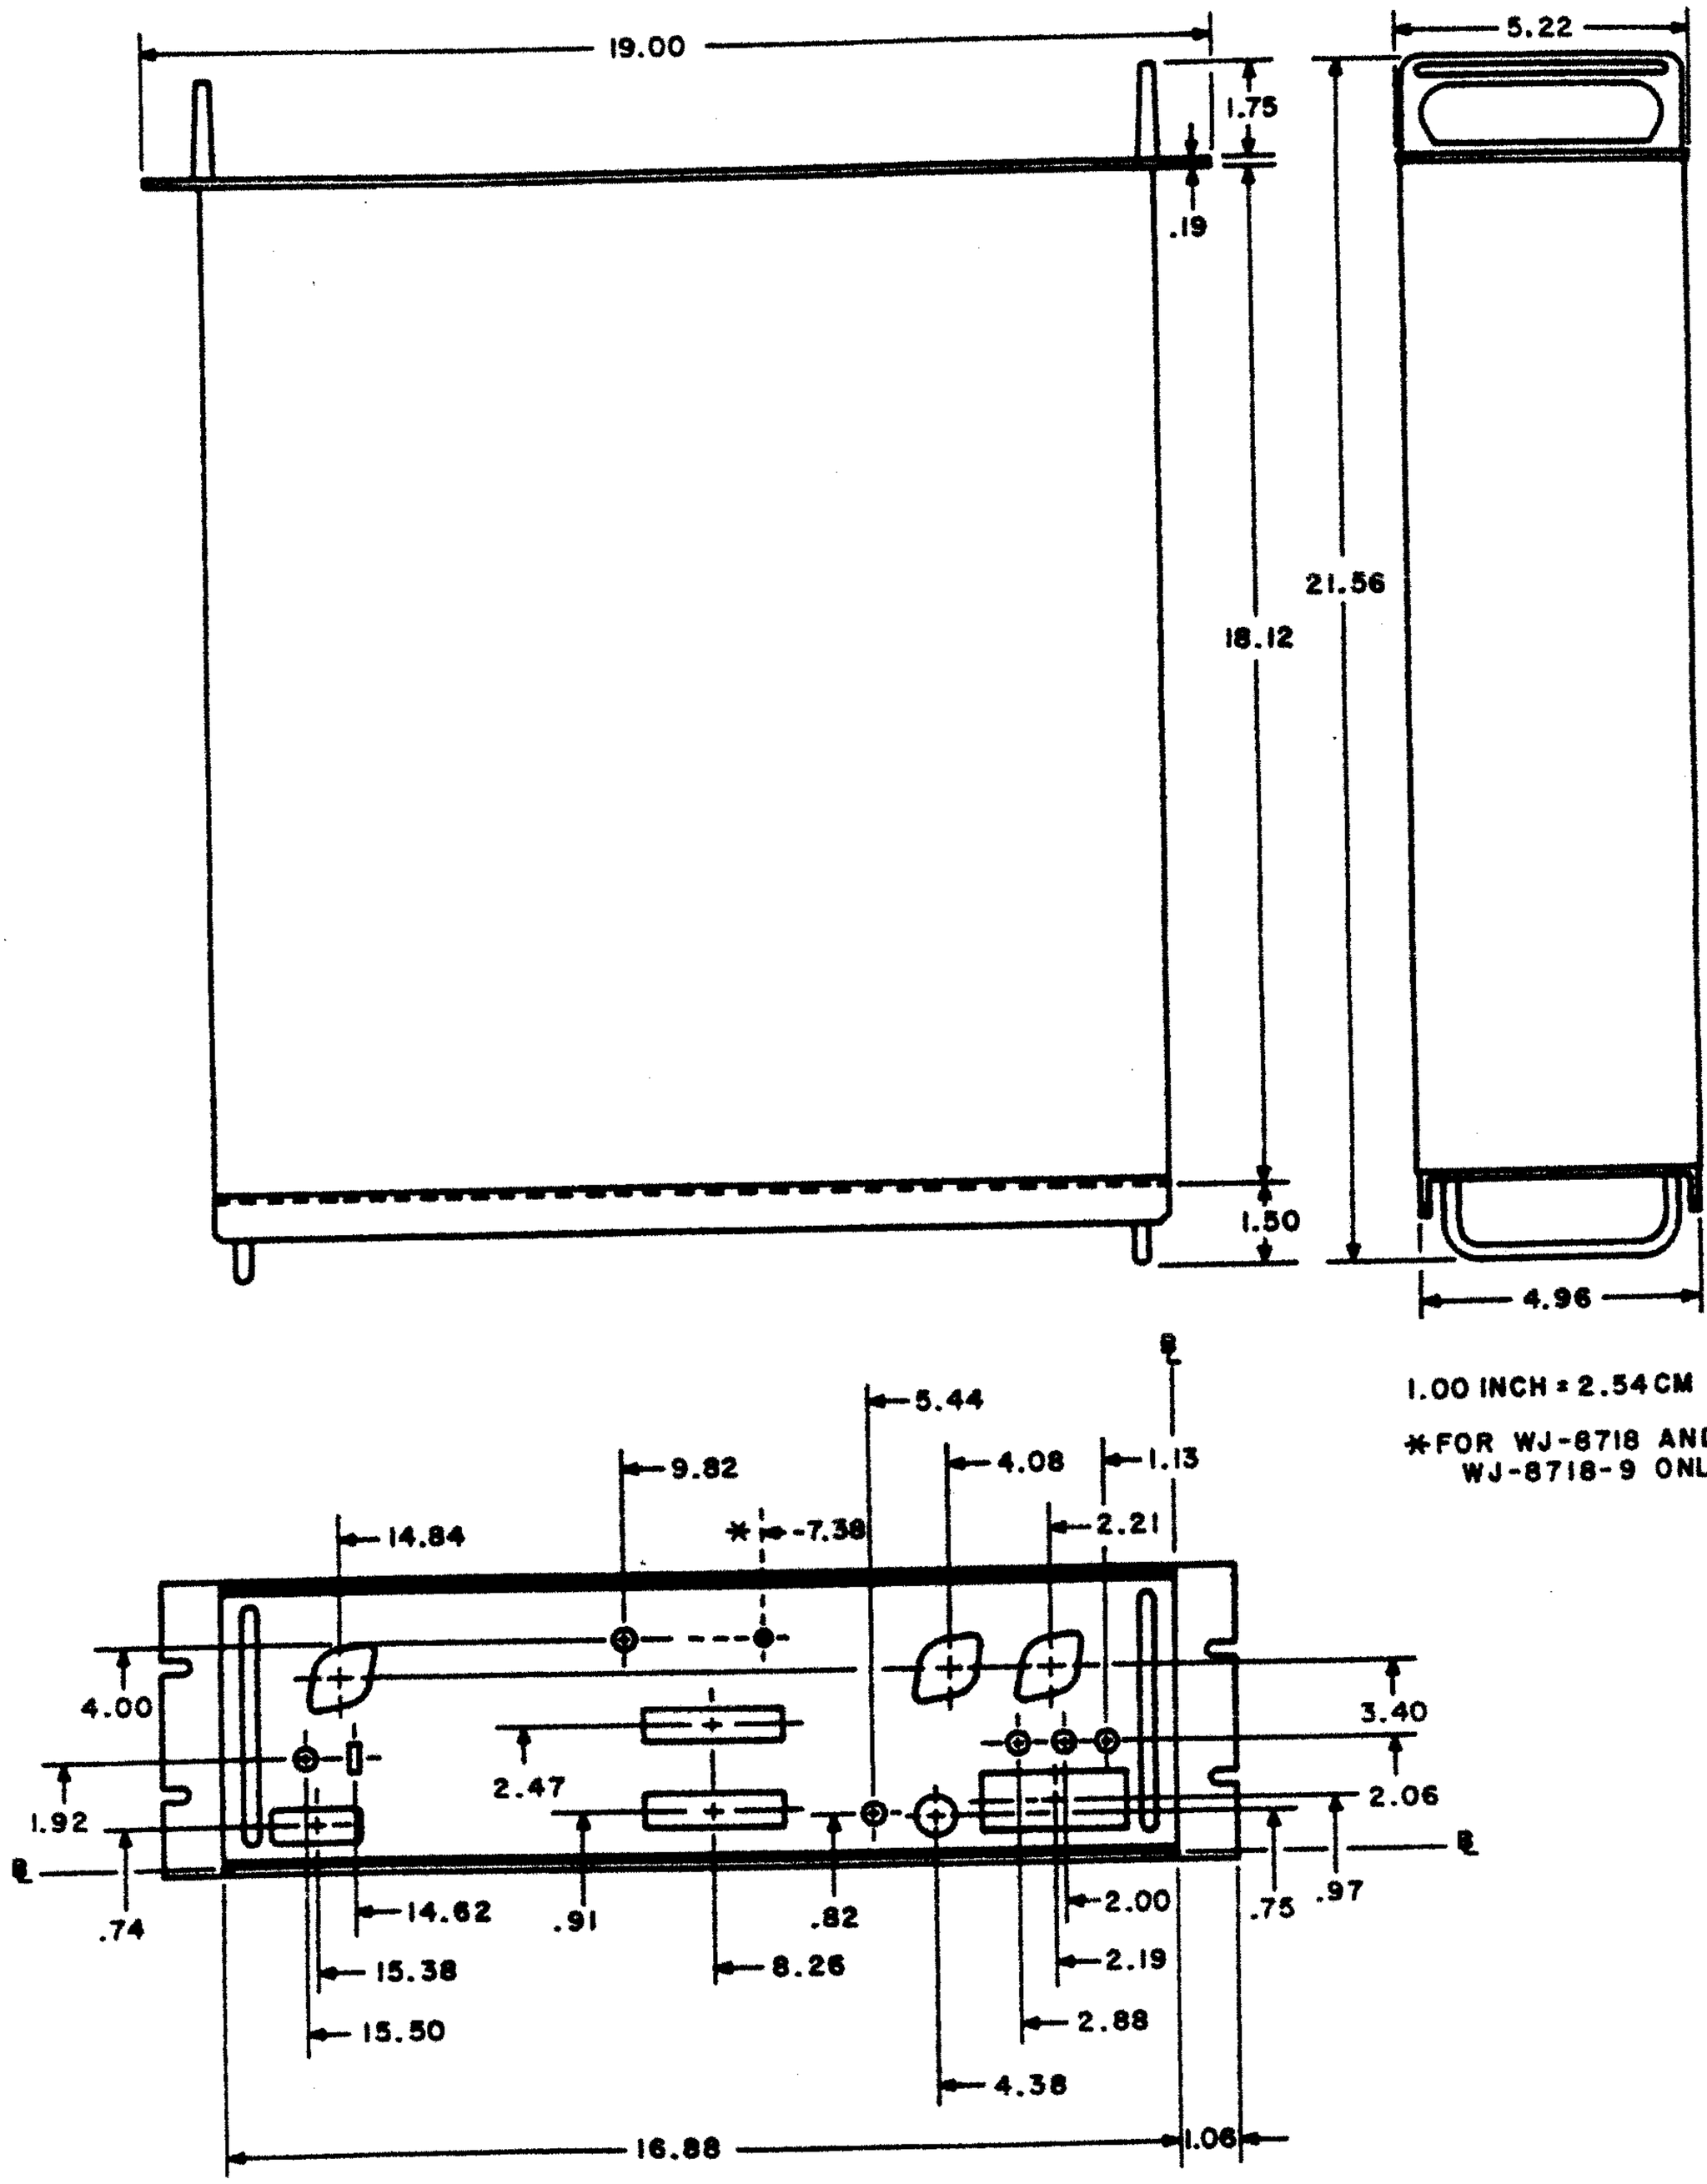



**Figure 2-1. WJ-8718 Series Receiver, Critical Dimensions**

# SECTION II

# INSTALLATION AND OPERATION

## 2.1 UNPACKING AND INSPECTION

Examine the shipping carton for damage prior to unpacking the equipment. If the carton appears to be damaged, try to have the carrier's agent present when the equipment is unpacked. If this is not possible, retain all packaging material and shipping containers for the carrier's inspection to verify damage to the equipment after unpacking, Also verify that the equipment shipped corresponds to the packing slip. Contact the Watkins-Johnson Company, CEI Division, or your Watkins-Johnson representative for any discrepancies or shortages.

The unit was thoroughly inspected and factory adjusted for optimum performance prior to shipment. It is, therefore, ready for use upon receipt. After uncrating and checking contents against the packing slip, visually inspect all exterior surfaces for dents and scratches. If external damage is visible, remove the dust covers and inspect the internal components for apparent damage. Then check the internal cables for loose connections, and plug-in items such as printed wiring boards, which may have been loosened from their receptacles.

## 2.2 PREPARATION FOR RESHIPMENT AND STORAGE

If the receiver must be prepared for reshipment, the packaging methods should follow the pattern established in the original shipment. If retained, the original materials can be reused to a large extent or at least provide guidance for the repackaging effort. Conditions during storage and shipment should be limited as follows:

Maximum humidity: 95% (no condensation)

Temperature range: $-30^{o}C$ to $85^{o}C$

## 2.3 INSTALLATION

Rack mounting equipment, manufactured by Watkins-Johnson Company, is designed for assembly in 19 inch racks in accordance with MIL-STD-189 or E.I.A. Standard No. RS-310. It is recommended that chassis slides be added to the racks for ease of assembly, access to the unit, and to provide adequate support for general installations. Mobile installation of the equipment should be evaluated on an individual basis.

Watkins-Johnson equipment is designed for operational temperatures between $0^{o}$ C and $50^{o}$ C ($32^{o}$ F-$122^{o}$ F). Equipment installation should provide for free-flowing air circulation around and through ventilated units. Multiple stacking, in particular close adjacent stacking of electronic equipment in a standard console, can produce an appreciable increase in operating temperature for all equipment contained within the console. Forced-air ventilation may be necessary to maintain proper air circulation and temperature for efficient operation of the equipment.

Access to the rear panel should be allowed so that input and output connections can be conveniently made or changed if desired. **Figures 2-2** through **2-7** are photographs of the front and rear panels depicting connector locations for the WJ-8718, 8718A and 8718-9 receivers. A description of the functions and input/output parameters of each connector follows.

### 2.3.1 VOLTAGE SELECTOR/FUSE BLOCK AND LINE CORD RECEPTACLE (FL1J1)

This assembly should be inspected before installing the receiver in a new location. With the line cord unplugged, the clear plastic window can be slid over the three male power receptacle prongs. This exposes the line fuse and a hinged, plastic FUSE PULL lever.

Swinging of the FUSE PULL lever to the left ejects the fuse from the holder and frees a line-voltage-select PC wafer found at the bottom of the assembly. Looking down on the PC wafer at a slight angle on the left side shows the selected line voltage for the receiver, either 100, 120, 220, or 240 Vac. If the voltage shown does not match the available line voltage, remove the PC wafer and reinstall it so that the closest line voltage is visible with the PC wafer in position; the PC wafer should be set in the voltage position closest to the line voltage used. Then install the fuse suitable for the line voltage: 1 A, slow-blow for 100 Vac and 120 Vac, or 1/2 A, slow-blow for 220 Vac and 240 Vac. Install the other fuse in the alternate fuseholder.

Slide the clear plastic window back over the fuse and PC wafer portion of the assembly holder and insert the line cord in the receptacle.

### 2.3.2 RF INPUT (A2J1)

This BNC connector is the RF signal input for the receiver. Nominal input impedance is 50 Ω. The input is protected against signals exceeding +15 dBm (1.25 V rms) and static build-up.

### 2.3.3 ALTERNATE FUSEHOLDER (XF2)

This fuseholder provides convenient storage of the fuse for the line voltage not in use. There is no electrical connection to the fuseholder.

### 2.3.4 IF OUTPUT (J12)

This BNC connector supplies a 455 kHz IF output. The level will be 20 mV, minimum, into 50 Ω in AGC mode, for RF input signals greater than 3 µV.

### 2.3.5 TERMINAL BOARD (TB1)

Two audio outputs are available on this board. They will be described separately.

- LINE AUDIO. These three terminals provide a floating, 600 Ω, center tapped audio output. This output will drive a 600 Ω load

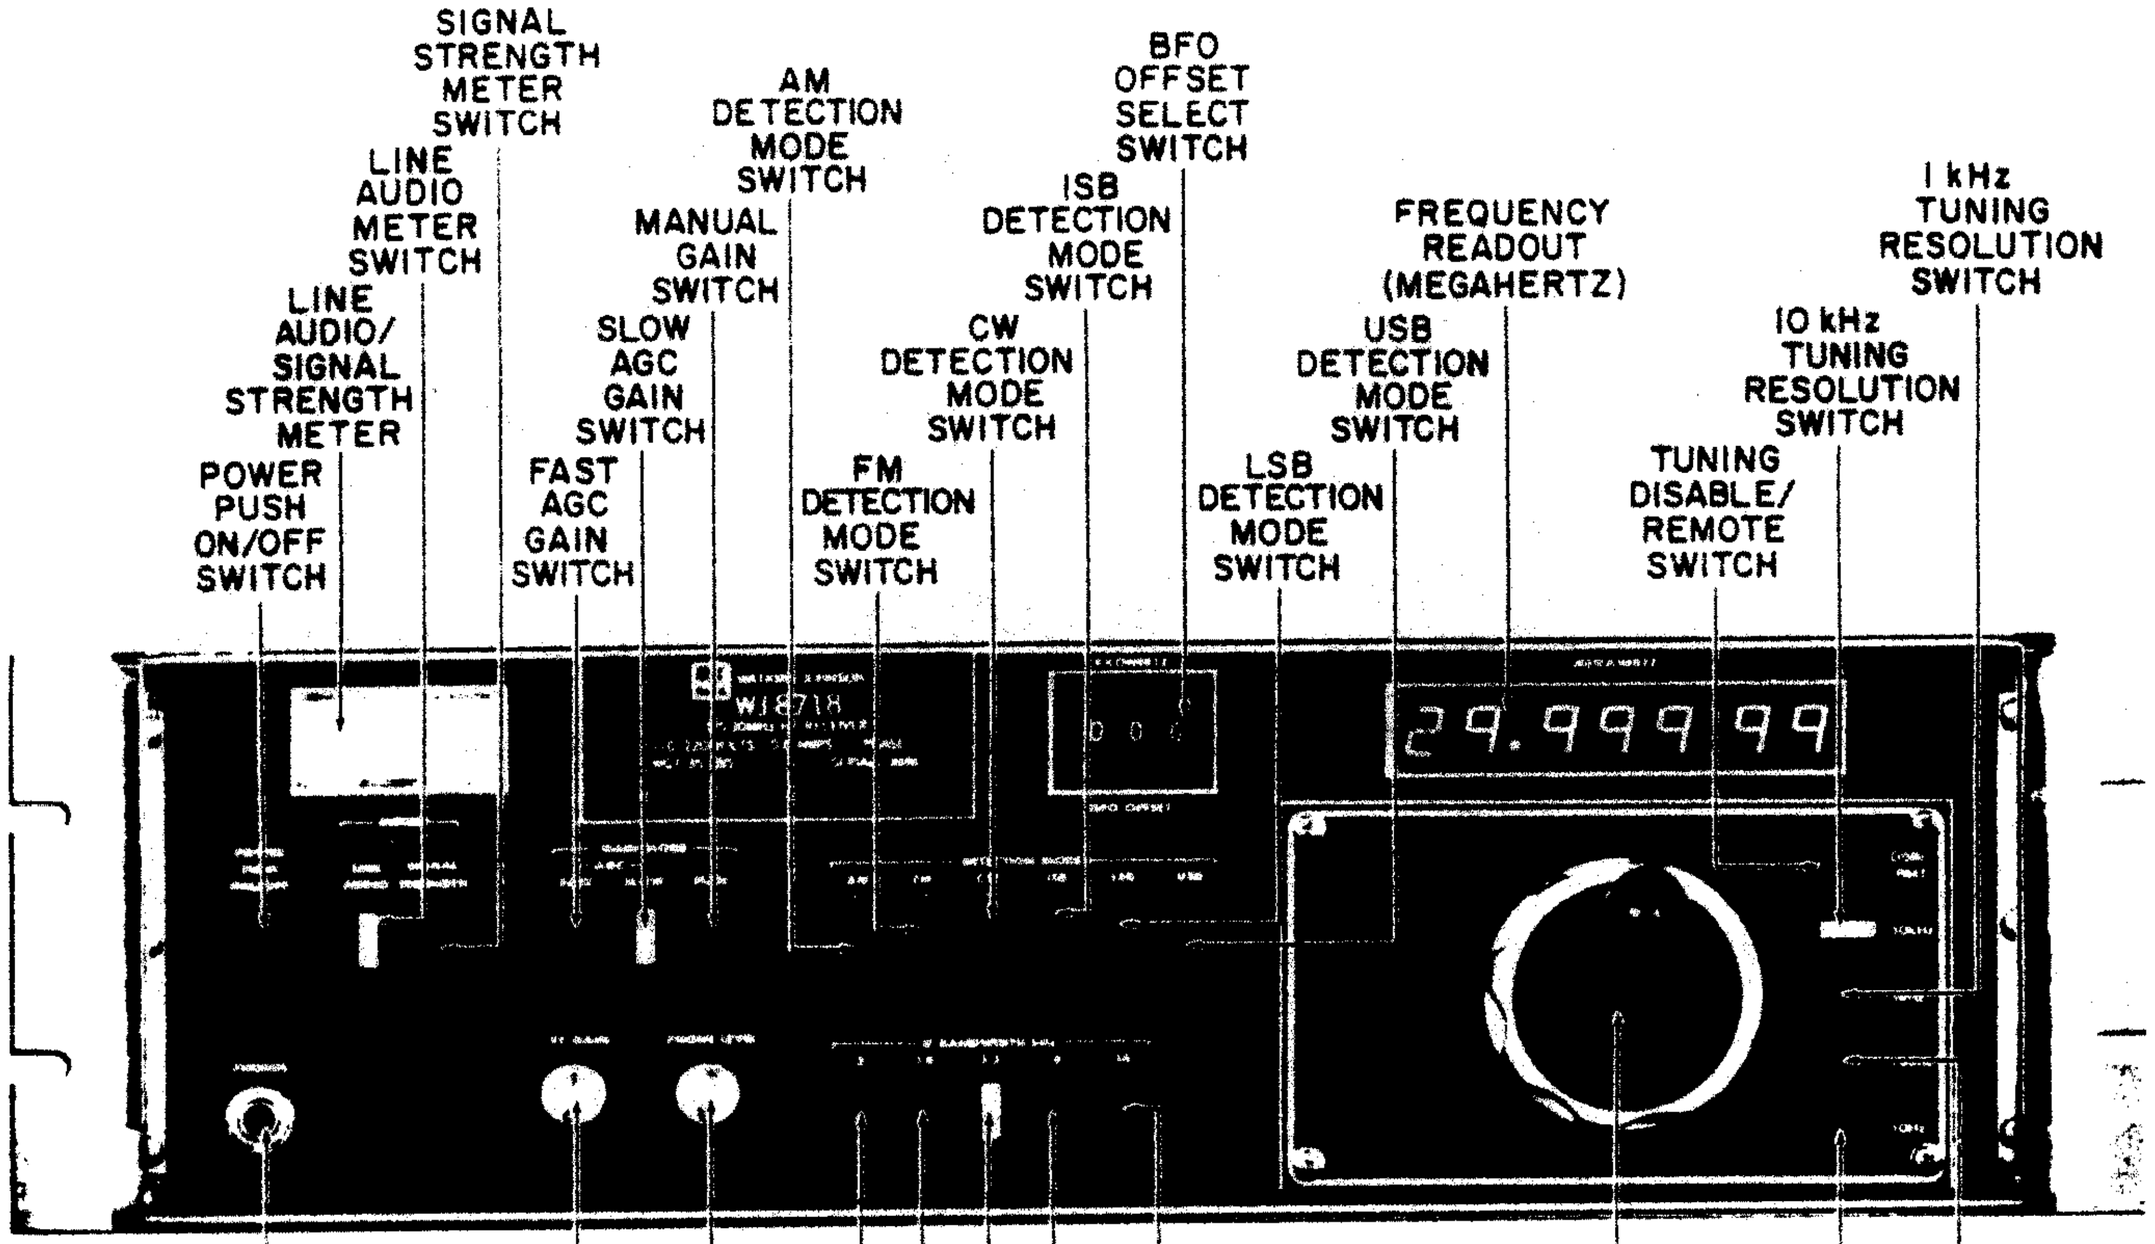



**Figure 2-2. WJ-8718 Series HF Receiver, Front Panel View**

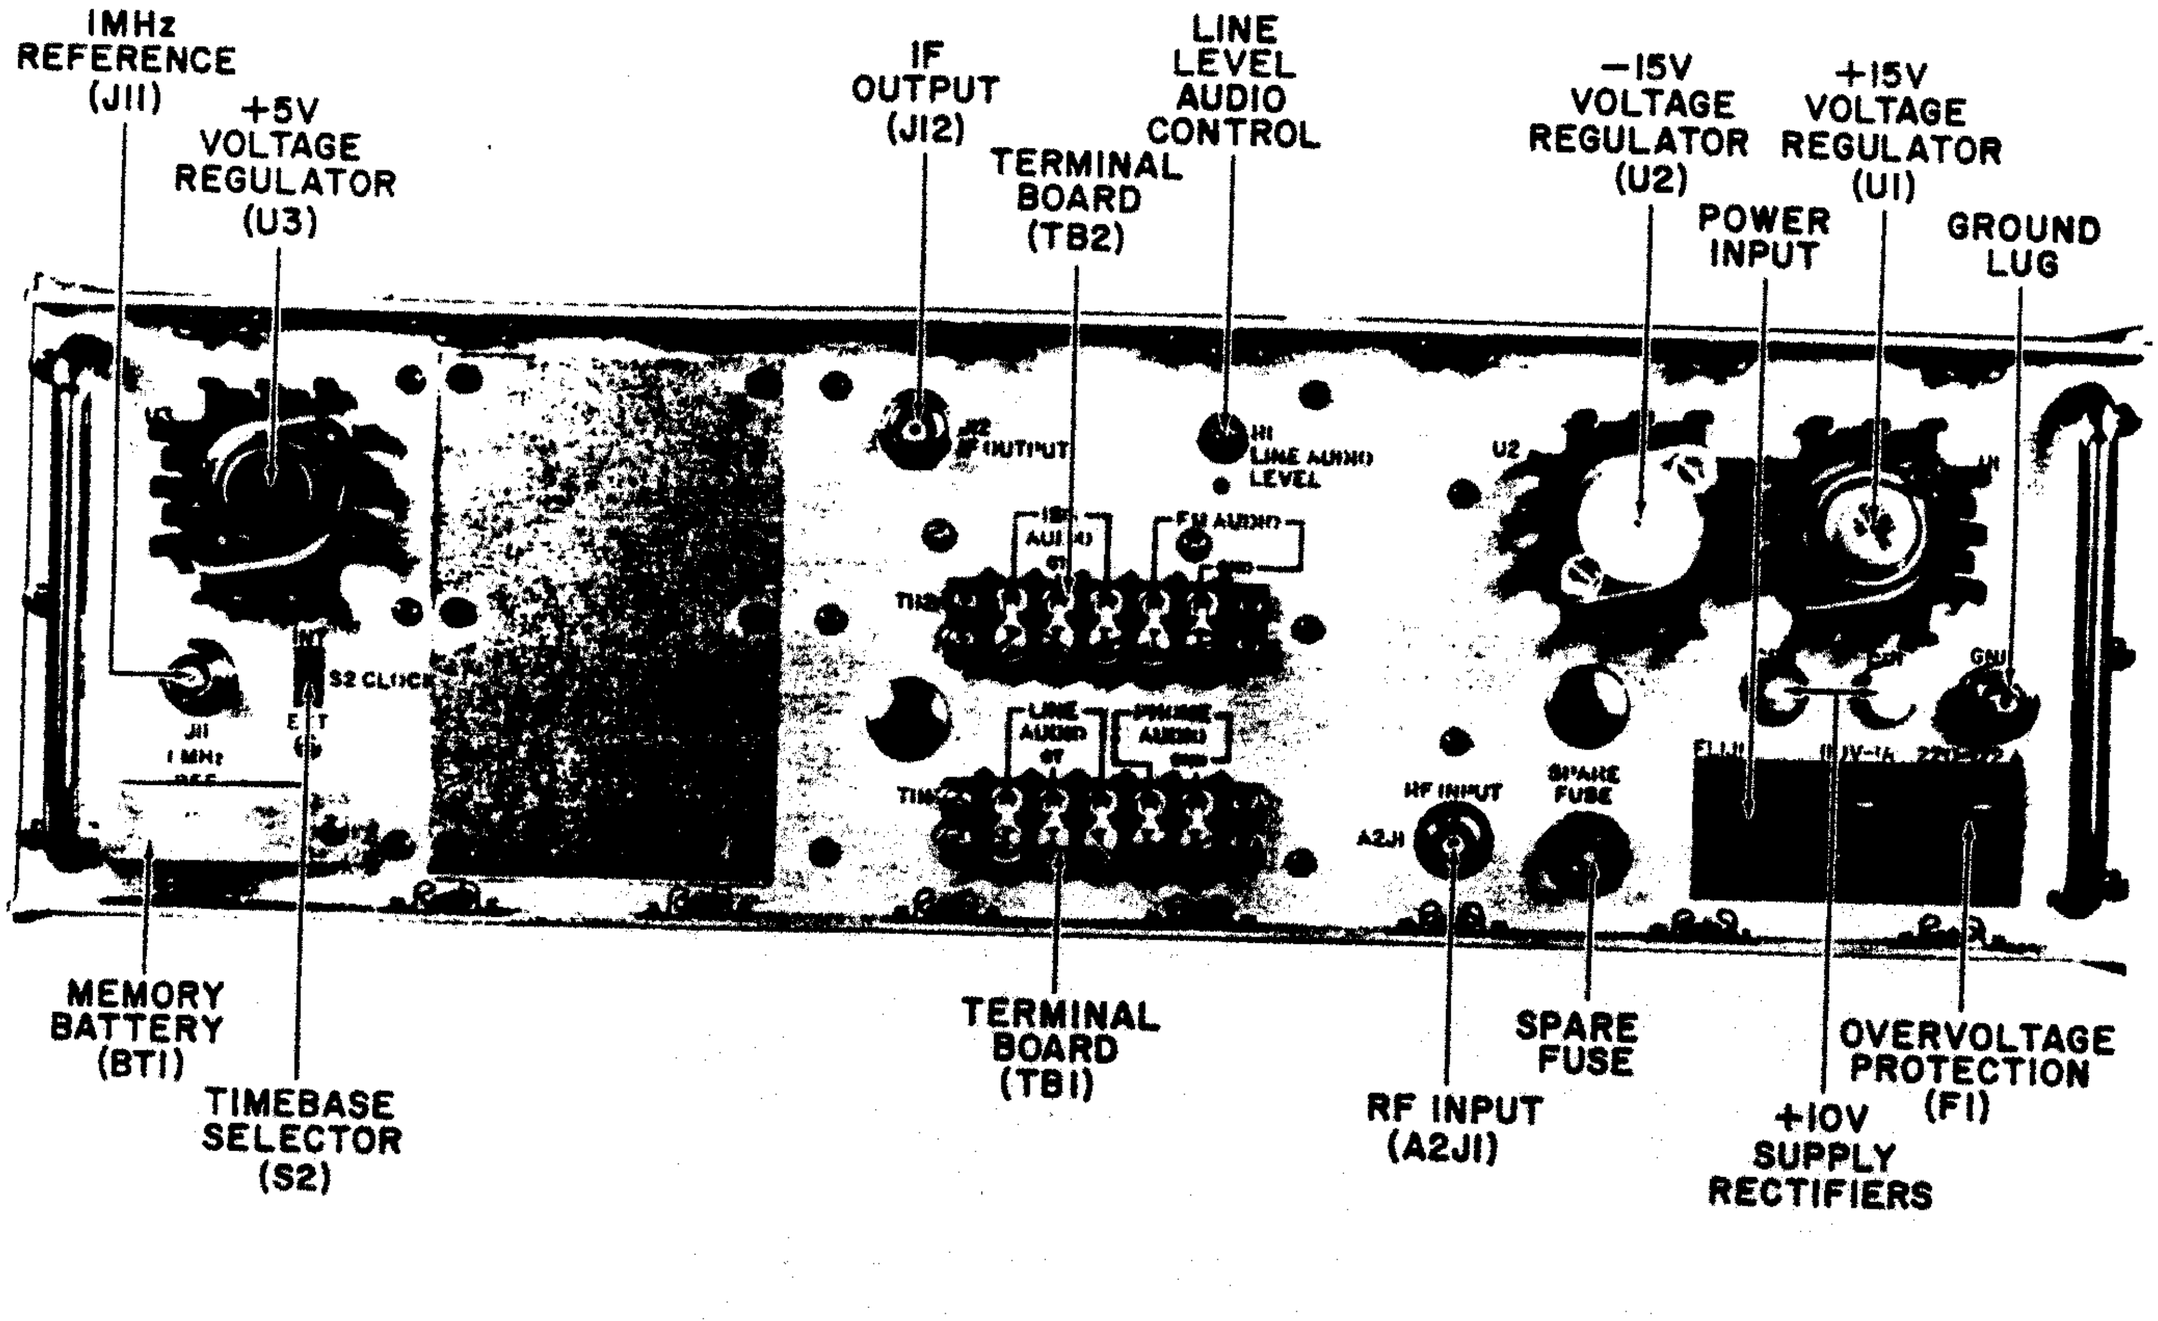



**Figure 2-3. WJ-8718 Series Receiver, Rear Panel View**

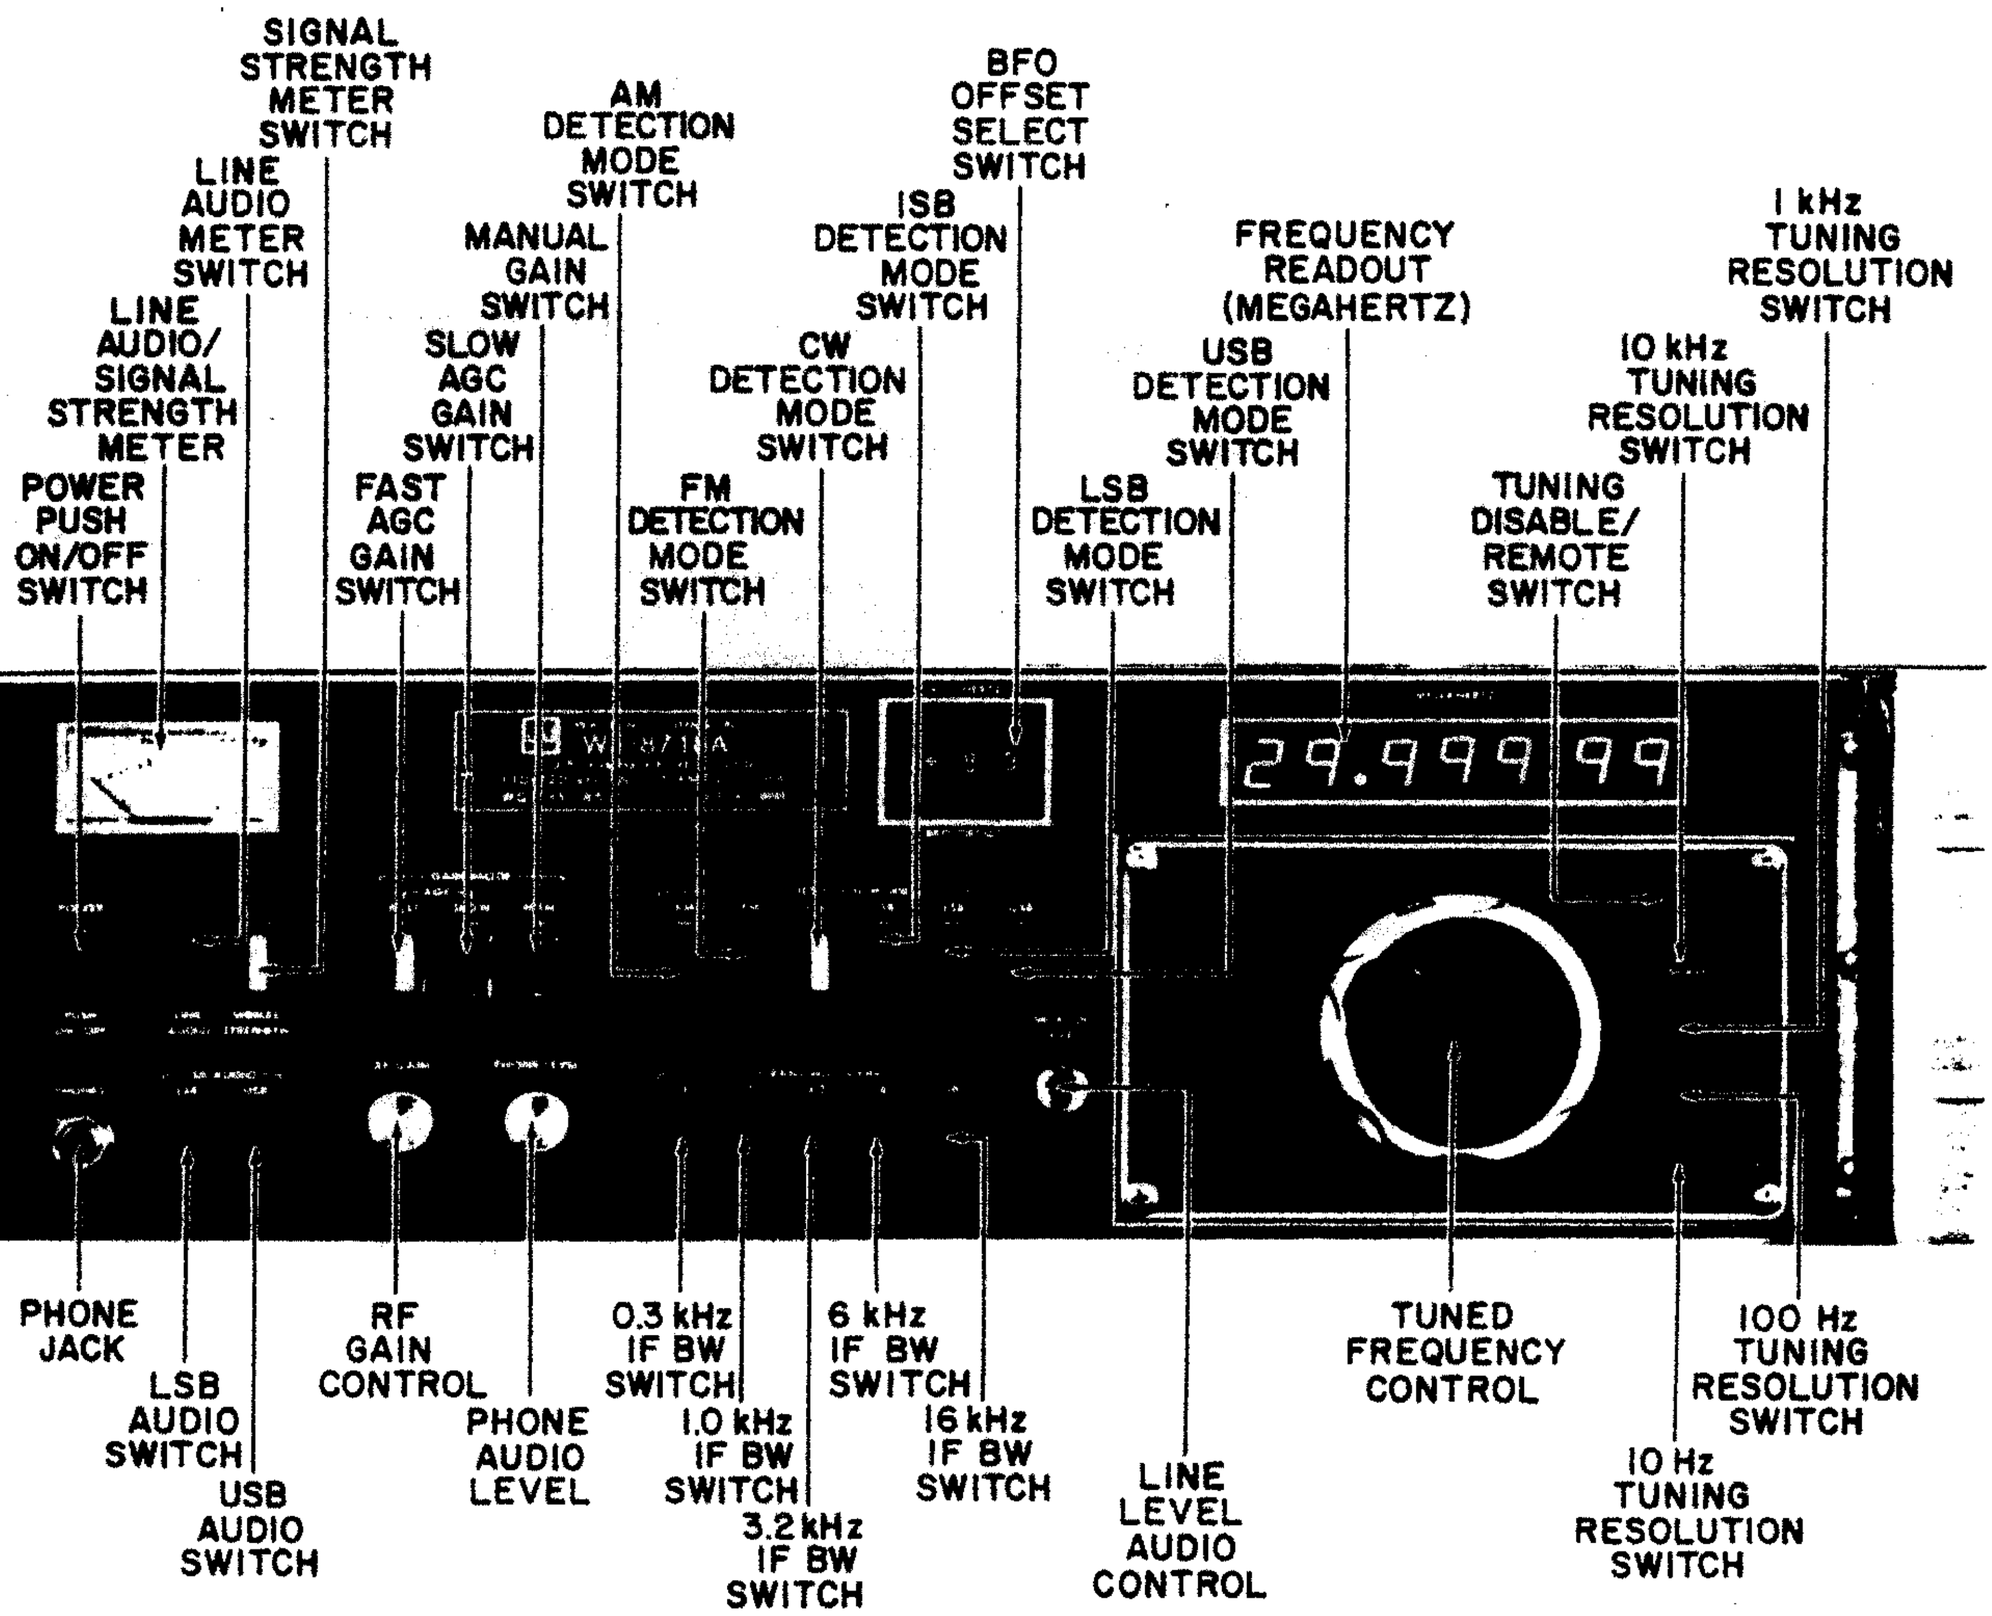



**Figure 2-4. WJ-8718A HF Receiver, Front Panel View**

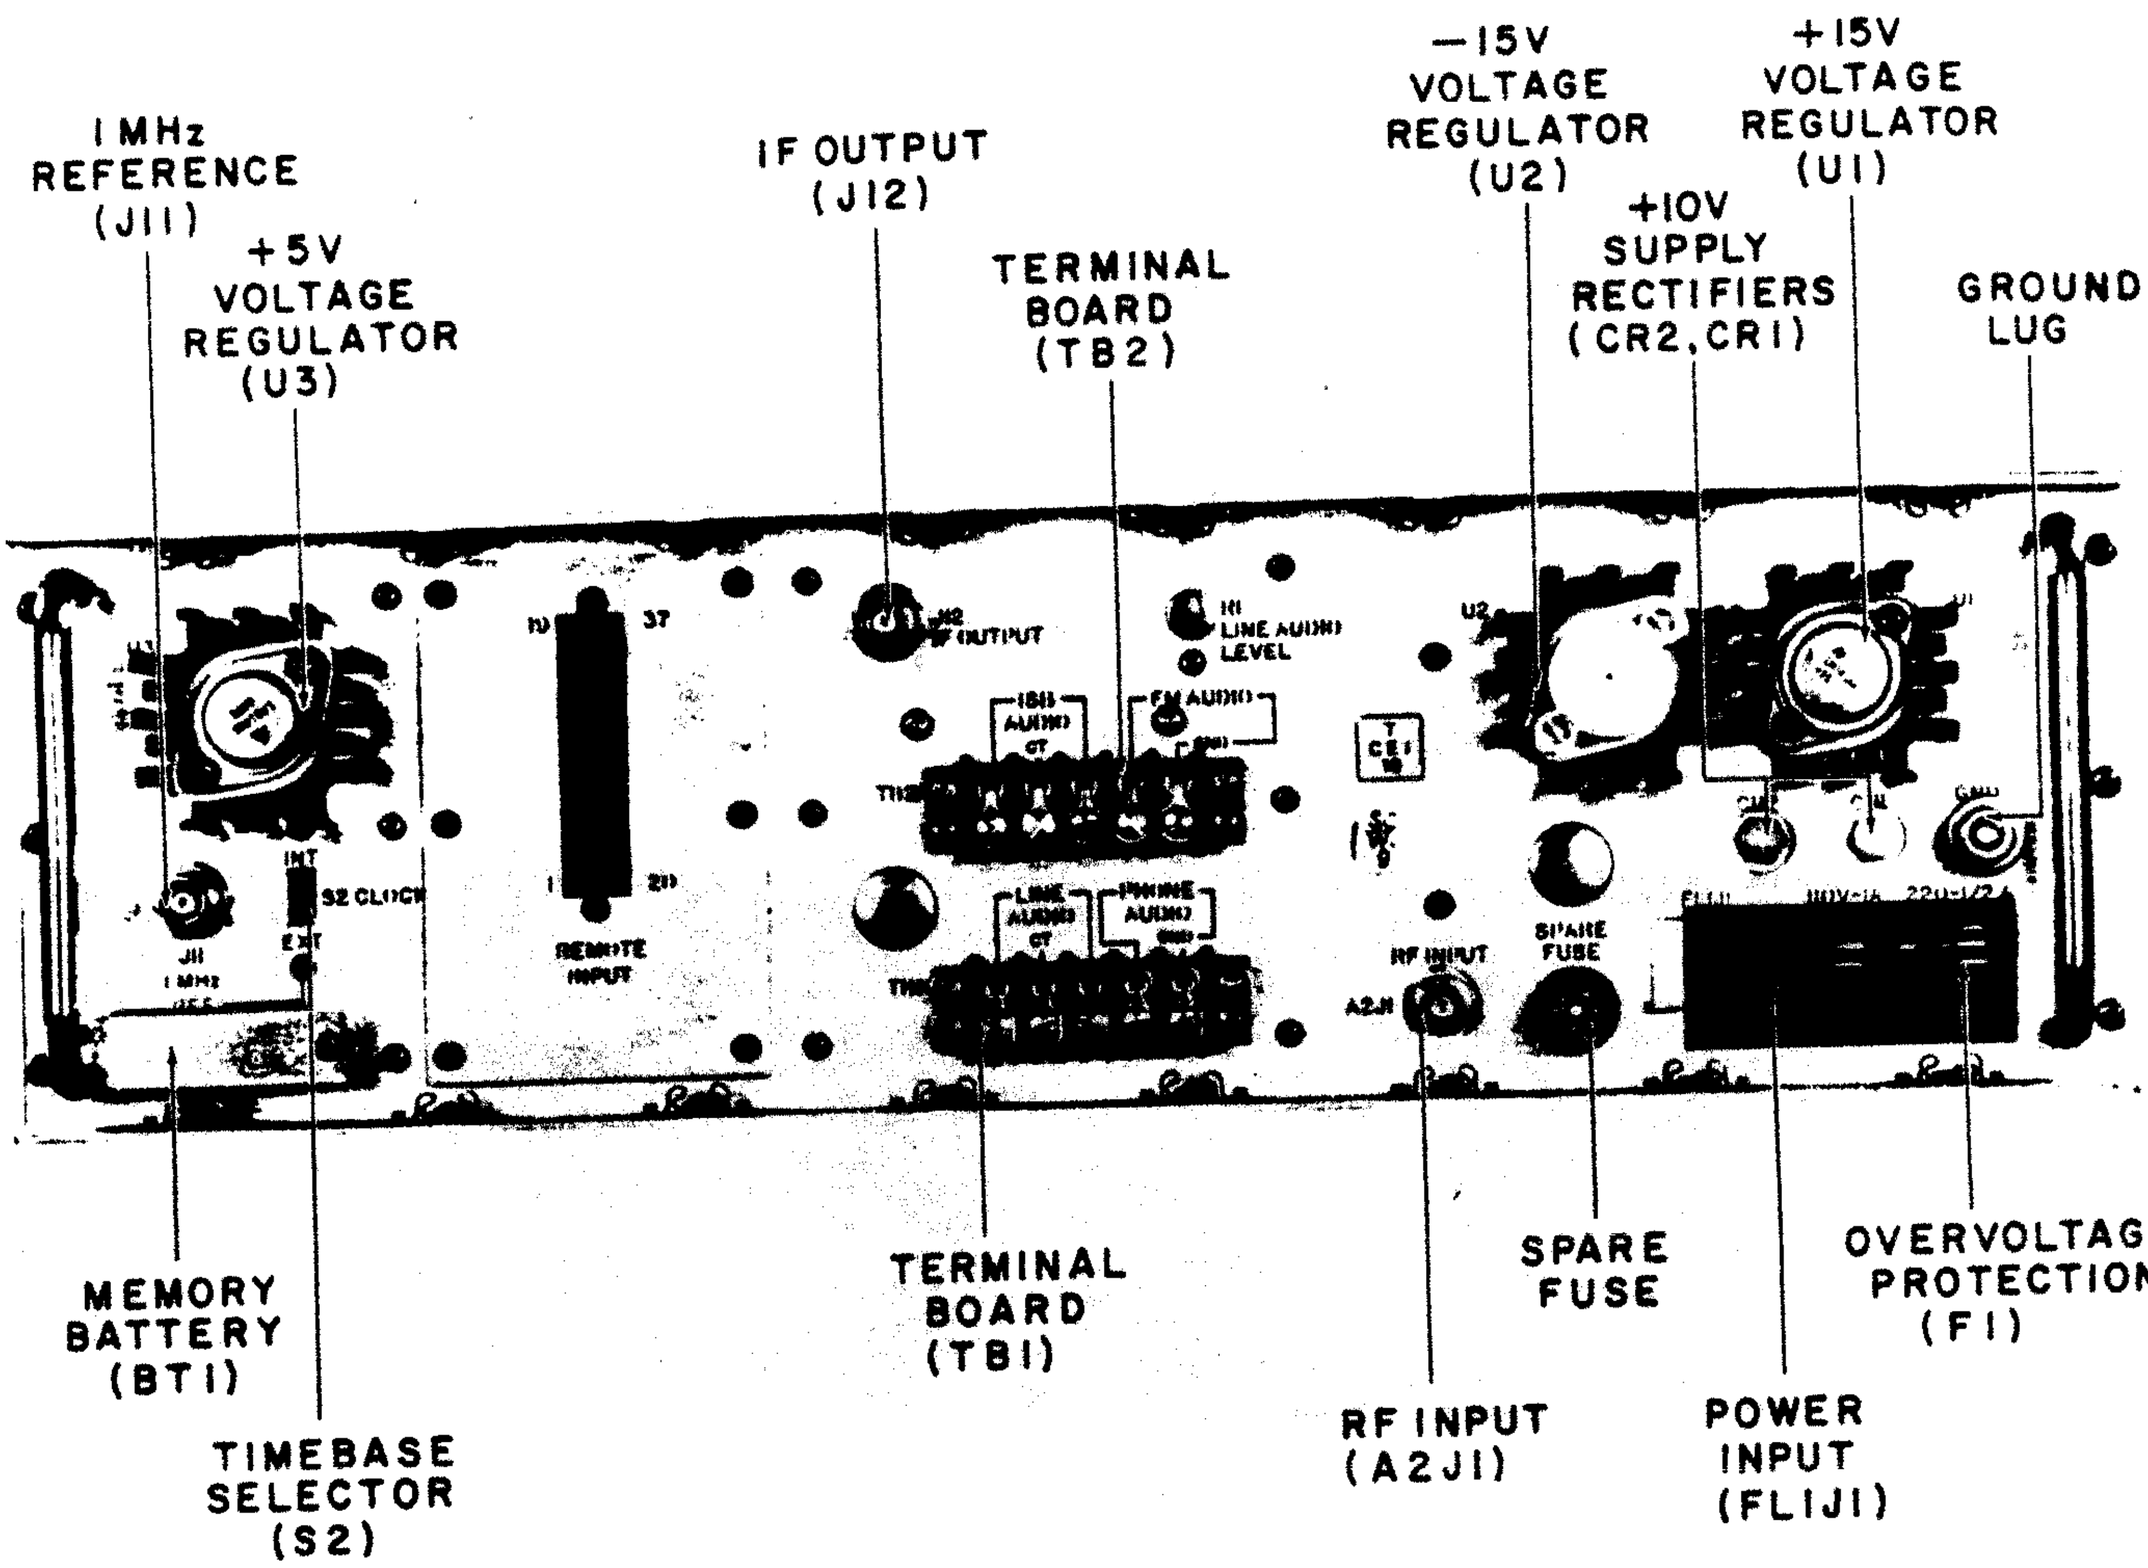



**Figure 2-5. WJ-8718A HF Receiver, Rear Panel View**

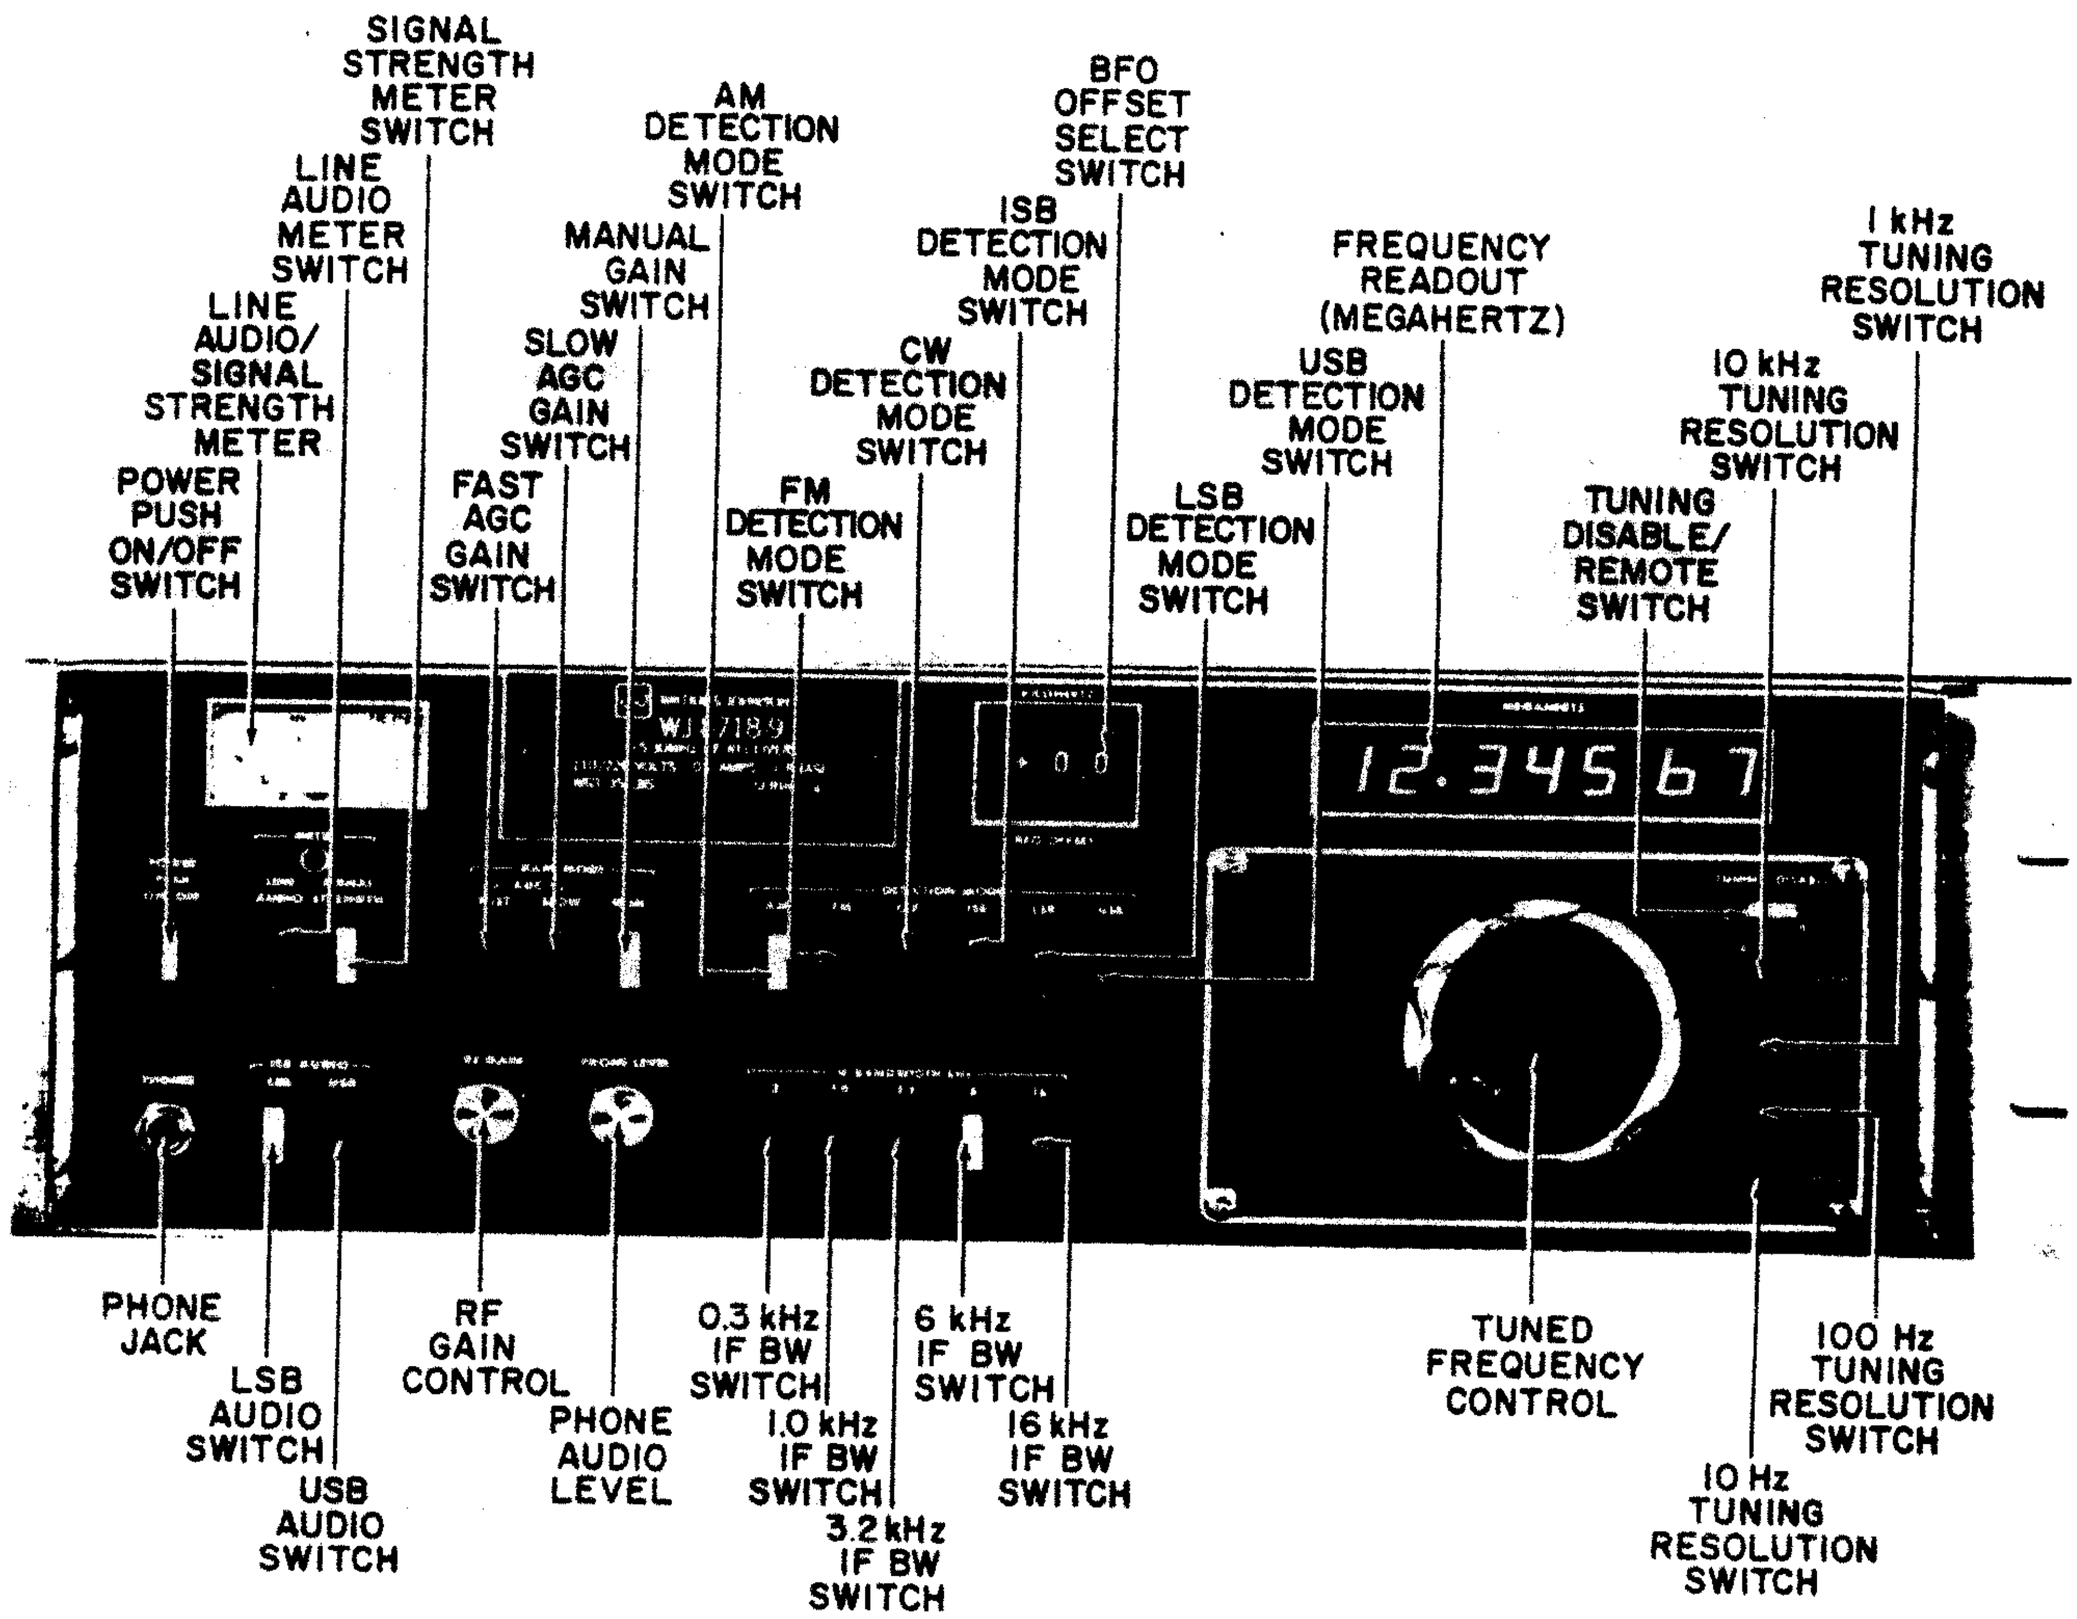



**Figure 2-6. WJ-8718-9 HF Receiver, Front Panel View**

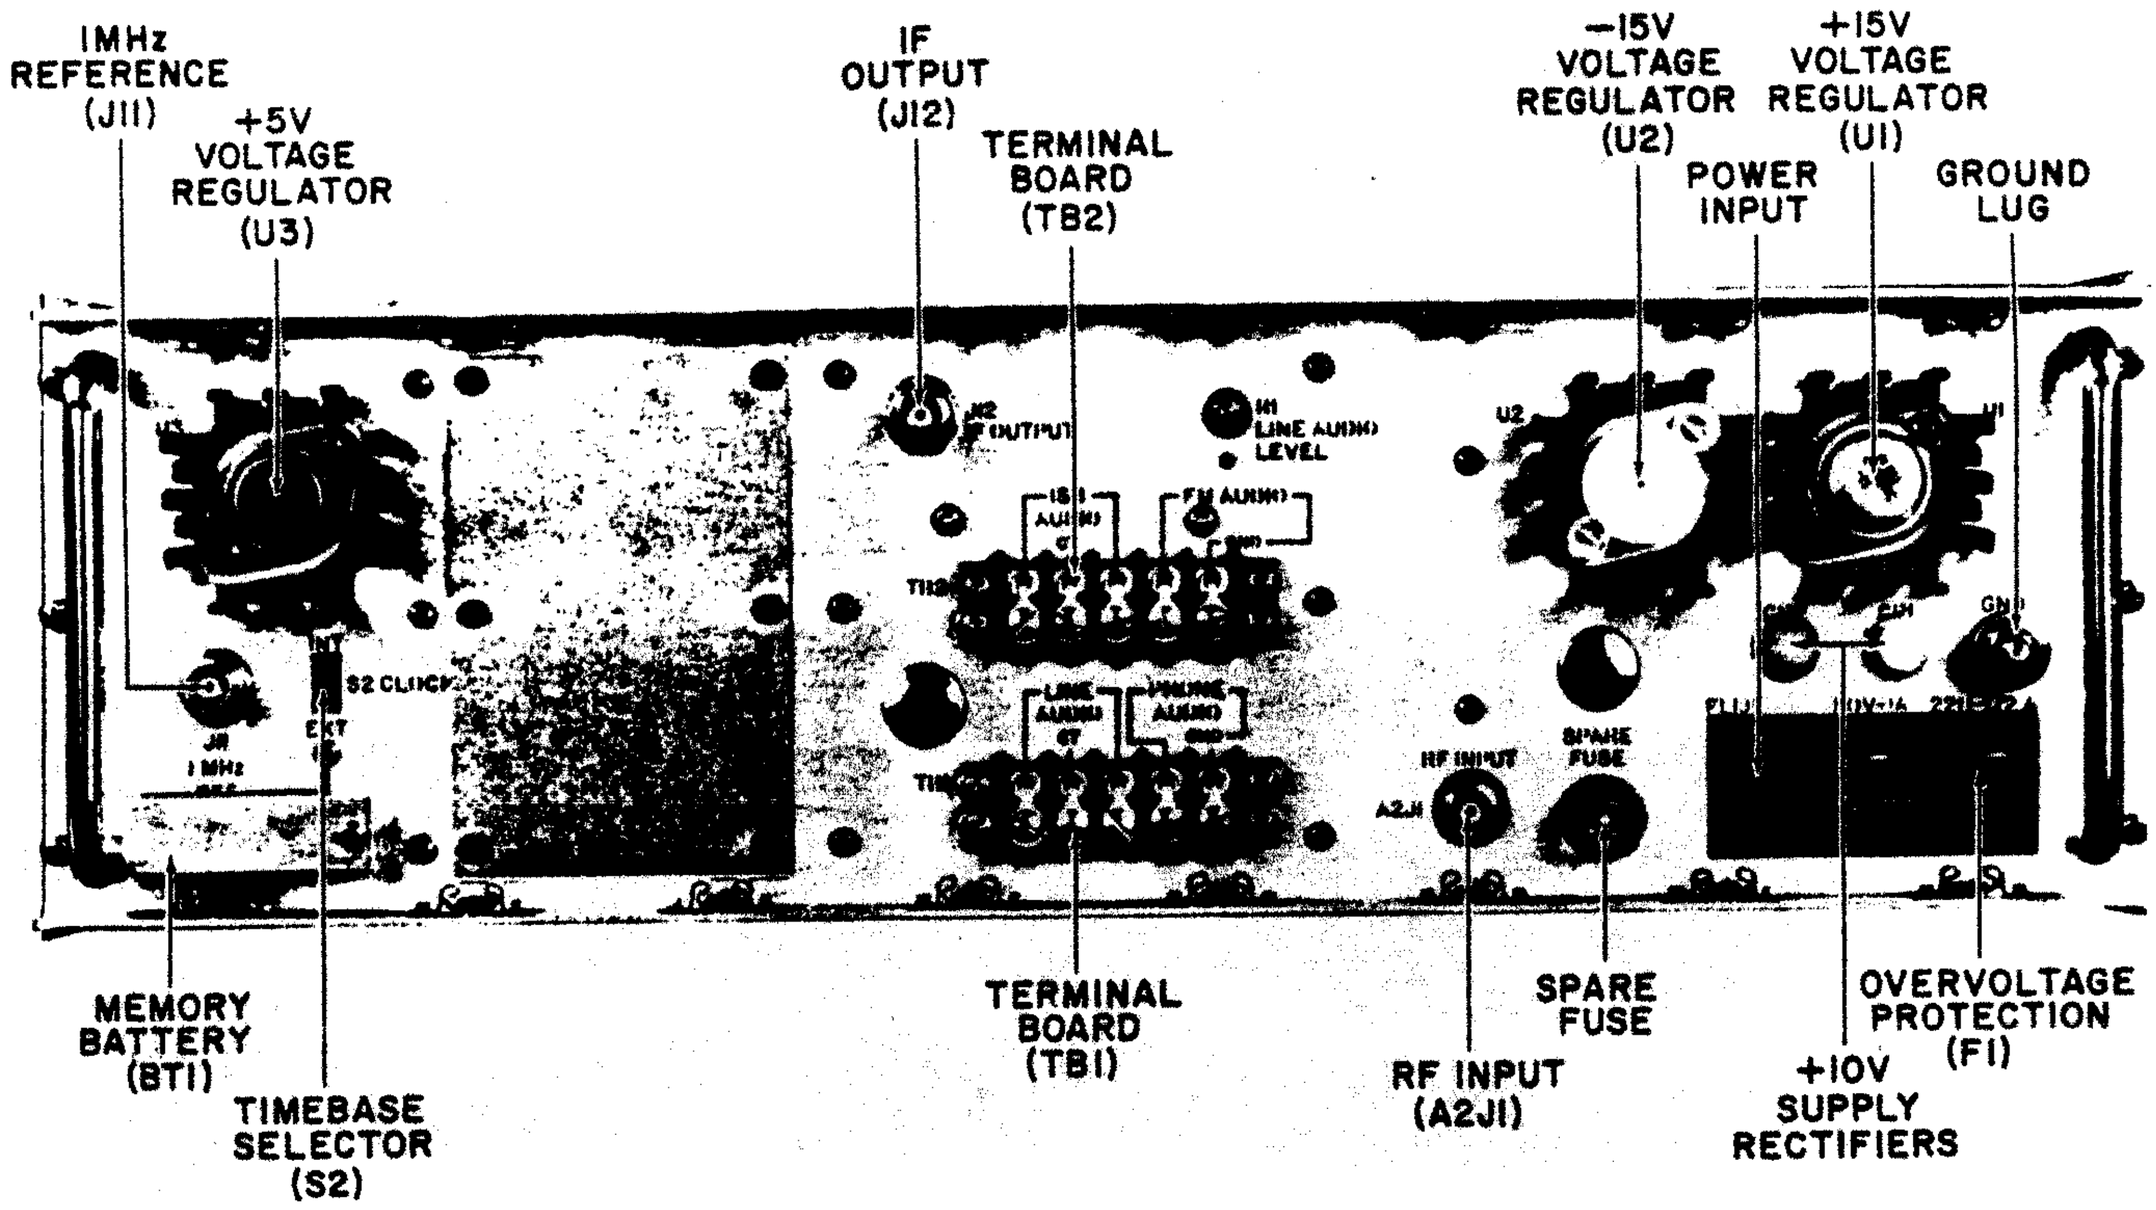



**Figure 2-7. WJ-8718-9 HF Receiver, Rear Panel View**

from zero (0) W to a minimum 1 W (0 V to 24.5 V rms). Actual level is determined by the setting of the LINE AUDIO LEVEL potentiometer R1. This line level is monitored by the front panel meter when the LINE AUDIO METER switch is engaged.

- PHONE AUDIO. This single ended output is parallel with the front panel PHONES jack and will drive a 600 Ω load. The front panel PHONE LEVEL potentiometer controls the output level to a maximum of 7.8 Vrms.

### 2.3.6 TERMINAL BOARD (TB2)

These outputs will be described separately.

- ISB AUDIO. Three of the terminals on this board provide a floating, center tapped, balanced output for driving a 600 Ω load. When in the ISB mode, only the LSB signal is available from this output. No other signal is available from these terminals. Audio level may be set to a maximum of 100 mW (7.75 V rms) using a potentiometer on printed circuit card A4A8. The USB signal for the ISB mode appears at the LINE AUDIO terminals of TB1.

- FM AUDIO. This is the audio output voltage from the FM/CW/SSB detector, A4A9. Measure with a high impedance voltmeter.

### 2.3.7 CLOCK SWITCH (S2)

Setting this switch to the INT position selects the internal time base for the receiver and provides the internal 1 MHz reference output at J11. Setting this switch to the EXT position deactivates the internal reference so that an external signal may be applied to J11.

### 2.3.8 1 MHz REF (J11)

When the CLOCK switch is in the INT position, this BNC connector provides a 1 MHz, 100 mV rms output into 50 Ω. When the switch is set in the EXT position, a 1 MHz reference signal of at least 50 mV rms into 50 Ω must be applied to J11 to provide a time base for the receiver.

### 2.3.9 PHONES JACK (J13)

This output is intended to drive a 600 Ω, or greater, stereo headphone set. When operating in the ISB mode, both USB and LSB information are monitored separately in the WJ-8718A/8718-9 receivers, and simultaneously in the WJ-8718.

### 2.3.10 REMOTE INPUT (A6A1J1)

This 37-pin input connector feeds remote control signals to the Manual Tuning Up/Down Counter, A6A1. Remote tuning is enabled by manually pressing the TUNING DISABLE pushbutton, or internally by connecting a jumper wire in Manual Tuning Up/Down Counter A6A1, as described in Note 4 of **Figure 6-19.** Frequency tuning and IF bandwidth can be remotely selected in AM, FM, or CW modes. Other modes automatically determine IF bandwidth. Identification of the Remote Input lines is shown in **Table 2-1.**

## 2.4 OPERATION

All front panel controls and indicators are described here. The pushbuttons have a mechanical interlock arrangement so that only one button of any group may be in at a time. Partial depression of a button in the out position releases any button previously depressed. A depressed button will be indicated by a brightly colored display behind the clear front surface. If no button has been depressed in any functional grouping, that particular mode will be inactive. For an explanation of front panel features, refer to the following paragraphs.

### 2.4.1 PUSH ON/OFF POWER (S1)

Press this button in to energize the receiver. During initial installation, be sure the line-voltage-select PC wafer on the rear panel matches the available line voltage before energizing the receiver. Refer to **paragraph 2.3.1** for the voltage selection procedure.

### 2.4.2 METER (M1)

The meter contains two scales of which one is a signal strength scale with a relative scale range of 0 to 110. This signal strength scale contains a MAN SET mark on the scale to indicate proper signal strength in the MAN gain mode. The other scale on the meter indicates the audio level of the LINE AUDIO output in dB above 1 mW, referenced to 600 Ω.

### 2.4.3 METER SWITCHES

These switches determine what function the meter will indicate with:

- LINE AUDIO. This position monitors the level of the rear panel LINE AUDIO output terminals. The meter scale indicates levels from 0 to 2 W (+33 dBm). Normal indication is 1 W.

- SIGNAL STRENGTH. This position provides a logarithmic indication of signal strength in AGC Mode, and a linear indication in MAN Mode. The meter indicates relative signal strength from 0 to 110. Normal indication would be at or near the MAN SET mark.

## Table 2-1. Remote Input Lines Identification

| Up/Down Counter Board A6A1 | | Remote Input A6A1J1 | |
|---|---|---|---|
| E20 | | Pin- 9 | 3.2 kHz |
| E12 | | Pin- 5 | 0.3 kHz |
| E32 | | Pin-15 | 1.0 kHz |
| E24 | | Pin-11 | 6.0 kHz |
| E28 | | Pin-13 | 16 kHz |
| E16 | | Pin-33 | BW enable |
| E39 | $2^0$ | Pin-37 | $10^1$ |
| E29 | \| | Pin-32 | |
| E30 | \| | Pin-14 | |
| E38 | $2^3$ | Pin-18 | |
| E37 | $2^0$ | Pin-36 | $10^2$ |
| E34 | \| | Pin-16 | |
| E33 | \| | Pin-34 | |
| E35 | $2^3$ | Pin-35 | |
| E26 | $2^0$ | Pin-12 | $10^3$ |
| E13 | \| | Pin-24 | |
| E14 | \| | Pin- 6 | |
| E25 | $2^3$ | Pin-30 | |
| E22 | $2^0$ | Pin-10 | $10^4$ |
| E18 | \| | Pin- 8 | |
| E17 | \| | Pin-26 | |
| E21 | $2^3$ | Pin-28 | |
| E10 | $2^0$ | Pin- 4 | $10^5$ |
| E08 | \| | Pin- 3 | |
| E04 | \| | Pin- 1 | |
| E09 | $2^3$ | Pin-22 | |
| E06 | $2^0$ | Pin- 2 | $10^6$ |
| E11 | \| | Pin-23 | |
| E15 | \| | Pin-25 | |
| E5 | $2^3$ | Pin-20 | |
| E36 | $2^0$ | Pin-17 | $10^7$ |
| E40 | $2^1$ | Pin-19 | |
| E7 | | Pin-21 | Load |
| E19 | | Pin-27 | |
| E23 | | Pin-29 | Ground |
| E27 | | Pin-31 | lines |

### 2.4.4 GAIN MODE

These switches establish the receiver gain mode.

- FAST AGC. The 15 ms response time provided is useful for AM and FM signals. SLOW AGC gives a 15 ms attack time and 2 sec decay time suitable for CW, ISB, and SSB signals.
- MAN GAIN. This mode activates the RF GAIN control which was inoperative in AGC modes. If the AM detector is overloaded in the MAN gain mode, switching to the SLOW AGC mode results in a recovery time several times longer than expected for the SLOW AGC mode.

### 2.4.5 RF GAIN CONTROL

When in the MAN gain mode, rotating the RF GAIN control clockwise approximates a logarithmic increase in receiver gain. With the METER switches in the Signal Strength mode, this control should be set for an indication at the MAN SET mark on the meter.

### 2.4.6 DETECTION MODE

One of the following six detection switches must be depressed to establish a detection mode. If the AM, FM, or CW switch is selected, an IF BANDWIDTH kHz switch also must be selected. Selection of optional ISB, USB, or LSB switches automatically activates other bandwidth filters related to these modes of operation.

- AM MODE. The Line Audio, Phone Audio, and front panel PHONES audio are taken from the AM detector in this mode.
- FM MODE. The Line Audio, Phone Audio, LINE AUDIO, PHONE AUDIO, and front panel PHONES audio are taken from the FM detector in this mode. A dc-coupled monitor voltage from the detector appears at the FM AUDIO terminals of TB2 for test purposes.
- CW MODE. Selection of this mode enables the BFO and the BFO OFFSET switch. The Line Audio, Phone Audio, and front panel PHONES audio are taken from the CW/SSB product detector in this mode.
- USB MODE. Selection of this mode overrides the front panel IF bandwidth switches and activates the independent IF filter for upper sideband reception. Audio is available at the front panel PHONES jack, and at the Audio Line terminals and Phone Audio terminals of TB1 on the rear panel. The BFO is enabled but fixed in frequency at 455 kHz. The frequency readout indicates the corresponding suppressed carrier frequency.

- LSB MODE. Except for the sideband selected, this mode is functionally identical to the USB mode.

- ISB MODE. Selection of this detection mode automatically activates separate IF filters independent of the front panel IF bandwidth selection. Both upper and lower sidebands are separately and simultaneously demodulated.

  On the rear panel, lower sideband information will be available at the ISB Audio terminals of TB2. Upper sideband information will be available at the Line Audio terminals of TB1.

### 2.4.7 IF BANDWIDTH (kHz)

One of the following IF bandwidth switches must be selected during AM, FM, or CW detection modes; in the three SSB detection modes the IF bandwidth switches are inoperative. Available bandwidths are: 0.3 kHz, 1.0 kHz, 3.2 kHz, 6 kHz, and 16 kHz.

### 2.4.8 BFO OFFSET

These thumbwheel switches are activated only in the CW detection mode. The BFO offset is ±8.9 kHz (from 455 kHz) in steps of 100 Hz. The BFO signal is injected after the IF bandwidth filters, ensuring that pitch is independent of the IF bandwidth. Switching to "0" of the "+, 0, -" section of the switch automatically tunes the BFO to 455 kHz, regardless of the setting of the numerical sections.

### 2.4.9 TUNED FREQUENCY READOUT

This seven-digit readout displays the tuned frequency of the receiver. Each digit is a seven-segment LED with intensity controlled by a single potentiometer located inside the receiver. The least-significant digit, at the far right, indicates 10's of Hz. Tuned frequency is displayed for both local and remote control of the receiver.

### 2.4.10 TUNING KNOB

Rotating the knob clockwise increases tuned frequency; counterclockwise rotation decreases tuned frequency. Continuing to tune past the end of the range causes the receiver to step to the opposite end of the band and to continue tuning in the same increasing or decreasing frequency direction. The receiver tunes from 00.00000 MHz to 29.99999 MHz, useable above 5 kHz.

### 2.4.11 TUNING RESOLUTION (A7)

- TUNING DISABLE. Engaging this button locks the receiver to the frequency currently being displayed. Any other tuning-related button engaged will be released and the tuning knob disabled. Also, by engaging this button, the receiver may be tuned remotely, if this option is installed. Depressing any tuning button slightly releases all buttons and also disables tuning.

- 10 kHz BUTTON. With this button engaged, only the four most-significant digits of the readout can be varied by the tuning knob. The 1 kHz, 100 Hz, and 10 Hz digits will be locked to the frequency indicated when the 10 kHz button was engaged.

- 1 kHz BUTTON. With this button engaged, the five most-significant digits of the readout can be varied by the tuning knob. The two least-significant digits will be locked to a fixed frequency.

- 100 Hz BUTTON. With this button engaged, only the 10 Hz digit is locked to frequency. All others are available for tuning.

- 10 Hz BUTTON. With this button engaged, all digits are available for tuning.

### 2.4.12 LINE AUDIO LEVEL (R1) (WJ-8718A only)

This potentiometer adjusts the level of audio signals on the LINE AUDIO terminals of TB1. The front panel meter monitors this output when the related LINE AUDIO switch is engaged. Rotating this control fully clockwise provides a 1 W audio output (24.5 V rms/+30 dBm) into 600 Ω.

### 2.4.13 PHONE LEVEL CONTROL

Rotating the front panel PHONE LEVEL control clockwise increases the output of both Phone Audio terminals at TB2 and the stereo PHONES jack on the front panel.

### 2.4.14 ISB AUDIO SWITCH (WJ-8718A/8718-9 only)

With the USB Switch depressed, USB audio is fed to both earphones. With the LSB Switch depressed, LSB audio is fed to the earphones. With neither switch depressed, USB audio is fed to one earphone and LSB audio is fed to the other earphone.

# SECTION III

# CIRCUIT DESCRIPTION

## 3.1 GENERAL

This section describes the various circuits of the WJ-8718 Series HF Receiver. A brief overall description of the four functional sections of the receiver is followed by a module level functional description. An overall functional block diagram is included to show functional signal flow through the receiver. The receiver functional description is followed by detailed circuit-level descriptions of each receiver module. The circuit descriptions are arranged in numerical order to facilitate ease of location.

The WJ-8718 Series Receiver, shown in **Figure 3-1**, is a triple-conversation, superheterodyne receiver which operates in the frequency range from 5 kHz to 30 MHz. It has selected bandwidths between 0.3 kHz and 16 kHz and demodulators for AM, FM, CW, ISB, LSB and USB. Tuning is in discrete 10 Hz steps, locked by frequency synthesizers to an internal or external frequency standard for accuracy and stability. The power supply section provides regulated voltages of ±15 V, +12 V (WJ-8718A/8718-9 only), and +5 V.

## 3.2 OVERALL RECEIVER DESCRIPTION

The receiver is divided into four functional sections: receiver, synthesizer, digital control and power supply. Refer to **Figure 3-1**, Receiver Overall Block Diagram, as an aid in understanding the Overall Receiver Description.

### 3.2.1 RECEIVER SECTION

Signals enter the receiver via the RF input connector on the rear panel. The RF Filter (A2) limits the input frequencies to a range of 5 kHz to 30 MHz. These signals are passed to the Input Converter (A3) where the receiver tuned frequency band is mixed with the 1st and 2nd LO signals and converted to the 10.7 MHz 2nd IF. The IF bandwidth at this point is fixed at 16 kHz by the Input Converter. The 10.7 MHz IF is applied to the IF section (A4) where it is mixed with the 3rd LO and converted to the 3rd IF, 455 kHz. The IF bandwidth within A4 is selectable from the front panel. In the AM, FM or CW modes, the IF bandwidth is selected from 0.3, 1.0, 3.2, 6 or 16 kHz. In the USB, LSB and ISB modes, the 455 kHz IF is automatically fixed at 2.95 kHz. The 455 kHz IF is demodulated in the AM, FM, CW, USB, LSB or ISB detection mode as selected via the front panel. Audio from the selected mode is applied through output transformer T2 which is applied to the LINE AUDIO output connector on the rear panel. In the ISB detection mode, the detected USB audio is applied to the LINE AUDIO output while the detected LSB audio is applied to the ISB AUDIO output connector on the rear panel. The output from the FM/CW/SSB detector is applied to the rear panel FM MONITOR terminal. The 455 kHz IF is applied to the rear panel IF OUTPUT jack. Receiver gain is controlled from the front panel and is selected from manual, AGC Fast or AGC Slow. In manual mode, the RF Gain knob on the front panel controls the gain.

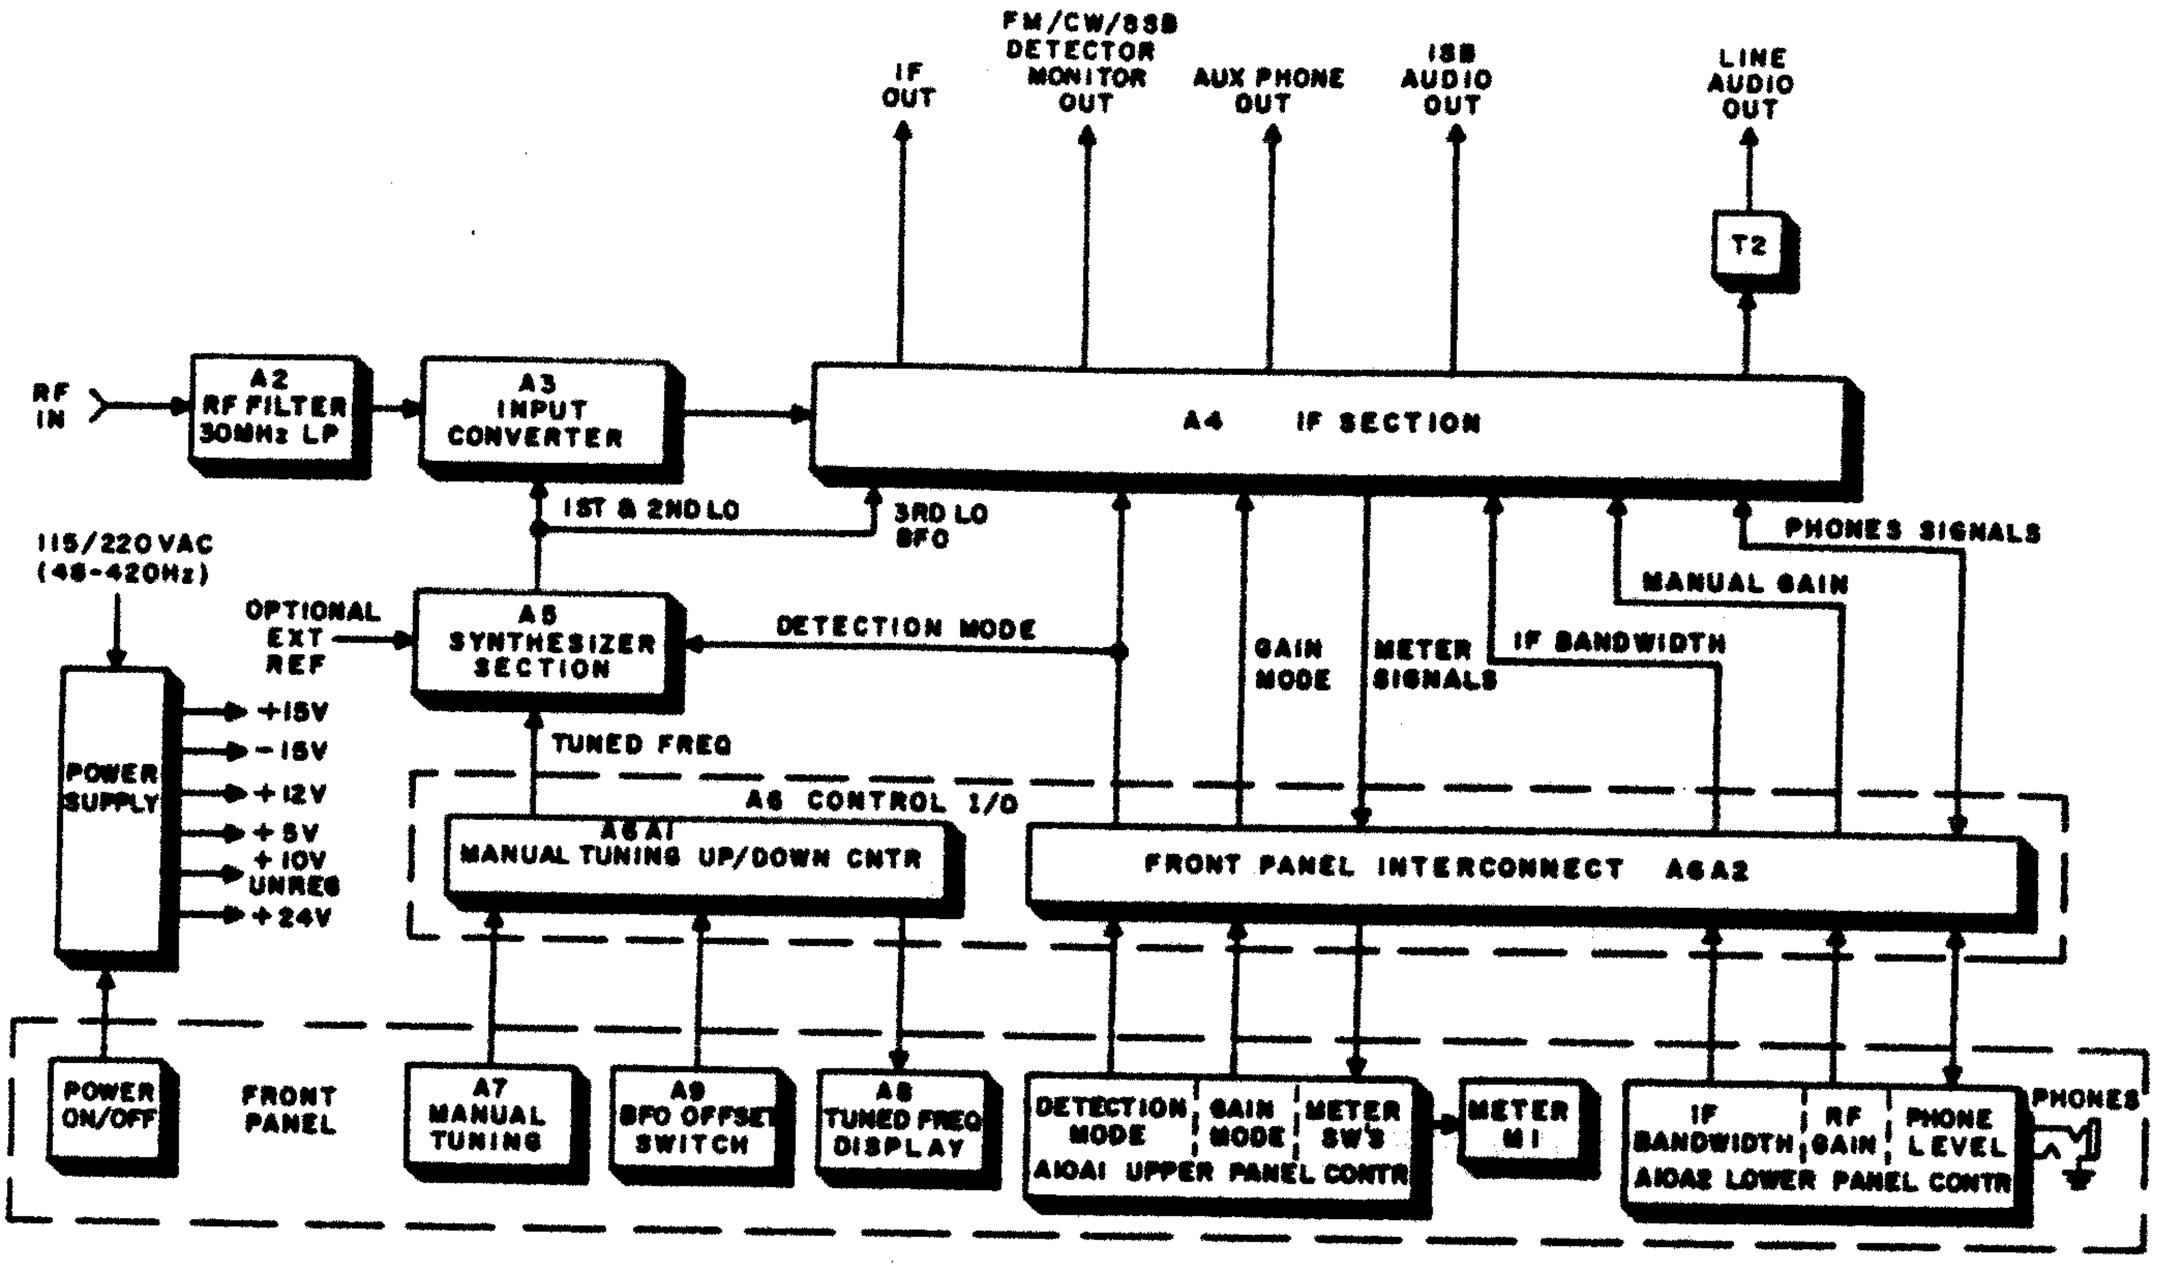



**Figure 3-1. Receiver Overall Block Diagram.**

### 3.2.2 SYNTHESIZER SECTION

The Synthesizer Section (A5) contains the 1st, 2nd, 3rd and BFO Synthesizers. A stable Time Base locks the four synthesizers to their respective operating frequencies. The 1st, 2nd and 3rd LO signals are used by the Receiver Section to convert the receiver tuned frequency to 455 kHz. The specific operating frequencies of the 1st and 2nd LO's are programmed by incremental tuned frequency BCD data from the Digital Control Section. The 3rd LO is locked to a fixed frequency of 11.155 MHz. When operating in a CW or SSB mode, the BFO beats with the 455 kHz IF to produce an audio output. The time base is derived from an internal crystal oscillator or an external reference source.

### 3.2.3 DIGITAL CONTROL SECTION

#### 3.2.3.1 Receiver Tuning Control

Receiver tuning parameters are controlled from the front panel through the Manual Tuning Up/Down Counter (A6A1) and the Front Panel Interconnect (A6A2) on the I/O Motherboard (A6). The Manual Tuning Up/Down Counter contains the RF frequency data. This information is sent to the Synthesizer Section and is also encoded for multiplexing to the

Frequency Display. Frequency data is changed by the Manual Tuning (A7) on the front panel. The Manual Tuning is connected to the Manual Tuning Up/Down Counter and controls the direction and rate of change of the tuned frequency.

The Frequency Display (A8) accepts the multiplexed information from the Up/Down Counter and displays it on the seven LED's of the front panel located display.

The BFO Switch (A9) provides a variation of 0.0 ±08.9 kHz from 455 kHz. It gives a direction of offset and a selectable amount. A zero setting in the directional control automatically returns the BFO to 455 kHz.

#### 3.2.3.2 Front Panel Control

The Front Panel Controls (A10A1) and A10A2) allow manual selection of detection mode, gain mode, meter mode, IF bandwidth, RF gain, and headphone levels. For all detection modes except ISB, the front panel phones jack will yield the Line Audio output. In the ISB detection mode, phones jack audio is selectable between USB and LSB in the WJ-8718A/8718-9, and provides USB and LSB simultaneously in the WJ-8718. The front panel Phone Level control sets the output level. The phone output is sent back through an amplifier in the IF section and is applied to the rear panel as the Aux. Phone output.

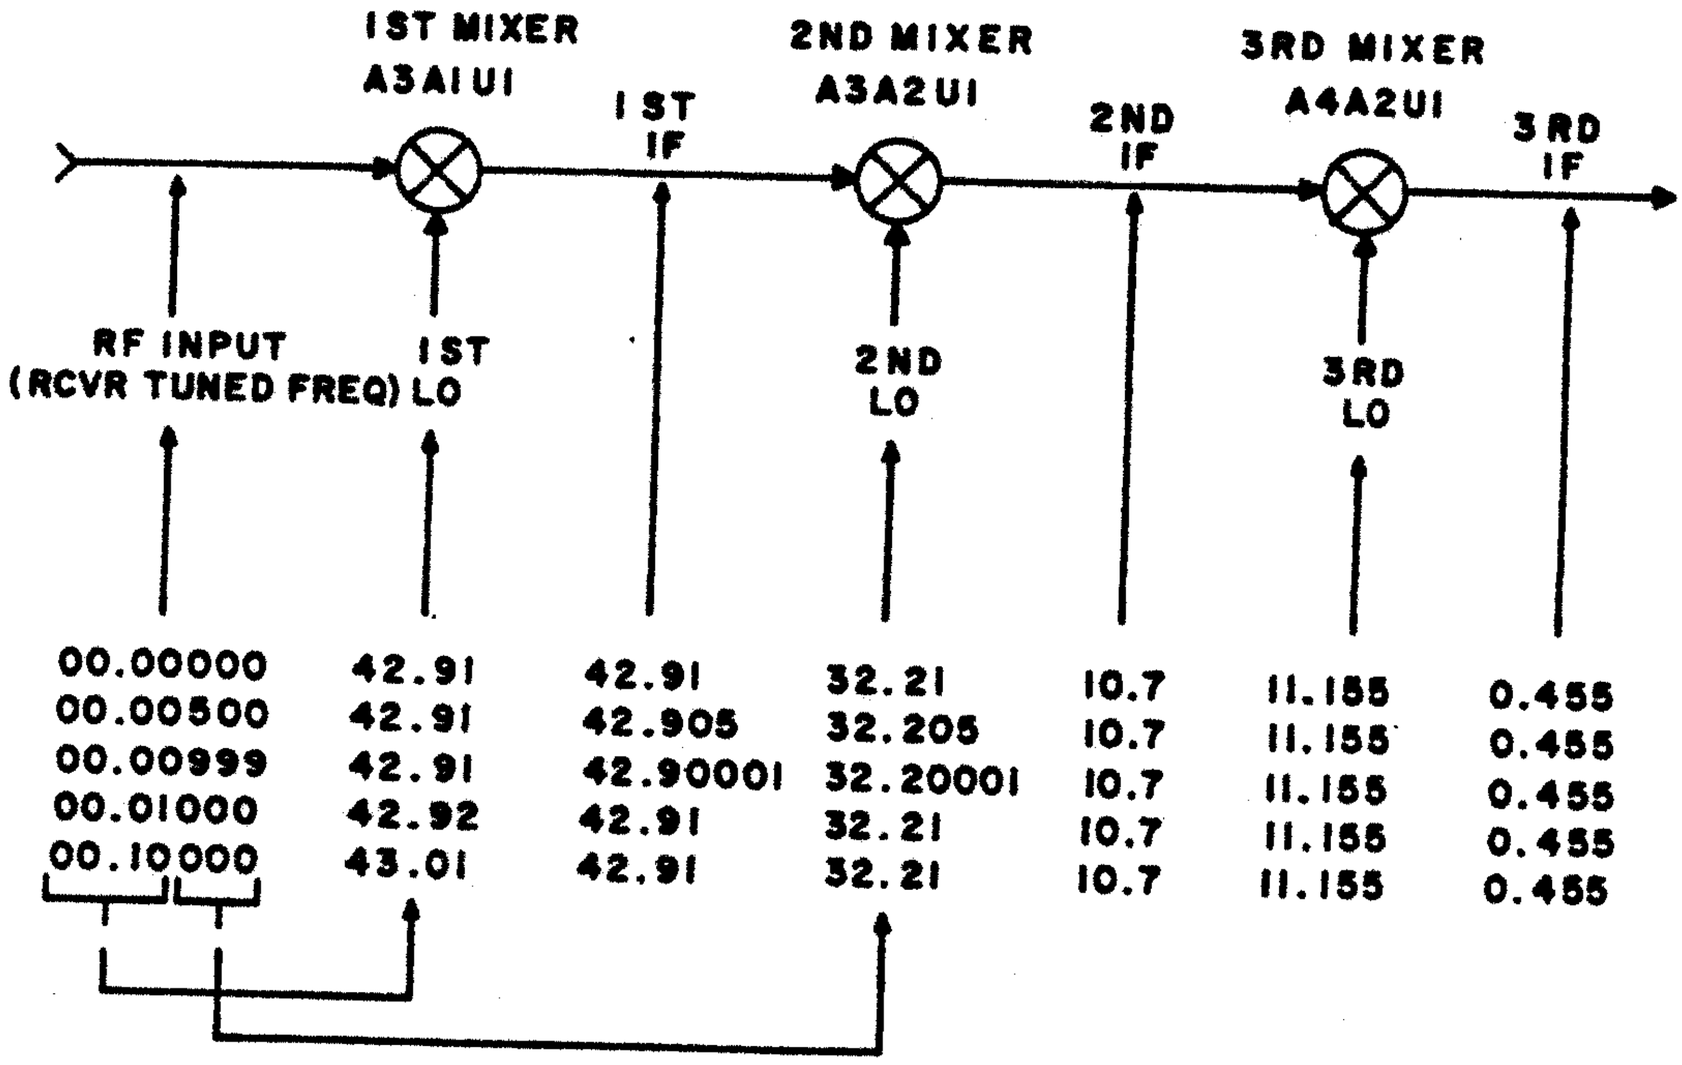
### 3.2.4 POWER SUPPLY SECTION

The receiver may be operated from either 115 or 230 Vac. The Power Supply Section of the receiver accepts the input voltage via a filter assembly, the input fuses, a voltage selector and the power switch. The input voltage passes to the receiver's transformer which then supplies two lesser ac voltages to the power distribution board. Through the use of rectifiers and voltage regulators, these ac voltages are converted to ±15 V, +12 V (WJ-8718A/8718-9 only), +5 V and unregulated +10 V, which are, in turn, supplied to the various units of the receiver.

## 3.3. FUNCTIONAL THEORY OF OPERATION

### 3.3.1 GENERAL

This section describes functional signal flow through the Receiver Section. The signal and control relationships between the Receiver Section and the Synthesizer/Digital Control Sections are explained where necessary to understand receiver functional signal flow. Power Supply Section Functional Operation and Distribution will be discussed separately in **Paragraph 3.3.6.** Refer to **Figure 3-2,** Receiver Functional Block Diagram and **Figure 3-3,** Receiver Frequency Conversion as an aid in understanding Receiver Functional Operation.




NOTE: ALL FREQ'S IN MHz

**Figure 3-3. Receiver Frequency Conversion.**

### 3.3.2 INPUT CONVERSION

#### 3.3.2.1 Type 791616-1 RF Filter (A2)

The RF Filter (A2) is a 15-pole low pass filter with a 50 Ω characteristic impedance and a 3 dB nominal loss. RF input signal are band-limited to 5 kHz to 30 MHz by the RF Filter and are applied to the Input Converter (A3).

#### 3.3.2.2 Type 791592-1 Input Converter (A3)

The 1st Mixer receives RF Input signals from the RF Filter (A1) and an LO Signal from the 1st LO Synthesizer (A5A1). The 1st LO is programmed from the four MSDs of receiver tuned frequency and produces a 1st LO frequency of 42.91 to 72.90 MHz. The 1st LO and RF Input signals are mixed by the 1st mixer to produce a first IF in the range of 42.90001 to 42.910 MHz (see **Figure 3-3** for the relationship between RF Input, 1st LO and 1st IF frequencies). The 1st IF signal is amplified and filtered by a 28 kHz bandwidth band-pass filter with a center frequency of 42.905 MHz.

The 2nd Mixer receives the 1st IF signal from the 1st Mixer and an LO signal from the 2nd LO Synthesizer (A5A2). The 2nd LO is programmed by the three LSDs of receiver tuned frequency and produces a 2nd LO frequency of 32.21 to 32.20001 MHz. The 2nd LO and 1st IF are mixed by the 2nd Mixer to produce a 2nd IF of 10.70 MHz (see **Figure 3-3** for the relationship between 1st IF, 2nd LO and 2nd IF frequencies). The 2nd IF signal is amplified and filtered by a 16 kHz bandwidth band-pass filter with a 10.7 MHz center frequency and drives the 50 Ω input of the 10.7 MHz Filter Switch, A4A1.

### 3.3.3 TYPE 791569-1 IF MOTHERBOARD (A4)

The IF Section, mounted on Motherboard A4 consists of the 3rd Mixer, four IF Filter Switches, three detector boards, an audio amplifier and AGC circuit (see **Figure 3-2**). IF Section functional signal flow will be correlated with control data from the Front Panel. Signal flow will be traced through each of the IF Section modules in a functional rather than numerical sequence.

#### 3.3.3.1 Type 791594-1 10.7 MHz Filter Switch (A4A1)

The 2nd IF output from A3 drives the 50 Ω input of the 10.7 MHz Filter Switch, A4A1-13. The signal is routed through one of three voltage-selectable circuit paths within A4A1. The wideband path, selected by +5 Vdc at pin 15, passes the full 16 kHz bandwidth from A3 through A4A1. The other two circuit paths, selected by +5 Vdc at pin 17 or 19, restricts the bandpass to 6 or 3.2 kHz respectively (see **paragraph 3.3.3.9** for complete explanation of bandwidth selection). The amplified, band-limited output at A4A1-57 drives the 50 Ω input of the 3rd Mixer, A4A2-57.

### 3.3.3.2 Type 71430-1 10.7 MHz/455 kHz Converter (A4A2)

The amplified 2nd IF output from A4A1-57 drives the 50 Ω input of the 10.7 MHz/455 kHz Converter, or the 3rd Mixer A4A2-57. The 3rd Mixer also receives an LO signal from the 3rd LO Synthesizer, A5A1, which is fixed at a frequency of 11.155 MHz. The 3rd LO and 2nd IF are mixed by the 3rd Mixer to produce a 3rd IF of 455 kHz (see **Figure 3-3** for the relationship between the 2nd IF, 3rd LO and 3rd IF frequencies). The 3rd IF output, A4A2-19, of the 3rd Mixer is stepped up to an impedance of 1000 Ω and drives the parallel-connected inputs of the 455 kHz Filter Switch, A4A3, the USB Filter Switch, A4A4 and the LSB/ISB Filter Switch, A4A5.

### 3.3.3.3 3rd IF Bandwidth Filtering

The 3rd IF output from the 3rd Mixer passes through one of five IF filters prior to final IF amplification and detection. If the AM, FM or CW Mode has been selected, the 3rd IF will pass through the 455 kHz Filter Switch, A4A3. If a sideband mode has been selected, the 3rd IF will pass through the USB Filter Switch, A4A4 or the LSB/ISB Filter Switch, A4A5.

#### 3.3.3.3.1 Type 791595-1 455 kHz Filter Switch (A4A3)

The 3rd IF output from A4A2-19 drives the high-impedance input of the 455 kHz Filter Switch, A4A3-13. When AM, FM or CW Mode is selected, the signal is routed through one of three voltage-selectable circuit paths within A4A3. The wideband path, selected by +5 Vdc of pin 15, passes the full bandwidth, determined by A3 and A4A1, through A4A3. The other two circuit paths, selected by +5 Vdc at pin 17 or 19, narrow the bandpass from that determined by A3 and A4A1 down to 1.0 kHz or 0.3 kHz respectively (see **paragraph 3.3.3.9** for complete explanation of bandwidth selection). The amplified, band-limited output from A4A3-57 drives the high-impedance input of the 455 kHz IF Amplifier/Demodulator, A4A7-57.

#### 3.3.3.3.2 Type 791596-1 USB Filter Switch (A4A4)

The 3rd IF output from A4A2-19 drives the high-impedance input of the 455 kHz Filter Switch, A4A3-13. In USB Mode, selected by +5 Vdc at pin 49, or in ISB Mode, selected by +5 Vdc at pin 51, the IF signal passes through the USB IF Filter within A4A4 (see **Paragraph 3.3.3.10** for complete explanation of mode selection). This filter restricts the IF bandwidth to 2.95 kHz (455.25 kHz to 458.2 kHz). The amplified USB IF output at A4A4-57 drives the high-impedance input of the 455 kHz IF Ampl./Demodulator, A4A7-57.

#### 3.3.3.3.3 Type 791597-1 LSB/ISB Fiter Switch (A4A5)

The 3rd IF output from A4A2-19 drives the high-impedance input of the LSB/ISB Filter Switch, A4A5-13. In LSB Mode, selected by +5 Vdc at pin 49, or in ISB Mode, selected by +5 Vdc at pin 51, the IF signal passes through the LSB IF filter within A4A5 (see **paragraph 3.3.3.10** for complete explanation of mode selection). This filter restricts the bandwidth to 2.95 kHz (451.8 kHz to 454.75 kHz). In LSB Mode, the amplified LSB IF output at A4A5-57 drives the high-impedance input of the 455 kHz IF Ampl/Demodulator, A4A7-57. In ISB Mode, the amplified LSB IF output at A4A5-53 drives the high impedance input of the ISB Detector/ Audio, A4A8-53.

### 3.3.3.4 Type 72488-1 455 kHz Ampl/AM Detector (A4A7)

The amplified 3rd IF output from A4A3-57, A4A4-57 or A4A5-57 drives the high impedance input of the 455 kHz IF Ampl/Detector, A4A7-57. The signal is amplified by a two-stage gain-controlled (for AGC purposes) amplifier with an overall bandwidth of 30 kHz. Following this, the IF signal is split to provide three outputs: the input to the AM Detector, the third IF output at A4A7-13 which drives the input to the FM/CW/SSB Detector and the 3rd IF ouptut at A4A7-17 which drives the rear panel IF Output jack J2. The AM Audio output from the AM Detector at A4A7-51 contains a DC level proportional to RF Input signal strength and audio resulting from modulation detection by the AM Detector. This AM Audio output drives the parallel-connected inputs of the AGC, A4A6-51, and the Audio Amplifier, A4A10-51.

### 3.3.3.5 Type 791599-1 FM/CW/SSB Detector (A4A9)

The amplified 3rd IF output from A4A7-13 drives the high-impedance input of the FM/CW/SSB Detector, A4A9-13. In the FM Mode, selected by +5 Vdc at pin 41 (see **Paragraph 3.3.3.10**), the signal is amplified, limited and drives an FM discriminator. The audio from the discriminator is amplified by a summing amplifier and appears as FM Audio at A4A9-57. In the CW or any of the sideband modes, selected by +5 Vdc at pin 43 (see **Paragraph 3.3.3.10**), the signal is applied to a product detector. The BFO Synthesizer is also enabled and supplies a fixed (SSB mode) or variable (CW mode) 455 kHz BFO signal to A4A9-17. This BFO signal mixes with the 3rd IF signal in the product detector. The audio from the product detector is amplified by the summing amplifier, and appears as CW/SSB Audio at A4A9-57. Audio from A4A9-57 drives the input of the Audio Amplifier, A4A10-57 and also appears on the rear panel TB2 as FM AUDIO.

### 3.3.3.6 Type 746001-1 Audio Amplifier (A4A10)

The AM Audio output from A4A7-57 drives the input to the Audio Amplifier, A4A10-57, and the FM/CW/SSB Audio output from A4A9-51 drives the input to the Audio Amplifier, A4A10-51. In AM mode, selected by +5 Vdc at pin 47 (see **Paragraph 3.3.3.10**), the AM Audio at pin 57 is gated through a summing amplifier at unity gain and appears at pin 55. In FM, CW or SSB Modes, pin 47 is 0 Vdc, and the FM/CW/SSB Audio at pin 51 is gated through the summing amplifier and appears at pin 55. Combined Audio at pin 55 has two destinations: the Headphone Amplifier in A10-A2 and the rear panel Line Audio Level control. The function of the headphone amplifier will be explained in **Paragraph 3.3.5.6.2**. The Line Audio Level control attenuates the audio signal from pin 55 and applies it to the Audio Amplifier via pin 17. A push-pull Line Audio amplifier amplifies the signal and outputs it at A4A10-11, 13. Transformer T2 on the rear panel matches to low impedance output at pins 11 and 13 to a 600 Ω line. The high level Line Audio signal appears on rear panel TB1. A rectifier samples the output of the A4A10 Line Audio amplifier and supplies the front panel meter in the LINE AUDIO setting. A low level audio signal from the A4A10-53 and drives the Auxiliary Phone amplifier. The Auxiliary Phone out signal at A4A10-19 appears at the rear panel TB1, PHONE AUDIO.

### 3.3.3.7 Type 791598-1 ISB Detector/Audio (A4A8) (Optional in WJ-8718/8718-9)

The amplified LSB IF signal from A4A5-53 drives the high impedance input of the ISB Detector/Audio, A4A8-53. In the ISB Mode, selected by +5 Vdc at pin 49 (see **Paragraph 3.3.3.10**), the LSB IF signal is amplified by two tuned stages and applied to a product

detector. The BFO signal mixes with the LSB IF signal in the product detector. The audio from the product detector appears at A4A8-41 as ISB Audio and goes through the Mode Switch to the Headphone Amplifier in A10A2 (see **Paragraph 3.3.5.6.2**). The ISB Audio from the product detector is also amplified by a push-pull amplifier stage. This provides a high level balanced ISB Line Audio terminals on rear panel TB1. An AGC circuit within A4A8 samples the ISB Audio from the product detector and adjusts the gain of the two-stage tuned amplifier that feeds the product detector. A sample of the AGC voltage appears at A4A8-43 and is applied to the main AGC module, A4A6-43, to produce a combined RF AGC.

### 3.3.3.8 Type 78112-1 AGC (A4A6)

The AM Audio output from A4A7-51 drives the input of the AGC, A4A6-51. In AGC mode, selected by 0 Vdc at pin 13, a filter network removes the audio modulation and the resulting DC level is amplified and output as the IF GC Voltage at A4A6-47. This voltage adjusts the gain of the IF Amplifier, A4A7. Under very strong input signal conditions, a gate circuit transfers the IF GC voltage to pin 19, RF GC, permitting a reduction in Input Converter gain. The ISB AGC signal, entering through pin 43, is summed through this gate to permit the ISB AGC to reduce the Input Converter Gain. A4A6-41, AGC Signal Strength, is a DC sample of the IF GC voltage that drives the front panel meter in Signal Strength Mode. In the MAN gain mode, selected by +5 Vdc at pin 13, the IF and RF GC outputs respond to the MAN GAIN, A4A6-17, signal from the front panel RF GAIN control. A4A6-12, MAN Signal Strength, is a DC sample of the AM Audio, A4A6-51, signal that drives the front panel meter in the Signal Strength Mode.

### 3.3.3.9 Bandwidth Selection

Bandwidth selection is accomplished via voltage-selectable filters in the 2nd and 3rd IF amplifiers. The select voltages are TTL compatible (0 Vdc = OFF, +5 Vdc = ON). In AM, FM and CW modes, the Front Panel Bandwidth switches are energized. Selection of a particular bandwidth sends +5 Vdc from A10A2S1 to the appropriate filters in A4A1 and A4A3. In USB, LSB or ISB Modes, the Front Panel Bandwidth switches are disabled. A4A1 is fixed in the wide position, and A4A4 or A4A5 is selected, as required. **Table 3-1** summarizes the relationship between Detector Mode, Bandwidth and filter selection.

### 3.3.3.10 Mode Selection

Mode selection is accomplished via TTL-compatible (0 Vdc = OFF, +5 Vdc = ON) select voltages from the Front Panel Detection Mode switches. Selection of a particular mode sends +5 Vdc from A10A1S3 to the appropriate IF section modules. As discussed in **Paragraph 3.3.3.9**, the mode switches also determine the 2nd and 3rd IF bandwidth in SSB Modes. The output of the AM detector, A4A7-51, is active on all modes since it is used to develop AGC voltages in A4A6. **Table 3-2** summarizes the Detection Mode selection relationships.

## 3.3.4 TYPE 791570-1 SYNTHESIZER SECTION (A5)

The Synthesizer Section, shown in **Figure 3-2**, consist of the 1st, 2nd, 3rd and BFO Synthesizers and the Time Base. The synthesizers receive digital commands from the

Man. Tuning Up/Down Counter and set the L O signals to the correct frequencies as dictated by the receiver tuned frequency. The relation between receiver tuned frequency and L O frequency is shown in **Figure 3-3.**

**Table 3-1. 2nd and 3rd IF Bandwidth Selection**

| BW Filter Select Pin | BW Switch Selection (AM, FM, CW Mode) 16 | 6 | 3.2 | 1.0 | 0.3 | SSB Modes USB | LSB | ISB |
|---|---|---|---|---|---|---|---|---|
| A4A1-15 (W1) | +5 | 0 | 0 | 0 | 0 | +5 | +5 | +5 |
| A4A1-17 (6 kHz) | 0 | +5 | 0 | 0 | 0 | 0 | 0 | 0 |
| A4A1-19 (3.2 kHz) | 0 | 0 | +5 | +5 | +5 | 0 | 0 | 0 |
| A4A3-15 (W2) | +5 | +5 | +5 | 0 | 0 | 0 | 0 | 0 |
| A4A3-17 (1.0 kHz) | 0 | 0 | 0 | +5 | 0 | 0 | 0 | 0 |
| A4A3-19 (0.3 kHz) | 0 | 0 | 0 | 0 | +5 | 0 | 0 | 0 |
| A4A4-49 (USB) | 0 | 0 | 0 | 0 | 0 | +5 | 0 | 0 |
| A4A4-51 (ISB) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | +5 |
| A4A5-49 (LSB) | 0 | 0 | 0 | 0 | 0 | 0 | +5 | 0 |
| A4A5-51 (ISB) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | +5 |

**Table 3-2. Detection Mode Selection.**

| Mode Select Pin | Detection Mode Switch Selection AM | FM | CW | USB | LSB | ISB |
|---|---|---|---|---|---|---|
| A4A10-47(AM SEL) | +5 | 0 | 0 | 0 | 0 | 0 |
| A4A9-41 (FM) | 0 | +5 | 0 | 0 | 0 | 0 |
| A4A9-43 (CW/SSB) | 0 | 0 | +5 | +5 | +5 | +5 |
| A4A8-49 (ISB) | 0 | 0 | 0 | 0 | 0 | +5 |
| A5A3-43 (OFFSET EN.) | 0 | 0 | +5 | 0 | 0 | 0 |
| A5A3-57 (BFO INH) | +5 | +5 | 0 | 0 | 0 | 0 |

### 3.3.4.1 Type 791630-1 1st L.O. Synthesizer (A5A1)

The 1st LO receives BCD tuned frequency command data from the four MSDs of the receiver tuned frequency readout. The BCD numbers range in value of 0000 to 2999 corresponding to receiver tuned frequencies of 00.00XXX MHz to 29.99XXX MHz. The output of the 1st LO tunes from 42.91 MHz to 72.90 MHz in 10 kHz steps in accordance with the BCD tuned frequency data. A stable 40 kHz time base signal provides a precise reference for the 1st LO phase lock loop control circuits.

### 3.3.4.2 Type 791601 2nd L.O. Synthesizer (A5A2)

The 2nd LO receives BCD tuned frequency command data from the three LSD's of the receiver tuned frequency readout. The BCD numbers range in value from 000 to 999 corresponding to receiver tuned frequencies of XX.XX000 MHz to XX.XX999 MHz. The output of the 2nd LO tunes down from 32.21000 MHz to 32.20001 MHz as the BCD data increments from 000 to 999. Stable 10 kHz and 1 MHz time base signals provide precise references for the 2nd LO phase lock loop control circuits.

### 3.3.4.3 3rd L.O. Synthesizer (P/O A5A1)

The 3rd LO Synthesizer produces a fixed frequency output of 11.155 MHz. Basic frequency control is obtained by an 11.155 MHz crystal oscillator. The exact frequency of oscillation is precisely locked to 10 kHz and 50 kHz time base reference signals by a phase locked loop.

### 3.3.4.4 Type 791576-1 BFO Synthesizer (A5A3)

The BFO Synthesizer receives BCD offset frequency command data from the MSD and LSD of the BFO offset switch, A9. The BCD numbers range in value from 00 to 89 corresponding to offset frequencies of 0.0 kHz to 8.9 kHz. Offset control data from the "+, 0, -" switch section of A9 programs the direction of BFO offset. The output of the BFO tunes from 446.1 kHz (455 kHz - 8.9 kHz) to 463.9 kHz (455 kHz + 8.9 kHz). In the AM and FM modes, BFO INH, A4A8-57, is high, shutting off the BFO output at A5-P15, even though the BFO itself is oscillating. In SSB modes, OFFSET ENABLE, A4A8-43 is low, fixing the BFO output at 455.000 kHz. A stable 1 kHz time base signal provides a precise reference for the BFO phase lock loop control circuits.

### 3.3.4.5 Time Base (P/O A5A1)

All four synthesizer circuits are synchronized by a common Time Base. Reference frequencies of 1 MHz, 50 kHz, 40 kHz, 10 kHz, and 1 kHz are supplied from a 2 MHz temperature compensated crystal oscillator or from a 1 MHz external source input at rear panel jack J11. The rear panel INT/EXT clock switch S2 allows selection at the internal and external reference. When in the internal mode, the 1 MHz internal reference is output from rear panel jack J11.

### 3.3.5 DIGITAL CONTROL SECTION

The Digital Control section is composed of the Manual Tuning Up/Down Counter; the Front Panel Interconnect; the Manual Tuning Module; the Frequency Display; the BFO Switch, the Upper Panel Control and the Lower Panel Control. **Figure 3-2** shows the overall relationship of these units.

#### 3.3.5.1 Type 791575-3 Manual Tuning Up/Down Counter (A6A1)

The Manual Tuning Up/Down Counter contains the RF tuned frequency data. This information is sent to the 1st and 2nd LO Synthesizers and is encoded for multiplexing to the display board. The frequency data is changed by means of the Encoder on the Manual Tuning Module on the front panel.

#### 3.3.5.2 Type 791828-1 Front Panel Interconnect (A6A2)

This module translates information received from the manually controlled front panel into control information for the receiver. Front panel information entering this module controls detection mode, gain mode, meter mode, and IF bandwidth, in addition to headphone and RF gain levels. This information is then decoded, for use primarily in the IF stages of the receiver. Two output lines from the Front Panel Interconnect, however, control the BFO for the various detection modes.

#### 3.3.5.3 Type 791874-1 Manual Tuning Module (A7)

The Manual Tuning Module contains the Encoder U1 and Tuning Resolution Switches A7A1. Switching is accomplished by connecting the desired tuning step to the step select switch line of the Manual Tuning Up/Down Counter board. Tuning steps available are 10 Hz, 100 Hz, 1 kHz, and 10 kHz.

#### 3.3.5.4 Type 791578-1 Frequency Display (A8)

The Frequency Display accepts the multiplexed information from the Manual Tuning Up/Down Counter and displays it on the seven front panel LEDs. These are seven-segment common-cathode displays which are controlled by an IC decoder/driver. The Up/Down Counter places digit display information in the IC where it is decoded into the proper number and sent to the display in its proper position.

#### 3.3.5.5 Type 791827 BFO Switch (A9)

Three thumbwheel switches provide a BFO variation of ±8.9 kHz from 455 kHz. The +, 0, -, thumbwheel provides the direction of offset, the second thumbwheel varies in range from 0 to 8, and the third thumbwheel varies in range from 0 to 9. A "0" setting of the direction thumbwheel causes the BFO to return automatically to 455 kHz regardless of the other thumbwheel settings.

### 3.3.5.6 Type 796053 Front Panel Control (A10)

The Front Panel Control consists of the Upper and Lower Panel Control boards joined by a 40-pin ribbon connector. This connector is attached to the Front Panel Interconnect (A6A2) and controls the manual selection of detection mode, gain mode, meter mode, IF bandwidth, RF gain, and heaphone levels. Signals for the phone outputs also connect to the lower panel control through the Front Panel Interconnect.

#### 3.3.5.6.1 Type 791583 Upper Panel Control (A10A1)

The Upper Panel Control allows selection of detection mode, gain mode, and meter mode. Each gang of switches mechanically operates to allow one pushbutton to be depressed at any time. All control lines connect to the Front Panel Interconnect card.

#### 3.3.5.6.2 Type 796054 Lower Panel Control (A10A2) (WJ-8718A/8718-9)

The Lower Panel Control allows selection of IF bandwidth and variation of RF gain and phone level potentiometers. This card also contains the amplifier to drive the headphone output. The amplifier receives the Line Audio signal in all detection modes except ISB. In this mode, the amplifier switches between the upper sideband and the lower sideband information.

#### 3.3.5.6.3 Type 791826 Lower Panel Control (A10A2) (WJ-8718)

The Lower Panel Control allows selection of IF bandwidth and variation of RF gain and phone level potentiometers. This card also contains the headphone amplifier. The amplifier receives the Line Audio signal in all modes except ISB. In ISB mode, the headphone amplifier simultaneously amplifies the separated upper and lower sideband audio signals.

### 3.3.6 POWER SUPPLY SECTION

See **Figure 3-4** for the power supply block diagram. The receiver may be operated from either 110 Vac, 120 Vac, 220 Vac or 240 Vac. This voltage feeds Filter Assembly FL1 which contains the input voltage selector. It then passes through fuses F1 and F2 and through the main power switch, S1. From the switch, current is routed through the Voltage Selector and into Transformer T1. The Transformer has a dual primary and center-tapped secondaries and produces outputs of 34 and 16 Vac both of which enter the Power Distribution board, (A1).

#### 3.3.6.1 Type 76240 Power Distribution (A1)

The Power Distribution board receives the 34 and 16 Vac inputs and rectifies these voltages for various circuits in the receiver. The 34 Vac enters this board, is rectified and filtered and sent to regulators U1, U2 and U4. The 16 Vac is rectified by two diodes located on the rear panel and returned to the Distribution board to be filtered and become a +10 V unregulated supply.

### 3.3.6.2 Power Supply Regulators

U1 and U2 located on the back of the chassis provide regulated +15 Vdc and -15 Vdc, respectively. These two voltages are supplied to most of the circuits in the receiver. The unregulated 10 Vdc, with its unregulated ground, connects to U3, a +5 Vdc regulator. U3 supplies +5 Vdc to the BFO and 2nd LO Synthesizers, the Up/Down counter board, and the Front Panel Interconnect card. The unregulated 10 Vdc also connects through other +5 Vdc regulators to provide this voltage to the 1st and 3rd LO Synthesizers. U4 provides regulated +12 Vdc for the Audio Amplifier (A4A10) in the WJ-8718A/8718-9 receivers.

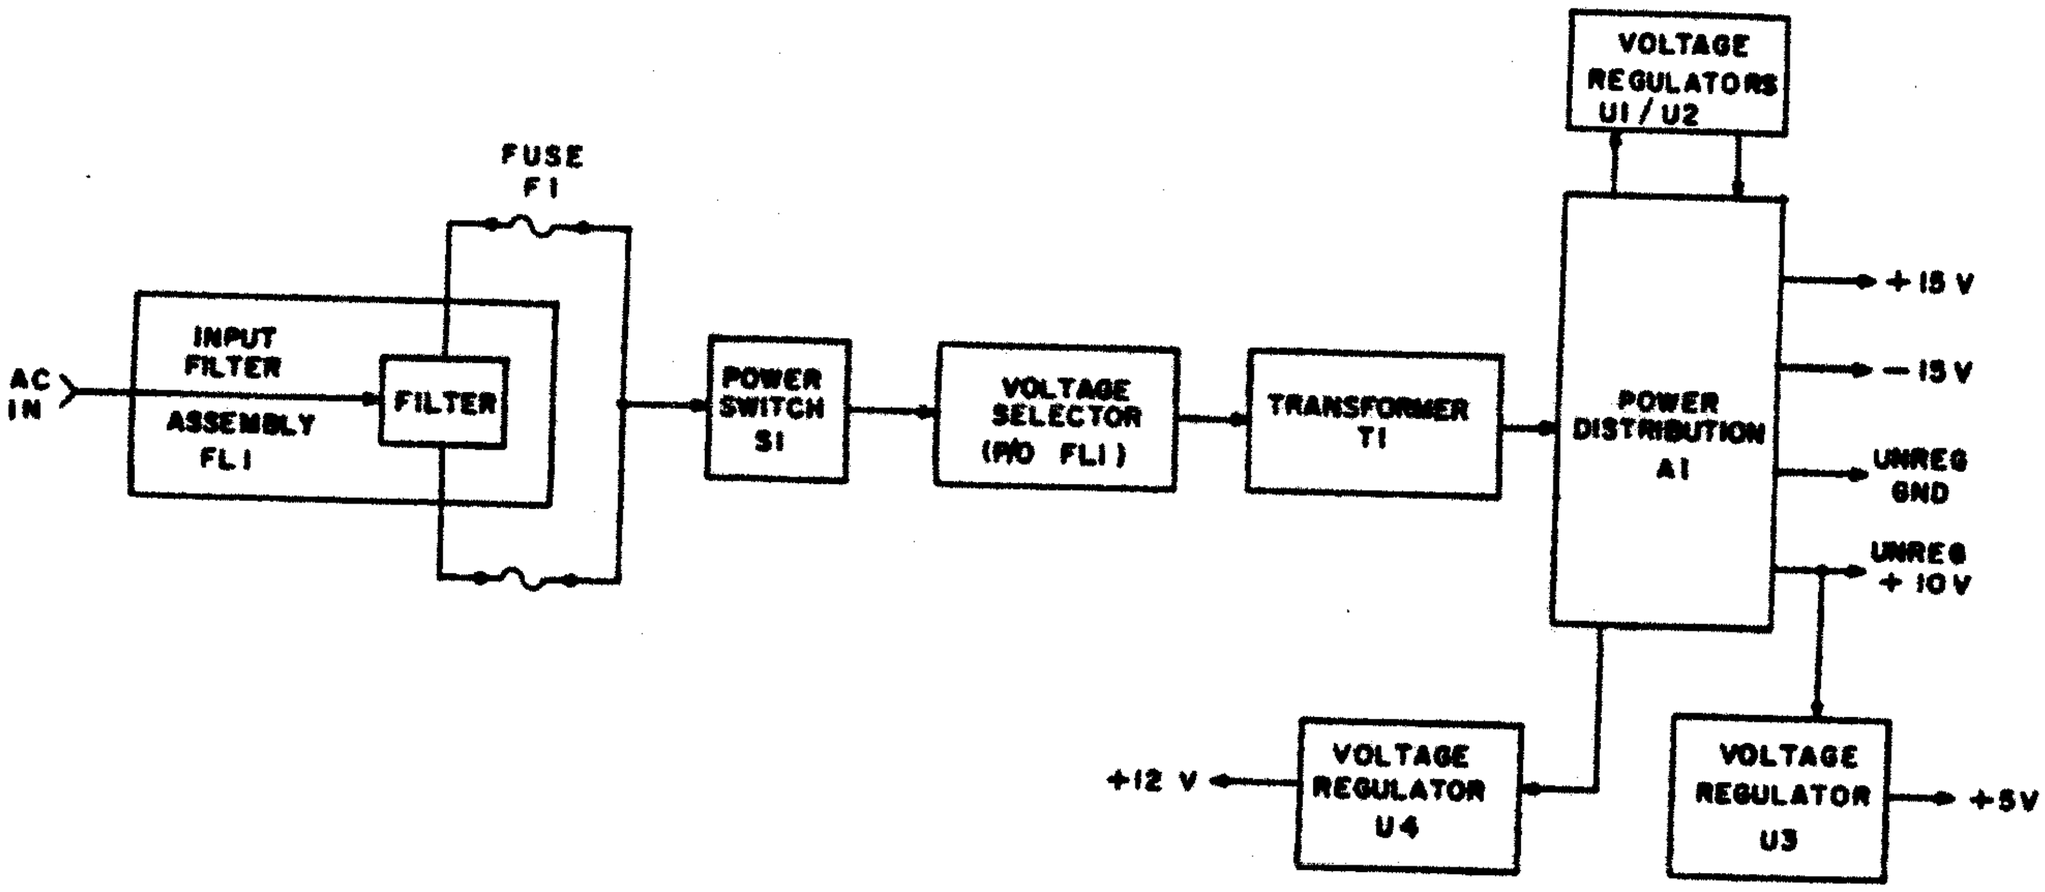


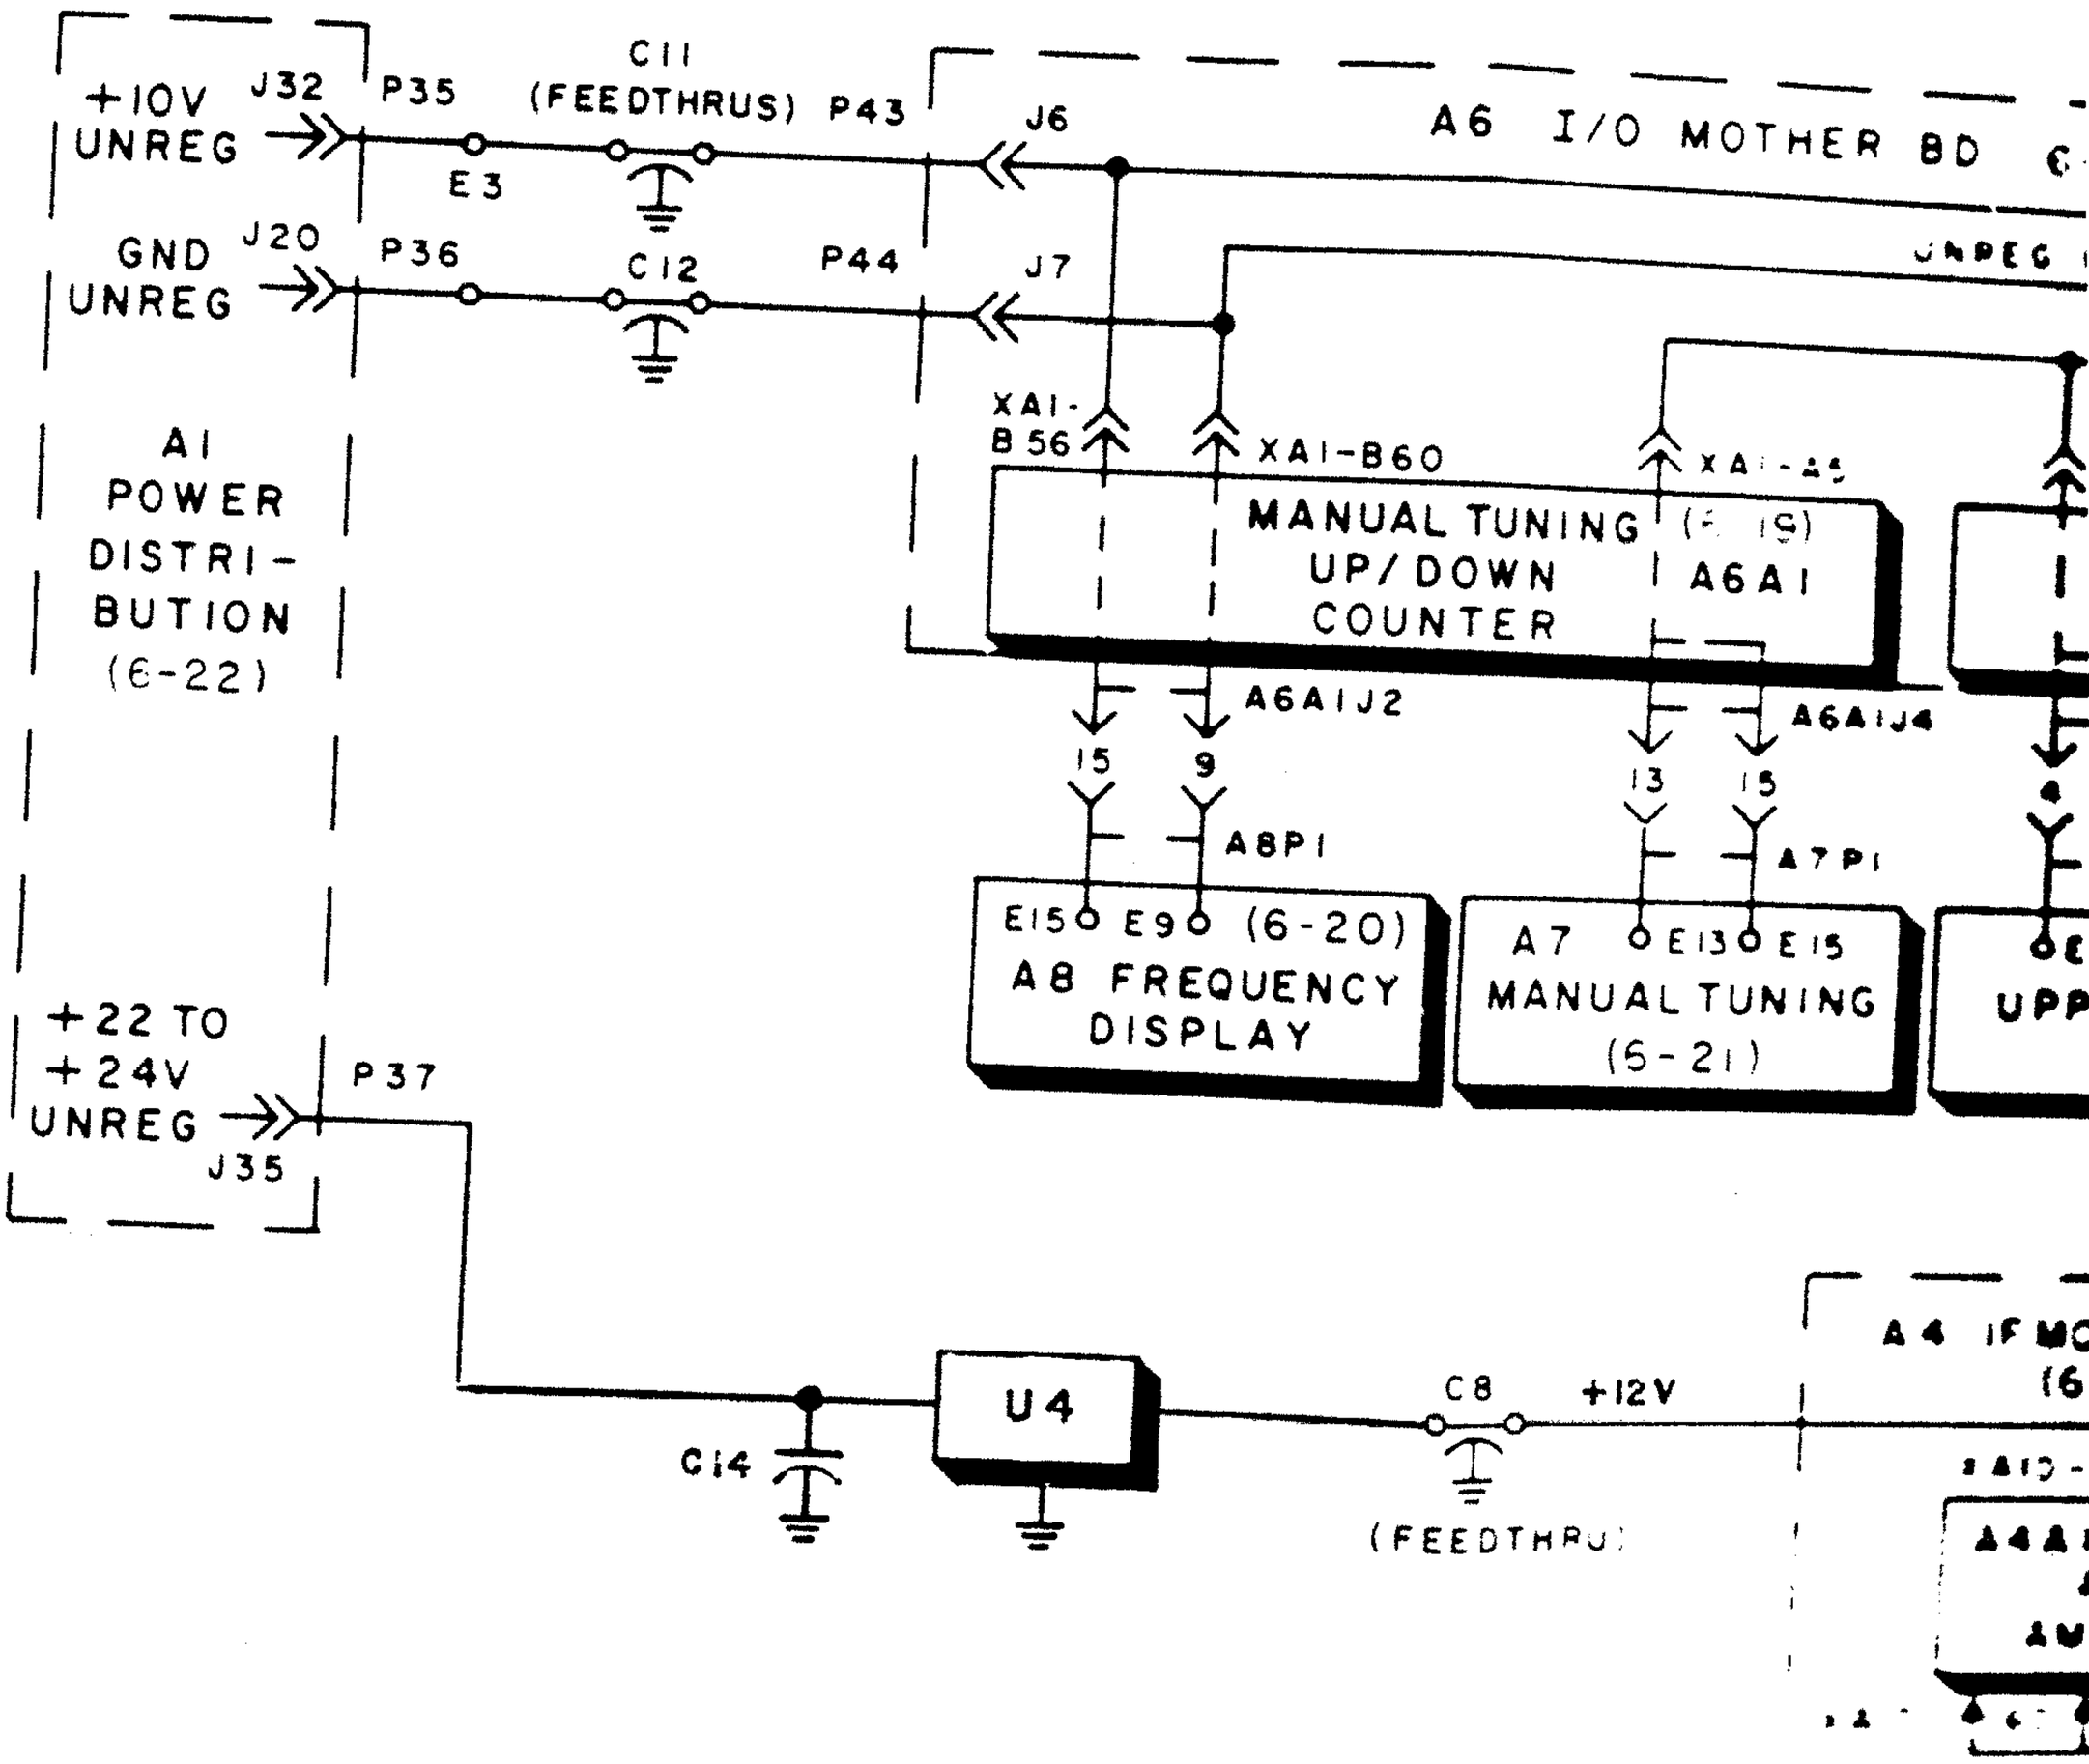

**Figure 3-4. Power Supply Section Functional Block Diagram.**

### 3.3.6.3 Power Supply Voltage Distribution

**Figure 3-5** is a simplified block diagram showing the interconnections between power supply outputs and main chassis subassemblies and modules.

## 3.4 CIRCUIT DESCRIPTIONS

This paragraph provides detailed circuit descriptions of the subassemblies and modules contained in the WJ-8718 Series HF Receiver. All significant components are identified and supplementary block diagrams are employed to aid in understanding circuit operation. Modules are discussed in numerical order to facilitate ease of location.


+10V UNREG
J32
P35
E3
C11 (FEEDTHRUS)
P43
J6
A6 I/O MOTHER BD
GND UNREG
J20
P36
C12
P44
J7
XA1-B56
XA1-B60
MANUAL TUNING UP/DOWN COUNTER
A6A1
A6A1J2
A6A1J4
15
9
13
15
A8P1
A7P1
E15
E9
(6-20)
A8 FREQUENCY DISPLAY
A7
E13
E15
MANUAL TUNING
(6-21)
A1 POWER DISTRI-BUTION (6-22)
+22 TO +24V UNREG
J35
P37
C14
U4
C8
+12V
(FEEDTHRU)

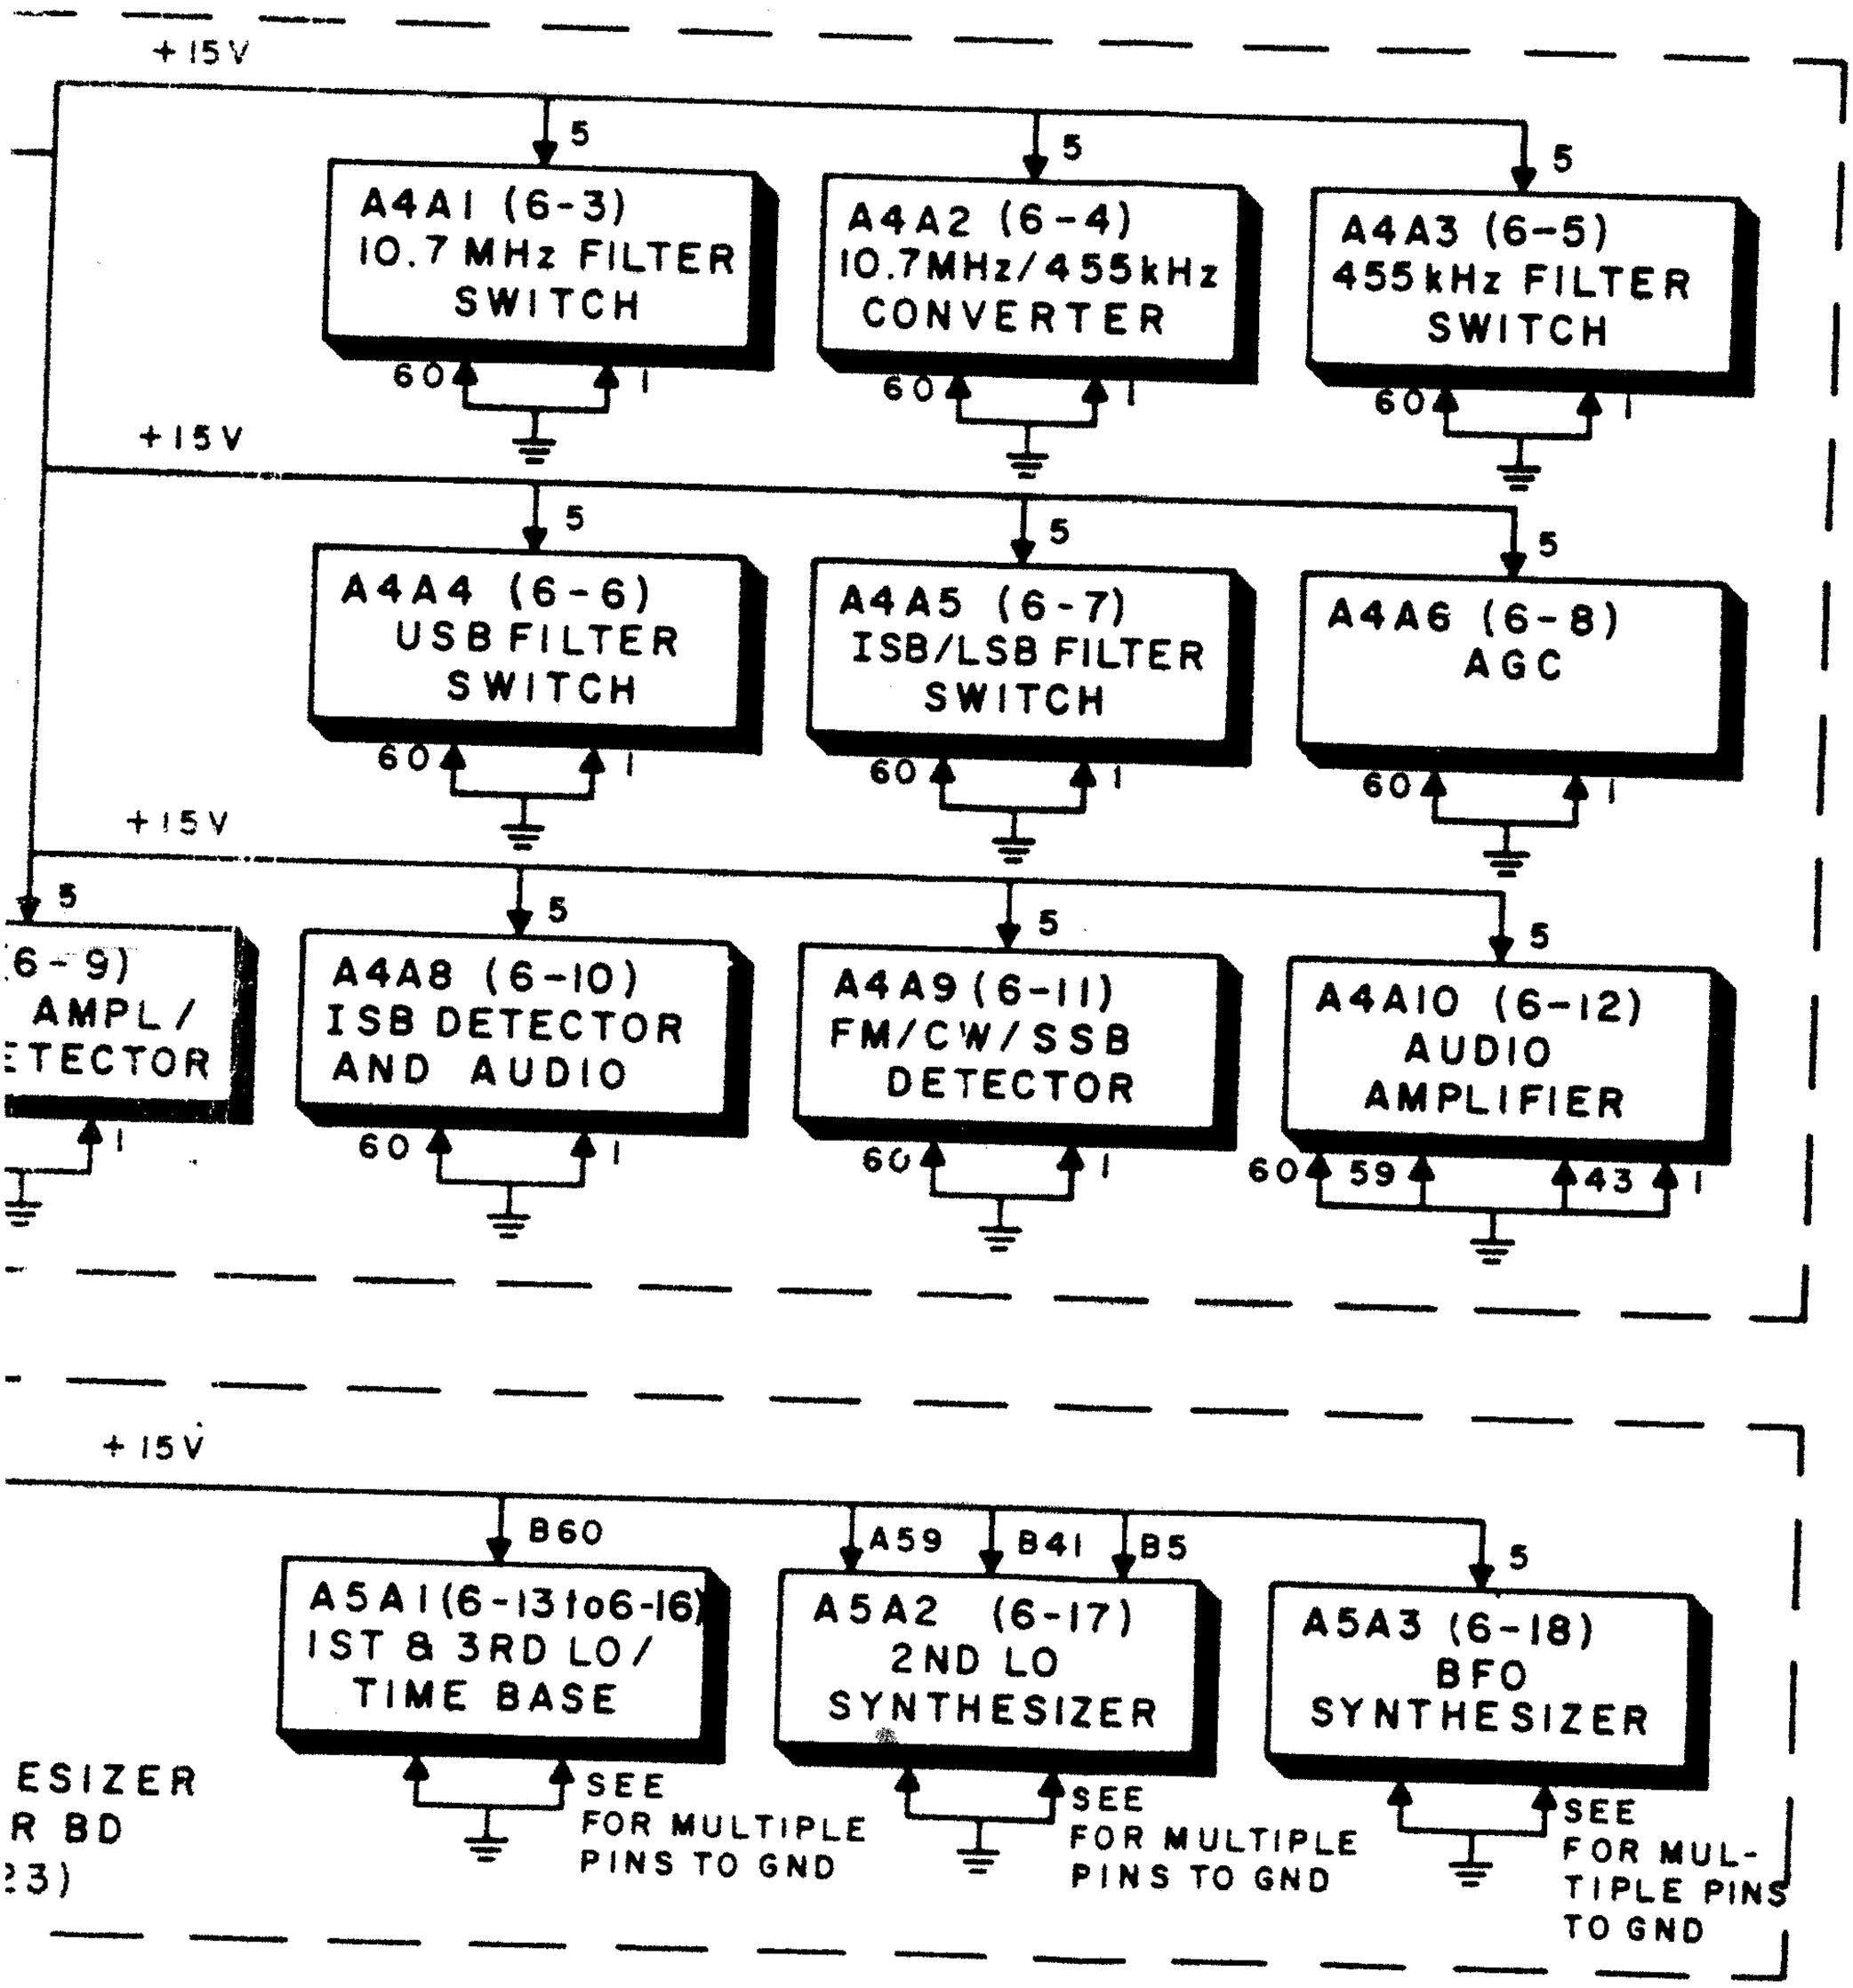



Figure 3-5. Power Supply Voltage Distribution Diagram (Sheet 1 of 3)

POWER SUPPLY
(6-22)
+15V
A1J10
P33
C9
(FEEDTHRU)
E1
P41
J4
J2
3
1
A3P1
C3 (6-2)
A3
INPUT CONVERTER
A6 I/O MOTHER BD
(6-22)
XA2
-57
A6A2 (6-23)
FRONT PANEL
INTERCONNET
A6A2J1
39
A10P1
E2
A10A2
LOWER PANEL CONTROL
(6-21)
A6
J3
28
A4P1
E28
L1
A5P1
1
A6
J1
A4
MOT
BOA
(6-
L2
E1
A5 S
M

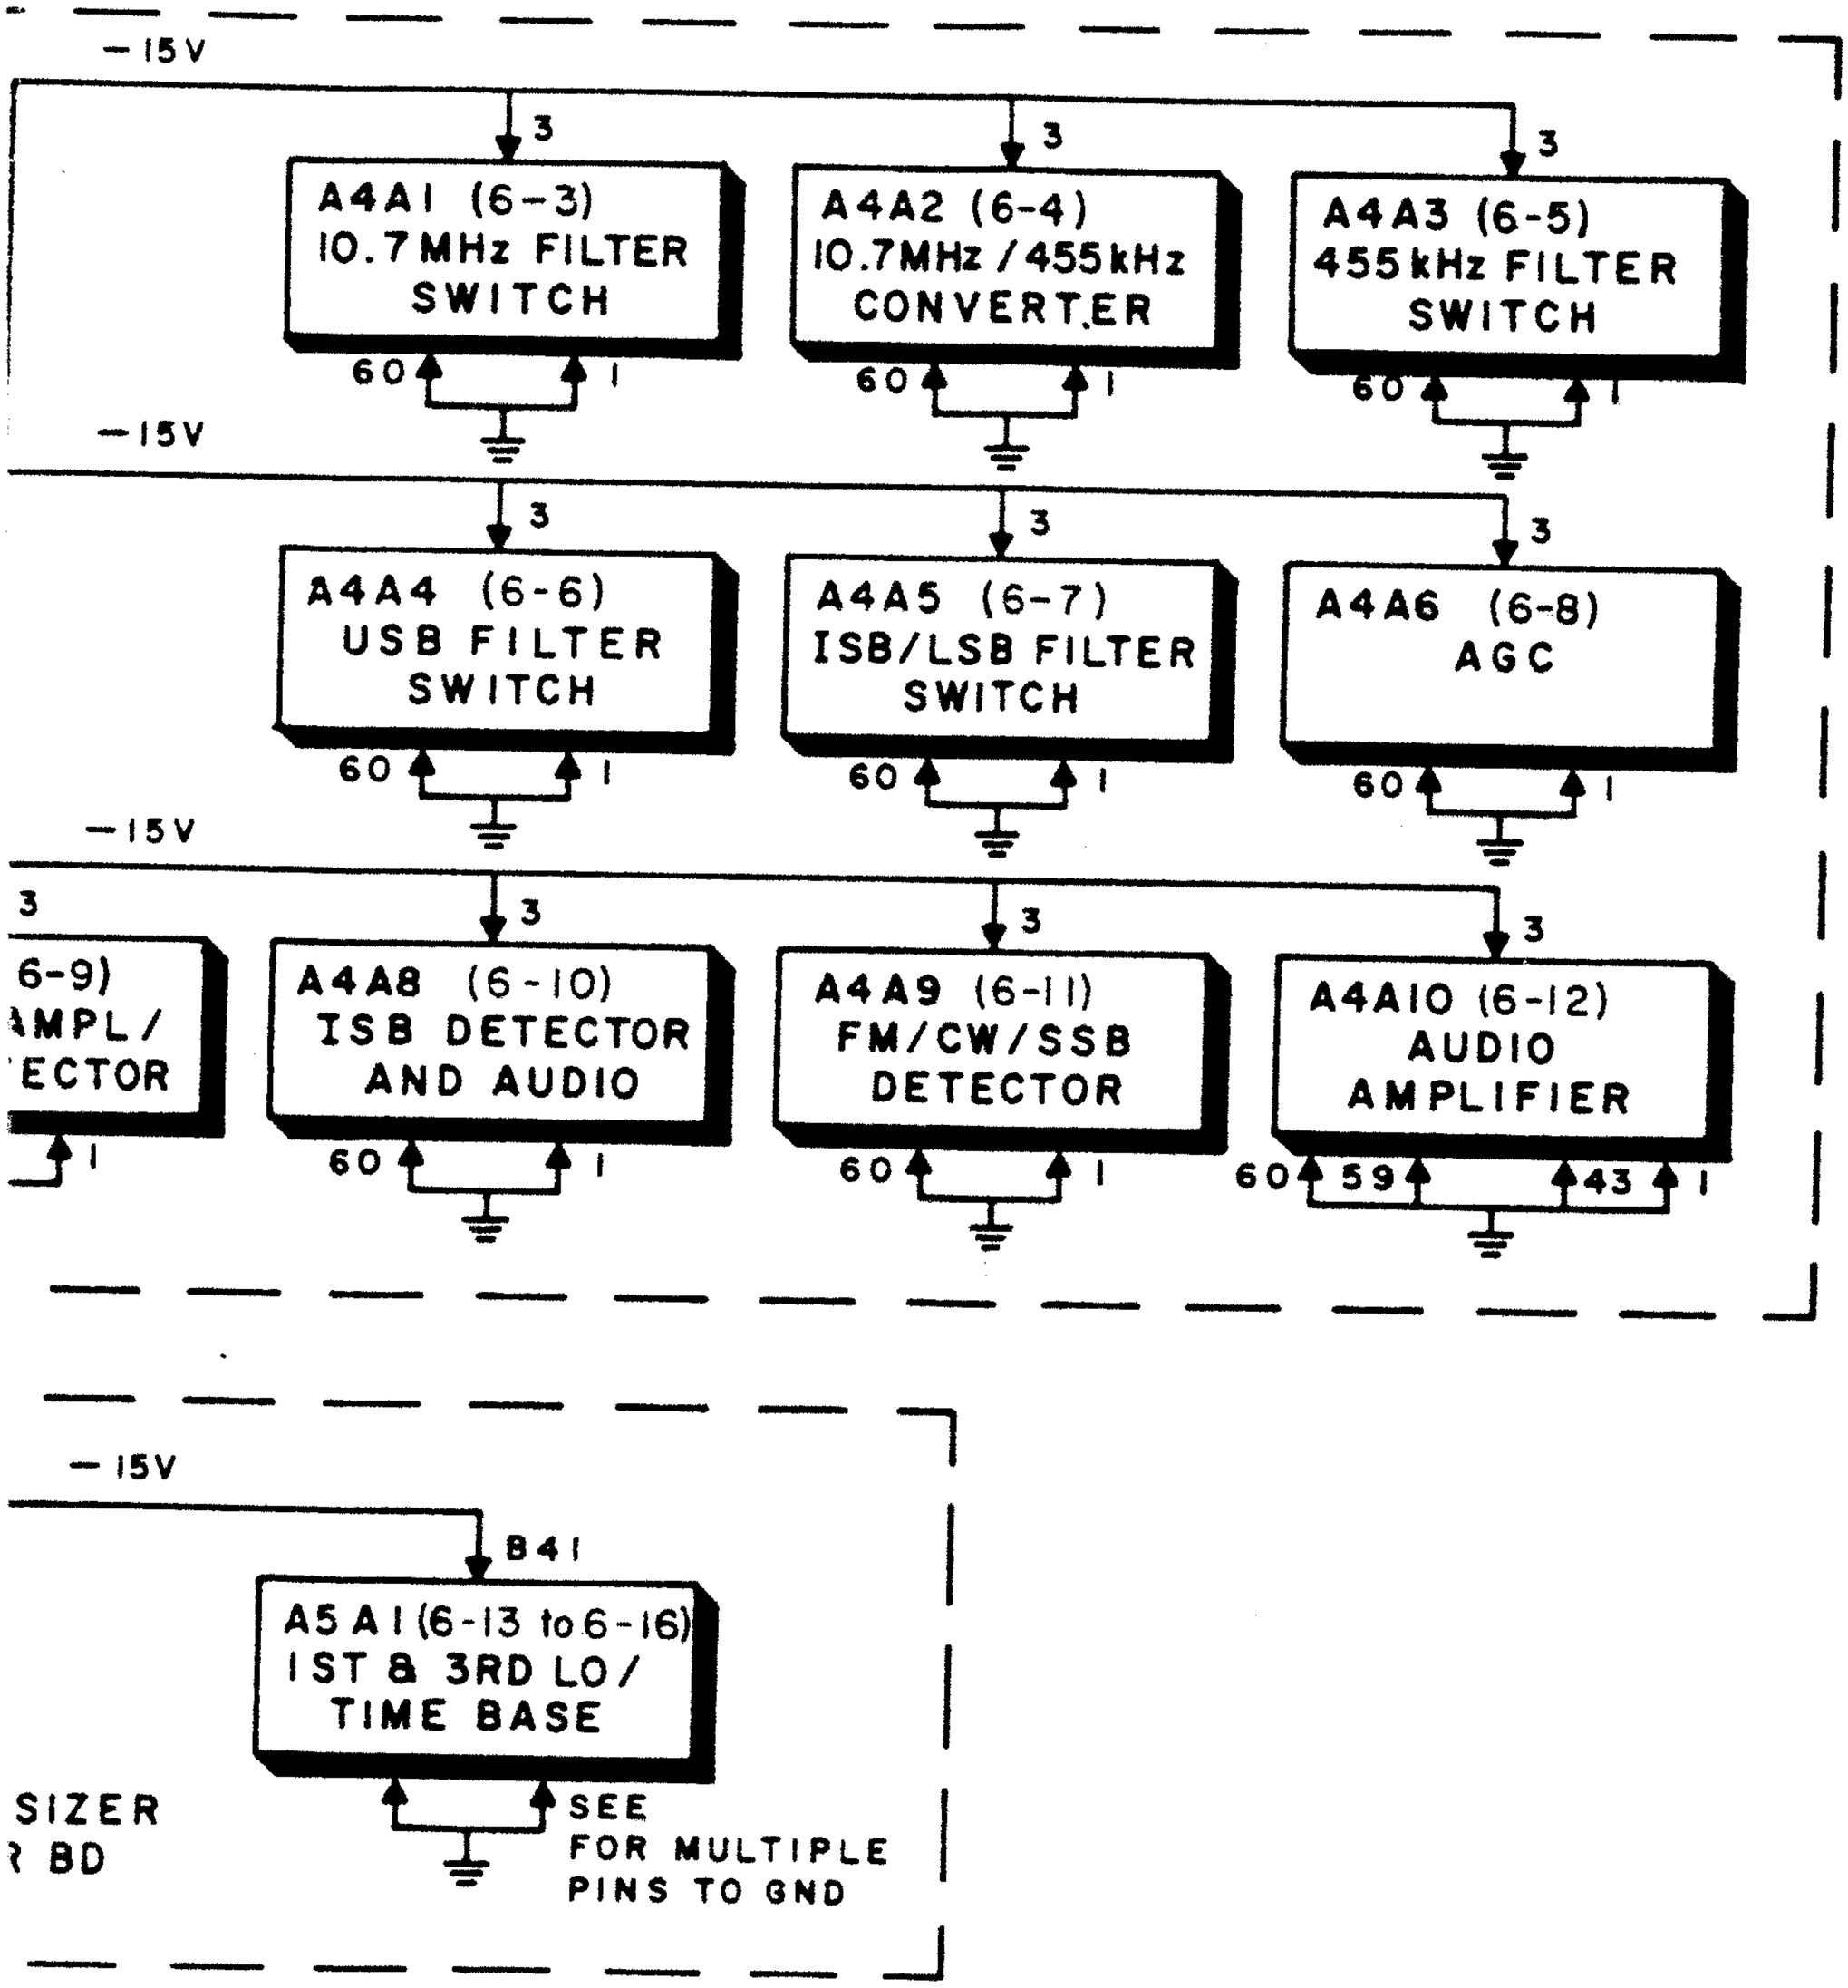



Figure 3-5. Power Supply Voltage Distribution Diagram (Sheet 2 of 3)

POWER SUPPLY
(6-22)
-15V
A1J14
P34
C10
(FEEDTHRU)
E2
P42
J5
J2
3
2
A3P1
A3
INPUT CONVERTER
(6-2)
C2
A6 I/O MOTHER BD
(6-22)
XA2
-59
A6A2 (6-23)
FRONT PANEL
INTERCONNECT
A6A2J1
35
A10P1
E6
A10A2
LOWER PANEL CONTROL
(6-21)
A6
J3
29
A4P1
L2
E29
A5P1
2
A6
J1
A4 IF
MOTHE
BOARD
(6-22)
A4A
455k
AM
60
L3
E2
A5 SYNT
MOT
(6-2

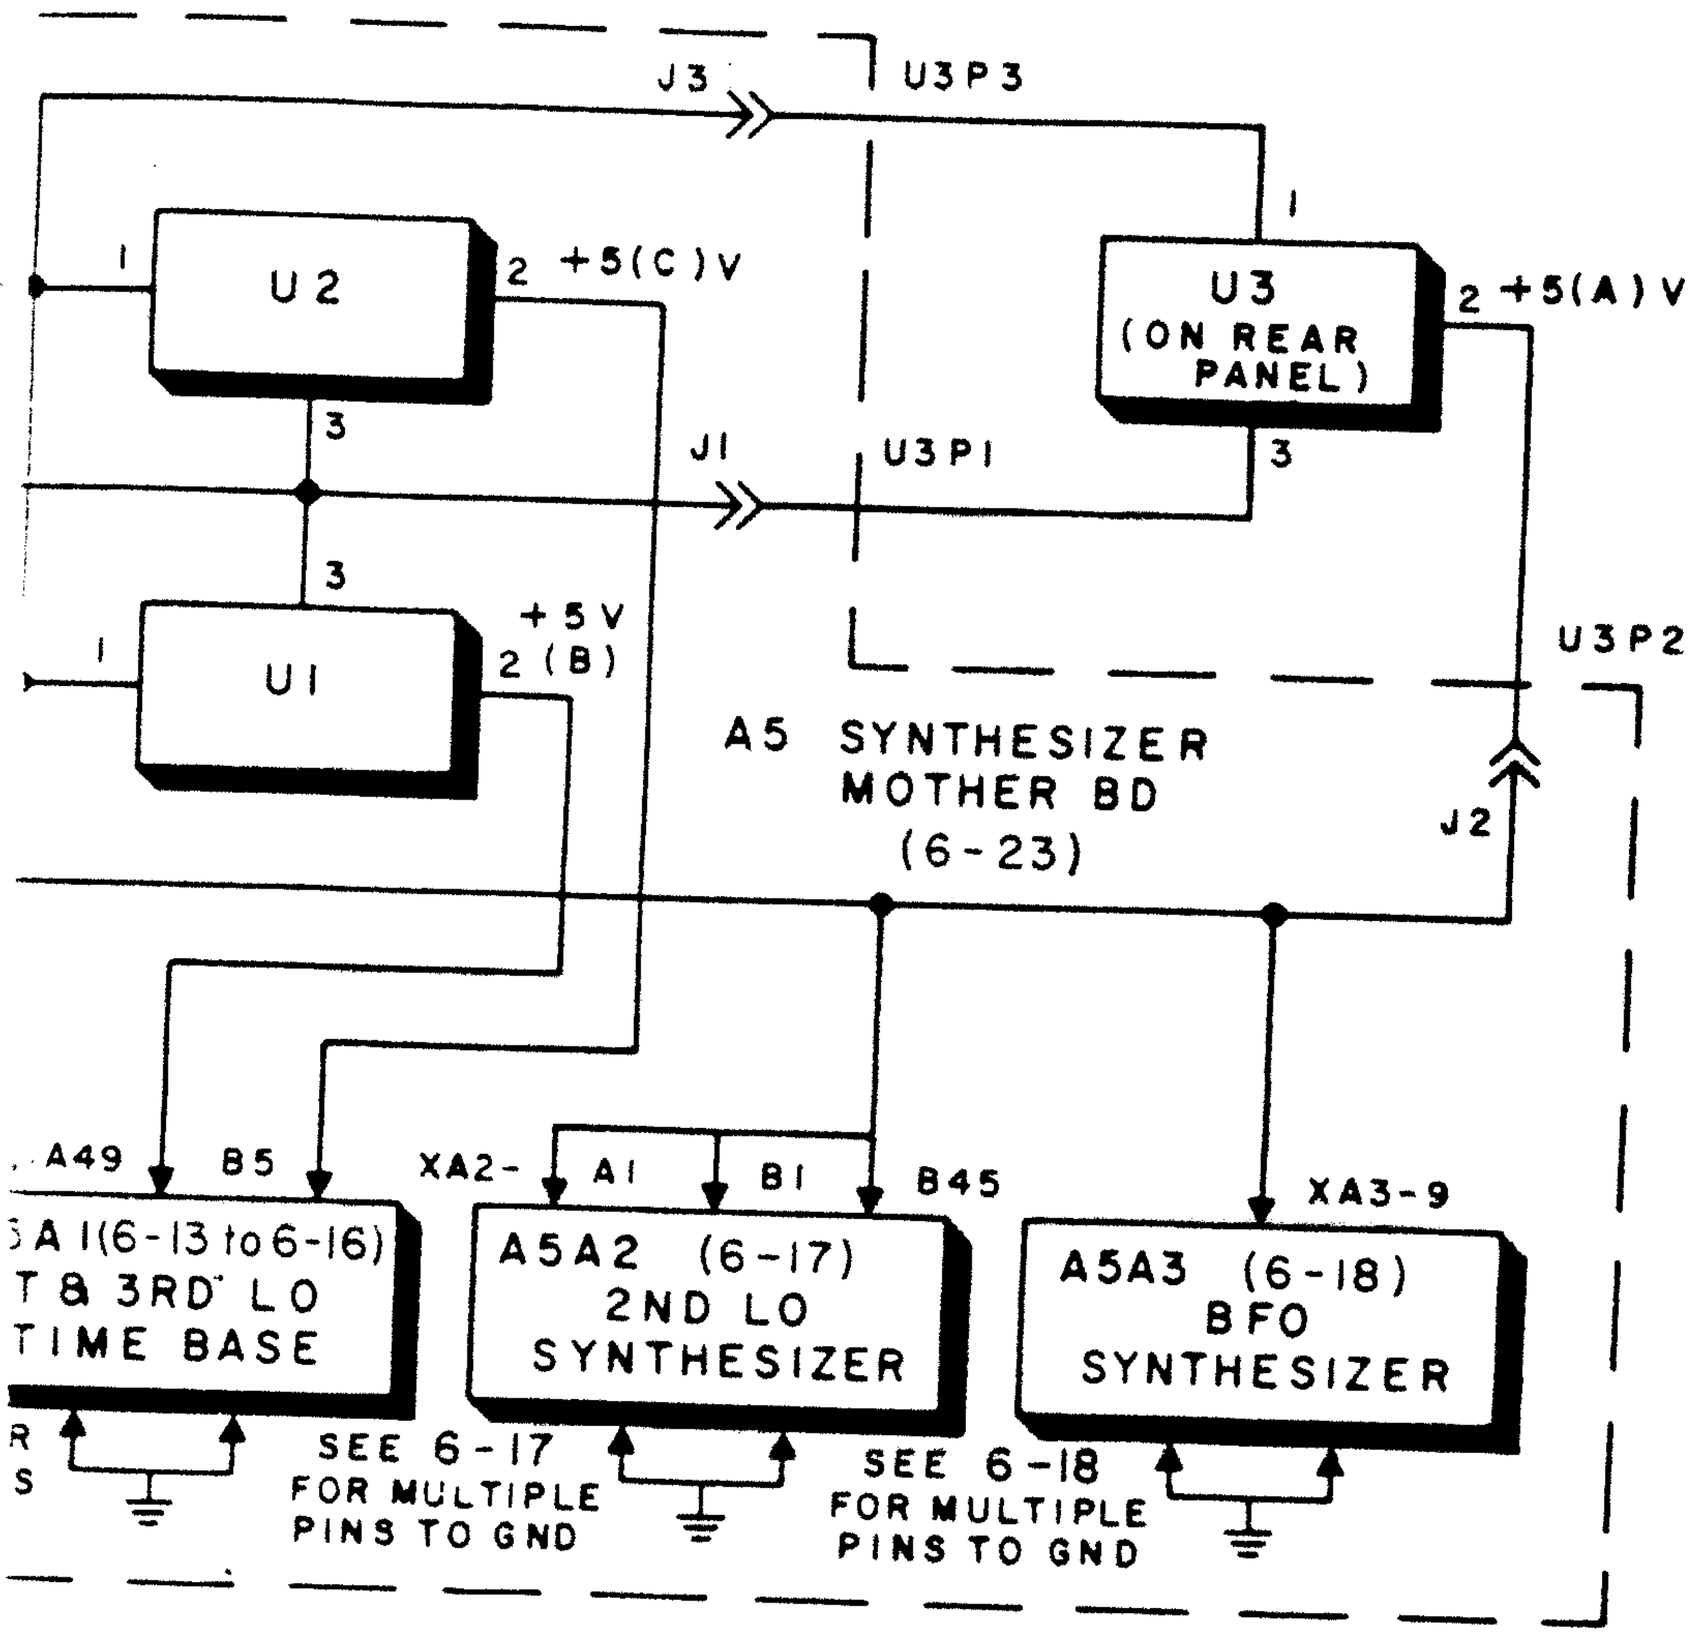



Figure 3-5. Power Supply Voltage Distribution Diagram
(Sheet 3 of 3)

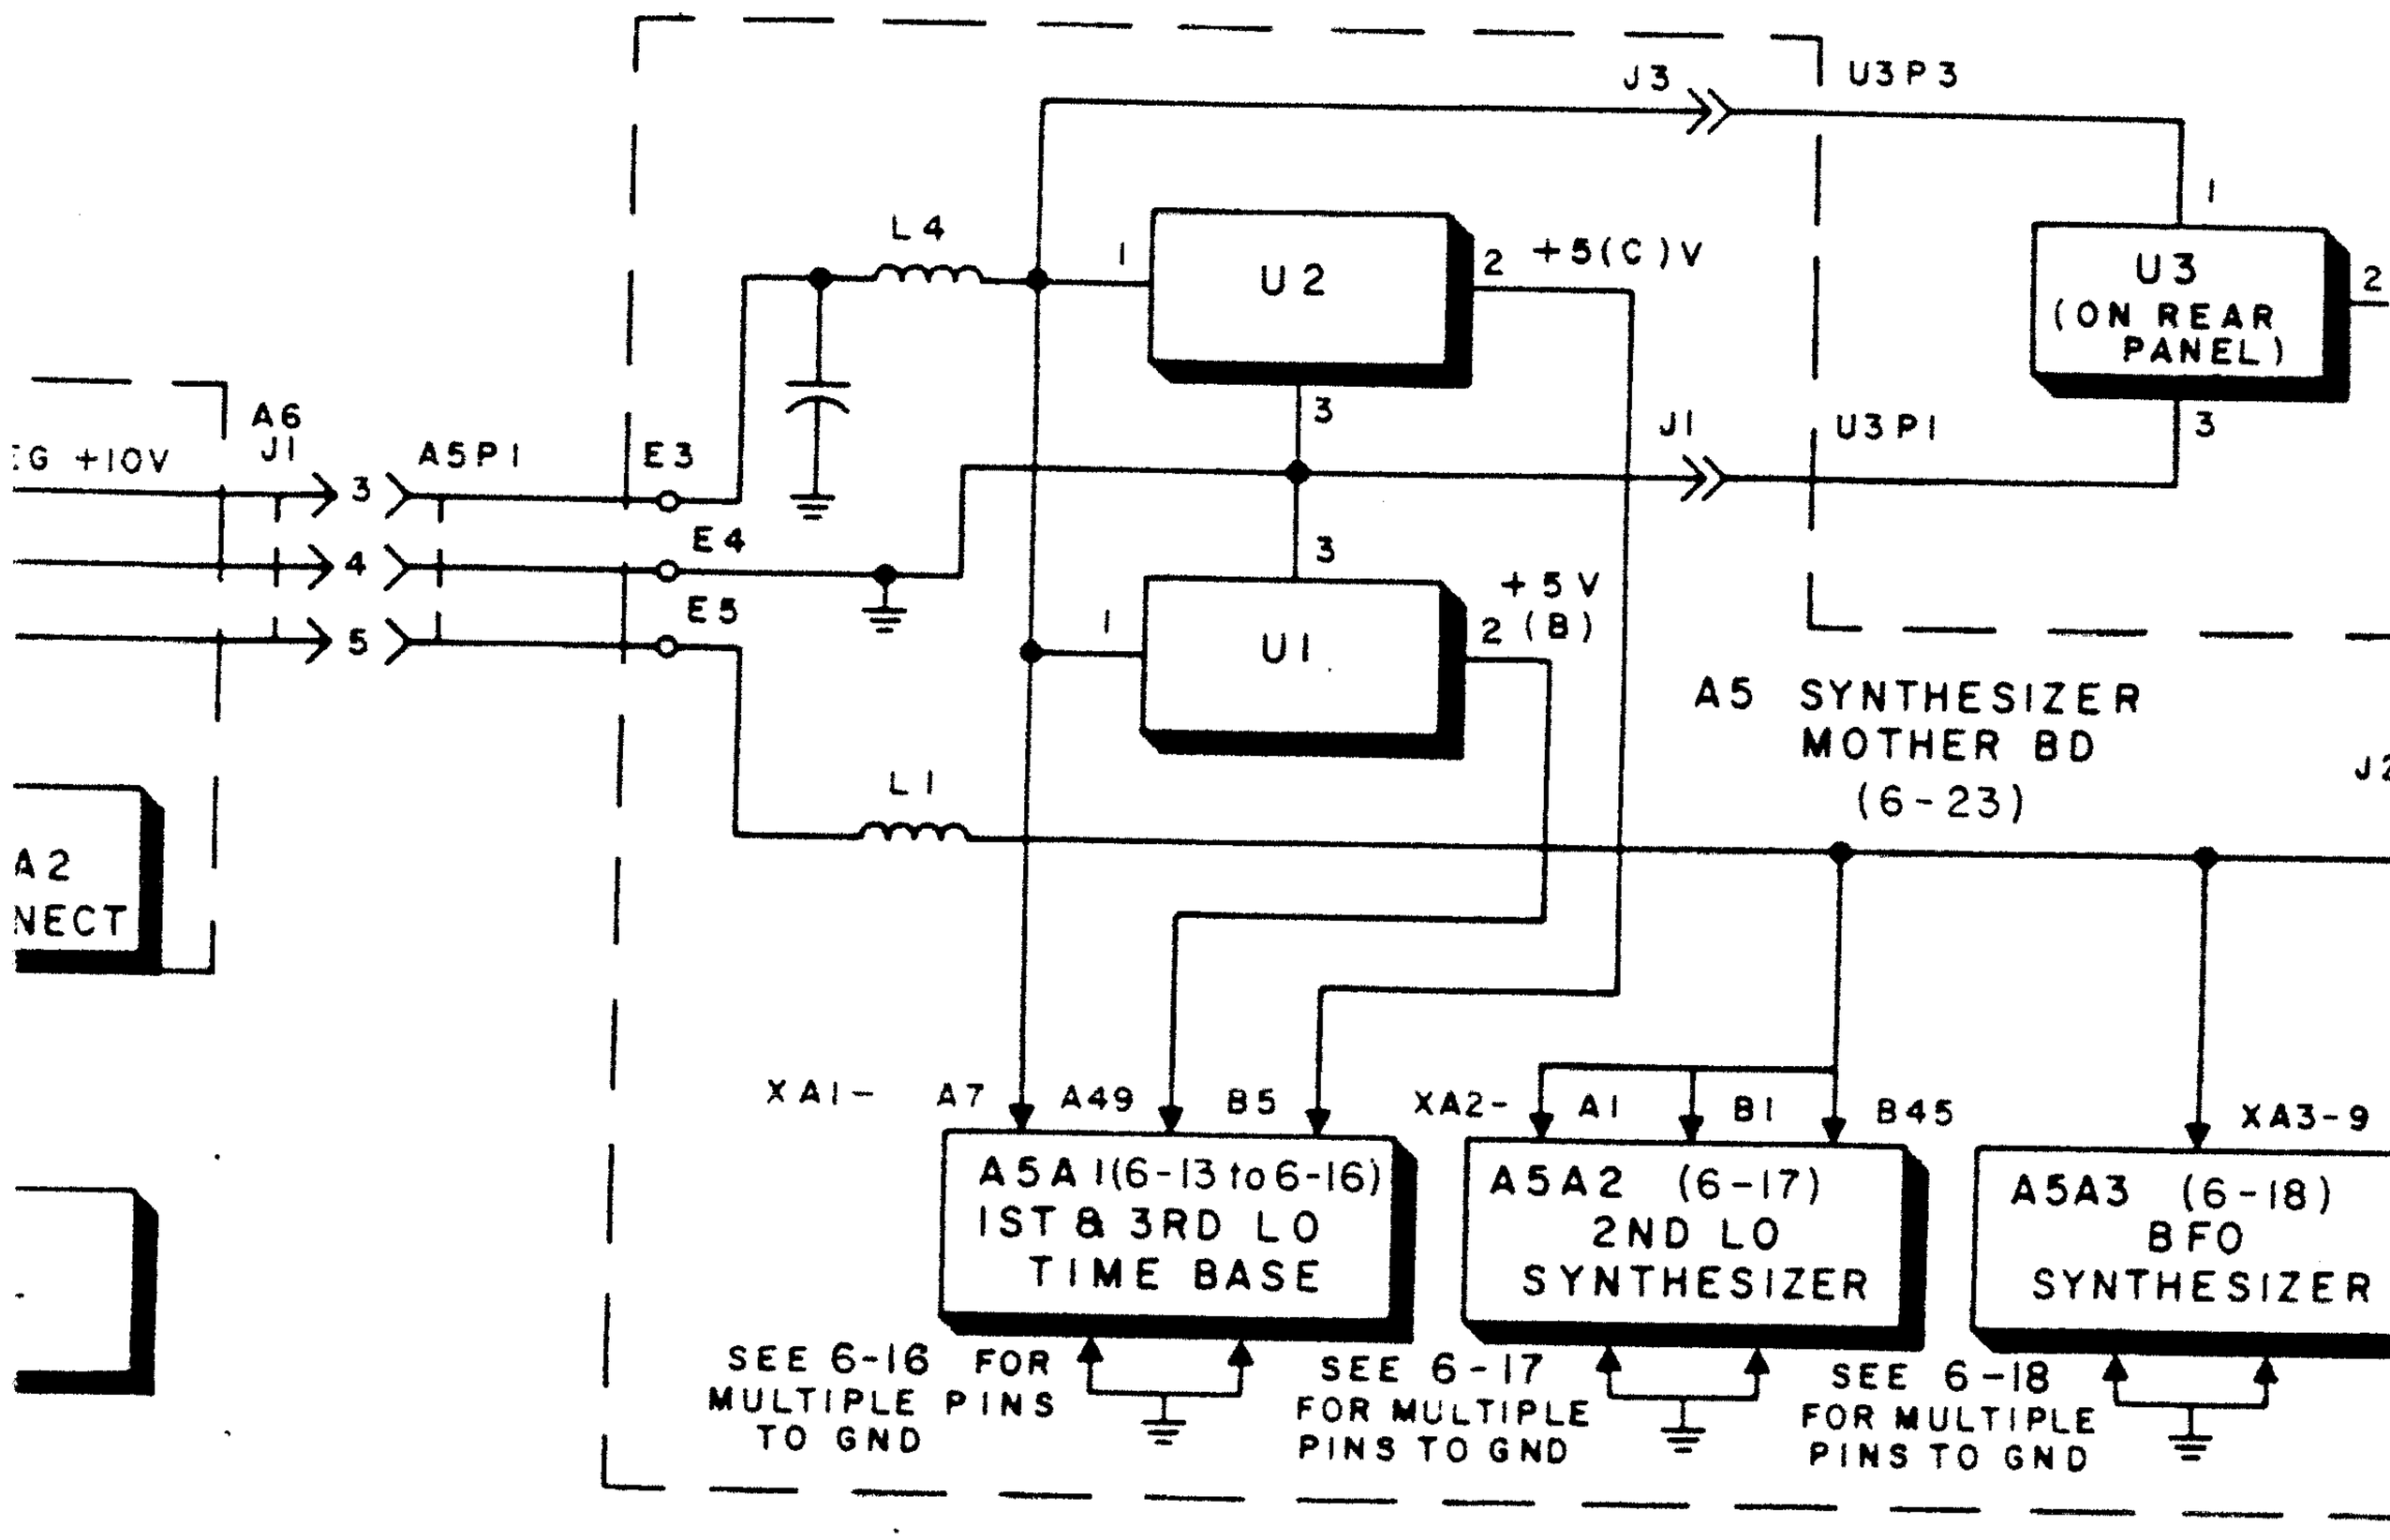
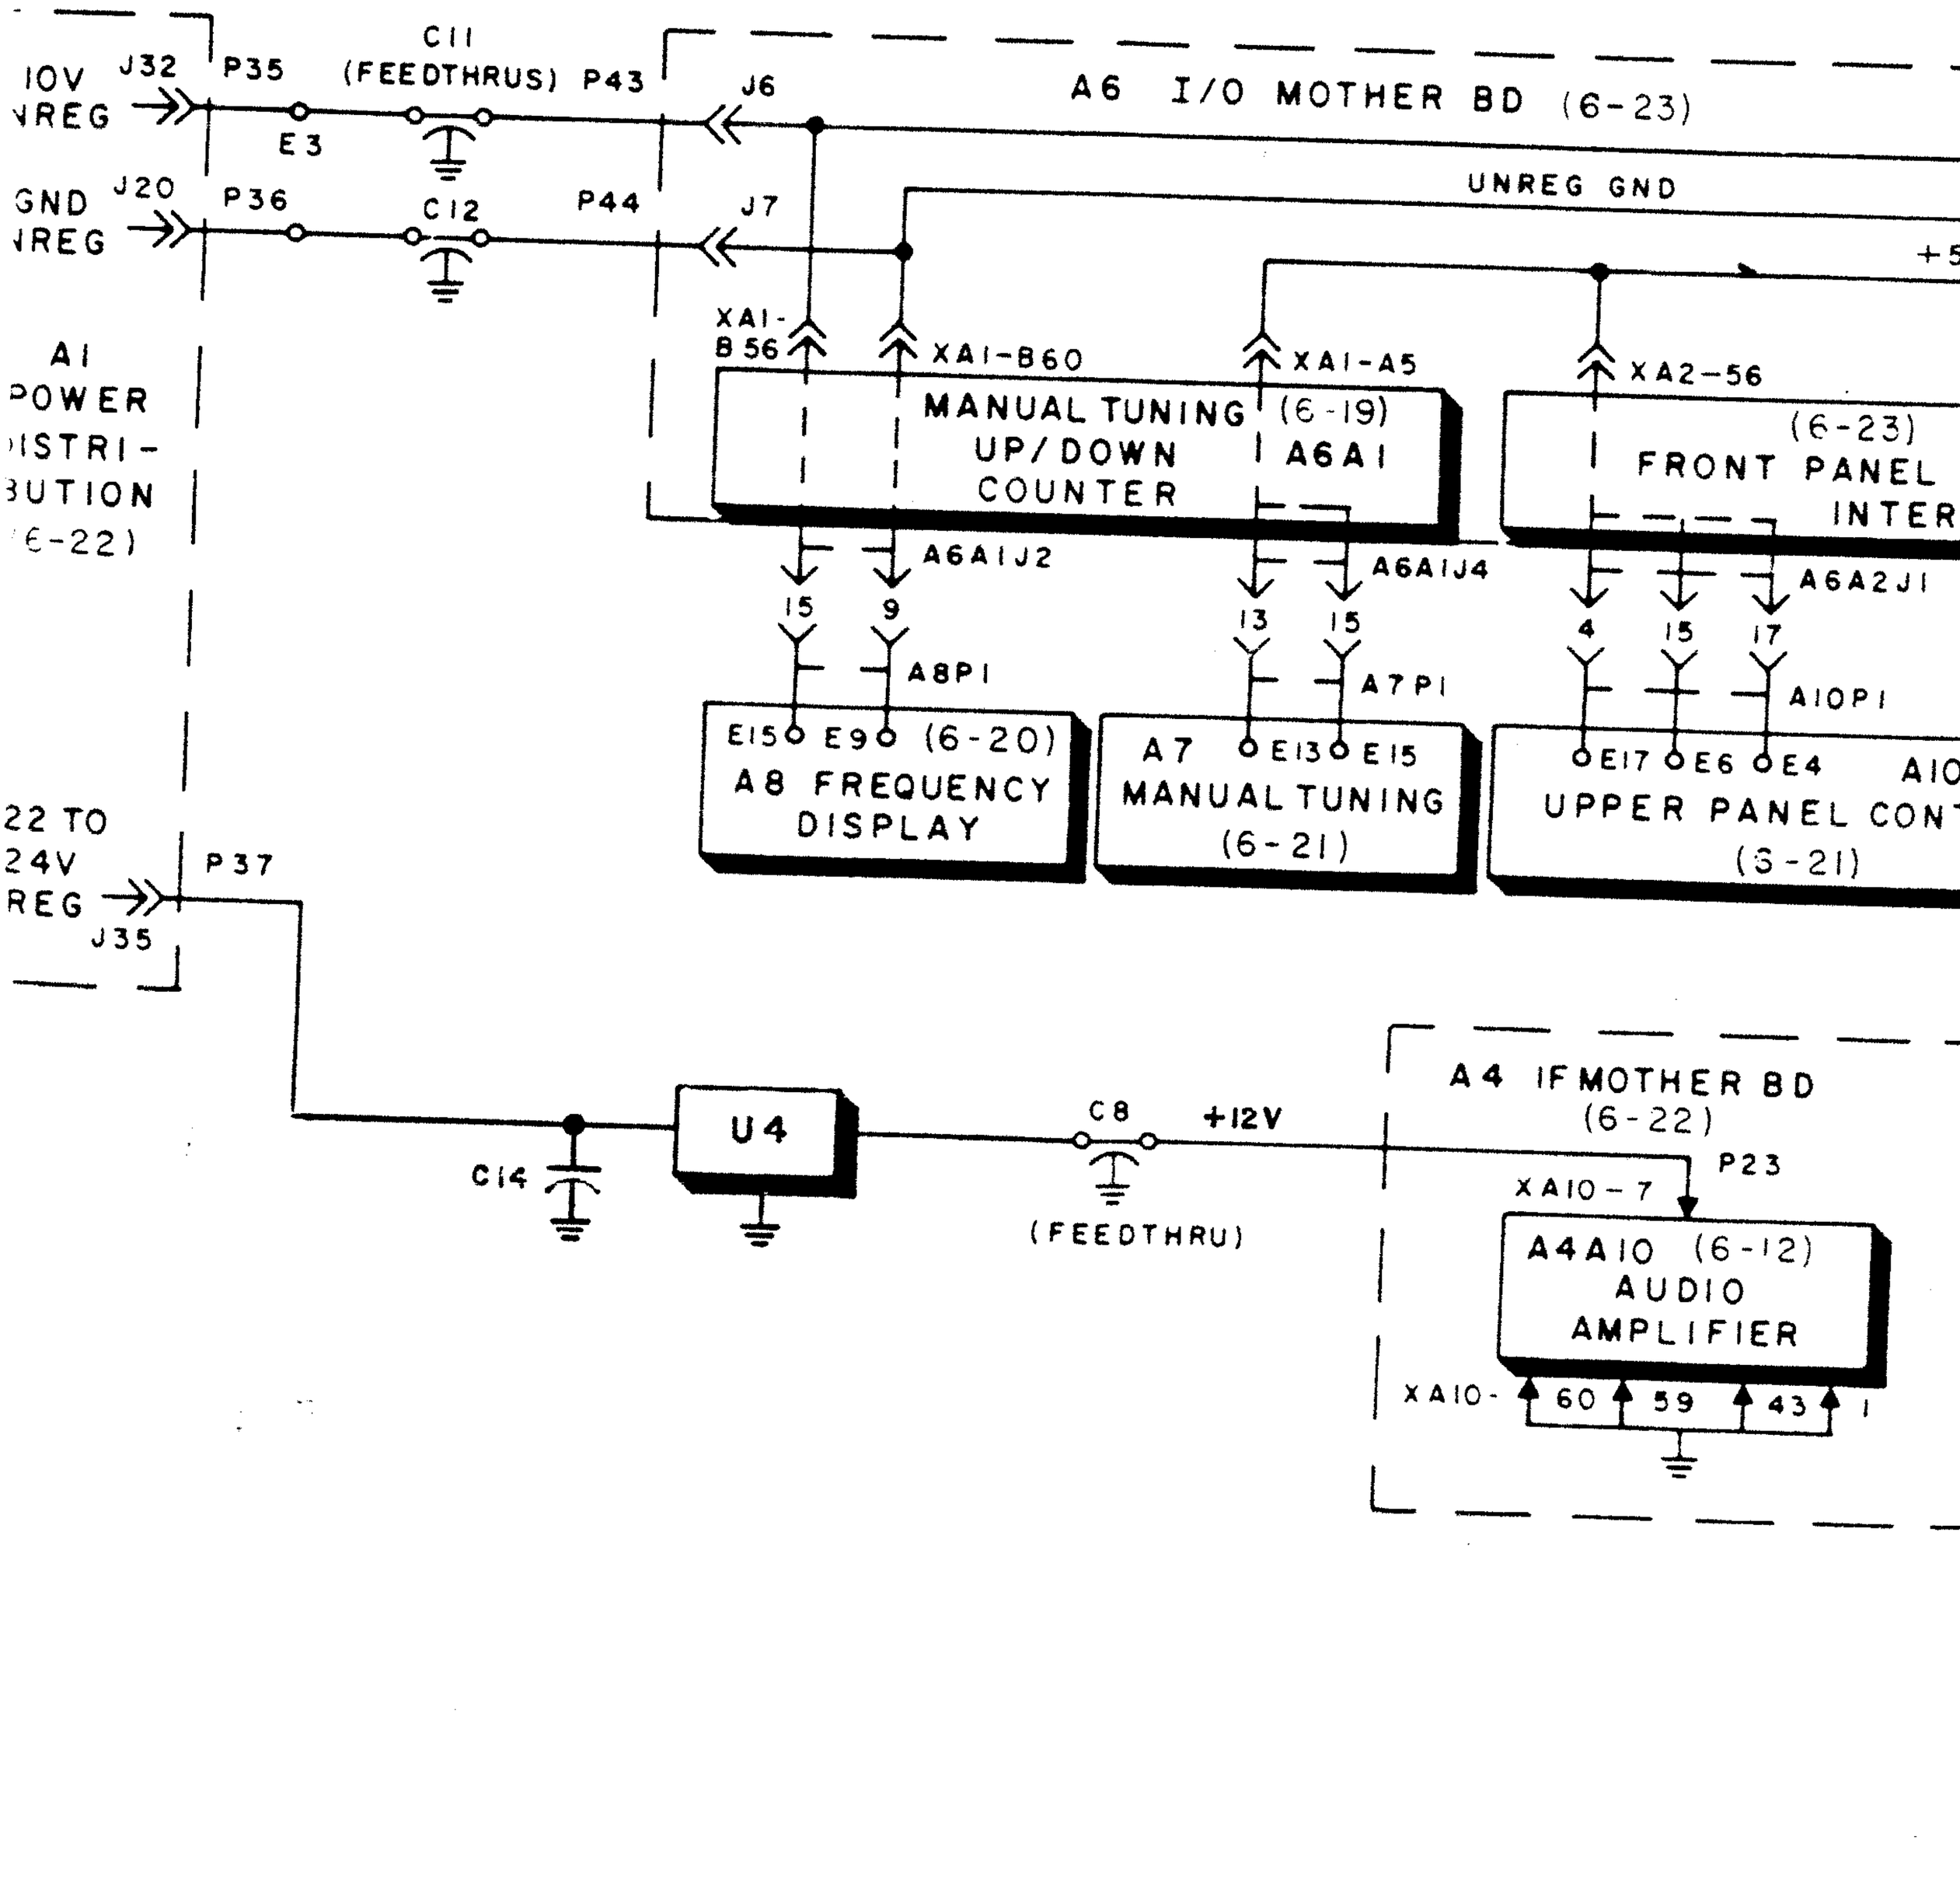



Figure 3-5. Power Supply Voltage Distribution I
(Sheet 3 of 3)


10V UNREG
J32
P35
E3
C11 (FEEDTHRUS)
P43
J6
A6 I/O MOTHER BD (6-23)
GND UNREG
J20
P36
C12
P44
J7
UNREG GND
+5
A1 POWER DISTRI-BUTION (6-22)
XA1-B56
XA1-B60
XA1-A5
XA2-56
MANUAL TUNING UP/DOWN COUNTER
(6-19)
A6A1
(6-23)
FRONT PANEL INTER
A6A1J2
A6A1J4
A6A2J1
15
9
13
15
4
15
17
A8P1
A7P1
A10P1
E15 E9 (6-20)
A8 FREQUENCY DISPLAY
A7 E13 E15
MANUAL TUNING
(6-21)
E17 E6 E4
UPPER PANEL CON
(6-21)
22 TO 24V REG
J35
P37
C14
U4
C8
+12V
(FEEDTHRU)
A4 IF MOTHER BD
(6-22)
P23
XA10-7
A4A10 (6-12)
AUDIO AMPLIFIER
XA10-
60
59
43
1

### 3.4.1 TYPE 791616-1 RF INPUT FILTER (A2)

Within this assembly is a Type 280093 PC board which contains the circuitry of the RF input filter. The schematic diagram for this circuit is **Figure 6-1.** The circuit is a 15-pole, elliptic function low-pass RF filter, with an insertion loss of less than 3.5 dB over normal input range of 5 kHz to 30 MHz. Above 30 MHz, the attenuation increases rapidly. This attenuation improves the image rejection and reduces the conducted LO leakage of the receiver. Over the range of LO and image frequencies, the attenuation of the input filter exceeds 80 dB. Resistor R1 provides a dc path to ground to bleed off any accumulated static charge at the RF input. Diodes CR1 through CR4 use the Zener breakdown potential to protect the rest of the receiver from input signals in excess of +15 dBm. C12 and L1 provide a high frequency trap to prevent radiation of harmonics of the 1st LO. The nominal input impedance of the filter is 50 Ω.

### 3.4.2 TYPE 791592-1 INPUT CONVERTER (A3)

**Figure 3-6** is a detailed functional block diagram of the Input Converter which should be referred to in the following circuit description. **Figure 6-2,** Input Converter Schematic Diagram, may be referred to for greater component level detail, if desired.

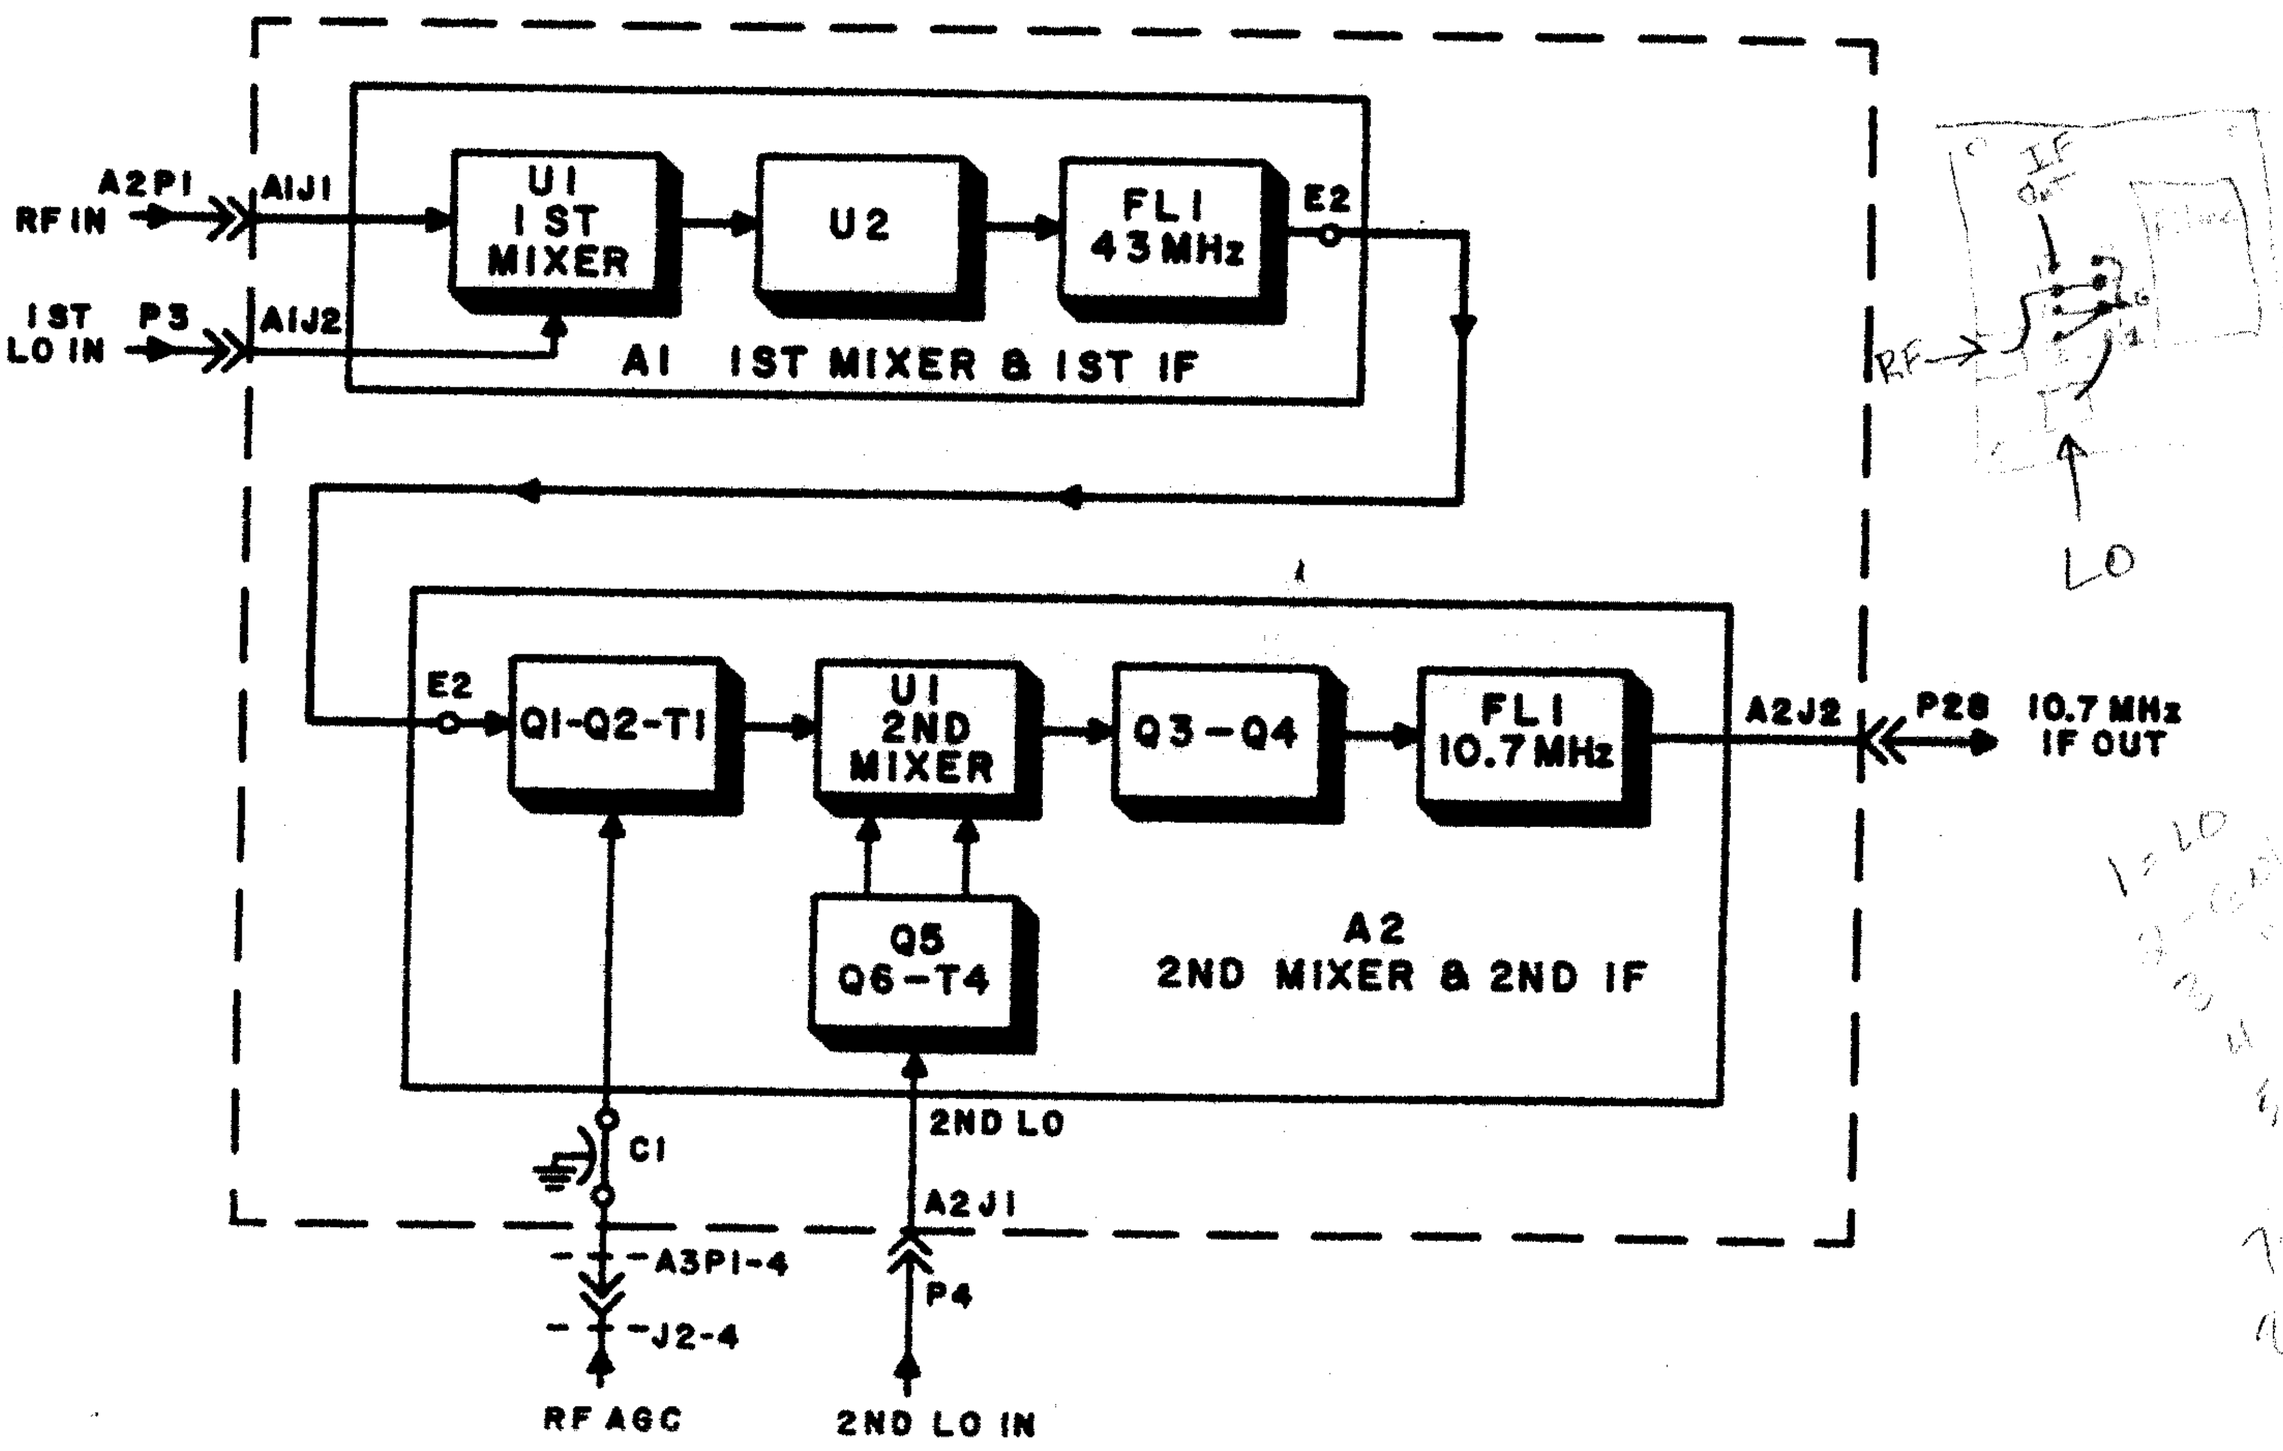



**Figure 3-6. Input Converter Functional Block Diagram.**

### 3.4.2.1 Circuit Description

All signals entering the Input Converter from the RF Filter are converted up in frequency and filtered. Signals passed by the 1st IF Filter are amplified and converted down in frequency to 10.7 MHz. Here they are further amplified and filtered. The overall net gain of the Input Converter is roughly +17 dB when zero gain control current is applied.

Signals reaching the 1st Mixer, A1U1, may be any frequency from 5 kHz up to slightly above 30 MHz and any level from the noise floor to +30 dBm. In general, many signals will be present covering a wide range of levels. The role of the 1st Mixer is to handle these in such a way that the balance of the receiver can select the desired signal and reject all others. To accomplish this, a high level mixer is used and relatively high (+20 dBm) local oscillator power is applied. The conversion loss of the 1st Mixer is approximately 6 dB. Therefore, the 1st Mixer is followed by amplifier A1U2 to restore the signals to their original levels. A1U2 is a broadband hybrid integrated amplifier with a low noise figure, a good terminating impedance for the mixer, and a large signal handling ability.

The output load of A1U2 is 50 Ω, ensuring a proper driving impedance for the 1st IF crystal filter A1FL1. This filter requires a 50 Ω source and load and has a center frequency of 42.905 MHz and a 3 dB bandwidth of 28 kHz. The primary function of A1FL1 is to reject unwanted signals which are passed by the RF Filter and 1st Mixer and to establish the initial IF bandpass.

Signals passed by A1FL1 are coupled to a second amplifier, A2Q2, through a coupling network. This amplifier has a similar constant current source A2Q1 biasing it. Its output circuit is a broadly tuned transformer, but is shunted by gain control diode A2CR2. As the current through the diode increases, its RF impedance decreases and the net gain of A2Q2 is decreased. Current to A2CR2 is supplied by the RF Gain portion of the AGC, A4A6. As the current varies from zero to maximum, there is approximately 30 dB of gain reduction.

The output signal of A2Q2 is down converted by the 2nd Mixer, A2U1. The 2nd LO signal enters the Input Converter via A2J1 at a level of approximately 0 dBm. Common emitter amplifiers, A2Q5 and A2Q6, provide enough gain to bring the 2nd LO signal to a nominal level of +17 dBm. Each of these stages is broadly tuned transformer-coupled and each has some unbypassed emitter resistance to preserve a relatively low harmonic content in the 2nd LO signal.

The 2nd Mixer is followed by a bipolar cascode amplifier. It consists of common emitter stage A2Q4 and common base stage A2Q3. These provide relatively high gain with good stability and low noise contribution. Transformer A2T2 couples the output of A2Q3 to crystal filter A2FL1. This filter has a center frequency of 10.7 MHz, a bandwidth of 16 kHz, and requires 50 Ω terminations.

The received signal frequency which corresponds to the center of the 2nd IF at exactly 10.7 MHz depends on the frequencies of both the 1st and 2nd LOs. The control of these two oscillators is described in the Synthesizer Section 3.3.

## 3.4.3 TYPE 791569-1 IF MOTHERBOARD (A4)

The schematic diagram of the IF Motherboard is **Figure 6-3.** The IF Motherboard has 11 positions for plug-in circuit cards. A total of 10 positions are used and the eleventh is a spare.

FIGURE 3-7

### 3.4.4 TYPE 791594-1 10.7 MHz FILTER SWITCH (A4A1)

**Figure 3-7** is a detailed functional block diagram of the 10.7 MHz Filter Switch which should be referred to in the following circuit description. **Figure 6-4**, 10.7 MHz Filter Switch Schematic Diagram, may be referred to for greater component level detail, if desired.

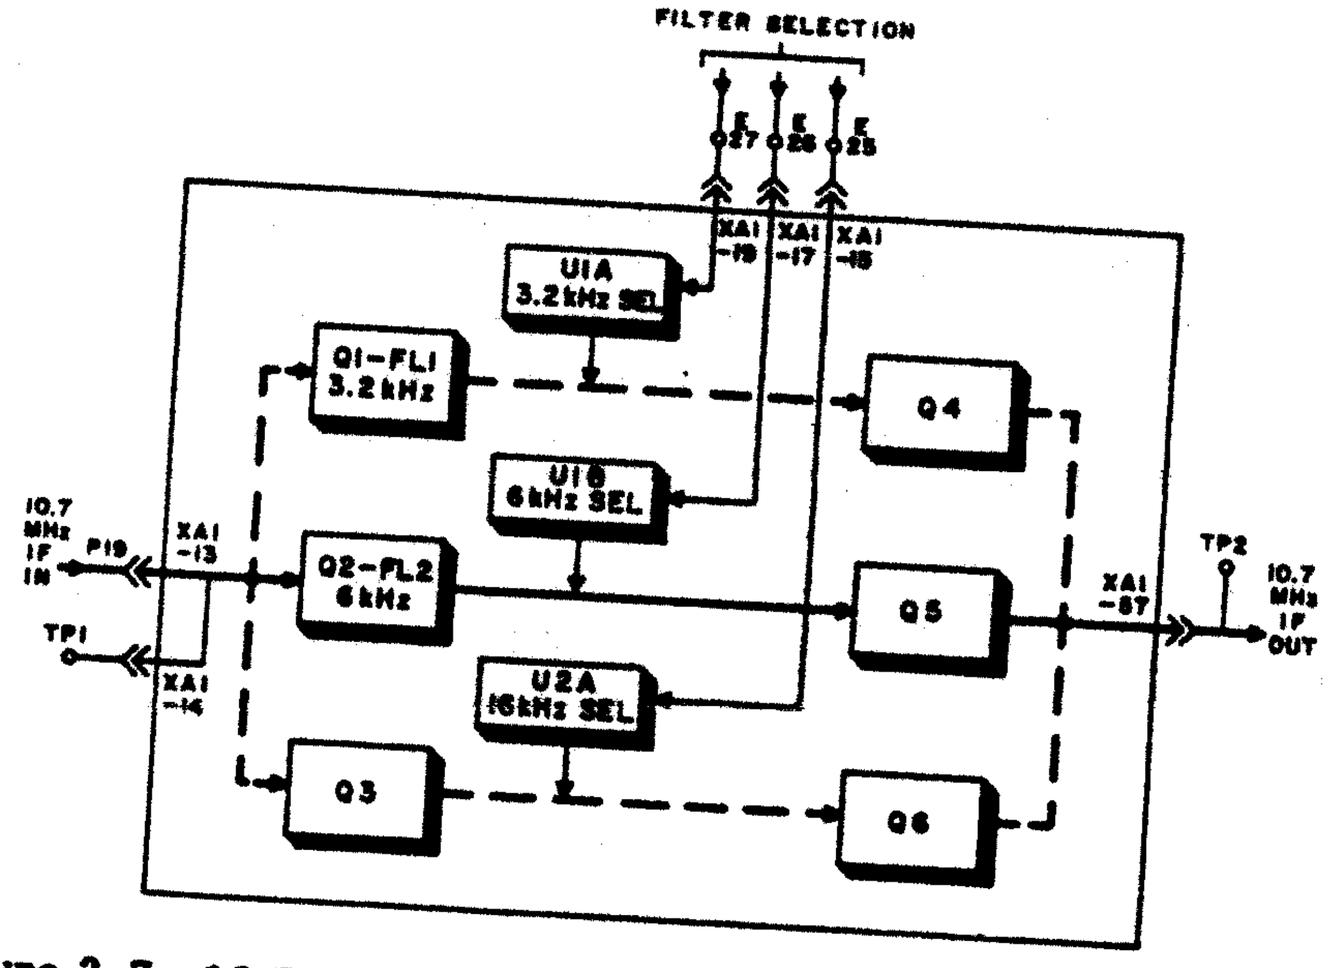



**Figure 3-7. 10.7 MHz Filter Switch Functional Block Diagram.**

#### 3.4.4.1 Circuit Description

The 10.7 MHz Filter Switch receives the 10.7 MHz IF signal output from the Input Converter, A3. At this point, the IF bandwidth has been set at 16 kHz by a filter in the Input Converter. The 10.7 MHz Filter Switch contains bandpass filters of 6 kHz and 3.2 kHz bandwidth. The purpose of this circuit is to route the IF signal through one of these filters, or through a wideband path which allows the full 16 kHz bandwidth to pass. The selection of the filter path is made by application of a logic high level to one of the three control terminals.

In any IF bandwidth, a logic high is applied to one of three control lines from the I/O Motherboard, at pin 15, 17, or 19. These lines are connected to the non-inverting inputs of U1A, U1B, and U2A. The inverting inputs are held at approximately 0.8 V by voltage divider R52-R53. The output voltage of the selected op-amp swings positive, turning on one pair of common-emitter IF amplifier stages. For example, if U1A is selected, Q1 and Q4 are turned on.

The 10.7 MHz IF signal is input at pin 13 and coupled through C1 to the base circuits of Q1, Q2, and Q3. If Q1 is on, the signal is amplified and coupled to FL1. This filter has a 200 Ω input impedance and a 3 dB bandwidth of 3.2 kHz. The filtered IF signal is applied to amplifier Q4 through level-adjust potentiometer R26. The amplified IF signal is output at pin 57. If 6 kHz bandwidth is selected, the IF signal is routed through Q2, FL2, and Q5. If any other bandwidth is selected, the IF signal is routed through Q3, attenuator R22, R23, R24, and Q6. The gain of the three signal paths is equalized by R26, R28, and R30 to approximately dB. The circuit has nominal input and output impedances of 50 Ω.

### 3.4.5 TYPE 71430-1 10.7 MHz/455 kHz CONVERTER (A4A2)

**Figure 3-8** is a detailed functional block diagram of the 10.7 MHz/455 kHz Converter which should be referred to in the following circuit description. **Figure 6-5,** 10.7 MHz/455 kHz Converter Schematic Diagram, may be referred to for greater component level detail, if desired.

#### 3.4.5.1 Circuit Description

The 3rd Mixer converts signals from 10.7 MHz to 455 kHz. The 3rd LO signal is input at the fixed frequency of 11.155 MHz and a level of approximately -6 dBm, and is amplified by transistor Q1 and its associated circuitry to +7 dBm before entering the mixer. The amplifier operates as a common emitter stage with some unbypassed emitter resistance to stabilize its gain and reduce distortion. The pi-network, C7-L2-C8, serves as an impedance transformer and low-pass filter, further reducing distortion of the LO signal.

Low-pass filter C9, L3, C10, L4, and C11 filters out undesired components above 500 kHz from the mixer output and matches impedances between the mixer and the following circuits. The nominal input impedance of the 3rd Mixer is 50 Ω and the output impedance is 1000 Ω.

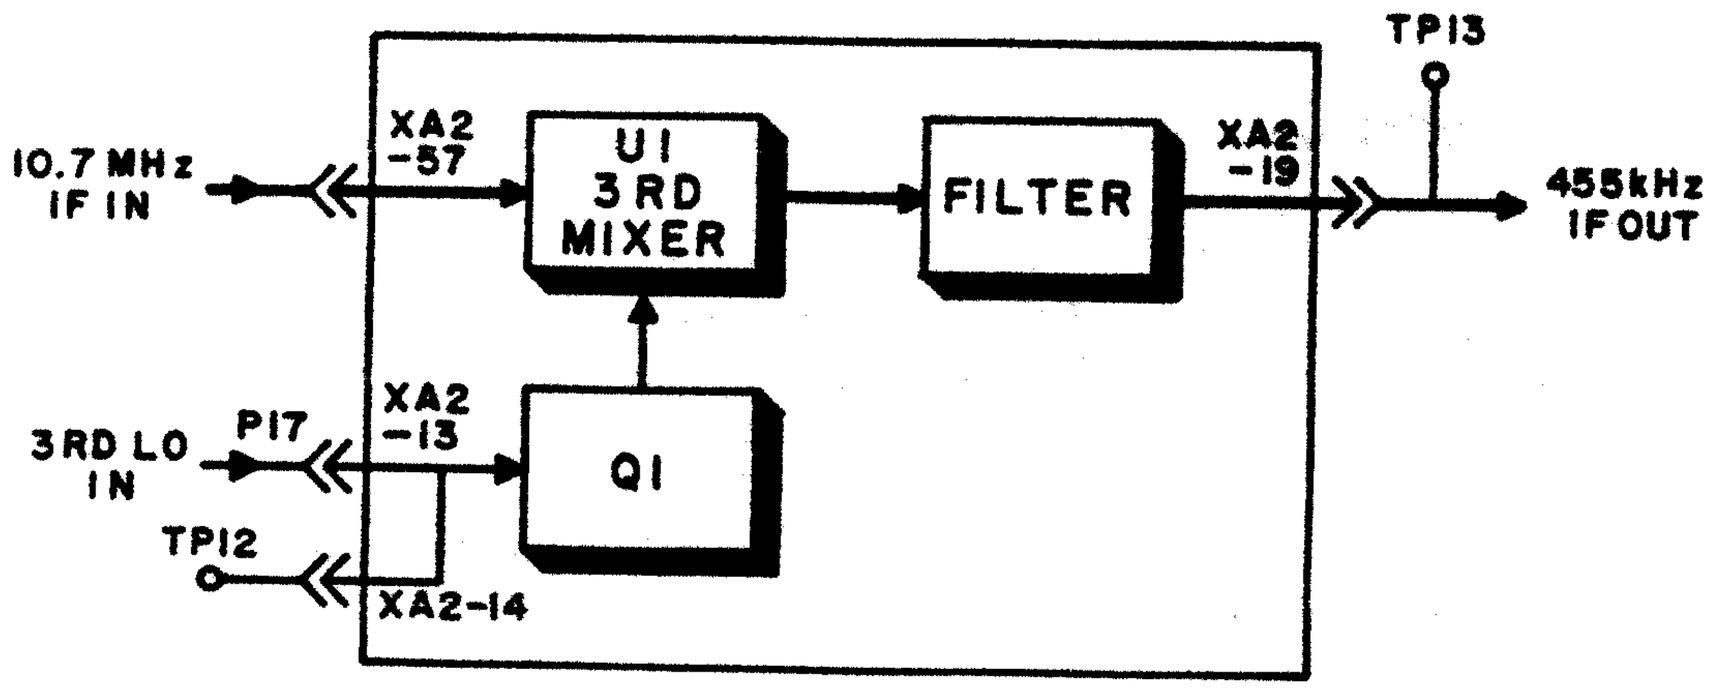



**Figure 3-8. 10.7 MHz/455 kHz Converter Functional Block Diagram.**

### 3.4.6 TYPE 791595-1 455 kHz FILTER SWITCH (A4A3)

**Figure 3-9** is a detailed functional block diagram of the 455 kHz Filter Switch which should be referred to in the following circuit description. **Figure 6-6,** 455 kHz Filter Switch Schematic Diagram, may be referred to for greater component level detail, if desired.

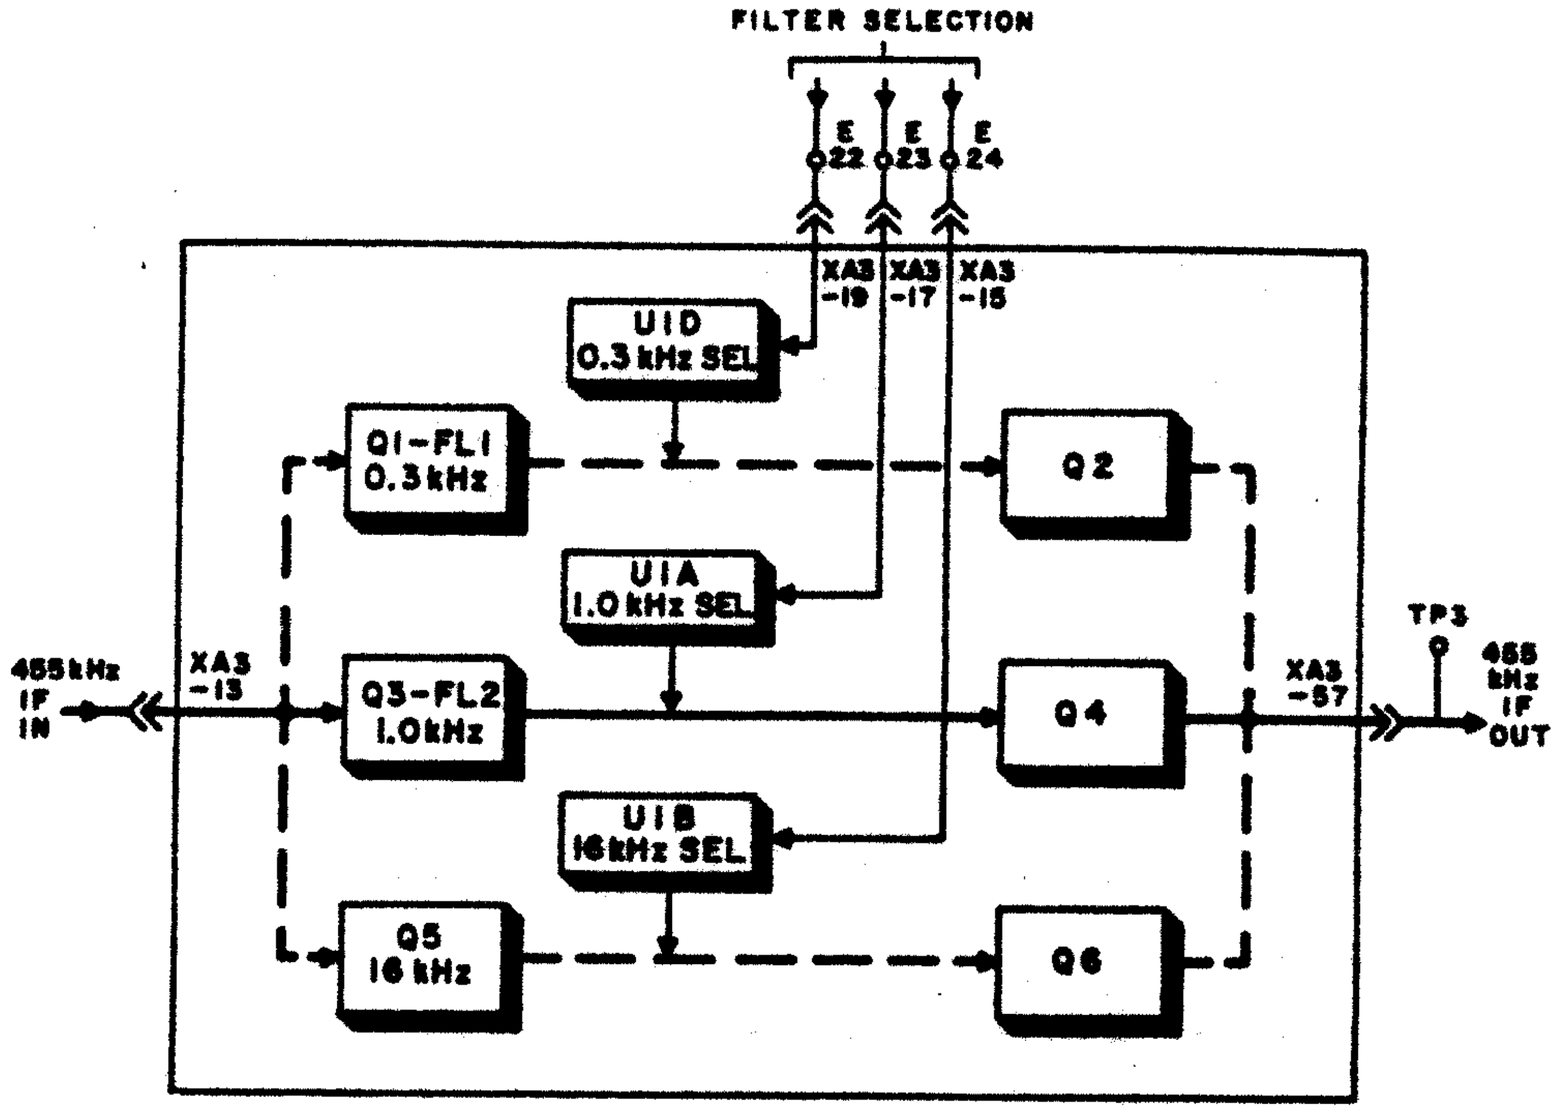



**Figure 3-9. 455 kHz Filter Switch Functional Block Diagram.**

### 3.4.6.1 Circuit Description

The 455 kHz Filter Switch is similar in function to the 10.7 MHz Filter Switch. Both contain three possible signal paths, two with crystal filters and one with broad bandwidth. There are, however, several important differences between the two filter switches. The 455 kHz bandwidth is 0.3 kHz when Q1 and Q2 are activated, and 1 kHz when Q3 and Q4 are activated. When Q5 and Q6 are activated the broad bandwidth path is energized, thus allowing the overall receiver bandwidth to be controlled by the 10.7 MHz Filter Switch or the Input Converter. In the 455 kHz Filter Switch it is possible for all paths to be off when the USB or LSB filters are selected.

The input signal at pin 13 connects in parallel to Q1, Q3, and Q5. When Q1 is biased on, the signal passes through Q1 and is fed through the 0.3 kHz crystal filter (FL1). The biasing of Q1 and Q2 is controlled by the voltage on pin 19. When this voltage is high (+5 V), the output of U1D will be +12 V, thus biasing Q1 and Q2. When this voltage is low (0 V), the output of U1D will be -12 V which will cause an approximate 1 V reverse bias to the bases of Q1 and Q2, and thus they are turned off.

When the 1 kHz bandwidth is selected, module pin 17 is high, and U1A turns on Q3 and Q4. When the 3.2 kHz, 6 kHz, or 16 kHz bandwidths are selected, module pin 15 is high and U1B turns on Q5 and Q6. When ISB, LSB, or USB are selected, all three control lines to this card are low and all three signal paths are inhibited.

All transistors, Q1 through Q6, are operated as common emitter amplifiers with unbypassed emitter resistors to control their gain. Through any of the three signal paths there is a net voltage gain of approximately 9 dB from the input to the output of the module. OP

AMP section U1C is not used and is as shown in the schematic connected in an inoperative condition.

### 3.4.7 TYPE 791596-1 USB FILTER SWITCH (A4A4) (Optional in WJ-8718/8718-9)

**Figure 3-10** is a detailed functional block diagram of the USB Filter Switch which should be referred to in the following circuit description. **Figure 6-6**, USB Filter Switch Schematic Diagram, may be referred to for greater component level detail, if desired.

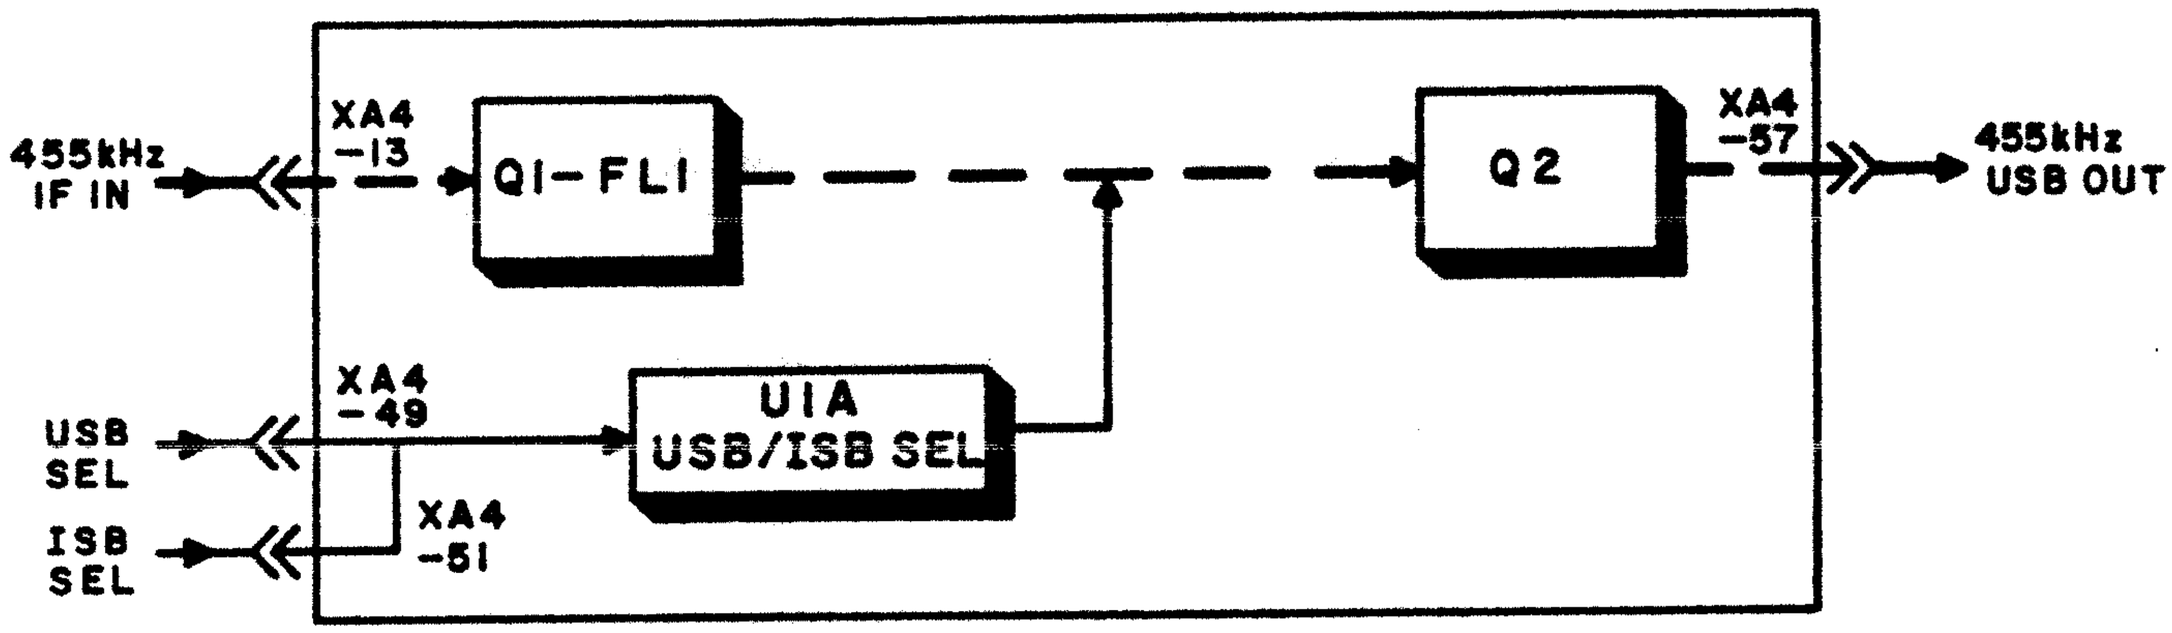



**Figure 3-10. USB Filter Switch Block Diagram.**

#### 3.4.7.1 Circuit Description

The USB Filter Switch input, pin 13, connects into the 455 kHz IF signal path, in parallel with the 455 kHz Filter Switch. When the receiver is operating in either the USB mode or the ISB mode, the upper sideband modulation is passed in this circuit and sent to the 455 kHz Amplifier/AM Detector (A4A7). The upper sideband filter (FL1) has a bandpass extending from 455.25 kHz to 458.2 kHz.

When either the USB or ISB detection mode is selected, a logic high is applied to the non-inverting input of U1A. This causes its output voltage to swing to near +15 V. The switching threshold (approximately 1.6 V) is set by R17 and R18. The positive output voltage supplies bias current to amplifiers Q1 and Q2, turning them on. The 455 kHz IF signal, with 16 kHz bandwidth, is amplified by Q1 and applied to the upper sideband filter, FL1. The upper

sideband is amplified by Q2 and output via pin 57. Potentiometer R23 provides gain adjustment for equalizing the USB signal level with the other filtered IF signals. Resistors R7 and R8 provide impedance matching for the filter input and output, respectively.

### 3.4.8 TYPE 791597-1 ISB/LSB FILTER SWITCH (A4A5) (Optional in WJ-8718/8718-9)

**Figure 3-11** is a detailed functional block diagram of the ISB/LSB Filter Switch which should be referred to in the following circuit description. **Figure 6-7**, ISB/LSB Filter Switch Schematic Diagram, may be referred to for greater component level detail, if desired.

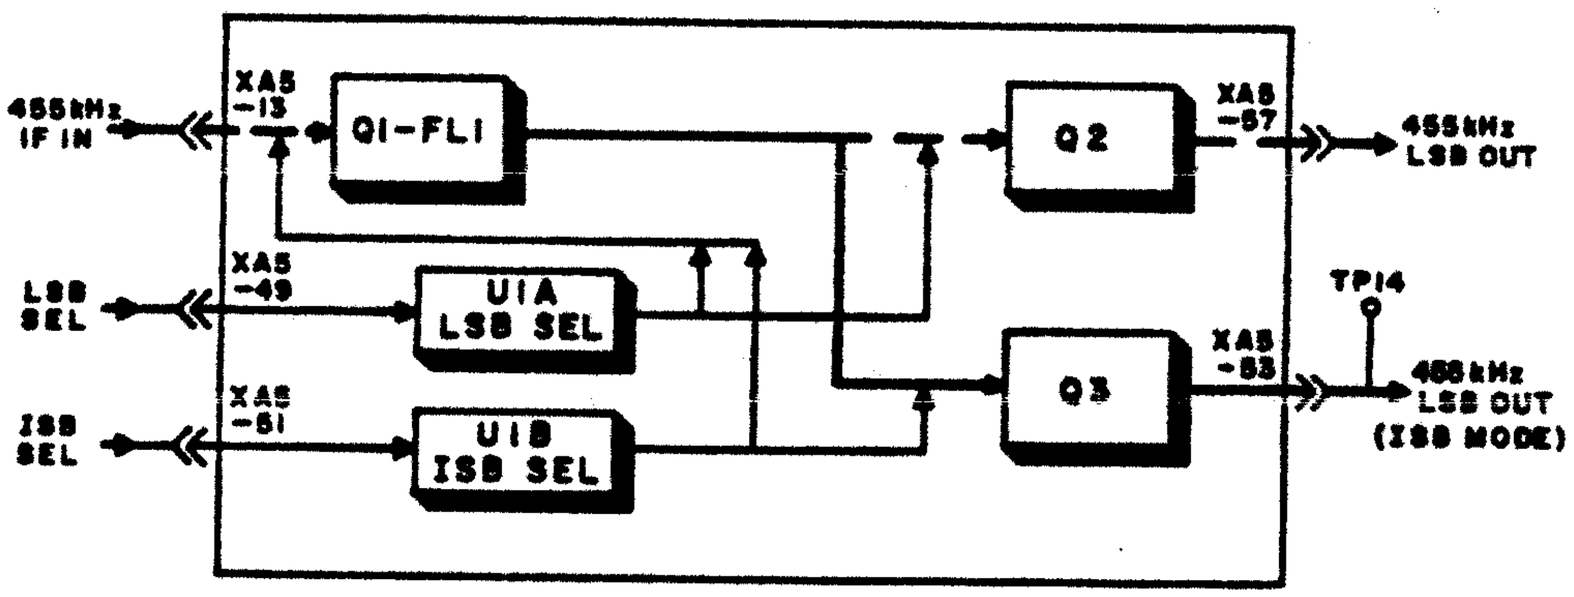



**Figure 3-11. ISB/LSB Filter Switch Functional Block Diagram.**

#### 3.4.8.1 Circuit Description

The ISB/LSB Filter Switch input, pin 13, connects into the 455 kHz IF signal path, in parallel with the 455 kHz Filter Switch. The circuit has two signal outputs, one to the 455 kHz Amplifier/AM Detector (A4A7), and one to the ISB Detector and Audio (A4A8). When the receiver is operating in the LSB detection mode, the lower sideband modulation is output to the 455 kHz Amplifier/AM Detector (A4A7). When the receiver is in the ISB detection mode, the lower side modulation is output to the ISB Detector and Audio board. The lower sideband filter (FL1) has a bandwidth extending from 451.8 kHz to 454.75 kHz.

When the LSB Detection mode is selected, a logic high is applied to the non inverting input of U1A. This causes the output voltage to swing to near +15 V. The switching threshold (approximately 2.5 V) is set by R23 and R24. Diode CR1 conducts, supplying bias current through R15 to turn on IF amplifier Q1. Output amplifier Q2 is also biased on, but current flow in R21 and R9. The 455 kHz IF signal, with 16 kHz bandwidth, is amplified by Q1 and applied to the lower sideband filter, FL1. The lower sideband is amplified by Q2 and output via pin 57.

When ISB detection mode is selected, Q1 is biased on by U1B and CR2, as previously described. Output amplifier Q3 is also biased on by current flow in R26 and R27. The lower-sideband information is amplified by Q3 and output via pin 53. Notice that only one output amplifier is operating in either mode. Potentiometer R32 allows gain adjustment for equalizing the filtered IF signal levels. Resistor R8 provides input impedance matching for the filter, and the output impedance is matched by R9 and R27.

### 3.4.9 TYPE 78112-1 AGC AMPLIFIER (A4A6)

**Figure 3-12** is a detailed functional block diagram of the AGC Amplifier which should be referred to in the following circuit description. **Figure 6-9**, AGC Amplifier Schematic Diagram, may be referred to for greater component level detail, if desired.

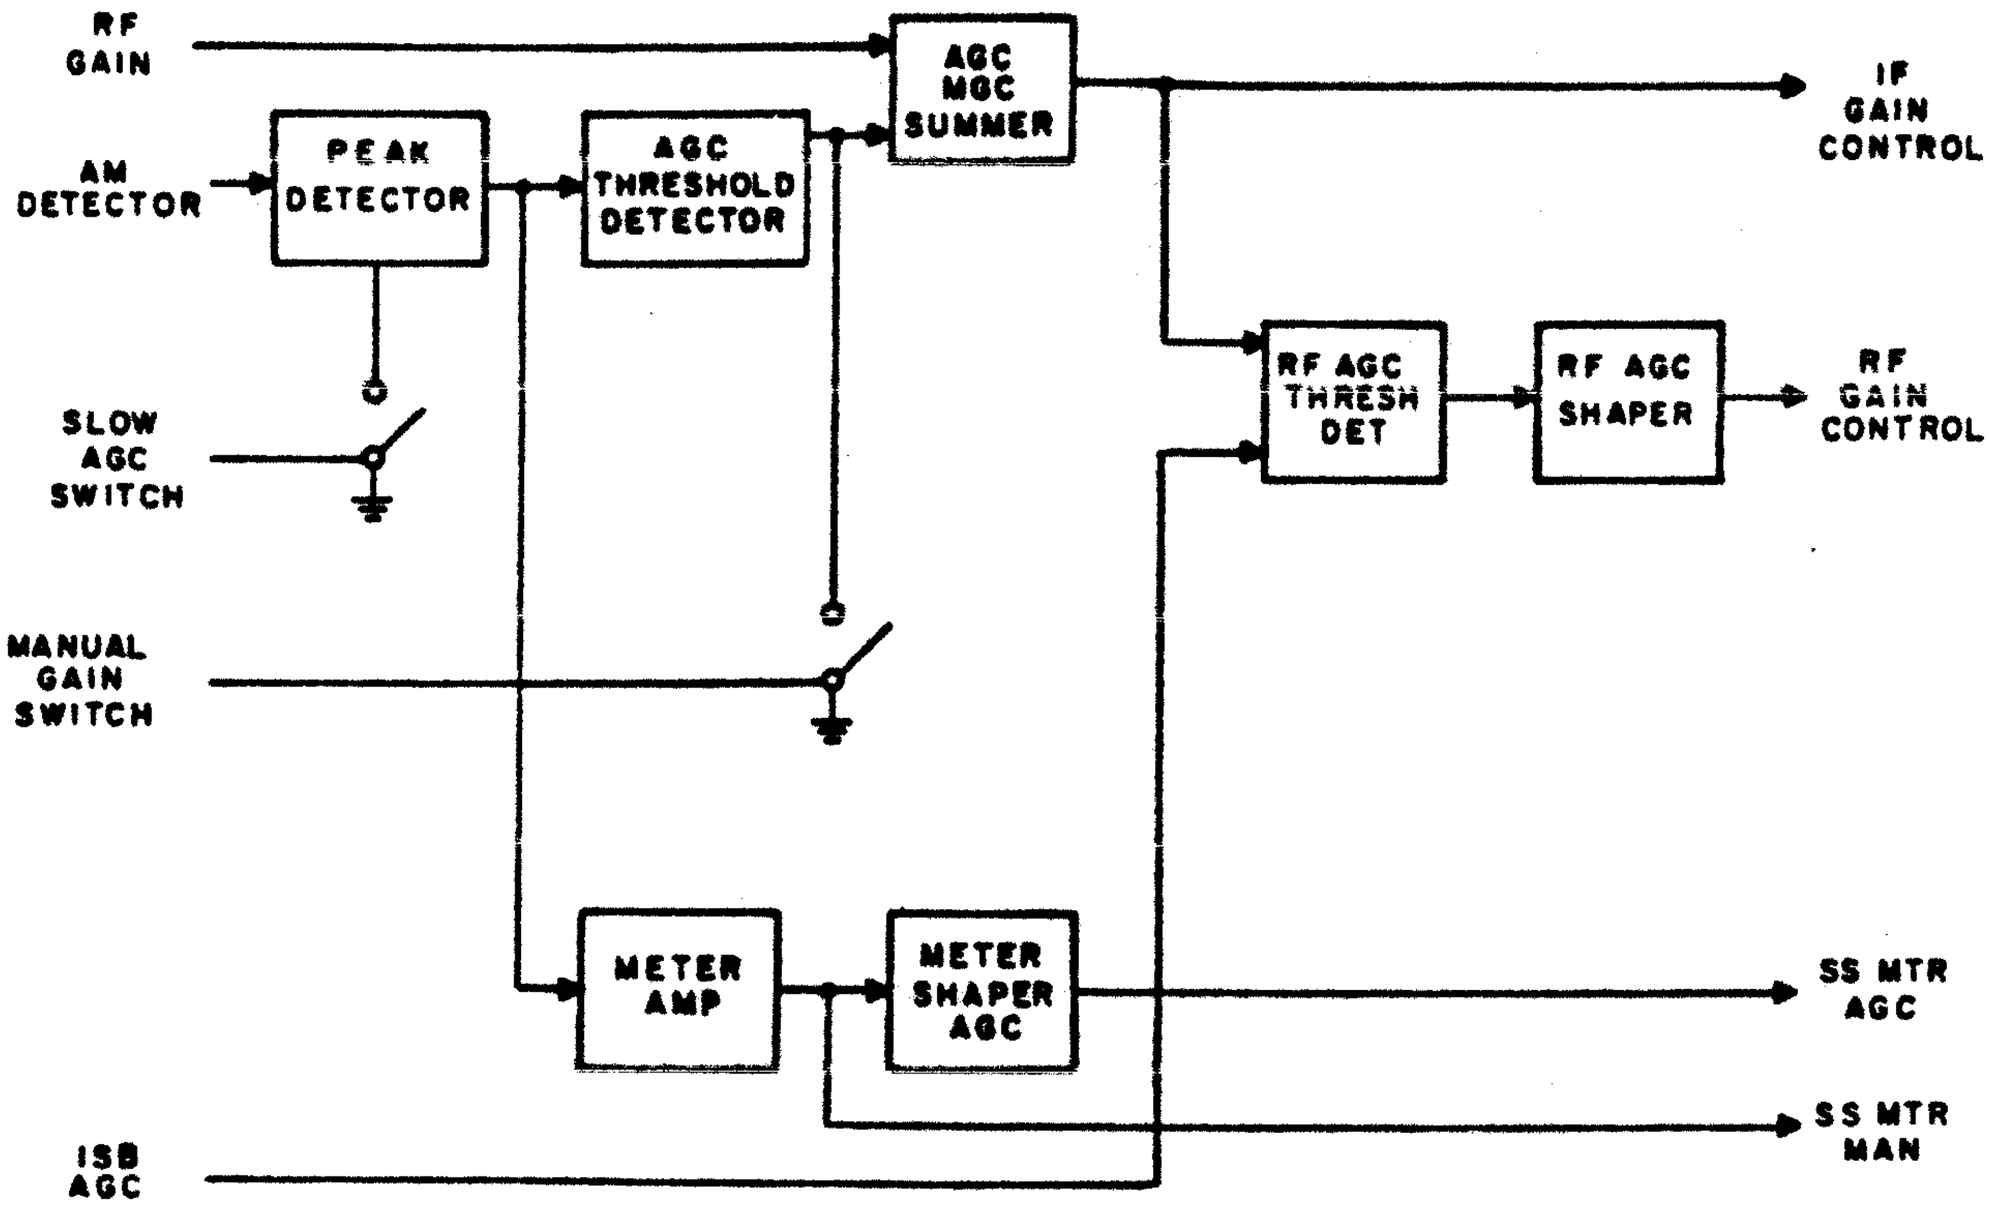



**Figure 3-12. AGC Amplifier Functional Block Diagram.**

3.4.9.1 **Circuit Description**

The primary function of the AGC Amplifier is to generate control voltages which adjust the amplification of signals passing through the receiver. When the Fast AGC or Slow AGC gain mode is selected, this module adjusts the receiver amplification (gain) to maintain a constant output from the AM Detector. If the desired signal entering the receiver should fade in amplitude, the receiver gain will increase just enough to compensate for the fade. When Manual gain mode is selected, the receiver gain is fixed at a level which depends on the setting of the RF Gain potentiometer on the front panel. This module, as a secondary function, provides voltage to operate the signal strength meter.

The differences in decay times of Fast AGC and Slow AGC make them useful for different kinds of signals. In the Fast AGC mode, the gain of the receiver adjusts about as quickly for a rise in signal strength as it does for a fall in signal strength. The time taken to respond to a rise is referred to as attack time, and the time taken for a fall is known as decay time. The response to rising signals remains fast in the Slow AGC mode, but when the signal strength falls the change in gain occurs much slower. For AM and FM signals, the total power contained in the carrier and sidebands does not vary much with time at the transmitter. With these types of signals, the main purpose of the AGC is to compensate for atmospheric losses between transmitter and receiver. These changes occur slowly or rapidly as several rises and falls per second. For signals of this sort, the characteristics of the Fast AGC mode will serve best. However, for pulsed signals such as telegraphy (A1 emission) and for SSB voice signals (A3J emission) there are rapid fluctuations in transmitted power with recurring peaks. When this type of signal is received, it is usually desirable that the AGC have a sort of memory for the peaks but still be able to respond quickly if there is an abrupt increase in signal level. Hence, the fast attack and slow decay times of the Slow AGC is desired for these cases.

There will also be instances where it is desirable to fix the gain of the receiver at some value to make critical comparisons of signal strength or to eliminate signals or noise below a particular amplitude. For these cases, the Manual gain mode is useful. When using this mode, it is desirable to adjust the RF GAIN control so the signal strength meter reads at the MAN SET line for the average signal to be monitored, to obtain the greatest latitude for signal level change.

In the AGC module, the direct coupled output of the AM detector is filtered by R5 and C3 to limit the speed of response of the Fast AGC. In the Fast AGC Mode, Q7 is biased off, disconnecting C4, so Q1 operates simply as an emitter follower. Q7 is biased on when Slow AGC is selected, grounding the negative end of C4. In this case Q1 can charge C4 quickly if there is a rise in input from the AM Detector, but when the input falls below its peak value Q1 is turned off by the charge stored in C4. Q1 continues to be off until C4 is discharged by R3. This action gives the fast attack response and slow decay response of the Slow AGC mode. Zener diode CR2 acts as a limiter to prevent short bursts of signal from overcharging C4 (which might cut off the amplifiers for many seconds).

OP AMP U1A acts as a buffer between C4 and the following circuits. A general-purpose diversity AGC output is provided at pin 16. Transistor Q2 acts as a threshold detector, blocking AGC action for weak signals. This is desirable to allow a maximum signal-to-noise ratio to be obtained in all stages of the receiver before any gain reduction is permitted. The base of Q2 is biased to approximately +0.2 V. If the emitter of Q2 is lower than about +0.8 V, Q2 will be turned off and no AGC action can occur. When the output of U1A is greater than +0.8 V, Q2 conducts and a gain control voltage appears across R13. When the Manual gain mode is selected, Q3 and Q6 will be turned on and will clamp the voltage on R13 to ground, and +5 V

will be applied to the RF Gain potentiometer on the front panel. OP AMP U2B acts as an inverting summing amplifier for the voltage at R13 (which will be zero in Manual gain mode) and the voltage on the RF GAIN control (which will be zero in Fast or Slow AGC modes).

The output of summing amplifier U2B is buffered by OP AMP U1D and fed to the 455 kHz amplifier on A4A7. Zero volts from U1D allows the 455 kHz amplifier to operate at maximum gain while a negative output from U1D causes the gain of the IF amp to be reduced.

A sample of the IF gain control voltage from U2B is also applied to RF AGC threshold detector Q5. This threshold detector causes the gain reduction to occur only in the 3rd IF amplifier, unless the signal at the RF input of the receiver and in the early stages of the receiver is great enough to ensure a good signal-to-noise ratio even in the early stages. The operation of the threshold detector is the same as that of Q2, except with polarities reversed to allow for the inversion which occurs in U2B. The base of Q5 is biased around -2.7 V so the IF gain control voltage must be more negative than -3.3 V for Q5 to conduct. When the ISB Detector and Audio module (A4A8) is installed and energized (ISB mode only), a similar AGC circuit in that module supplies a corresponding sample of its IF gain control voltage to Q4. This allows the RF gain control to respond to either the USB component, amplified by A4A7, or the LSB component, amplified by A4A8. This combined action is necessary to protect against possible overload of the 1st and 2nd IF which are common to both USB and LSB. Q4 duplicates the operation of Q5. When the ISB module is not installed or not selected, Q4 does not conduct and may be ignored.

As stated in the description of the Input Converter, the gain control in the 1st IF amplifier is accomplished by varying the RF impedance of a diode that shunts the load circuit of one stage. The impedance of this diode is approximately inversely proportional to the dc current through it. Therefore, to obtain a 6 dB gain reduction requires a certain current, an additional 6 dB reduction requires doubling the current and another 6 dB reduction requires four times the original current and so on. To achieve the desired relationship between AM Detector output and RF gain reduction requires that the control diode current rise slowly at first, then more rapidly as the received signal strength increases further (exponentially). This current/voltage relationship is obtained through a shaping network comprised of U2D, R47, R48, CR5, and R31. The actual current for the control diode is supplied by buffer U2A.

The relationship between signal strength and the voltage out of U1A make this voltage suitable for operation of the signal strength meter. In the Manual gain mode, this voltage is proportional to the RF input signal voltage. Its polarity is inverted by OP AMP U1C and it is applied through R49 and front panel switches A10A1S1B and S2C to the meter. This allows the receiver to act as a tuned voltmeter whose calibration depends on the setting of the RF GAIN control.

In the AGC modes, the voltage out of U1A increases approximately linearly with signal voltage up to the AGC threshold level of 3 μV (RF input). Above this level the U1A output is compressed by AGC action to be nearly proportional to the logarithm of the RF input voltage. By using a shaping network composed of R41, R50, R51, CR6, CR7, and CR8 to suitably compress the output of U1C at low signal levels, the signal strength meter is made to be approximately linear in dB over a greater than 100 dB range. Resistors R50 and R51 control the amount of compression and the exact fit of the meter scale with signal strength. If an accurate source of variable signal level is available, these fixed resistors may be replaced with variable ones which may be adjusted for best tracking of the meter. The variable resistors may then be removed, measured and replaced with fixed resistors of the same value.

### 3.4.10 TYPE 72488-1 455 kHz AMPLIFIER/AM DETECTOR (A4A7)

**Figure 3-13** is a detailed functional block diagram of the 455 kHz Amplifier/AM Detector which should be referred to in the following circuit description. **Figure 6-10**, 455 kHz Amplifier/AM Detector Schematic Diagram, may be referred to for greater component level detail, if desired.

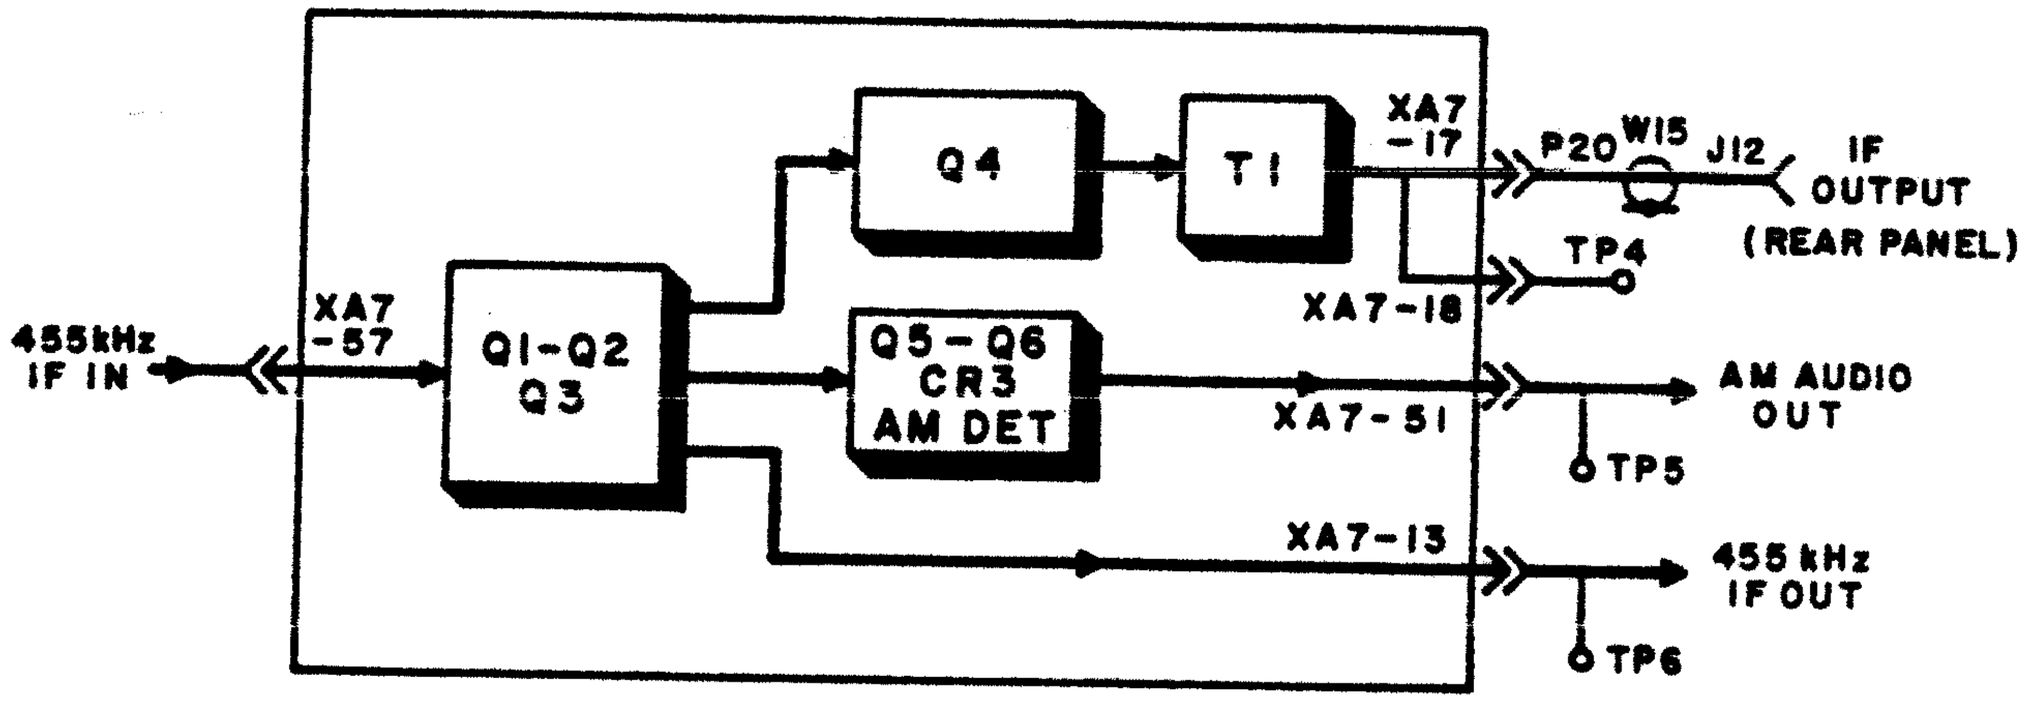



**Figure 3-13. 455 kHz Amplifier/AM Detector Functional Block Diagram.**

#### 3.4.10.1 Circuit Description

Although received signals are amplified by most of the circuits in the receiver, the majority of the amplification of weak signals takes place in the 455 kHz amplifier of A4A7. Following a two-stage gain controlled amplifier, the input signal is split to provide three outputs: the IF sample which operates the FM/CW/SSB Demodulator, the IF output for the rear panel, and the input to the AM Detector. The AM Detector, which operates at a relatively high level for good linearity, has its output directly coupled to the AGC module and the Audio Amplifier.

FET's Q1 and Q2 operate as common source amplifiers with their gains controlled by a variable voltage applied to gate 2 of each transistor. Inductor L1 broadly tunes the output of Q1 by cancelling any stray capacitance, but the network consisting of L2, C9, C10, C11, and L3 forms a double-tuned bandpass filter of approximately 35 kHz bandwidth. This filter is narrow enough to suppress any broadband noise contributed by earlier stages of the receiver, but at the same time is wide enough not to restrict the receiver's bandwidth. Potentiometer R7 between the first and second amplifiers adjusts the maximum gain of the amplifiers and hence of the whole receiver.

Transistor Q3 serves as a buffer between the 455 kHz amplifier and its three outputs. For signals fed to the FM/CW/SSB Detector (pin 13), Q3 acts as an emitter-follower stage. For the rear panel IF Output, Q3 feeds the signal to Q4, which acts as a power amplifier. Transformer T1 supplies a 50 Ω IF output to the rear panel, providing a nominal 20 mV IF output for RF inputs greater than 3 μV. For the AM detector, Q3 and Q5 both act as common-emitter

amplifiers to raise the IF signal to a level of several volts which will permit the detector diode, CR3, to perform linearly. Diodes CR4 and CR5 provide a dc-bias to operate the AM Detector and emitter-follower (Q6) above ground to establish the proper dc level for the AGC circuit. The low-pass filter of L7 and C28 suppresses any residual IF signal.

### 3.4.11 TYPE 791598-1 ISB DETECTOR/AUDIO (A4A8) (Optional in WJ-8718/8718-9)

**Figure 3-14** is a detailed functional block diagram of the ISB Detector/Audio which should be referred to in the following circuit description. **Figure 6-11**, ISB Detector/Audio Schematic Diagram, may be referred to for greater component level detail, if desired.

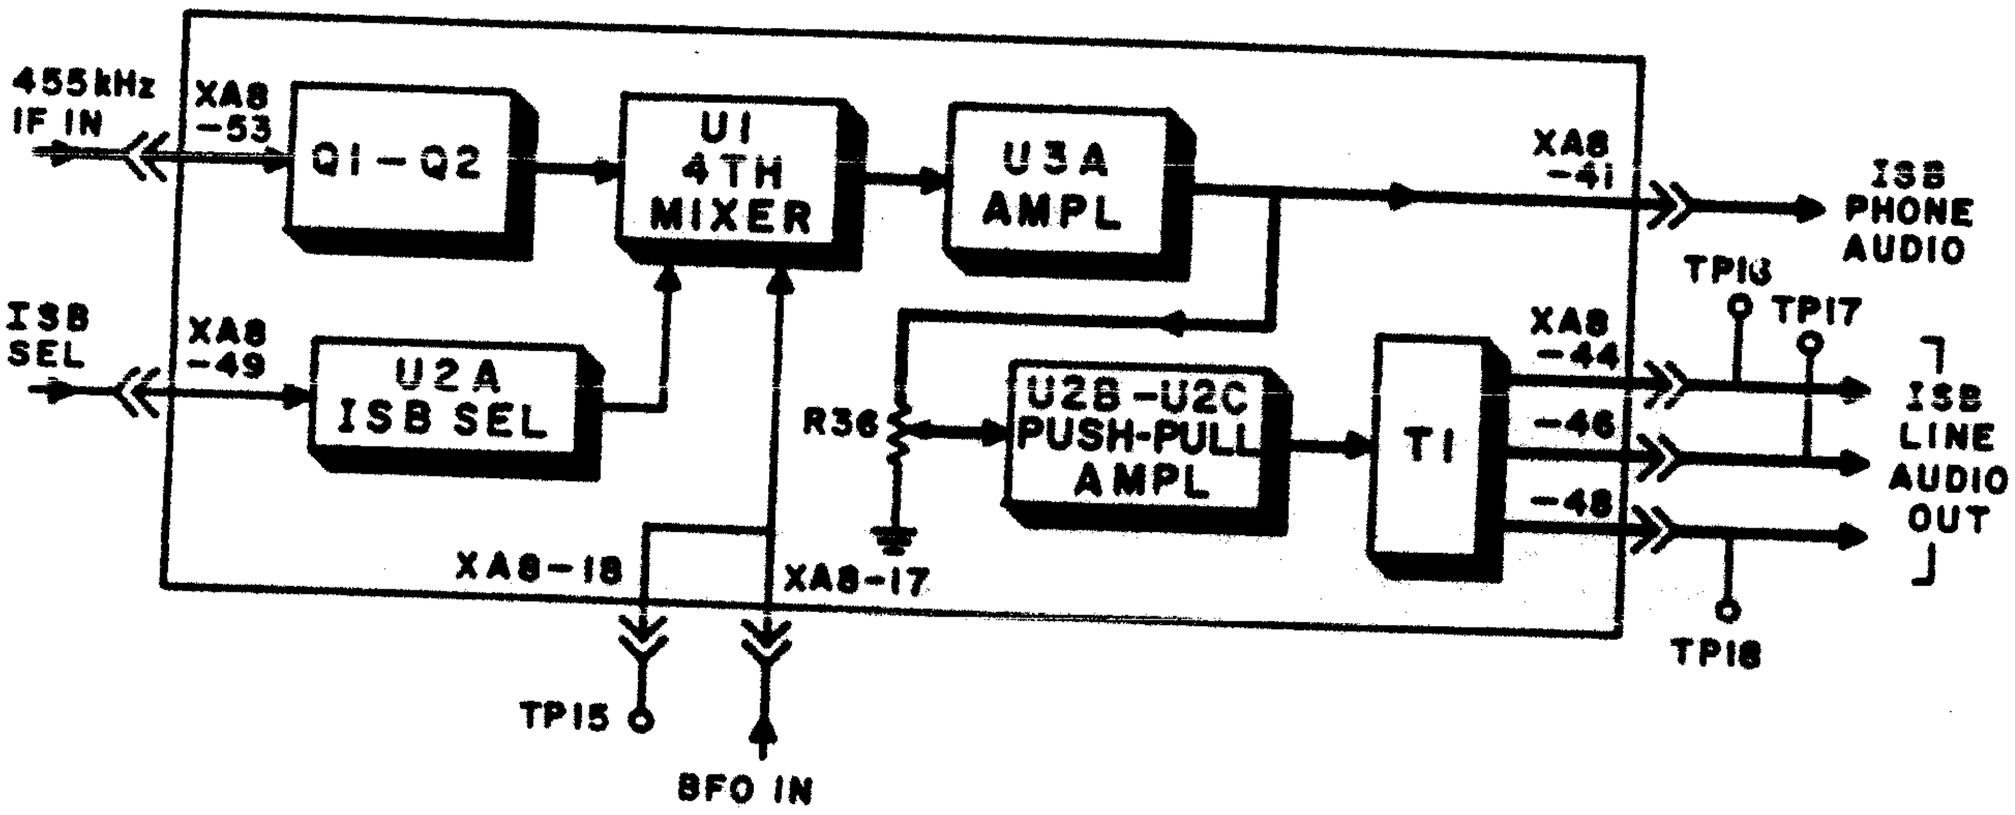



**Figure 3-14. ISB Detector/Audio Functional Block Diagram.**

### 3.4.11.1 Circuit Description

For ISB operation, two independent single sideband signals must be demodulated. Since they share the same carrier frequency, they may be processed together up to a certain point. In this receiver, ISB is handled as a single composite signal through the 3rd Mixer. At that point it is split, the USB component being filtered and passed through the main signal path, the LSB component filtered and separately amplified and demodulated by the ISB Detector and Audio module.

The ISB Detector and Audio module is therefore a combination of circuits from other modules previously discussed. There is a 455 kHz amplifier similar to part of A4A7, a product detector similar to that on A4A9, an AGC circuit like part of A4A6, and an ISB line audio amplifier similar to the auxiliary phone amplifier on A4A10. A sample of the AGC voltage developed in this module is sent to the main AGC module to produce a combined RF AGC.

Common source FET amplifiers Q1 and Q2 have variable gain depending on their gate 2 voltage. This voltage is derived from the module's AGC section. Potentiometer R8 is used to set the maximum gain of the amplifier to give the same input level to balanced modulator U1 as is received by A4A9U2 at low signal levels.

Balanced modulator U1 uses the BFO to act as a 4th Mixer and converts the LSB signal to audio. When the ISB mode is selected, +5 V is applied to pin 49 and U2A switches on, supplying power to U1. Its output is low-pass filtered and then amplified by U3A. The output of U3A splits three ways. It leaves the module to go to the front panel which provides LSB phone audio in the ISB mode. It also feeds the ISB Line Audio amplifier through level control R36, and drives the AGC circuit.

The AGC is a simplified form of the one on A4A6. It always acts in the Slow AGC mode. Peak detector Q4 charges C19, which discharges through R52. Buffer U2D drives AGC threshold detector Q3. The output of Q3 is amplified by U3D to supply the IF AGC to amplifiers Q1 and Q2 via buffer U3C, and the sample to the RF AGC circuit on A4A6. When the ISB mode is selected, Q5 is turned off by the positive output from U2A. No meter outputs are supplied by this module.

The ISB Line Audio amplifier (U2B and U2C) is identical, except for component values, to the auxiliary phone amplifier on A4A10, which will be discussed in detail in **paragraph 3.4.13.**

## 3.4.12 TYPE 791599-1 FM/CW/SSB DETECTOR (A4A9)

**Figure 3-15** is a detailed functional block diagram of the FM/CW/SSB Detector which should be referred to in the following circuit description. **Figure 6-12,** FM/CW/SSB Detector Schematic Diagram, may be referred to for greater component level detail, if desired.

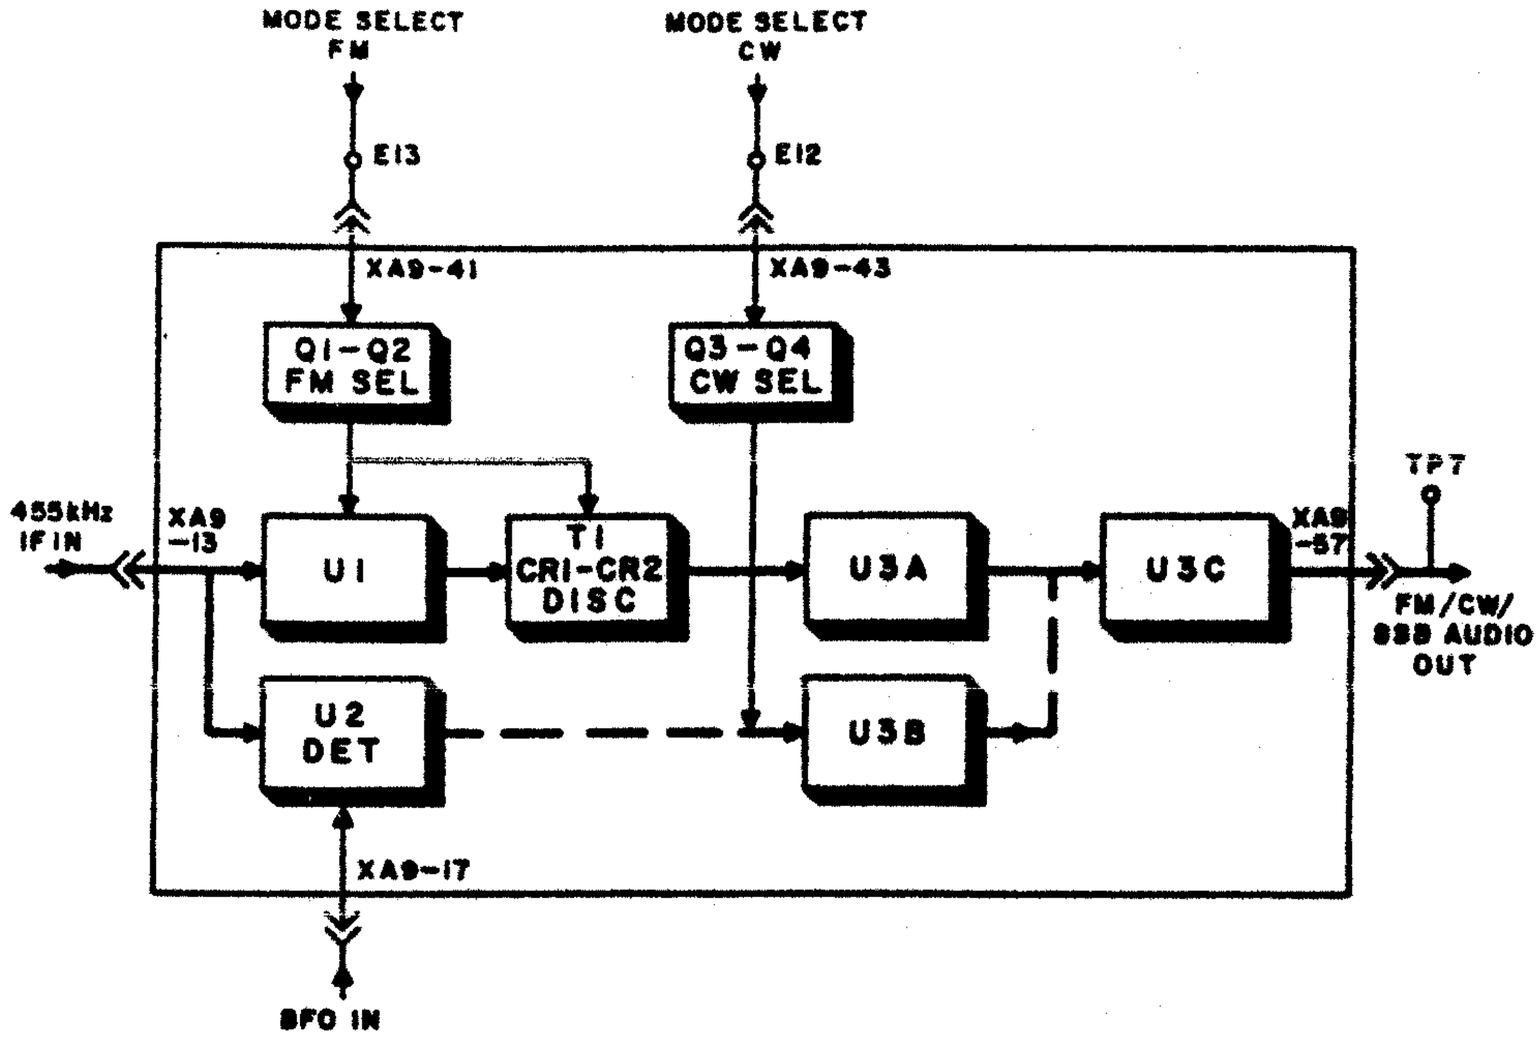



**Figure 3-15. FM/CW/SSB Detector Functional Block Diagram.**

3.4.12.1 <u>Circuit Description</u>

For FM reception, this module contains a limiter and discriminator. Power for these circuits is supplied when the FM detection mode is selected. For CW or SSB reception, there is a product detector which has its power applied when the CW, USB, LSB, or ISB detection modes are selected. Also, when the product detector is energized, the BFO Synthesizer is enabled and its output is applied to the product detector.

The IF output sample of approximately 10 mV from the 455 kHz amplifier of A4A7 is the input signal for this module. It is applied to both demodulators although only one is actuated at a time. When FM is selected, the control input at pin 41 is high (+5 V) and Q2 and Q1 are turned on. This applies approximately +9 V to limiter U1. The input signal is amplified and clipped by cascaded stages within U1, so its output is free of any amplitude variations. The extent to which the amplitude variations are removed contributes to the AM rejection of the receiver when receiving FM. The output of the limiter drives the Foster-Seeley discriminator. Diodes CR1 and CR2 rectify the composite signals fed to them by C7 and T1. When the signal from the limiter is at exactly 455 kHz, T1 is tuned so that equal and opposite voltages are produced across load resistors R6 and R7, giving a net output of zero to buffer U3A. For inputs slightly off 455 kHz, the voltages of R6 and R7 do not cancel causing a positive output for inputs above 455 kHz and a negative for those below 455 kHz. (Note that these polarities are reversed by U3C, so the output of the module will go negative when the signal frequency increases.) Proper adjustment of L1 will make the output voltage vary linearly with input frequency over ±8 kHz from 455 kHz. At the output of U3A, a low-pass filter, L3 and C11, reduces higher frequency noise components which are present in the discriminator output. When the CW mode or any of the sideband modes is selected, the control input on pin 43 is high (+5 V). This turns on Q4 and Q3, applying +9 V to balanced modulator U2. The BFO is also applied to U2 (approximately a 40 mV level). This allows U2 to act as the 4th mixer in the signal path as described in the Synthesizer Relationships section. Its action may be considered to down-convert IF signals to the audio frequency range. For sideband signals, proper tuning of

the receiver places the center of the IF signal at the frequency corresponding to the carrier frequency of the received signal. This causes the audio components out of U2 to reconstruct those of the original signal transmitted. For CW signals, the BFO is offset from the signal either by use of the BFO offset control on the front panel to cause an audible tone at the audio output when a signal is present.

The output of U2 goes through low-pass filter L2 and C17, which reject higher frequency noise components, to buffer U3B. OP AMP U3C acts as a summing amplifier for the outputs of the FM discriminator or product detector when either is present. It gives different amplifications to these two signals to bring them up to approximately equal levels. The audio output of this module goes to both the Audio Amplifier and the FM Audio terminal of TB2 on the rear of the receiver.

### 3.4.13 TYPE 746001-1 AUDIO AMPLIFIER (A4A10)

**Figure 3-16** is a detailed functional block diagram of the Audio Amplifier which should be referred to in the following circuit description. **Figure 6-13**, Audio Amplifier Schematic Diagram, may be referred to for greater component level detail, if desired.

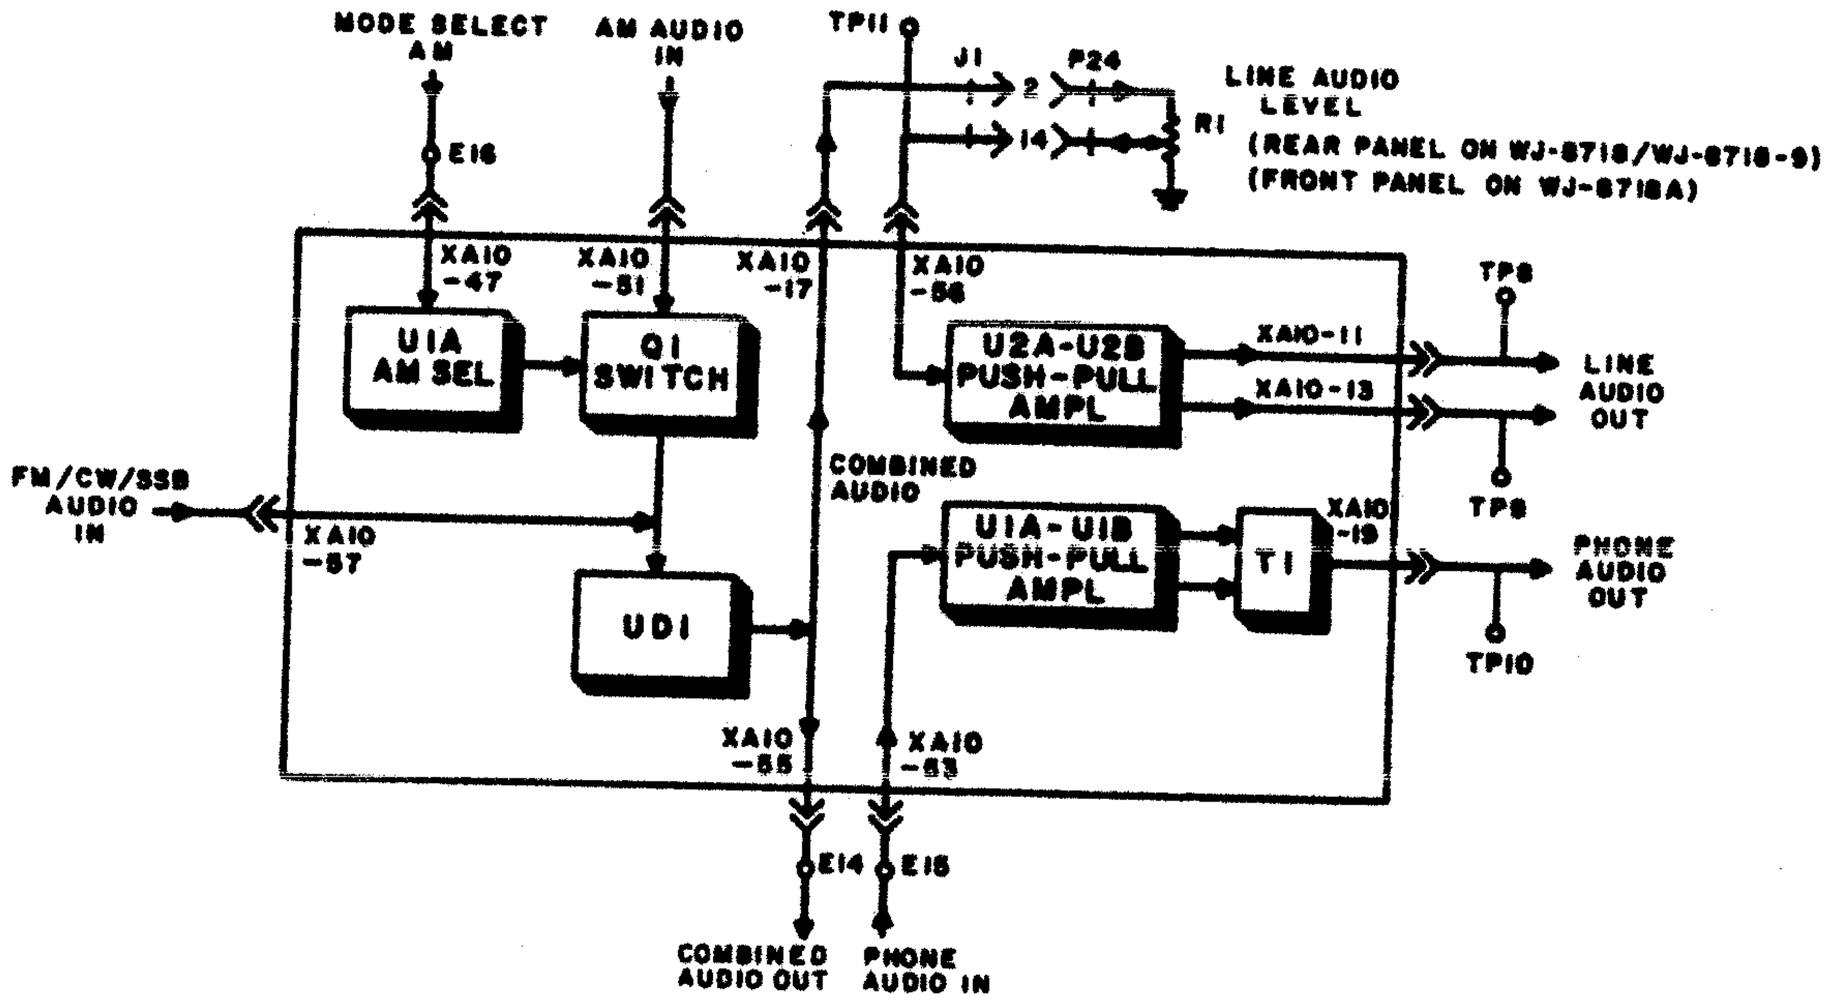



**Figure 3-16. Audio Amplifier Functional Block Diagram.**

#### 3.4.13.1 Circuit Description

The Audio Amplifier combines the audio outputs of the AM detector and FM/CW/SSB Detector and feeds them to the LINE AUDIO LEVEL control on the rear panel and the PHONE LEVEL control on the front panel. The signal returned from the wiper of the LINE AUDIO LEVEL potentiometer drives the line audio amplifier. The signal returned from the PHONE LEVEL control drives the auxiliary phone amplifier which feeds the PHONE AUDIO terminals on TB1. A rectifier which samples the output of the line audio amplifiers supplies dc to operate the front panel meter in the LINE AUDIO setting.

When the AM detection mode is selected, the control input to pin 47 is high (+5 V). The output of U1A is +14 V, which reverse biases CR1. The gate of FET Q1 will then assume the same potential as its source and Q1 will be on, acting as a closed switch for AM audio. Both demodulators of the FM/CW/SSB Detector will be off so the output of U1D will be AM audio only. When any other detection mode is selected, the control input to pin 47 will be low (0 V) and the output of U1A will be approximately -14 V. This will tend to forward bias CR1 and will cause gate of Q1 to be similarly negative, cutting off all signal flow through Q1. The audio signal from the FM/CW/SSB Detector will appear at the output of U1D.

The signal into line audio amplifier U2 is the output of U1D attenuated by the LINE AUDIO LEVEL control, R1. The two sections of U2 act as a push-pull bridge amplifier, driving output transformer T2 located on the inside of the rear panel. The amplifier U2 uses a supply voltage of +12 Vdc from U4 on the main chassis. Type 746001 is current-limit protected by U4 on the main chassis which provides the +12 Vdc power. A circuit within U2 provides a bias voltage at pin 1 which is equal to one-half the supply voltage. This is connected to the non-inverting inputs of both amplifier sections of U2. Both amplifiers use unity feedback at dc, that is, the only dc path to the inverting inputs is from the outputs, so there is very little dc difference between their outputs at pins 2 and 13.

The input signal is applied to the non-inverting input of U2B, pin 9. Although pins 6 and 9 are at the same dc potential, pin 6 is bypassed so no ac signal appears there. The operation of amplifier U2B will be clear if pin 7, the inverting input of U2A, is considered to be at ac ground. With this assumption, U2B simply appears as a non-inverting amplifier with a closed-loop ac gain of 50. Its ac gain is determined by the ratio of feedback resistors R20 and R19. On the other hand, U2A may then be viewed as an inverting amplifier with an ac gain of nearly one. Its input is the full output of U2B and its gain is determined by R20 and R19 acting as input resistors and R21 as feedback resistor. As with inverting OP AMPs, extremely little signal voltage appears at the amplifier inverting input terminal, thus satisfying the assumption made to explain the behavior of U2B. The net gain of the combined amplifier is 100 and its outputs are balanced with respect to ground. Due to the high current U2 can pass, it is grounded separately from the other circuits on the Audio Amplifier module to prevent ground current coupling which might lead to instability and parasitic oscillations.

The output signal of U2A is rectified and filtered to indicate LINE AUDIO level on the front panel meter. The rectifier is a voltage doubler consisting of CR2, CR3, C12, and C13. It responds to peak-to-peak input voltage and is calibrated by resistors R22, R23, and R24 to indicate the RMS value of a sine-wave at the LINE AUDIO terminals of TB1 on the rear panel. Its calibration is therefore most accurate for sine-wave voltages.

The auxiliary phone amplifier U1B and U1C is a low power bridge amplifier and is therefore similar to U2. It operates from both +15 V and -15 V supplies and has its inputs biased at ground. Comparing its circuit with that of U2 it should be apparent that it also uses unity dc feedback and has a closed loop gain of 100 for ac signals. Its output current capability is much lower than U2, so it can only supply 100 mW compared to 1 Watt from U2.

## 3.4.14 SYNTHESIZER CIRCUIT DESCRIPTIONS

The following paragraphs provide detailed circuit descriptions for each of the four synthesizers and the time base used in the WJ-8718A HF Receiver. A brief discussion of synthesizer relationships is found in **Paragraph 3.2.2, 3.3.2.2, 3.3.3.2** and **3.3.4.**

### 3.4.15 GENERAL PHASE LOCK LOOP THEORY

Prior to discussing specific circuit characteristics of the WJ-8718A synthesizer, it is helpful to review the general theory of the circuits used in phase lock loop synthesizer.

#### 3.4.15.1 Basic Phase Lock Loop

The phase lock loop is the method used in this receiver to provide accurate numerical control of the local oscillator frequencies. This technique allows the oscillators to be controlled by any appropriate source of BCD digital data, including remote control sources. The basic phase lock loop is composed of four circuits: a phase detector, a low-pass filter (sometimes called a lead-lag filter, integrator, or loop filter), a voltage-controlled oscillator (VCO), and a frequency divider (counter). A basic phase lock loop configuration is shown in **Figure 3-17.** Depending on the application, the frequency divider circuit may be fixed (to divide by a certain number), or may be programmable to divide by any number in a specific range (20 to 29, for example). The frequency divider may consist of several counters cascaded together, to provide division by a large number. The operation of the basic phase lock loop requires a stable fixed frequency source, to be used as the reference frequency. This receiver contains a temperature-compensated crystal oscillator (TCXO) to provide the basic reference frequency, and may also be operated using an externally supplied 1 MHz reference signal. Both fixed and programmable loops are discussed in the following paragraphs.

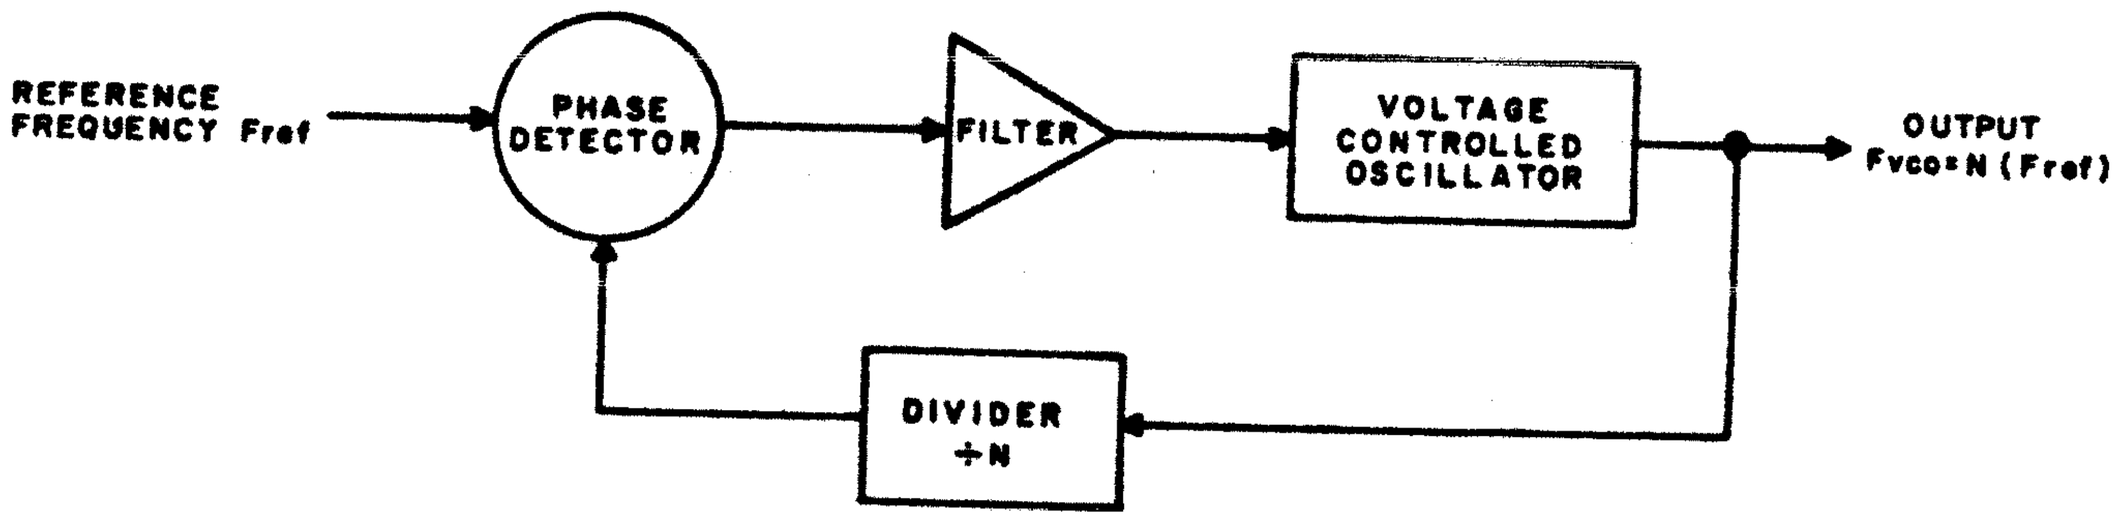



**Figure 3-17. Basic Phase Lock Loop Configuration**

#### 3.4.15.2 Programmable Phase Lock Loop

The basic phase lock loop technique compares the frequency and phase of an incoming reference signal to the output of the voltage controlled oscillator (VCO). If the two signals differ in frequency and/or phase, an error voltage is generated by the phase detector/filter and applied to the VCO, causing it to correct in the direction required for decreasing the frequency/phase difference. The phase detector produces output pulses which are related to the frequency/phase difference. The filter circuit averages (integrates) these pulses into a proportional error correction voltage. This voltage is applied to control the capacitance of a varicap diode in the VCO circuit, and thus tune the VCO toward the correct

frequency. The correction procedure continues until lock is achieved, after which the VCO will track the incoming reference signal.

Dividing a VCO output by two before applying it to the phase detector results in an error voltage that drives the VCO to twice the reference frequency. A divide-by-3 action results in an error voltage that drives the VCO to three times the reference frequency. Thus, the reference frequency is always multiplied by the divider ratio to give the VCO output frequency. From this, the following relationship can be given:

$$F_{vco} = N\,(F_{ref})$$

An example of the basic phase lock loop technique, using numbers, will provide an understanding of its actual operation. Referring to **Figure 3-18**, the desired frequency is obtained by programming the variable divider through selectable inputs. Assuming the VCO is locked at the desired frequency of 25 MHz, this signal enters the input of the (in this case) divide-by-25 counter (divider). The counter emits a pulse at its output each time 25 pulses enter its input. Therefore, the 25 MHz input results in an output of 1 MHz. This 1 MHz signal is compared to the reference frequency of 1 MHz, indicating a locked situation. If the divider's output had been less than 1 MHz, the phase detector would have produced pulses to drive the VCO to a higher frequency. Similarly, if the divider's output had been greater than 1 MHz, the VCO would have been driven to a lower frequency. An important concept to be noted here is that the phase lock loop's output frequency is dependent upon the selectable inputs of the variable divider.

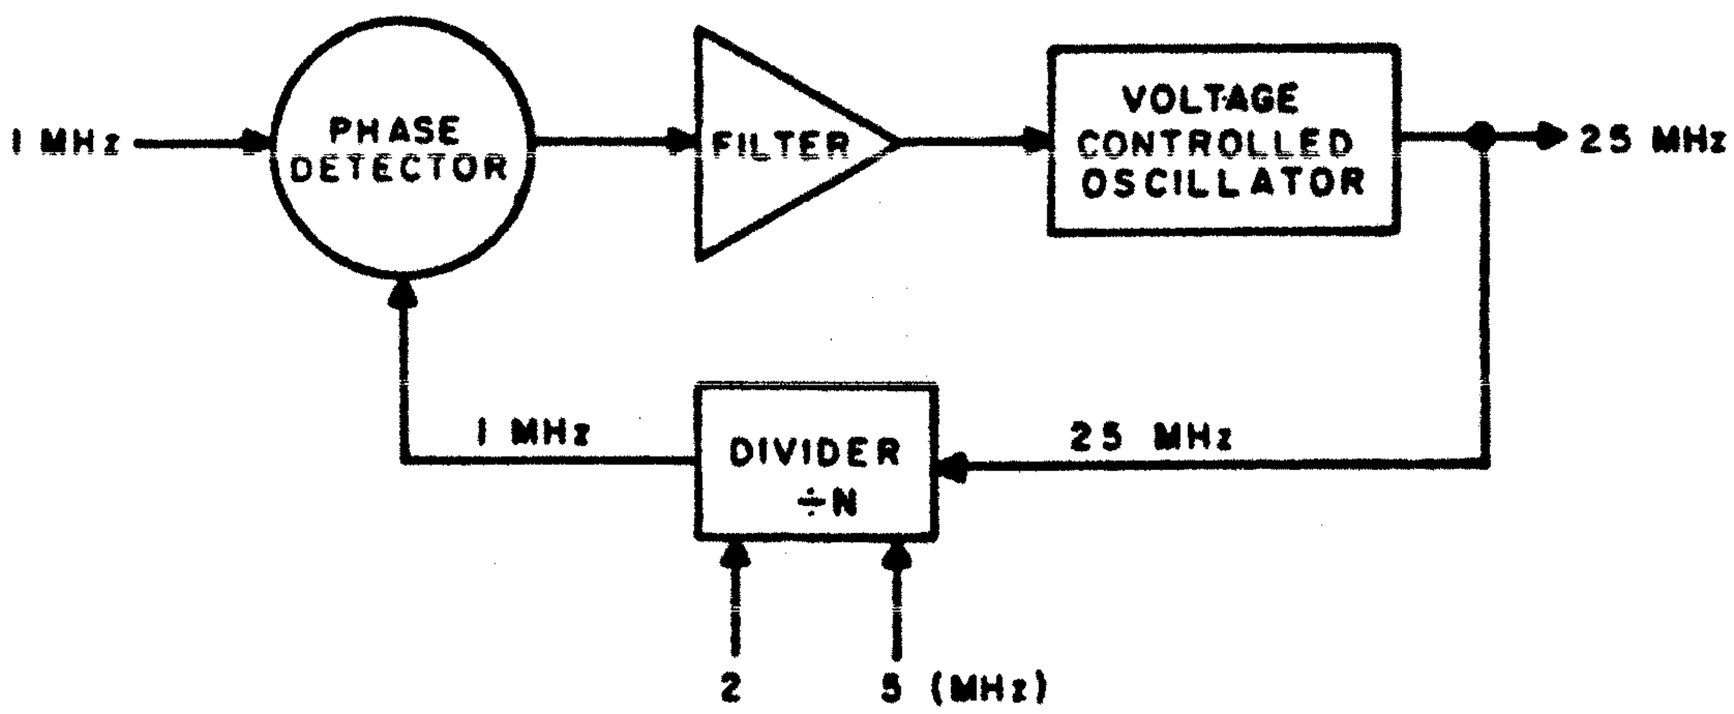



**Figure 3-18. Programmable Phase Lock Loop**

### 3.4.15.3 Prescaling Technique

A variation of the basic phase lock loop, shown in **Figure 3-19**, is utilized in the 1st and 2nd LO Synthesizers. The divider portion consists of a two modulus prescaler and two programmable counters. The two-modulus (divider) prescaler accepts the output from the VCO and divides it by one of two numbers (P or P+1). The prescaler in the 1st LO is a divide-by-

50/51 counter and the 2nd LO prescaler is a divide-by-100/101 counter. The swallow counter controls the number of times the prescaler divides by P+1. The programmable counter counts the number of pulses from the prescaler. Totally, these three components provide for coarse (N) and fine (A) tuning of the VCO.

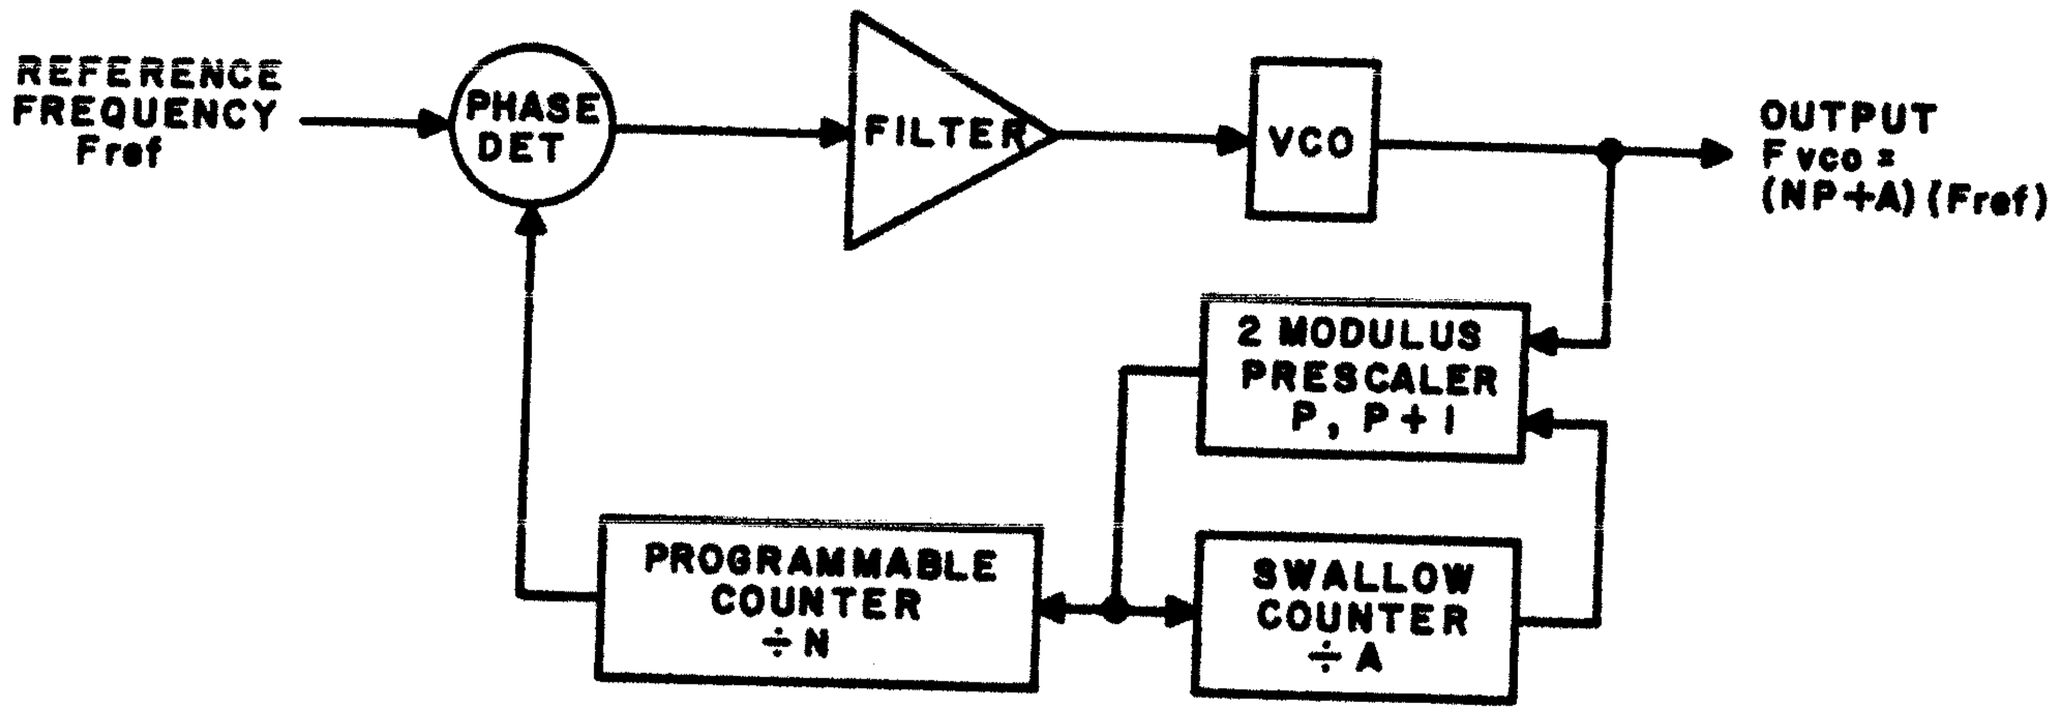



**Figure 3-19. Two-Modulus Prescaling in the Phase Lock Loop**

In operation, the prescaler divides by P+1, A times. For every P+1 pulse from the prescaler, both the swallow counter and programmable counter are decremented by 1. The prescaler divides by P+1 until the swallow counter reaches its zero state. At this point, the modulus of the prescaler changes to P and the swallow counter is disabled. The prescaler then divides by P until the remaining count in the programmable counter (N-A) decrements to zero. At this time the output of the programmable counter emits a pulse while the swallow and programmable counters are reset. The cycle then repeats.

An example of the two-modulus prescaling technique is given in **Figure 3-20.** For illustration, a VCO output of 153 MHz is desired. Selected into the programmable counter are the two most significant digits, 1 and 5. Selected into the swallow counter is the least significant digit, 3. Under lock conditions, the divider has an input of 153 MHz and an output of 1 MHz.

To produce a 1 MHz signal from a 153 MHz signal requires a divide ratio of 153. The table in **Figure 3-20** shows a count sequence with 153 input pulses resulting in one output pulse. Similarly, a 153 MHz input results in a 1 MHz output. The programmable counter emits

a pulse every time it counts 15 pulses. With the swallow counter set to three, the prescaler divides-by-11 three times and then switches to the divide-by-10 state. At this point, the programmable counter needs 12 input pulses before emitting an output pulse. The prescaler then divides-by-10 twelve times to finish the count sequence. With 3 counts of 11 (3x11=33), and 12 counts of 10 (12x10=120), one output pulse emits from the programmable counter every 153 input pulses (33+120=153).

The two phase lock loop types described are used throughout the WJ-8718A synthesizer section. The 1st LO and part of the 2nd LO utilize the prescaler configuration while the 3rd LO and another part of the 2nd LO use a fixed divide-by-N ratio. The BFO uses the basic phase lock loop configuration, utilizing the divide-by-N technique ($F_{VCO}$=N $F_{ref}$). Common to all the synthesizers in this receiver is the phase detector used. It will be described in detail below.

| PROGRAM COUNTER | SWALLOW COUNTER | PRESCALER COUNTS | INPUT PULSES |
|---|---|---|---|
| 15 | 3 | 0 | 0 |
| 14 | 2 | 11 | 11 |
| 13 | 1 | 11 | 22 |
| 12 | 0 | 11 | 33 |
| 11 | - | 10 | 43 |
| 10 | - | 10 | 53 |
| 9 | - | 10 | 63 |
| 8 | - | 10 | 73 |
| 7 | - | 10 | 83 |
| 6 | - | 10 | 93 |
| 5 | - | 10 | 103 |
| 4 | - | 10 | 113 |
| 3 | - | 10 | 123 |
| 2 | - | 10 | 133 |
| 1 | - | 10 | 143 |
| 0 | - | 10 | 153 |

153 INPUT PULSES = 1 OUTPUT PULSE

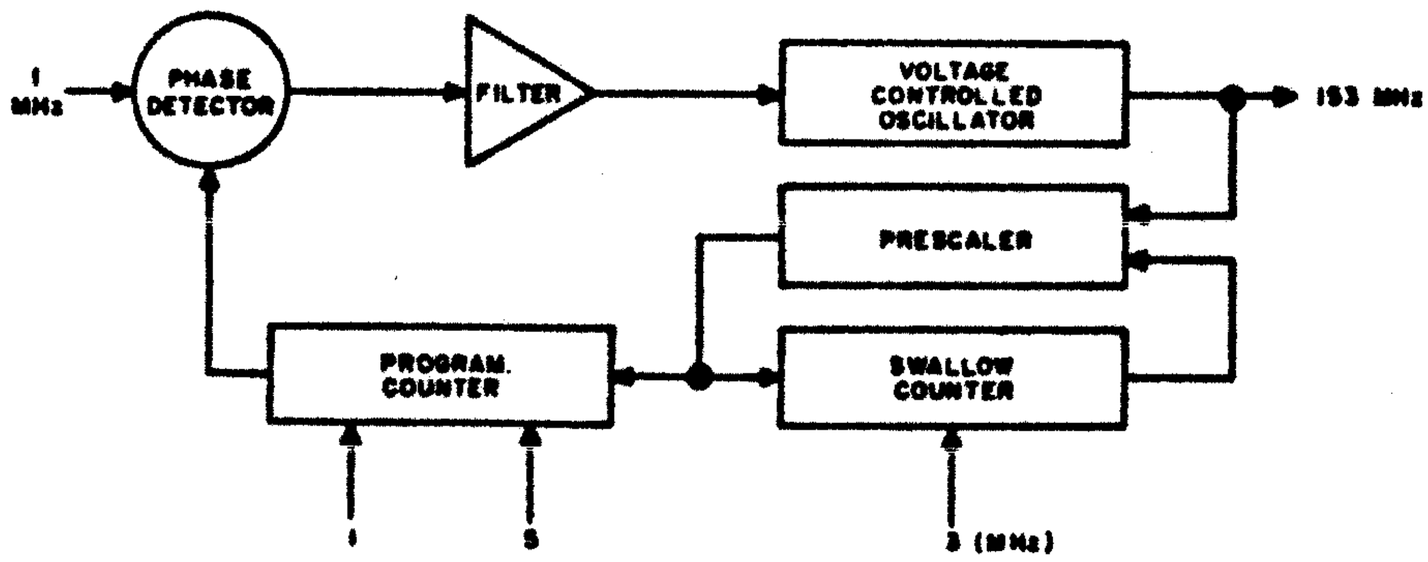



**Figure 3-20. Prescaler Dividing Technique**

### 3.4.15.4 Phase Detector

The phase detector used in all of the synthesizers is actually a phase and frequency detector. The integrated circuit also includes a charge pump and an amplifier. Each of these three sections will be discussed below. **Table 3-3** provides some information about the phase detectors in these synthesizers. Refer to the 1st and 3rd LO schematic diagram, **Figure 6-16**, for illustration of typical phase detector operation.

**Table 3-3. WJ-8718 Series Phase-Lock Loop Characteristics**

| Synthesizer | Phase Detector Ref. Des. | Phase Detector Ref. Freq. | Programmable Divider? | VCO Range | Output Frequency |
|---|---|---|---|---|---|
| 1st LO | U5 | 40 kHz | YES | 171.64-291.60 MHz | 42.91-72.90 MHz |
| 2nd LO 32M | U1A,B | 1 MHz | NO | 32 MHz | |
| 2nd LO PROG | U12A, B | 10 MHz | YES | 200-210 MHz | |
| 2nd LO OUT | U6A, B | 200-210 kHz | NO | 32.20-32.21 MHz | 32.20-32.21 MHz |
| 3rd LO | U22A, B | 5 kHz | NO | 11.155 MHz | 11.155 MHz |
| BFO | U9A, B | 1 kHz | YES | 4461-4639 kHz | 446.1-463.9 kHz |

The phase detector normally receives a fixed reference frequency at one input (R) and a variable frequency at the input (V) from the divider section. The output responds only to transitions from the two inputs and has four output states as shown in **Figure 3-21.** If the frequency and phase match exactly, outputs U and D remain high. If the variable input leads in phase with respect to the reference input, U remains high and D goes low. If the variable input lags in phase with respect to the reference input, D remains high and U goes low. When inputs V and R are separated by a frequency difference, the output at pins U or D varies high and low at a rate proportional to the difference frequency of the two inputs.

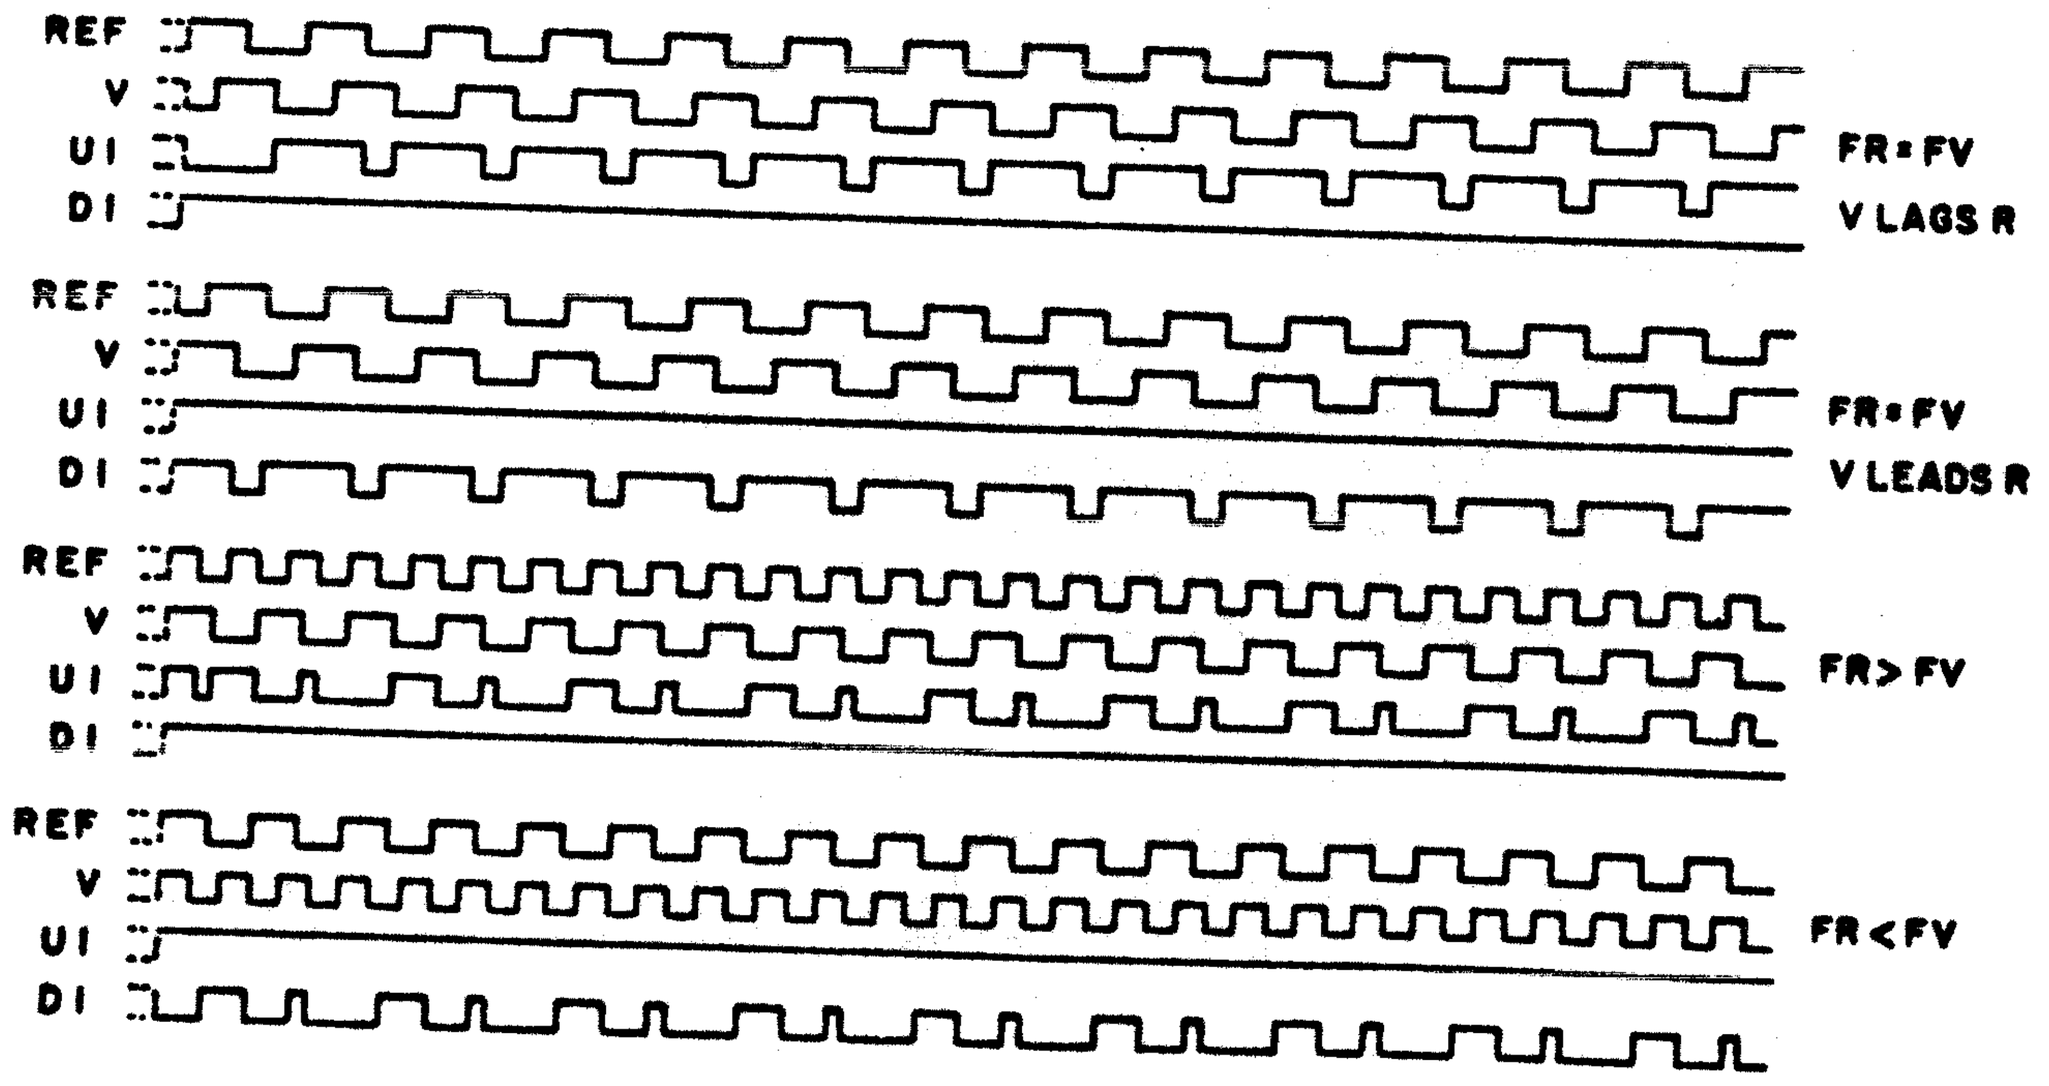



**Figure 3-21. Phase Detector Timing Diagram**

Under lock conditions, when the input of both V and R are identical in phase and frequency, the output pulses from U and D will be extremely narrow and appear on an oscilloscope as spikes. For a large difference between the two input frequencies, as when a new

LO frequency is established, the outputs respond as described above with wide pulses appearing on the proper outputs.

The charge pump accepts both outputs from the phase detector and translates the voltage levels before they are applied to the loop filter. The input to pin 11 appears as an inverted output at pin 10. The input to pin 4 appears as an output at pin 5. There will be a pulsed waveform entering either pin 4 or pin 11 at any given time. The charge pump delivers voltage commands from 2.25 V on positive swings to 0.75 V on negative swings, with a mean value of 1.5 V. The charge pump outputs are applied to a low-pass active filter.

The active filter normally uses the amplifier contained in the phase detector IC plus external resistors and capacitors. In some cases an external transistor will also be used, or an external OP AMP. This filter has a direct influence on loop bandwidth, capture range, and transient response. Its output is the VCO tuning voltage, which is applied to control the capacitance of a varicap tuning diode in the VCO tank circuit, thereby controlling the VCO frequency.

### 3.4.16 TYPE 791600-1 1ST LO SYNTHESIZER (A5A1A2)

The 1st LO Frequency Synthesizer circuits are part of the 1st and 3rd LO/Time Base circuit board. The 1st LO utilizes a phase lock loop configuration with the prescaling technique previously described in **paragraph 3.4.15.3.** The output of the 1st LO tunes in 10 kHz steps from 42.91 MHz to 72.90 MHz. This tuning range mixes with the 0.0 to 29.99 MHz receiver tuning range to produce a 1st IF signal in the range of 42.90 to 42.91 MHz. A block diagram of the 1st LO is shown in **Figure 3-22.**

#### 3.4.16.1 Functional Description

The programmable divider, phase detector, and lead-lag filter of the 1st LO Synthesizer are contained on the main circuit board (Type 791600); the VCO and tuning voltage control circuits (Type 791629) are mounted separately, but together with the main circuit board, they form a combined assembly. The phase detector (U5), charge pump (U6C), and lead-lag filter (U7) of the 1st LO will be discussed lightly since a detailed description of these circuits can be found in **paragraph 3.4.15.4** of the phase lock loop section. Refer to **Figure 3-22** for the following discussion.

A two-modulus prescaler (described in **paragraph 3.4.15.3**) is used at the input to the divide-by-N counter to divide down the frequency from the VCO so that it can be handled by conventional low-power Schottky counters. If the 1st LO is locked on the correct frequency, the output of the programmable counter will be 40 kHz. This 40 kHz is compared to the 40 kHz reference frequency from the Time Base in phase detector U5. The difference in frequency and phase of these two input signals produces a series of pulses which the charge pump converts to positive or negative going voltages. These voltages are integrated by lead-lag filter U7 toprovide the tuning voltage for the VCO. The Notch Filter and Tuning Voltage ground reference circuits isolate the VCO tuning voltage from any ripple from the 40 kHz reference frequency. An octal band-switching code, generated by octal encoder U13 from the divider section, switches the VCO to one of eight tuning ranges spaced 16 MHz apart.

The VCO has two inputs and two outputs. The inputs to the VCO are a tuning voltage and a band-switching code. Together they supply the VCO with the necessary

information for tuning to the correct frequency. The actual VCO generates frequencies between 171.64 MHz and 291.60 MHz. This range is sent to the programmable divider of the phase lock loop. The other output of the VCO is applied to a frequency divider. Since the 1st LO frequency range is from 42.91 MHz to 72.90 MHz, the VCO frequency range must be divided by 4. For this same reason, the eight tuning ranges of the VCO (from the band switching code) are spaced 16 MHz apart within the VCO and 4 MHz apart (16 MHz ÷ 4) for the 1st LO output. In summary, the VCO frequency is four times that of the 1st LO output frequency.

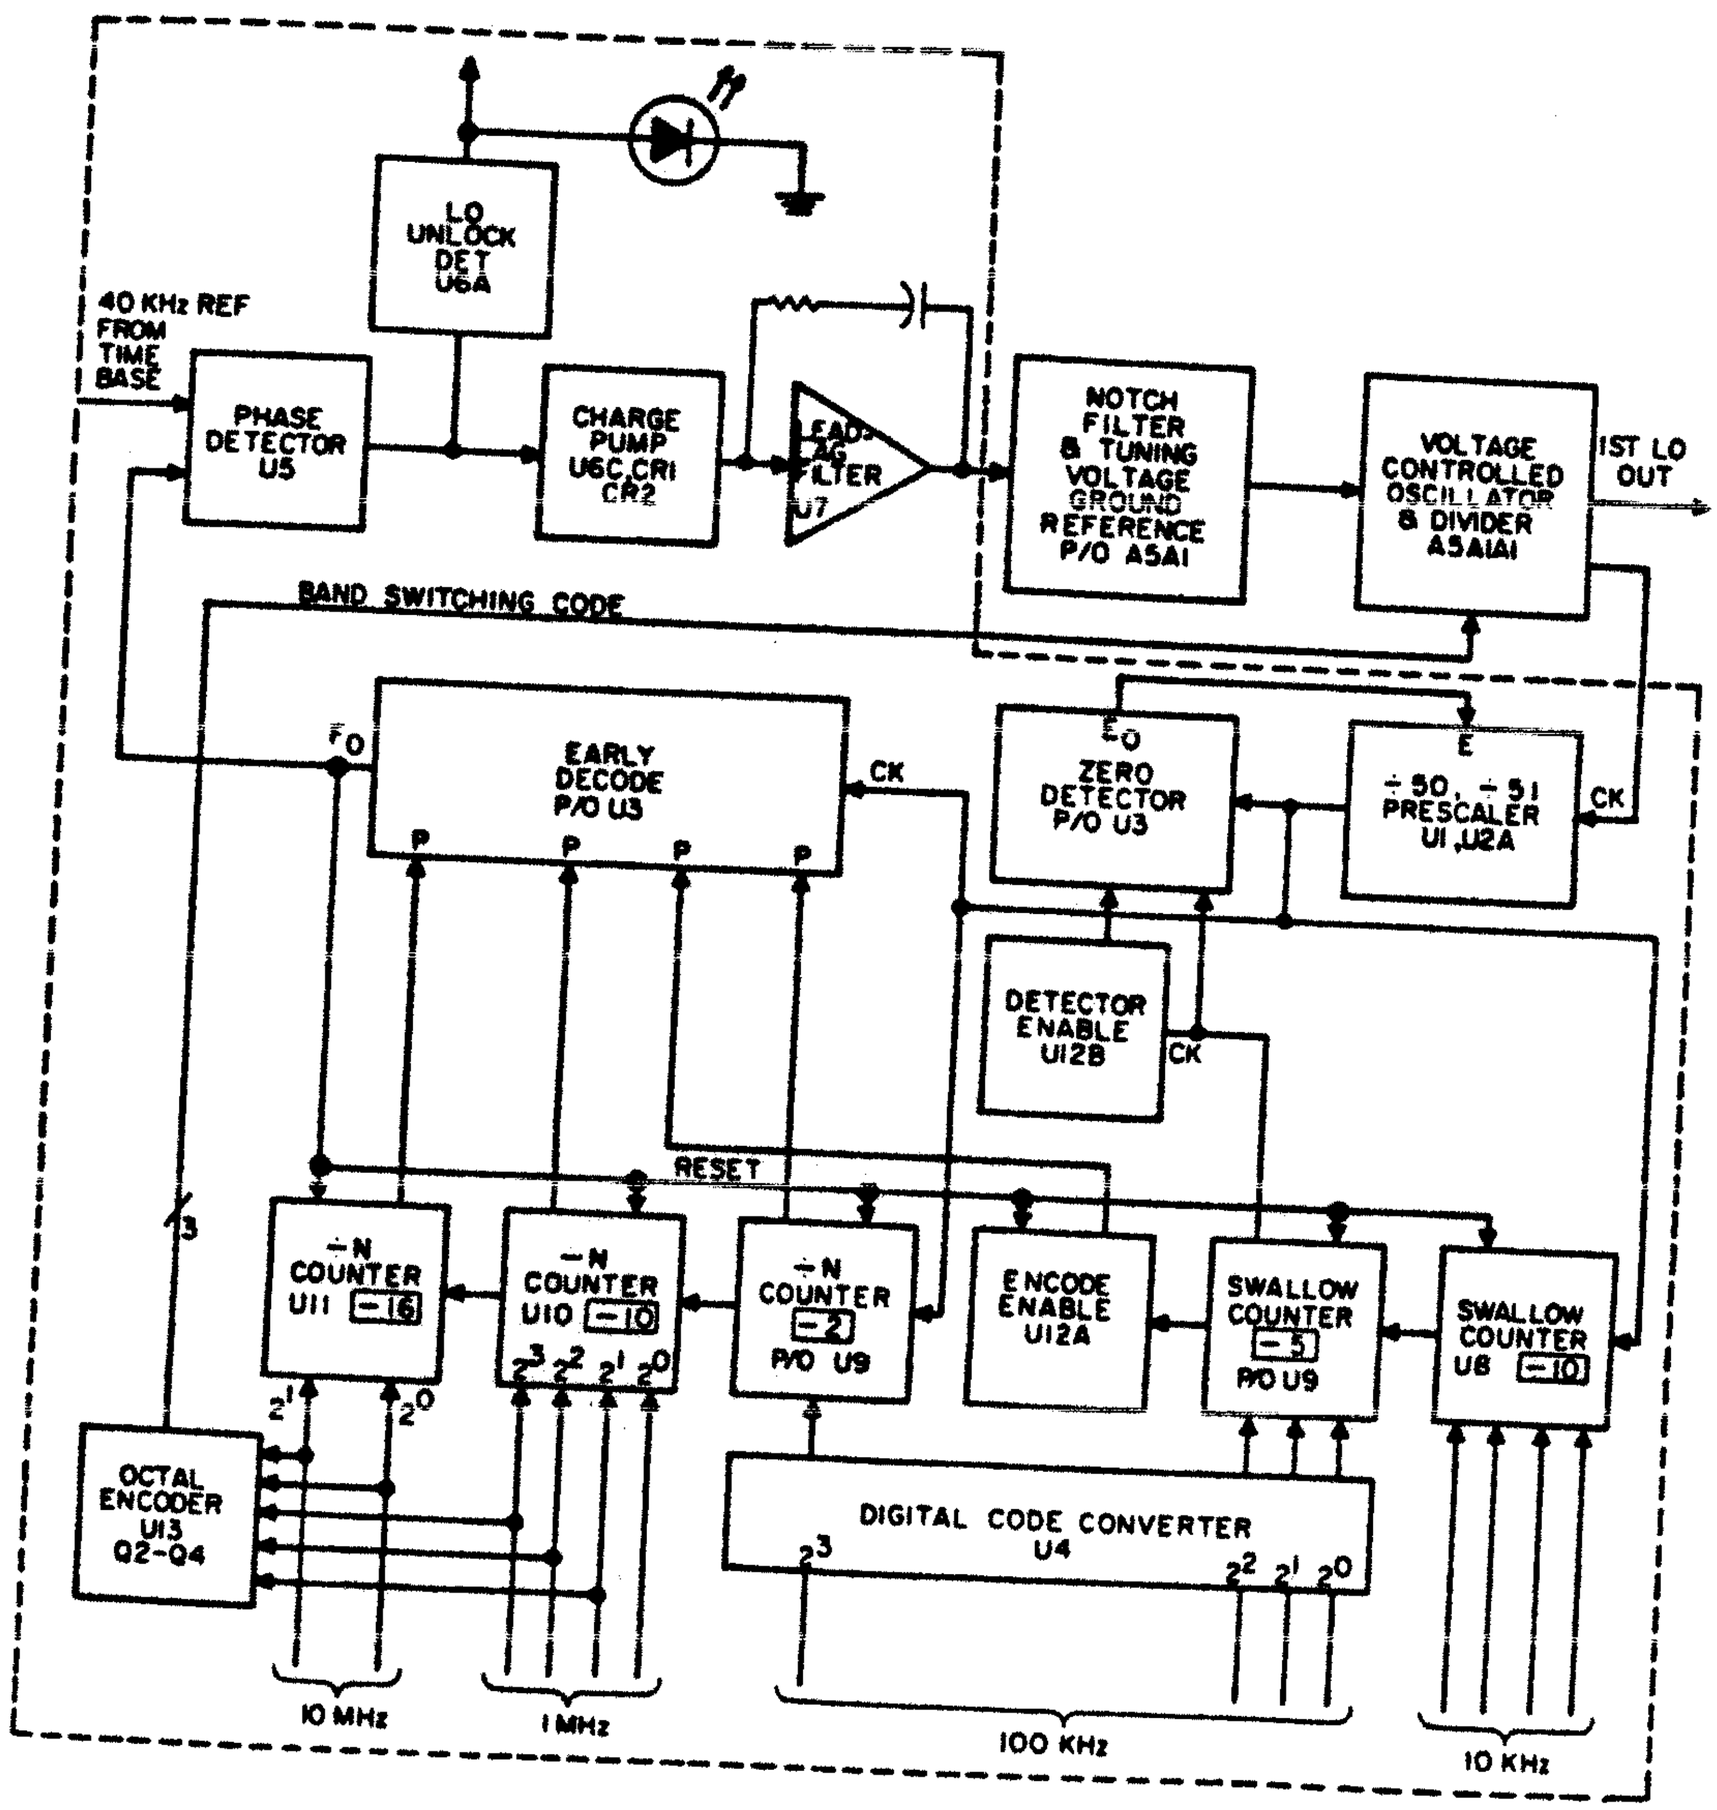



**Figure 3-22. 1st LO Functional Block Diagram**

The programmable divider has an input range from 171.64 MHz to 291.60 MHz, in 40 kHz steps, and must divide each of these frequencies down to exactly 40 kHz. This condition calls for the programmable divider to have a divide ratio from 4291 (171.64 ÷ 40 kHz) to 7290 (291.60 MHz ÷ 40 kHz).

From the conditions above, the counters within the programmable divider, U8, U9, U10 and U11, must have a divide range from 4291 to 7290. The inputs of the counters are always preset from the BCD equivalents of the four most significant digits of the tuned frequency. This range is from 0000 to 2999. One other condition exists at the input to the counters; U11 is wired to automatically add 8 to its preset. Therefore, the VCO presets have a range from 8000 to 10999. The external logic circuits connected to the counters stop the counters from counting when they reach the terminal count number 3709. Since the counters are wired to count down, the overall divide range needed from the counters is obtained; the divide range is from 4291 (8000-3709) to 7290 (10999-3709).

### 3.4.16.2 Circuit Description

#### 3.4.16.2.1 Counting Cycle

Although the counters have the correct divide range needed to divide the input frequency down to 40 kHz, the VCO output frequency is too high for the counters to operate properly. Therefore, a high-speed, two-modulus prescaler is used to divide the input frequency to a range that can be handled by the counters.

The prescaler used in the 1st LO divides either by 50 or 51. In order for the counters to divide correctly, they must divide in increments of 50 or 51 also. When the prescaler divides by either 50 or 51, only one pulse is sent to the counters. Therefore, the counters must interpret this pulse as representing either 50 input pulses or 51 input pulses.

The counter section shown in Figure 3-16 is divided into two parts: a programmable counter and a swallow counter. The programmable counter consists of U11, U10, and part of U9, and the swallow counter consists of U8 and part of U9. Both counters receive the same clock pulse from the prescaler output. By having the swallow counter control the prescaler, the represented count will decrement by 51 when the programmable counter and the swallow counter are counting. When the swallow counter reaches terminal count, the prescaler will begin to divide by 50 and the swallow counter will be disabled for the remainder of the cycle.

**Figure 3-23** shows graphically a typical 1st LO counting cycle. The prescaler divides by 51 until the swallow counter reaches terminal count. When the outputs of the swallow counter reach this state, they cause the zero detector's $E_0$ output state to become high. This causes the prescaler to divide by 50 until the end of the count cycle. Since the programmble counter is separately clocked, it continues to count down until its terminal count is detected by the early decode circuit. When this occurs, the $\overline{F_0}$ output of the early decode goes high after the next clock pulse from the prescaler. This is the output pulse supplied to the phase detector. When the output from the early decode circuit again goes low, it resets the counters to the preset number on their inputs. It also causes the reset enable circuit to reset the zero detector circuit causing its output to go low so the prescaler can divide by 51 during the next count cycle.

FIGURE 3-23
FIGURE 3-24

Refer to the schematic diagram of the 1st LO, **Figure 6-17**, to aid in understanding the circuit descriptions presented below.

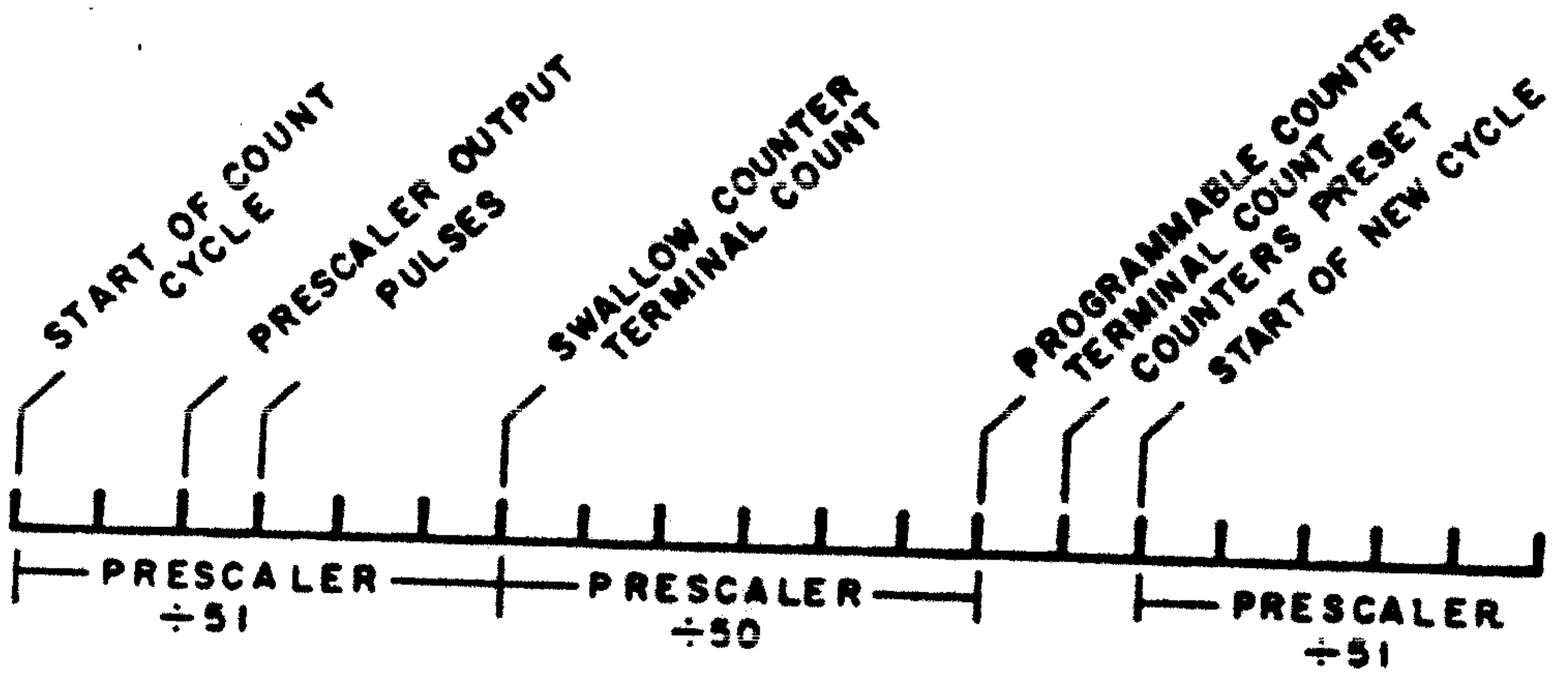



**Figure 3-23. 1st LO Counting Cycle**

### 3.4.16.2.2 Prescaler, U1 and U2A

The prescaler input frequency ranges from 171.64 MHz to 291.60 MHz. The prescaler divides this by 50 or 51, depending on the states of the E inputs of U1. **Figure 3-24** illustrates the prescaler's operation. U1 is a divide-by-10/11 counter and U2A is a divide-by-5 counter. The prescaler divides by 51 when E4 is low and when E5 pulses low once for every five pulses from U2A. E5 is low for only one count out of five so the complete count cycle of U1 and U2A takes 51 counts (4 x 10 + 1 x 11). This count cycle continues until the swallow counter reaches terminal count. E4 then goes high and U1 divides by 10 only, giving U1 and U2A a complete count cycle of 50.

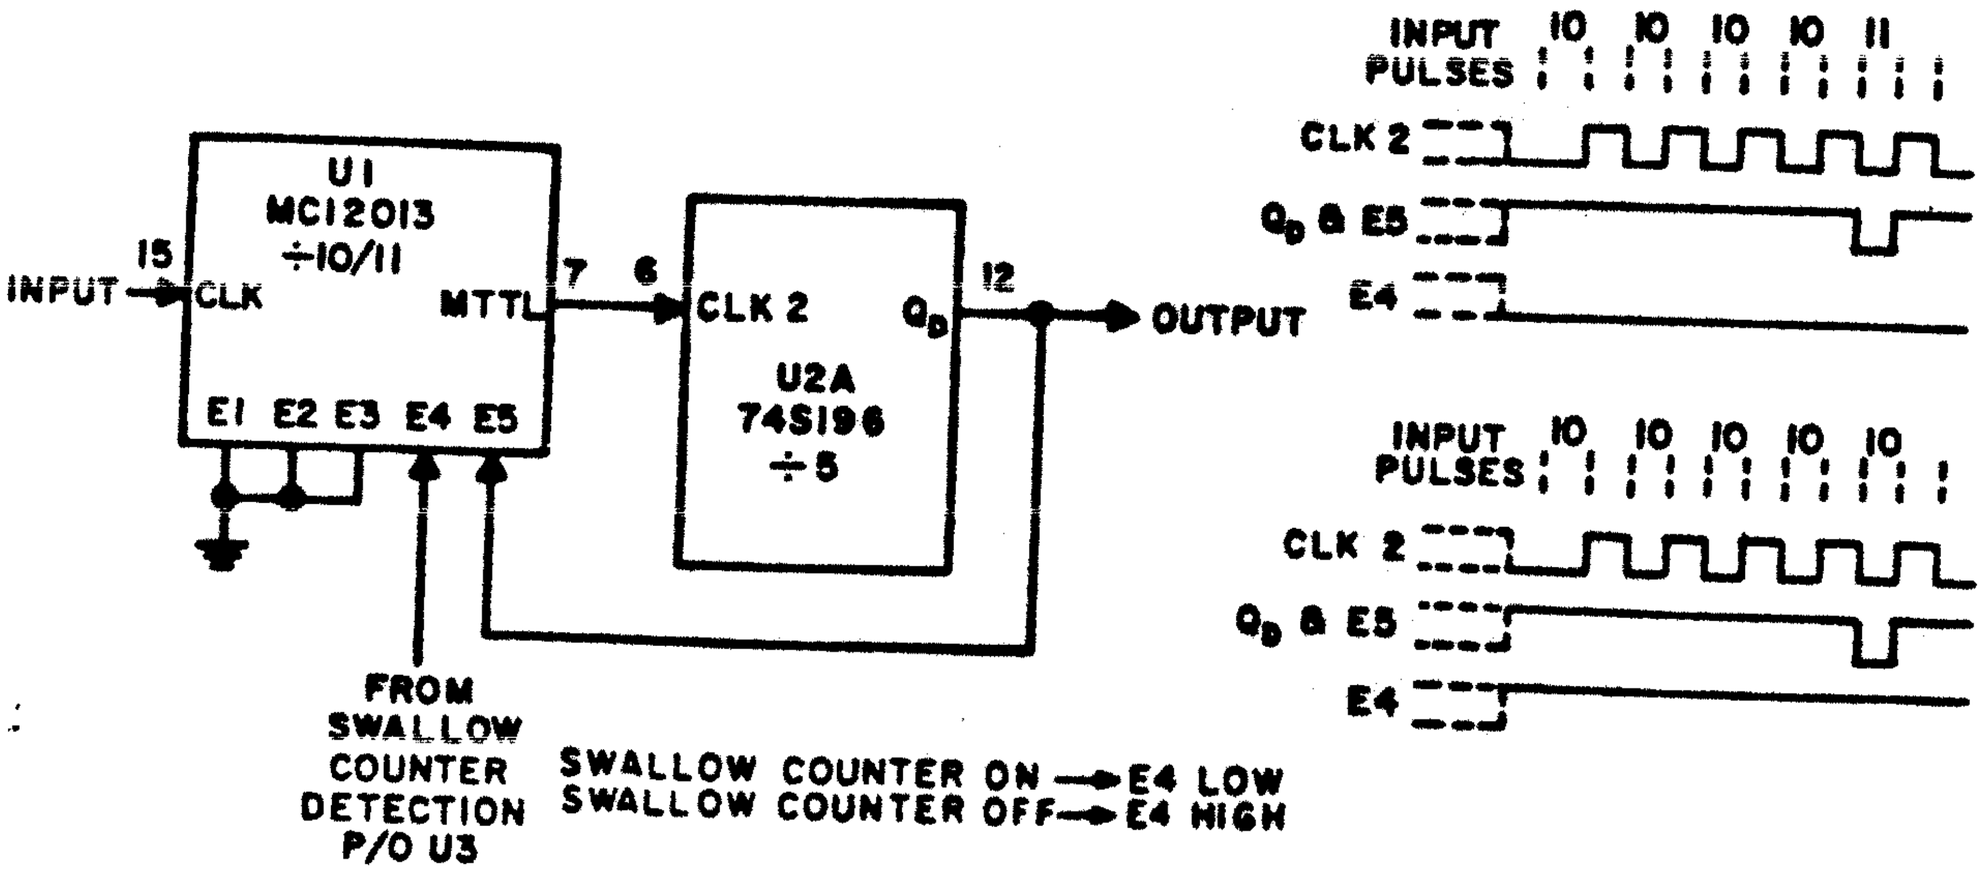



**Figure 3-24. 1st LO Prescaler Timing Diagram**

### 3.4.16.2.3 Digital Code Converter U4

U4 is a programmable ROM (Read Only Memory) that serves as a decoder or code converter. It behaves as a look-up table to translate a BCD input, which has bit values of $2^3$, $2^2$, $2^1$, $2^0$, to a new code with bit values of $5^1$, $2^2$, $2^1$, $2^0$. **Table 3-4** illustrates all possible inputs and outputs of U4.

**Table 3-4. Code Converter U4, Truth Table**

| BCD INPUTS TO U4 | | | | OUTPUTS FROM U4 | | | |
|---|---|---|---|---|---|---|---|
| $2^3$ | $2^2$ | $2^1$ | $2^0$ | $5^1$ | $2^2$ | $2^1$ | $2^0$ |
| D | C | B | A | $Y_4$ | $Y_3$ | $Y_2$ | $Y_1$ |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 0 | 0 | 0 | 1 | 0 | 1 | 0 | 0 |
| 0 | 0 | 1 | 0 | 0 | 0 | 1 | 1 |
| 0 | 0 | 1 | 1 | 0 | 0 | 1 | 0 |
| 0 | 1 | 0 | 0 | 0 | 0 | 0 | 1 |
| 0 | 1 | 0 | 1 | 1 | 0 | 0 | 0 |
| 0 | 1 | 1 | 0 | 1 | 1 | 0 | 0 |
| 0 | 1 | 1 | 1 | 1 | 0 | 1 | 1 |
| 1 | 0 | 0 | 0 | 1 | 0 | 1 | 0 |
| 1 | 0 | 0 | 1 | 1 | 0 | 0 | 1 |

U4 serves as part of the programmable counter and part of the swallow counter. Output $Y_4$ presets the divide-by-2 counter, which is part of the programmable counter. Outputs $Y_1$, $Y_2$, and $Y_3$ preset the divide-by-5 counter which is part of the swallow counter. The function of U4 in each counter section will be discussed below.

### 3.4.16.2.4 Programmable Counter U9, U10, U11

The programmable counter is formed by U11, U10, and part of U9. U11 and U10 count down and U9 counts up. U10 is a divide-by-10 counter (BCD). U11 is a divide-by-10 counter (BCD). With the D input of U11 tied high (to Vcc 3), the counter is always preset with at least 8 (1000). The divide-by-2 counter within bi-quinary counter U9 is part of the programmable counter, using preset input A and output QA.

U11, U10, and U9 are cascaded with a clock input entering U9 at pin 8 (CLK1). U9 cascades to U10 and clocks U10 on its the 0 to 1 transition. U10 cascades to U11. The programmable counter counts from its preset values on U11, U10, and U9 down to a detection number of 370 (0011, 0111, 0000). A carry condition is the only exception to this count sequence and will be discussed later.

### 3.4.16.2.5 Swallow Counter U8, U9

The 1st LO swallow counter is formed by decade counter U8 and the divide-by-5 part of bi-quinary counter U9. Cascaded, they form a divide-by-50 counter which controls the

divide mode of prescaler U1. The counting mode of the swallow counter is unusual, in that U8 counts down and clocks U9, which counts up. Refer to **Table 3-5.** The terminal count for the swallow counter occurs at 09. At this point the Z inputs of control device U3 must all be low. However, the $\overline{Z_0}$ input is controlled by U12B, which enables detection of the terminal count. The Q output of U12B is set high at the beginning of each count cycle, and will not go low until the most significant swallow counter digit, from U9, steps from 1 to 2. This clocks U12B, validates the terminal count, and the prescaler mode will be changed when the counter reaches 09. Therefore, for preset values between 29 and 40, the counter cycles past the first 09 count to the 10 to 29 transition, then terminates at 09.

#### 3.4.16.2.6 Carry Condition U12A, U6B

A carry condition occurs in the programmable counter when the preset to the swallow counter falls into the range of 29 to 00. Refer to **Table 3-5.**

**Table 3-5. Count Sequence, 1st LO Swallow Counter**

| +5 U9B (UP) | +10 U8 (DOWN) | COMMENTS | +5 U9B (UP) | +10 U8 (DOWN) | COMMENTS |
|---|---|---|---|---|---|
| 0 | 0 | THIS TRANSITION SETS CARRY CONDITION (U8 clocks U9) | 3 | 4 | |
| 1 | 9 | | 3 | 3 | |
| 1 | 8 | | 3 | 2 | |
| 1 | 7 | | 3 | 1 | |
| 1 | 6 | | 3 | 0 | |
| 1 | 5 | | 4 | 9 | U8 clocks U9 |
| 1 | 4 | | 4 | 8 | |
| 1 | 3 | | 4 | 7 | |
| 1 | 2 | | 4 | 6 | |
| 1 | 1 | | 4 | 5 | |
| 1 | 0 | SWALLOW COUNTER VALIDATE (U8 clocks U9) | 4 | 4 | |
| 2 | 9 | | 4 | 3 | |
| 2 | 8 | | 4 | 2 | |
| 2 | 7 | | 4 | 1 | |
| 2 | 6 | | 4 | 0 | |
| 2 | 5 | | 0 | 9 | TERMINAL COUNT (U8 clocks U9) |
| 2 | 4 | | 0 | 8 | |
| 2 | 3 | | 0 | 7 | |
| 2 | 2 | | 0 | 6 | |
| 2 | 1 | | 0 | 5 | |
| 2 | 0 | | 0 | 4 | |
| 3 | 9 | U8 clocks U9 | 0 | 3 | |
| 3 | 8 | | 0 | 2 | |
| 3 | 7 | | 0 | 1 | |
| 3 | 6 | | 0 | 0 | |
| 3 | 5 | | 0 | 9 | Repeat Cycle U8 clocks U9 |

If the preset to the swallow counter is 00, the first count will cause the transition to 19. When this occurs, the U9 output $Q_B$ will go high, while $Q_C$ remains low. The logic of U24B and U24A produces a logic high to clock U12A. The Q output of U12A is preset high at the beginning of each cycle, but if the 00 to 19 transition occurs, it is clocked low. This applies a logic low to NAND gate U6B, and effectively shifts the actual terminal count of the programmable counter from 370 to 371. (The actual number detected is 380 or 381, for reasons explained later, in **paragraph 3.4.16.2.8**).

### 3.4.16.2.7 Count Sequence

**Table 3-6** illustrates the count-down sequence of the 1st LO divider for two example RF input frequencies. In the first example, the receiver is tuned to 00.00XXX MHz and the 1st LO counter presets are loaded with the value 8000, as explained in **paragraph 3.4.16.1.** The two most significant preset digits (8 and 0) are loaded directly into U11 and U10. The least significant digit (0) is loaded directly into U8. The 0 applied to code converter U4 results in a 0 preset to both sections of U9, as explained in **paragraph 3.4.16.2.3.** The swallow counter (U8, U9B) and the programmable counter (U9A, U10 and U11) are both decremented by 1 prescaler output pulse for each 51 prescaler input pulses. When the swallow counter reaches its terminal count (at 09) the prescaler divide mode changes to 50. Since the swallow counter was preset with 00, a carry condition exists and the terminal count for the programmable counter is 371, as explained in **paragraph 3.4.16.2.6.** When the programmable counter reaches terminal count, the cumulative number of pulses into the prescaler equals 4291. Since the loop reference frequency is 40 kHz, the VCO frequency is 4291 x 40 kHz, or 171.64 MHz. The VCO output to the mixer is divided by 4, resulting in an actual LO output of 42.91 MHz. This is the LO frequency corresponding to a tuned RF of 00.00XXX MHz.

The second example in **Table 3-6** shows the receiver tuned to 29.99XXX MHz and the 1st LO counter presets loaded with the value 10999. The two most significant preset digits (10 and 9) are loaded directly into U11 and U10. The least significant digit (9) is loaded directly into U8. The 9 applied to code converter U4 results in a value of 1 applied to U9A, and a value of 1 applied to U9B, as explained in **paragraph 3.4.16.2.3.** Since the swallow counter preset is 19, no carry condition exists and the terminal count for the programmable counter is 370. When terminal count is reached, the cumulative number of pulses into the prescaler equals 7290. With a loop reference of 40 kHz, the VCO frequency is 291.6 MHz, and the actual LO output (291.6 MHz ÷ 4) equals 72.90 MHz. This corresponds to a tuned RF of 29.99XXX MHz.

## Table 3-6. 1st LO Divider Count-Down Cycles

| Pre-Scaler Mode | Pulses into Prescaler New | Pulses into Prescaler Cum. | Prescaler Output Pulses | U9B (÷5) | U8 (÷10) | U11 (÷16) | U10 (÷10) | U9A (÷2) | COMMENTS |
|---|---|---|---|---|---|---|---|---|---|
| ÷51 | 0 | 0 | 0 | 0 | 0 | 8 | 0 | 0 | Preset for Tuned Freq. of 00.00XXX MHz |
| | 51 | 51 | 1 | 1 | 9 | 7 | 9 | 1 | |
| | 51 | 102 | 1 | 1 | 8 | 7 | 9 | 0 | |
| | 408 | 510 | 8 | 1 | 0 | 7 | 5 | 0 | |
| | 51 | 561 | 1 | 2 | 9 | 7 | 4 | 1 | Swallow Ctr. Validation |
| | 1530 | 2091 | 30 | 0 | 9 | 5 | 9 | 1 | Swallow Ctr. Terminal Count |
| ÷50 | 50 | 2141 | 1 | | | 5 | 9 | 0 | |
| | 900 | 3041 | 18 | | | 5 | 0 | 0 | |
| | 1000 | 4041 | 20 | | | 4 | 0 | 0 | |
| | 100 | 4141 | 2 | | | 3 | 9 | 0 | |
| | 50 | 4191 | 1 | | | 3 | 8 | 1 | Early Decode Terminal Count (Carry Condition) Divide Ratio = 4291 |
| | 100 | 4291 | 2 | | | 3 | 7 | 1 | |
| | 4291 x 40 kHz = 171.64 MHz | | | | | | | | |
| ÷51 | 0 | 0 | 0 | 1 | 9 | 10 | 9 | 1 | Preset for Tuned Freq. of 29.99XXX MHz |
| | 51 | 51 | 1 | 1 | 8 | 10 | 9 | 0 | |
| | 408 | 459 | 8 | 1 | 0 | 10 | 5 | 0 | |
| | 51 | 510 | 1 | 2 | 9 | 10 | 4 | 1 | Swallow Ctr. Validation |
| | 1530 | 2040 | 30 | 0 | 9 | 8 | 9 | 1 | Swallow Ctr. Terminal Count |
| ÷50 | 1000 | 3040 | 20 | | | 7 | 9 | 1 | |
| | 1000 | 4040 | 20 | | | 6 | 9 | 1 | |
| | 1000 | 5040 | 20 | | | 5 | 9 | 1 | |
| | 1000 | 6040 | 20 | | | 4 | 9 | 1 | |
| | 1000 | 7040 | 20 | | | 3 | 9 | 1 | |
| | 150 | 7190 | 3 | | | 3 | 8 | 0 | Early Decode Terminal Count (No Carry Condition) Divide Ratio = 7290 |
| | 100 | 7290 | 2 | | | 3 | 7 | 0 | |
| | 7290 x 40 kHz = 291.60 MHz | | | | | | | | |

### 3.4.16.2.8 Divider Section Terminal Count

The terminal counts of both the swallow counter and the programmable counter are detected by the terminal count control IC, U3. The prescaler mode is controlled by the swallow counter logic outputs applied to the Z inputs of U3, as described in **paragraph 3.4.16.2.5.** The terminal count of the programmable (main) counter is obtained when the correct logic levels are applied to the P and B inputs of U3. As previously stated, the actual terminal count occurs at 370 (or 371, with the carry condition). However, because of the relatively high counting speed, the counters require about two clock pulses to reset at the end of each counting cycle. Therefore, the divider makes use of a two-pulse "early decode" circuit contained in U3, **Figure 3-25.**

When the terminal count logic conditions are satisfied (at the P and B inputs) U3 counts one clock pulse, then drops the $F_0$ output line low. This resets the flip-flops and presets (loads) the counters. At the end of the second clock pulse, the $F_0$ output goes high, starting the count cycle and clocking the VCO phase detector, U5. Therefore, the number detected by U3 is 380 (or 381, in the carry condition) but the actual terminal count is 370 (or 371), because two more prescaler output pulses occur before the $F_0$ output goes high.

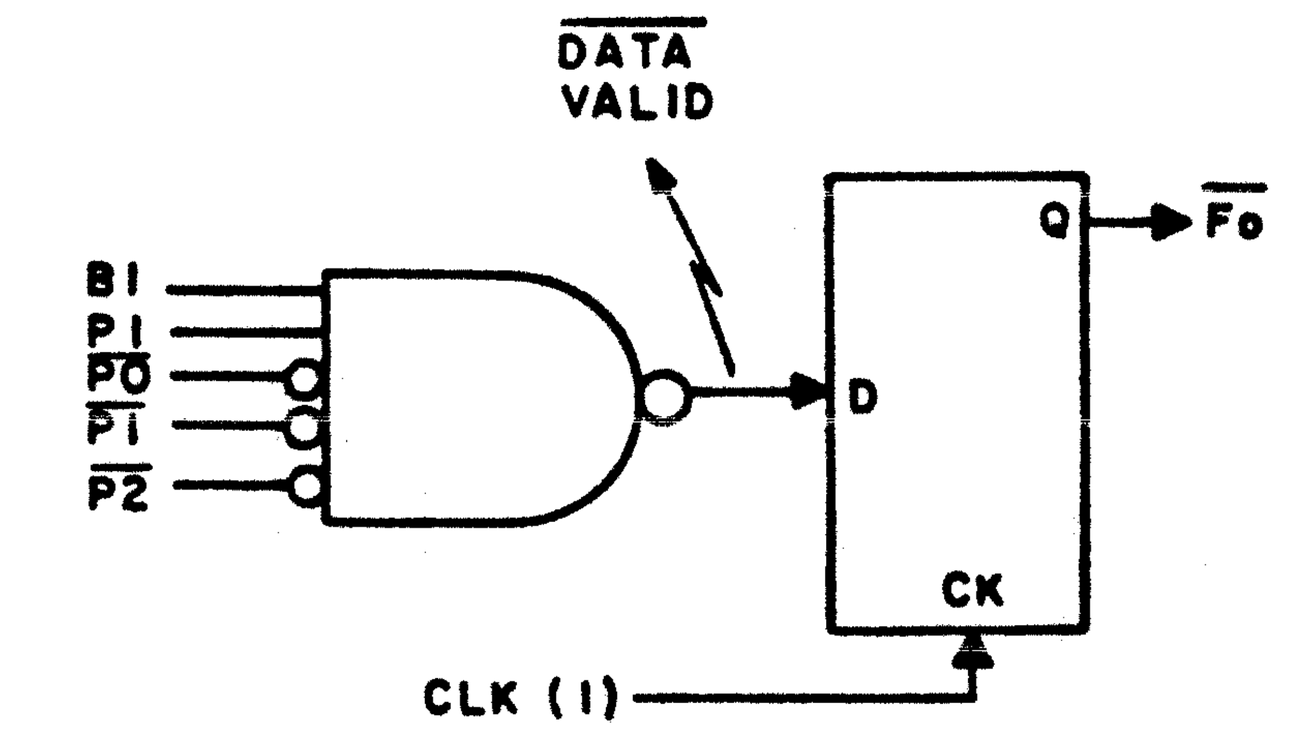



**Figure 3-25. Two-Pulse Early Decode, Count Termination**

### 3.4.16.2.9 VCO Band Select Code

The VCO Band Select circuits are shown in the 1st and 3rd LO Synthesizer schematic diagram, **Figure 6-17**. The purpose of U13, Q2, Q3, and Q4 is to translate the 1st LO frequency range into eight different bands for the VCO. The band select code causes different combinations of inductance to be placed across the VCO tuning circuitry, thereby changing the VCO frequency range.

Octal encoder U13 accepts BCD inputs from the two most significant digits of the 1st LO frequency word and translates them into a binary coded word on $Y_2$, $Y_3$, and $Y_4$. The transistors connected to these outputs supply negative true-code outputs. For example, when $Y_2$ is low, -12 V appears at the base and emitter of Q2 turning the transistor off. This causes the collector to be off and +15 V to appear at output E1. When $Y_2$ is high, Zener diode CR8 conducts causing Q2 to turn on, resulting in a -12 V potential at output E1. The relationship of the band select code to the LO frequency word is detailed in **Table 3-7.**

**Table 3-7. Band Select Coding**

| RF Digit | | Band Select Code (Negative True) | | |
|---|---|---|---|---|
| 10 MHz (U11) | 1 MHz (U10) | $2^2$ (E3) | $2^1$ (E2) | $2^0$ (E1) |
| 0 | 0 | 0 | 0 | 0 |
| 0 | 4 | 0 | 0 | 1 |
| 0 | 8 | 0 | 1 | 0 |
| 1 | 2 | 0 | 1 | 1 |
| 1 | 6 | 1 | 0 | 0 |
| 2 | 0 | 1 | 0 | 1 |
| 2 | 4 | 1 | 1 | 0 |
| 2 | 8 | 1 | 1 | 1 |

## 3.4.17 TYPE 791629 VOLTAGE CONTROLLED OSCILLATOR (A5A1A1)

### 3.4.17.1 Functional Description

**Figure 3-26** is the functional block diagram for the Voltage Controlled Oscillator. The VCO is an integral part of the 1st LO Synthesizer loop, whose inputs are a tuning voltage and a band select code, and whose output is the 1st LO frequency. The VCO operates at a frequency four times the desired 1st LO frequency. The band select code and the tuning voltage combine to tune the oscillator from 171.64 MHz to 291.60 MHz in 40 kHz steps. The oscillator output is amplified by Q2 and split between the buffer amplifier and the Divide-by-4 Assembly. Buffer amplifier Q3 provides the synthesizer with a sample of the oscillator signal. The sample is processed and, if required, a correction is made to the tuning voltage. The amplified oscillator frequency is divided by 4 (by U1) since the oscillator frequency is actually four times the desired 1st LO frequency. Amplifier Q7 supplies a high-level signal for the 1st Mixer. A further explanation of the VCO follows.

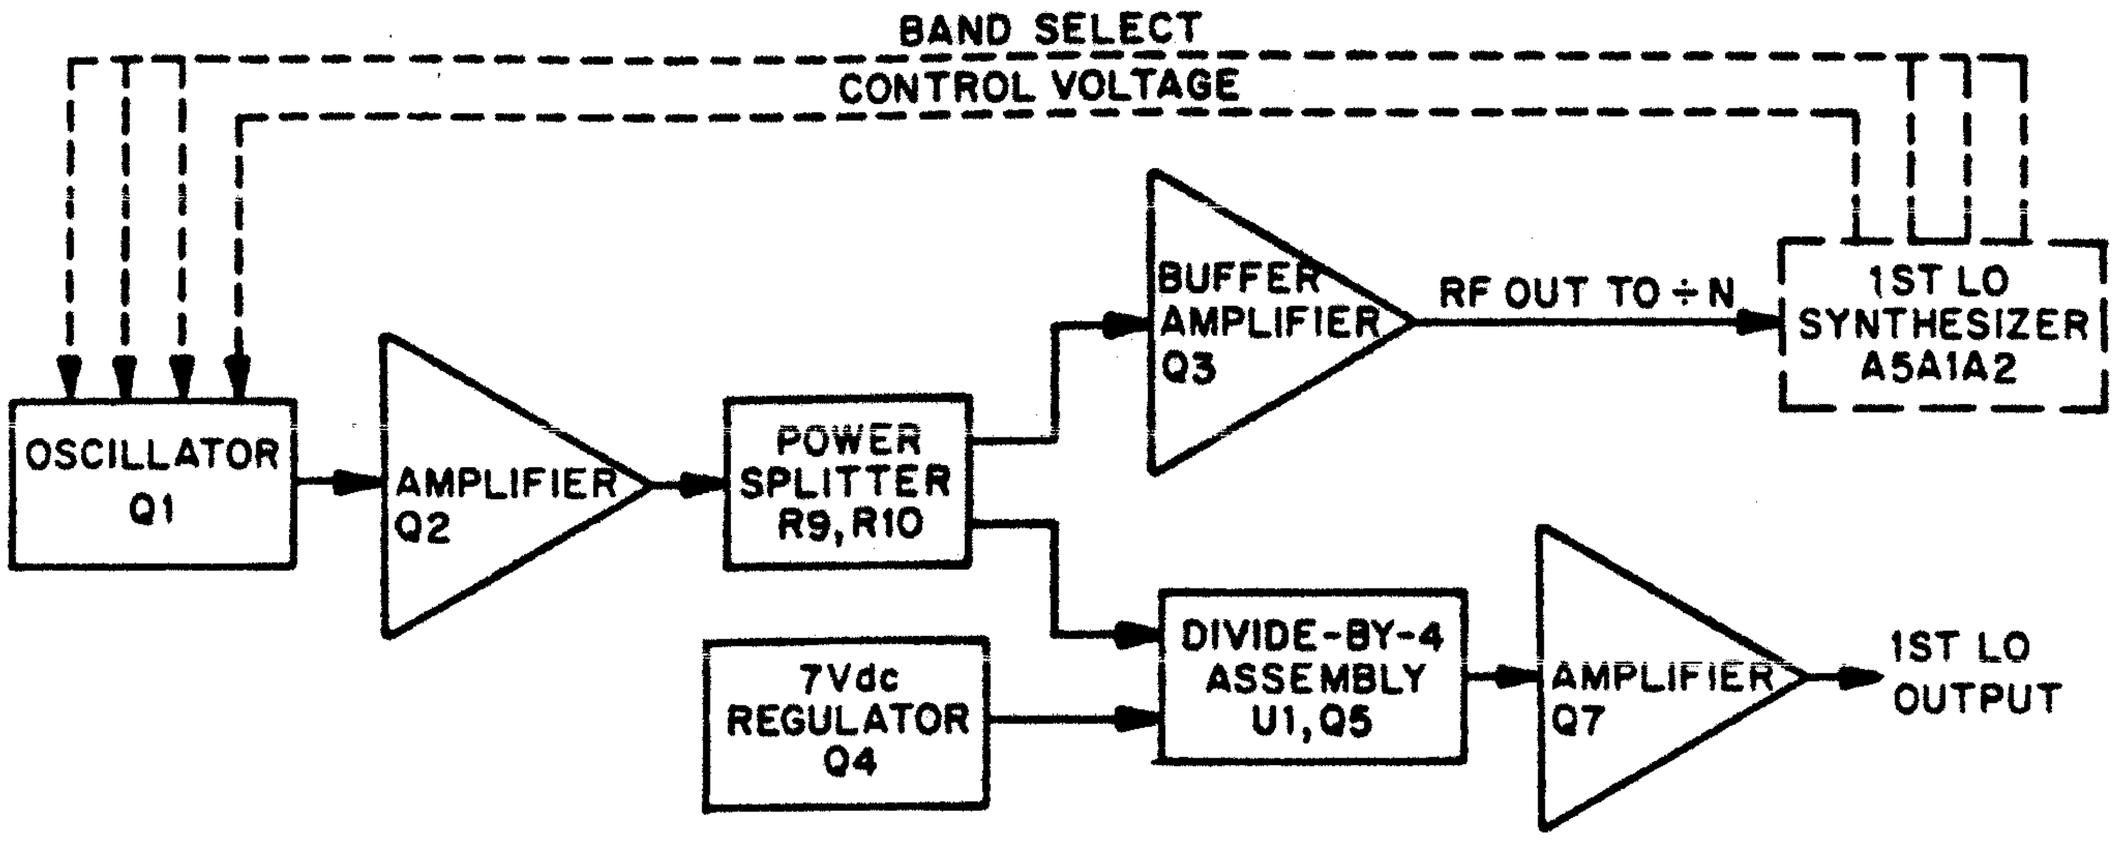



**Figure 3-26. VCO Functional Block Diagram**

3.4.17.2 **Circuit Description**

Refer to **Figure 6-16** for the schematic diagram of this circuit. This description follows the same organization as the functional description given in the preceding paragraph.

Applying a negative-true-code voltage to the BAND SELECT inputs tunes the oscillator to one of eight different frequency bands. When the BAND SELECT inputs are all positive, CR1 through CR3 are off, and L2 through L4 are effectively out of the circuit. This allows the inductance of T1 to be maximum. When any or all of the BAND SELECT inputs are negative, the corresponding diode will conduct and the inductance of T1 will be reduced by the shunting effect of the inductor (L2, L3, or L4). Varactor diode CR4 fine tunes the oscillator in response to the tuning voltage input. Common-emitter amplifier Q2 keeps load changes at the input of power divider R9 and R10 from being reflected back to the output of oscillator Q1. T2 matches the output of the amplifier to the input of the power divider. The signal is coupled to buffer amplifier Q3, which drives the prescaler of the synthesizer. R9 and C15 couple the signal from Q2 to the input of the divide-by-4 circuit U1. MECL divider U1 divides the signal frequency by four and amplifier Q5 isolates its output from load changes. Voltage regulator Q4 provides U1 and Q5 with a -7.0 V power input from the -12 V power supply input to the assembly. Amplifiers Q5 and Q7 provide the relatively high currents needed to drive the input of the 1st Mixer.

### 3.4.18 TYPE 791601 2ND LO SYNTHESIZER (A5A2)

#### 3.4.18.1 Functional Description

The 2nd LO tunes from 32.20001 to 32.21000 MHz in 10 Hz steps. This synthesizer utilizes three phase lock loops to produce the 2nd LO output. The functional block diagram of the 2nd LO is shown in **Figure 3-27.**

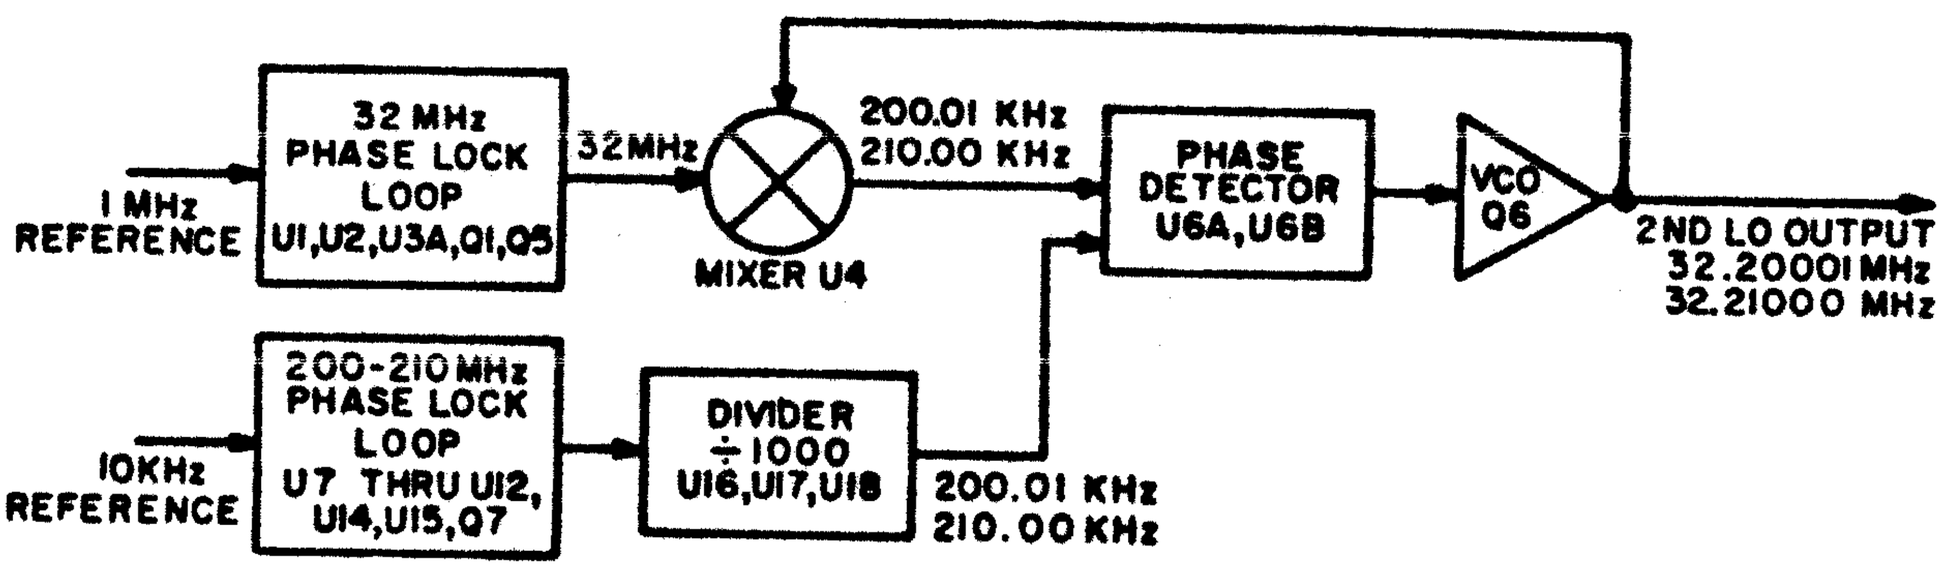



**Figure 3-27. 2nd LO Functional Block Diagram**

The phase lock loop in the upper left section of the diagram has a reference input of 1 MHz from the Time Base and a fixed output of 32 MHz. The bottom phase lock loop is programmable and produces an output from 200 to 210 MHz. This output routes through a divide-by-1000 stage, resulting in a programmable output from 200 to 210 kHz. The third phase lock loop depends on the other two phase lock loops to produce the 2nd LO output.

An explanation of the 2nd LO output loop will clarify the overall operation of this synthesizer. The 2nd LO output routes to mixer U4, where it is mixed with the fixed-frequency phase lock loop output of 32 MHz. This mixer produces the difference of its two input frequencies, resulting in an output within the 200 to 210 kHz range. This output is amplified and level translated for TTL compatibility. Mixer output and divide-by-1000 output signals are compared in frequency and phase by U6A, whose output characterizes the difference betweenits two inputs. Filter U6B integrates the phase detector output into a varying dc voltage which drives the VCO to establish the desired frequency. The VCO output is sent through a buffer amplifier whose output is the 2nd LO.

#### 3.4.18.2 Circuit Description

The circuit description for the 2nd LO follows the same organization as the functional description. The 2nd LO will be discussed in the following order: 32 MHz phase lock loop, programmable phase lock loop, and 2nd LO output loop. The schematic diagram for the 2nd LO is shown in **Figure 6-18.**

The 32 MHz phase lock loop utilizes the basic phase lock loop configuration shown in **Figure 3-17.** The VCO output (from oscillator Q5) is applied to buffer amplifier Q1. The collector output of Q1 routes through a divide-by-2 counter, U3A, and a divide-by-16 counter, U2, dividing the 32 MHz output down to 1 MHz. This signal and the 1 MHz reference from the time base are compared in phase detector U1A, and filtered in U1B (these circuits are described in **paragraph 3.3.2.4**). The dc voltage from U1B varies the capacitance of varactor diode CR3. Q5s oscillation frequency depends on the tuned circuit incorporating CR3. Q1 is a buffer amplifier which has two outputs isolated from each other. C9 and L9 pass the 32 MHz emitter signal to the mixer while rejecting any harmonics of 32 MHz or any 1 MHz signals from the input of U4. The collector output is returned to the counter to close the loop.

The programmable phase lock loop incorporates a two-modulus prescaler, swallow counter, divider, phase detector, filter, and VCO. The output of this loop, from Q7, feeds into U15 and U16. U14 and U15 form a prescaler whose divide ratios are 100 and 101. **Figure 3-28** illustrates the prescaler operation. Individually, U15 is a divide-by-10 or 11 counter and U14 is a divide-by-10 counter. Cascading the two counters results in divide ratios of 100 and 110. This needs additional modifications. U15 divides by 11 when both E5 and E4 are at a low state. This occurs only during the swallow counting sequence when E4 is held low by U11C. U15 divides by 10 for 90 input pulses from the VCO. Because of this, nine input pulses enter U14 at pin 2. At this point U14s ripple clock output, pin 15, goes low for one input pulse. This enables U15 to divide by 11 once. Therefore, dividing by 10 nine times (9x10) and dividing by 11 once (1x11) results in a divide ratio of 101 (90+11). This division of 101 occurs until the swallow counter (U7 and U8) reaches terminal count. From this point, E4 of U15 remains high until the divider reaches terminal count, thus dividing by 10. U11B and U11C detect the state of the swallow counter while U11D detects the terminal count of the divider.

The swallow counter is comprised of U7 (a decade counter) and U8 (a binary counter). U11A, B, and C form the swallow counter terminal count detector. The counter can be loaded with any number between 00 and 99, inclusive. During a load pulse U7 and U8 are loaded, and the output of the NAND latch formed by U11B and U11C is reset. This low signal is sent to the prescaler control input of U15, causing it to divide by 101. When U8 reaches state 1010, sensed by U11A, the NAND latch will be set causing the prescaler to divide by 100. As soon as U8 is clocked to state 1010, U7 will be in 0000 state because up counting is used. Since detection occurs when U7 is 0 and U8 is 10, the terminal count for the swallow counter is 100.

The main programmable counter consists of binary counters U9 and U10. U11D is used as the detector. U9 can be loaded with any value between 0 and 9, and U10 is always loaded with 2. Since binary counters are used, the 2 loaded in the second digit is not worth 20 (2x10), but is worth 32 (2x16). U11D senses a high level on the QA output of U9 and the minimum/maximum output of U10. The first time this occurs while up counting is when U10 and U9 are in states 15 and 1, respectively. Again the 15 in the second digit is worth 240 (15x16), so the terminal count is 240 + 1 = 241. Each count of the programmable counter is equal to 100 counts of the overall divide chain so the actual terminal count for the programmable counter is 241 x 100 = 24100.

Combining the terminal counts of both counters will yield the overall terminal count. The terminal count for the swallow counter was 100 and for the programmable counter was 24100. Therefore, the terminal count for the whole chain is 100 + 24100 = 24200. The programmable counter is always loaded with 32 plus the input to U9 so the overall chain is loaded with 3200 (32x100) plus the inputs to the three stages.

FIGURE 3-28

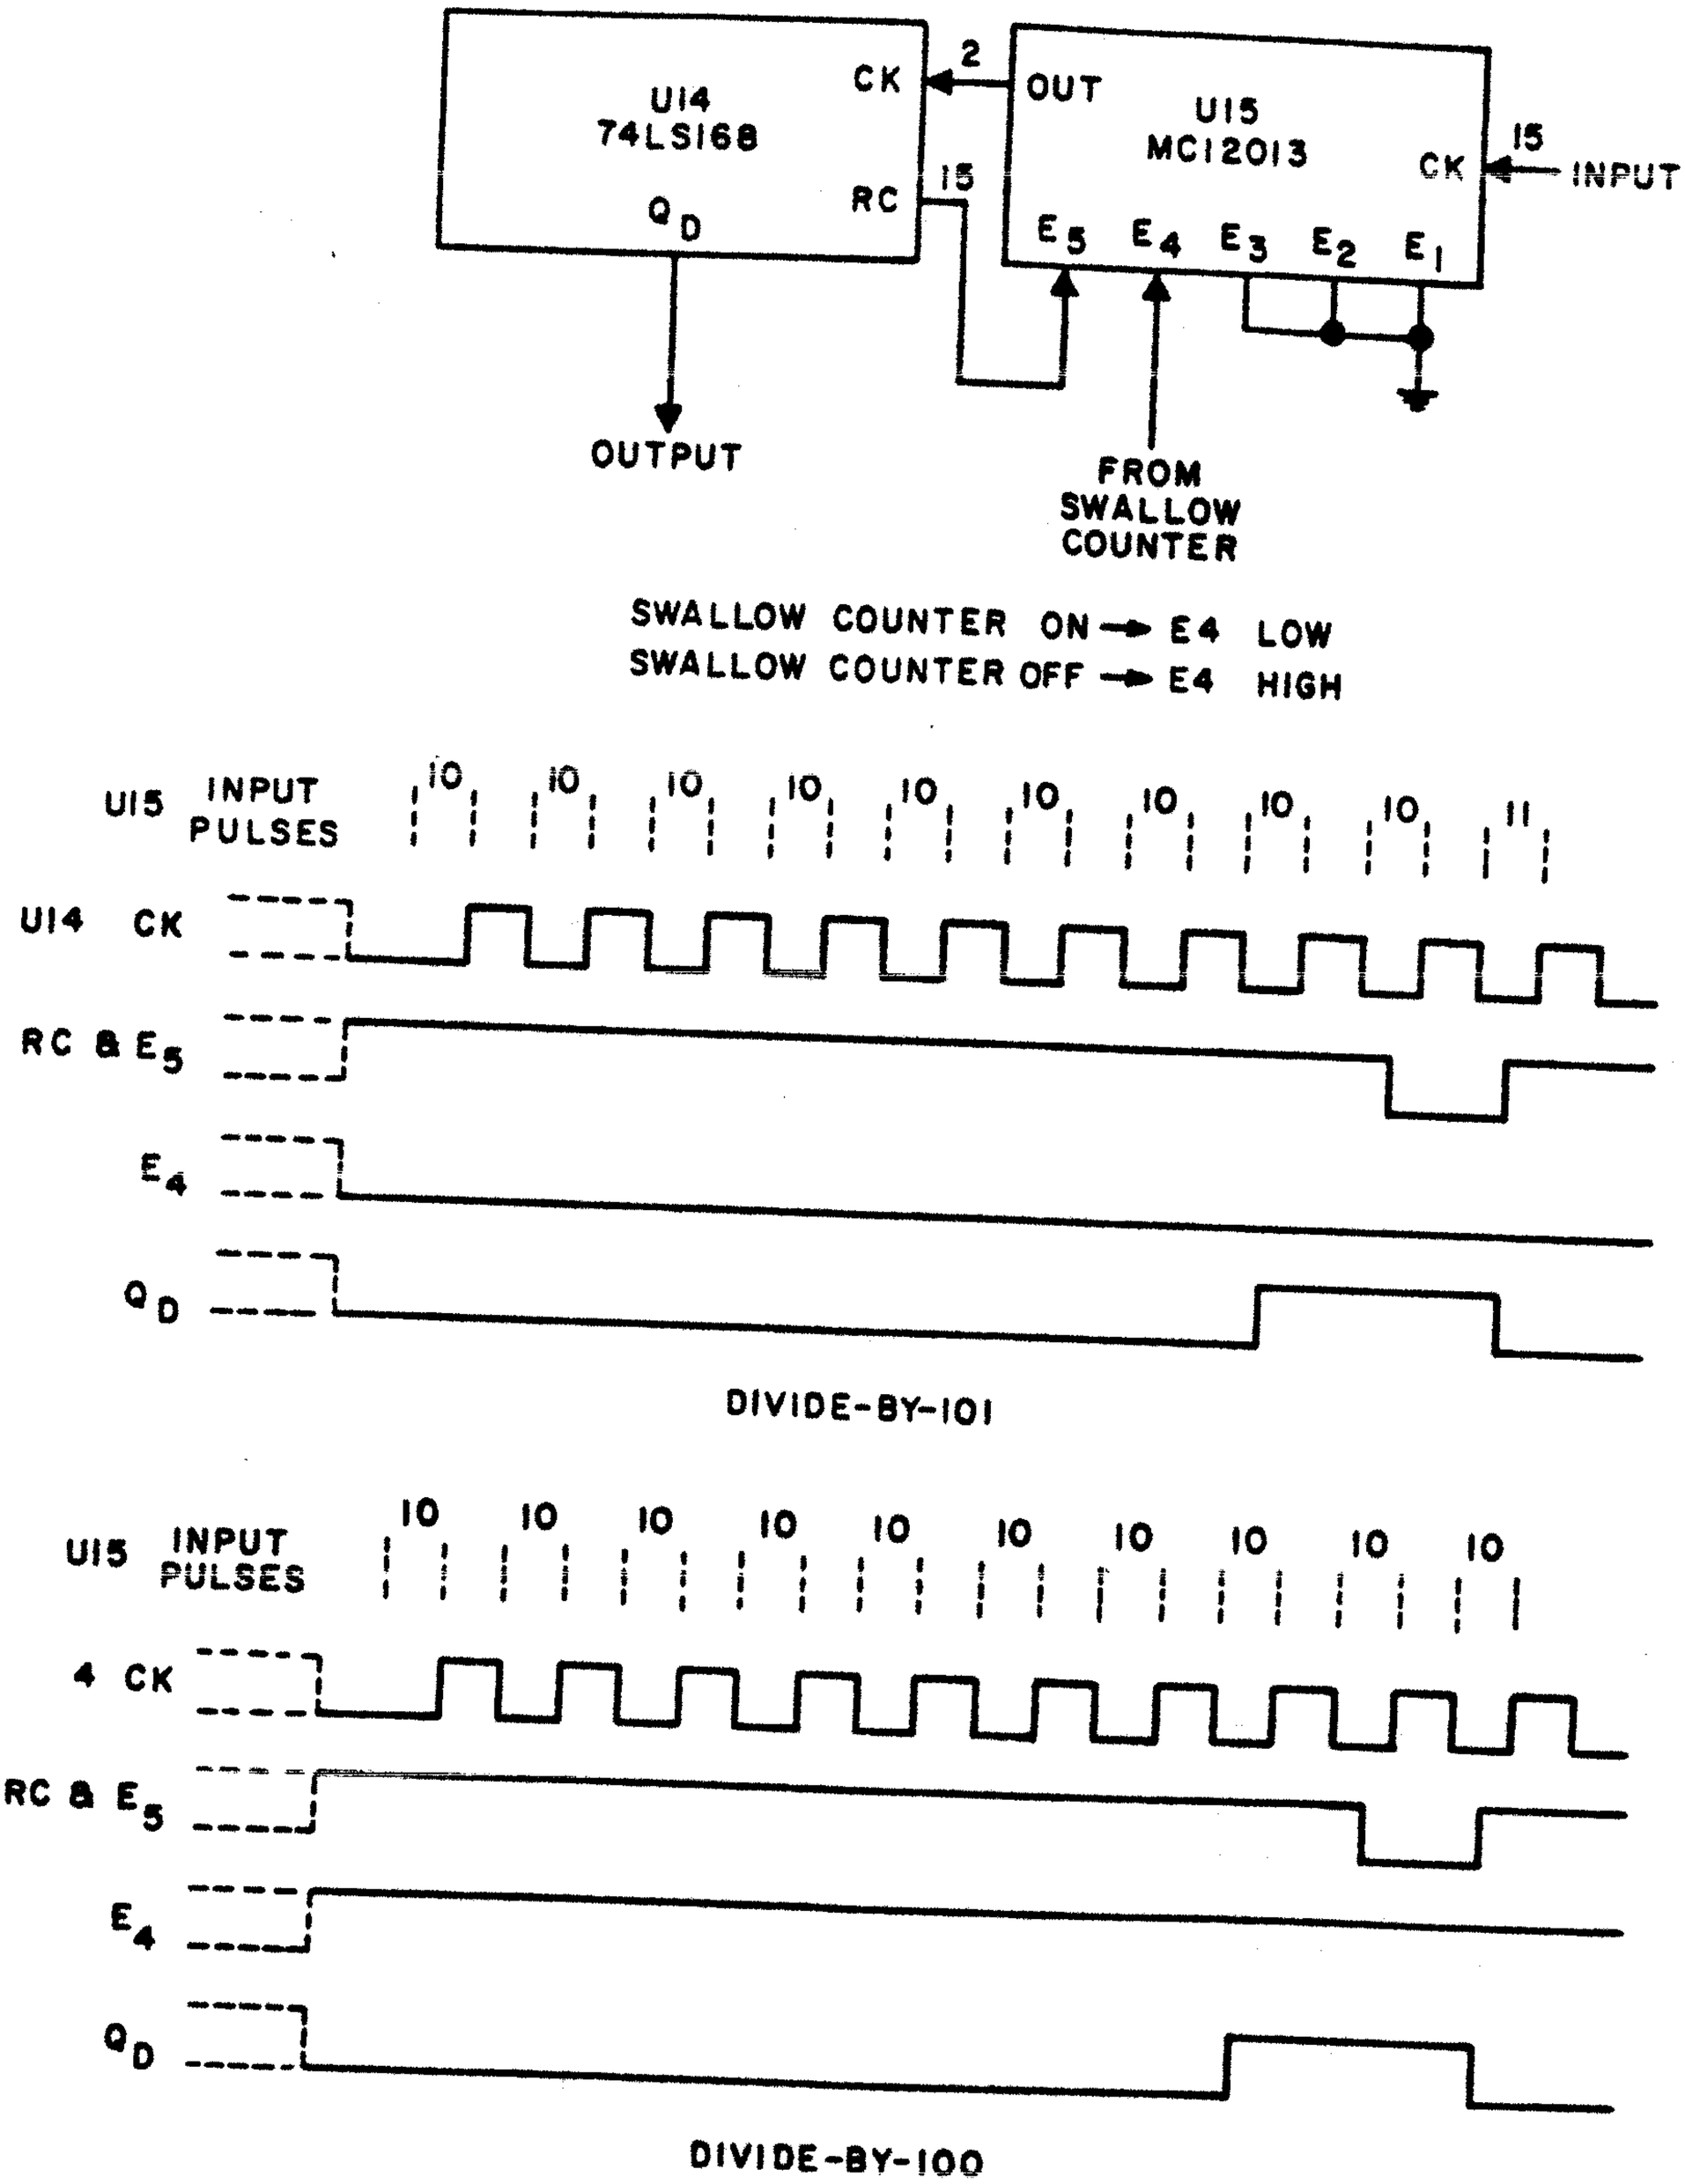



**Figure 3-28. 2nd LO Prescaler Timing Diagram**

Suppose 000 is loaded into the 2nd LO. The input to the counters is 3200 + 000 = 3200. The terminal count is 24200, so the divide ratio is 24200 - 3200 = 21000. Suppose 999 is loaded. The input is 3200 + 999 = 4199. The divide ratio is 24200 - 4199 = 20001. Suppose 500 is loaded. The input is 3200 + 500 = 3700. The divide ratio is 24200 - 3700 = 20500.

Assuming lock is achieved, a 10 kHz signal should be seen at the output of U11D. This signal is compared to a 10 kHz reference frequency from the Time Base, in phase detector U12A, and filtered in U12B (these circuits are described in **paragraph 3.4.15.4**). The dc voltage from U12B varies the capacitance of varactor CR5 which varies the frequency of oscillator Q7. This signal, ranging from 200.01 MHz to 210.00 MHz, feeds the prescaler and routes to a divide-by-1000 circuit. U16, U17, and U19 each are divide-by-10 counters. When cascaded, the circuit provides a division ratio of 1000 (10x10x10). The input to U6A is a signal ranging from 200.01 kHz to 210.00 kHz.

The 2nd LO output loop produces the 2nd LO frequency range of 32.20001 to 32.2100 MHz in 10 Hz steps. This range of frequencies and the 32 MHz signal from Q1 mix in U4, resulting in a difference frequency range from 200.01 kHz to 210.00 kHz.

Differential amplifier U5 accepts the push-pull output from U4 and amplifies the signal approximately 10 times into a single-ended output. Q2 translates the output level of U5 to TTL levels for the input to U6A. This signal and the phase locked frequency from the programmable divider are compared in phase detector U6A, producing dc voltages that are filtered by U6B (these circuits are described in **paragraph 3.4.15.4**). U6B's output varies the capacitance of varactor diode CR4 and tunes oscillator Q6. This output enters a buffer amplifier, Q3, where the signal is output to mixer U4, and is coupled through impedance matching voltage divider C22, C23, to become the 2nd LO output.

## 3.4.19 TYPE 791600-1 3RD LO SYNTHESIZER (A5A1A2)

The 3rd LO is part of the 1st and 3rd LO/Time Base board, Type 791600. The 3rd LO has an input of two reference frequencies from the Time Base and a fixed output frequency of 11.155 MHz. The 3rd LO utilizes a basic phase lock loop configuration and a digital mixing technique. A functional description along with a circuit description is provided below.

### 3.4.19.1 Functional Description

**Figure 3-29** shows a functional block diagram of the 3rd LO. Included in the diagram are reference designations that correspond to the 3rd LO schematic. The 3rd LO is part of the 1st and 3rd LO/Time Base schematic diagram, **Figure 6-17**. The VCXO (voltage-controlled crystal oscillator) for this synthesizer is formed by Q8, Y1, CR7, and their associated components. The oscillator is crystal-controlled to 11.155 MHz, and will be driven into proper phase relationship by the dc tuning voltage applied to CR7. The oscillator signal is buffered by emitter-follower Q9 and is split into two signal paths. One path is to board pin A55, the 3rd LO output. The other path is to flip-flop U21B. The flip-flop acts as a digital mixer, producing an output frequency equal to the difference between the VCO frequency (11.155 MHz) and the frequency that is the nearest integral multiple of the clock frequency (223 x 50 kHz = 11.15 MHz). The difference equals 5 kHz. This signal is applied to phase detector U22 along with a 5 kHz reference derived from the Time Base circuit by U21A. The error pulses are integrated into a control voltage for the VCO.

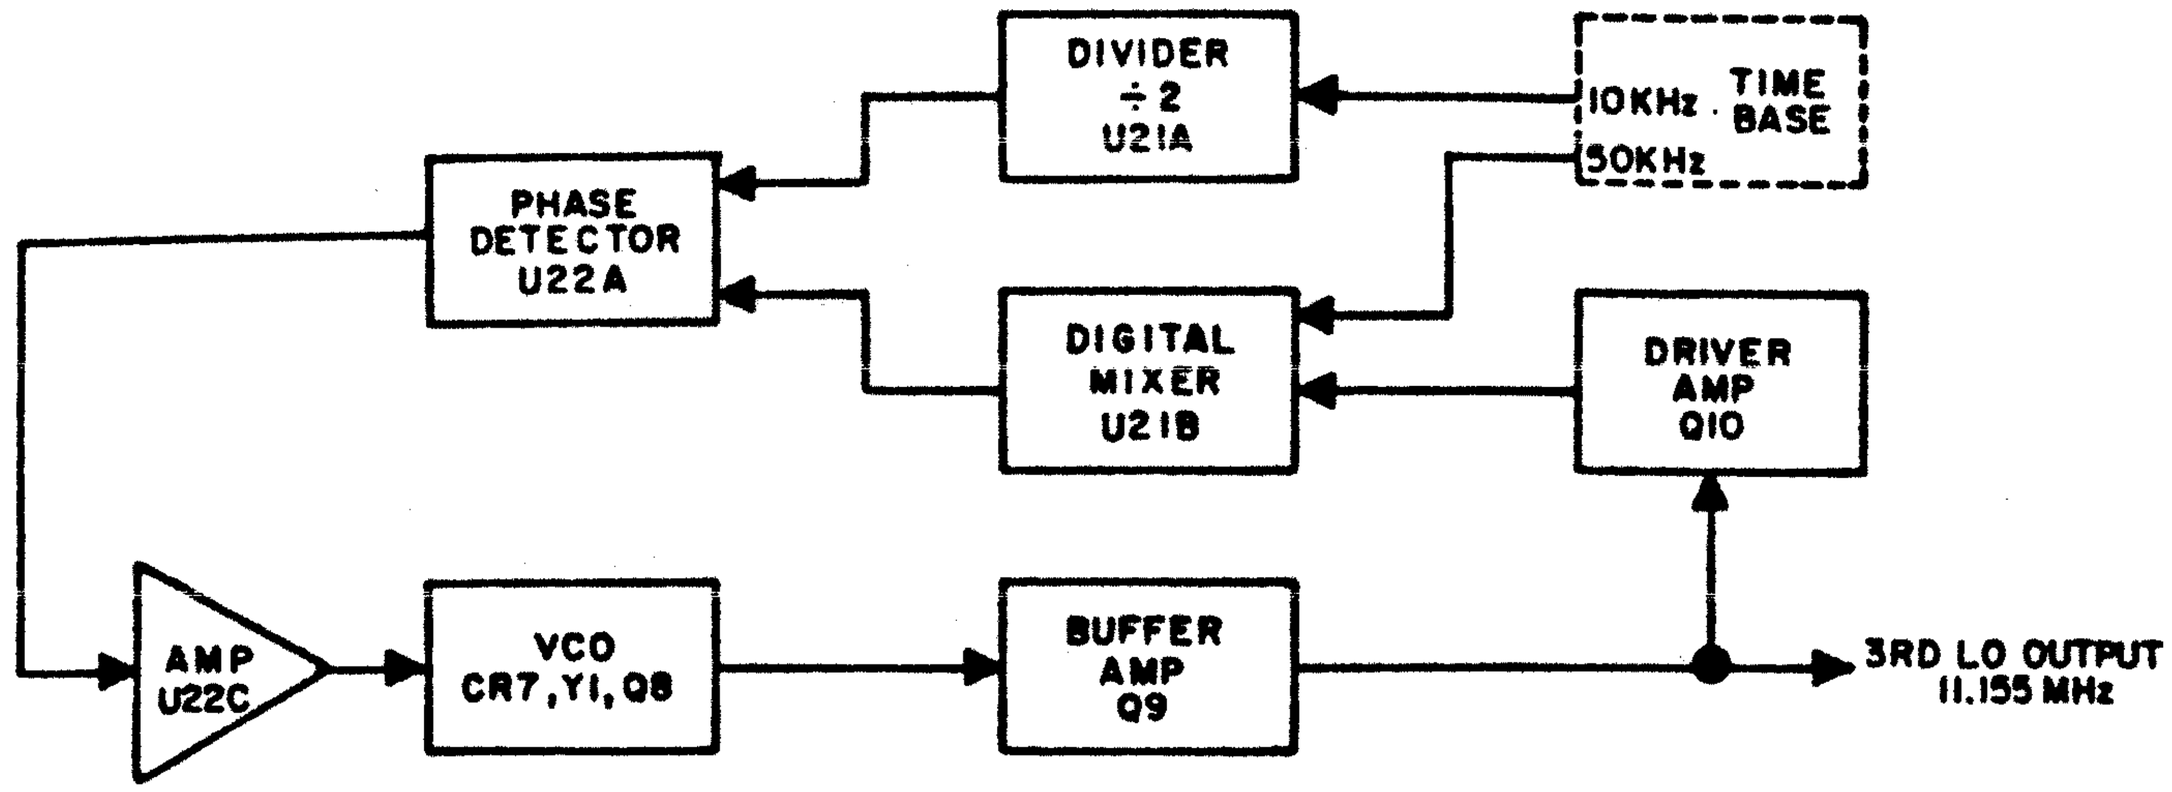



**Figure 3-29. 3rd LO Functional Block Diagram.**

3.4.19.2 Circuit Description

The 3rd LO output, found at pin A55 of the 1st and 3rd LO Synthesizer board (A5A1A2), is roughly a 100 mV rms sine wave. This signal also couples to Q10, through C37, where it is amplified to levels applicable for the digital mixer. The 3rd LO signal is compared to a 50 kHz reference at pin 11 of U21B, to produce a 5 kHz output, when the 3rd LO is locked. This 5 kHz signal from the mixer is compared to a 5 kHz signal from the time base, via divide-by-2 U21A, in the phase detector, U22A. The charge pump U22B converts the differences in phase and/or frequency into positive and negative going dc levels. These levels pass through filter U22C and bias varactor diode CR7. The 11.155 MHz crystal oscillator is then driven in the direction to achieve lock. The 3rd LO frequency then passes through buffer amplifier Q9 and TTL driver Q10 to complete the loop.

Although the VCO incorporates an 11.155 MHz crystal, Y1, a phase lock loop is still needed. The purpose of the phase lock loop is to vary the oscillator frequency for the purpose of phase-locking it with the Time Base. With the phase lock loop disconnected, the crystal oscillator can produce a usable output frequency for the 3rd LO but would not be exactly the correct frequency to mix with the 10.7 MHz output of the 2nd Mixer.

## 3.4.20 TYPE 791576-1 BFO SYNTHESIZER (A5A3)

### 3.4.20.1 Functional Description

The BFO Synthesizer produces a 455 kHz ±8.9 kHz signal. The BFO therefore tunes from 446.1 to 463.9 kHz, in 100 Hz steps. This synthesizer utilizes the basic phase lock loop configuration shown in **Figure 3-17.** The actual phase lock loop operates at a frequency range of 10 times the BFO output to allow for the use of a 1 kHz reference frequency.

A functional block diagram of the BFO Synthesizer is shown in **Figure 3-30.** Some reference designations are included in the diagram and correlate with the BFO schematic diagram, **Figure 6-19.** The functional block diagram does not include all external connections and should only be used with this discussion.

The VCO produces a frequency that is distributed to the BFO output connection (via divide-by-10 counter U10) and to the programmable counter clock inputs. The presettable inputs, in conjunction with the end of cycle detector, create a divide-by-N counter. The end of cycle detector produces pulses which are compared to a 1 kHz reference frequency in the phase detector. The resultant output is pulses that characterize the difference in frequency and phase of the two input frequencies. The loop filter takes the output pulses from the phase detector and integrates them into a varying dc voltage. This varying voltage drives the VCO in the proper direction to establish the desired frequency.

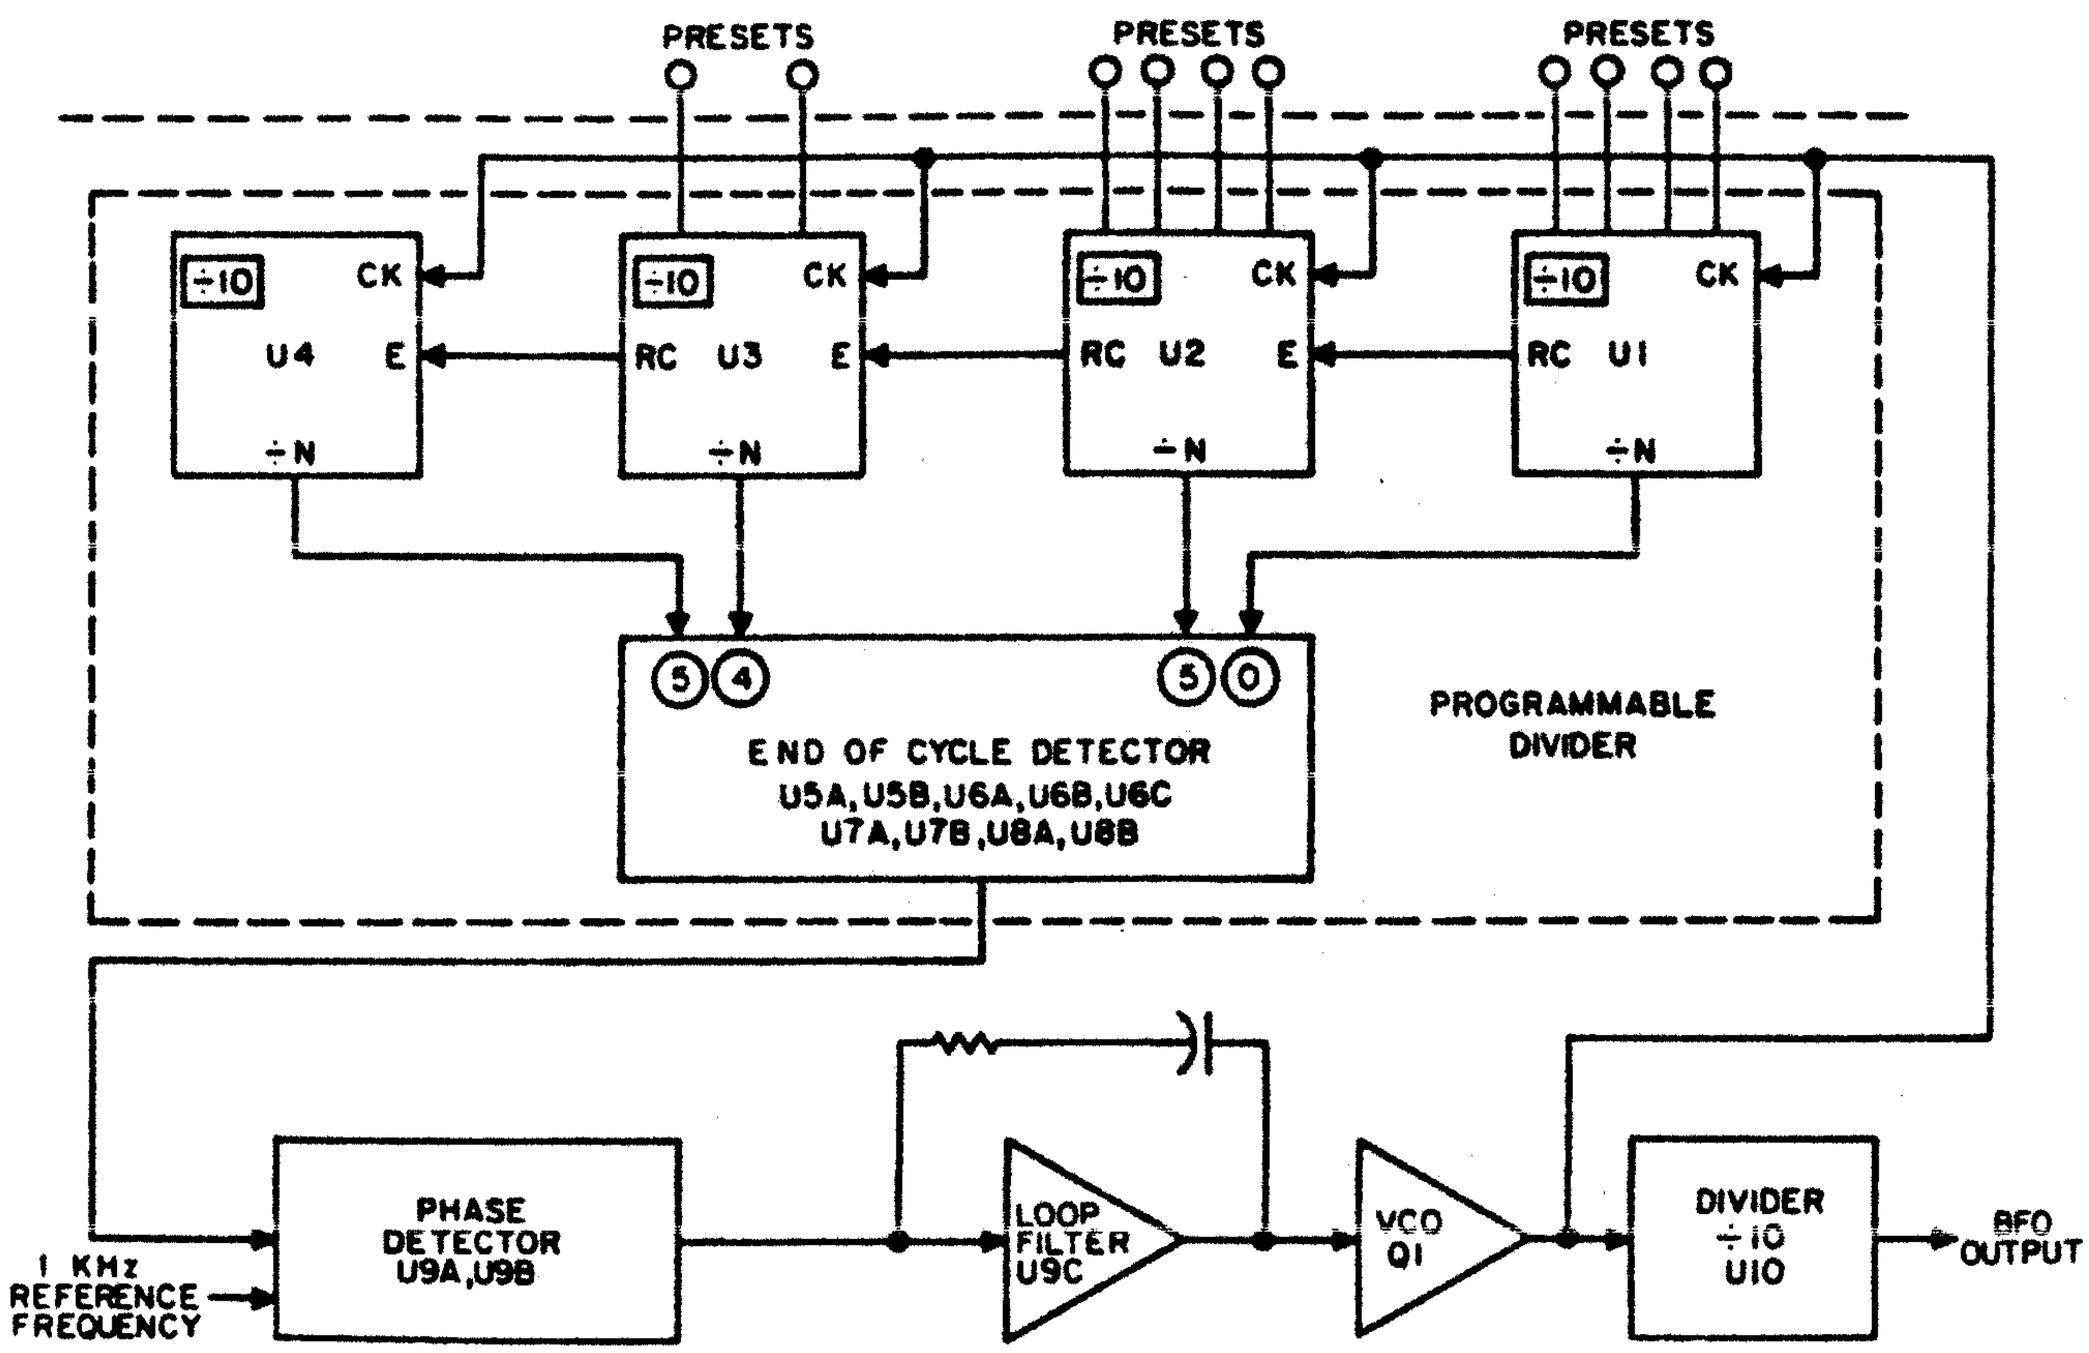



**Figure 3-30. BFO Functional Block Diagram**

3.4.20.2 **Circuit Description**

The circuit description of the BFO Synthesizer is presented in a sequential manner to facilitate understanding. The BFO phase lock loop will be discussed in the following order: programmable divider, phase detector, charge pump, loop filter, and VCO. Integrated circuit data is supplied where needed. The BFO Synthesizer schematic diagram is shown in **Figure 6-19.**

Refer to **Figure 3-30** to aid in the description of the counters used in the programmable divider. U1, U2, U3, and U4 are BCD synchronous up/down counters. These counters may be programmed, through inputs D, C, B and A, for any initial state, 0 through 9. The ripple clock output and count enable input permit cascading. The ripple clock output, normally high, produces a low level pulse when the counter is at 9 when counting up, and at 0 when counting down. A high at the enable input inhibits counting while a low level input enables counting. The direction of count is determined by the level of the up/down (U/D) input. When low, the counter counts up, and when high, it counts down. The preset function is controlled by the state of the load inputs. When a logic low is applied to the load input, the BCD number at the preset inputs (D, C, B and A) is loaded into the counter, and counting will begin from that number.

The programmable divider must produce an output of 1 kHz for any input signal in the range of 4.461 to 4.639 MHz. Therefore, the divide ratio of the programmable counter must be from 4461 (4.461 MHz+1 kHz) to 4639 (4.639 MHz+1 kHz). Because counters U1 through U4 are cascaded (by connecting the ripple clock of one to the enable of another) and have a maximum count of 10000 (10x10x10x10), additional circuitry is needed to reduce the divide ratio.

To reduce the maximum count, an end-of-cycle detector circuit is used to terminate the count sequence. The end-of-cycle detector, consisting of U5A, U5B, U6A, U6B, U6C, U7A, and U7B terminates the counting of U4, U3, U2, and U1 at 5450. When this number is detected, a pulse is sent to the phase detector (U9) and the counters are reset.

Now that a terminal count has been established, an explanation of the presettable inputs follows. The preset of U4 is always set (hard wired) to 0000. U3 has two preset inputs which depend on the direction of counting. These inputs to U3 connect to the plus or minus (±) thumbwheel switch for variable BFO selection. Selecting a negative (-) BFO frequency enters a 1001 into U3 and the counters count up. Selecting a positive (+) BFO frequency enters a 0000 into U3 and the counters count down. U2 has nine possible preset input states from BCD 0000 to 1000. U1 has ten possible preset states from 0000 to 1001. These possible preset states are determined by the setting of the BFO switch. Selecting a zero BFO offset (±0.0 kHz) grounds all preset inputs of U1 and U2, loading both counters with 0000. Also, selecting a "0" from the "+, 0, -" thumbwheel grounds all thumbwheel preset inputs causing a zero BFO offset. In all sideband modes, the BFO offset line is grounded, in turn grounding the presets of U1 and U2 and loading them with 0000. Refer to the BFO Switch Truth Table, **Table 3-9**, for further clarification of the BFO Switch operation.

Knowing the possible input values of the divider and the end-of-cycle detection number, an example will help explain the count sequence (refer to **Figure 6-18**). Assume that counters U4, U3, U2, and U1 are all loaded with 0000. This corresponds to a BFO frequency of 455 kHz, a VCO frequency of 4.55 MHz, and a BFO thumbwheel setting of 0.0 kHz. A "+" thumbwheel setting initiates down counting. Therefore, counting from 0000 down to 5450 results in a divide ratio of 4550. (Note that the next count down from 0000 is 9999). With a divide ratio of 4550, the counters will reach a terminal count 1000 times a second with an input frequency of 4.55 MHz.

Notice that setting the thumbwheel switches to -0.0 kHz indicates the same VCO frequency, 4.55 MHz, but initiates "up" counting. A negative "-" setting enters a 1001 (BCD 9) in U3, making the count start from 0900. With an input of 0900 counting up to 5450 results in the same divide ratio of 4550.

Assume a BFO frequency of 460.4 kHz is needed. This corresponds to a thumbwheel selection of +5.4 kHz, and a VCO frequency of 4.604 MHz. From the thumbwheel selection, a "+" presets U3 with a 0000, a "5" presets U2 with a 0101, and a "4" presets U1 with a 0100. Therefore, counting from 0054 down to 5450 results in a divide ratio of 4604. With a divide ratio of 4604, the counters will reach terminal count 1000 times a second with an input frequency of 4.604 MHz.

U8A and U8B have two purposes: to send a pulse to the LOAD input of the counters for presetting and to extend the width of the end of cycle detector's pulse.

The phase detector, U9A, receives a fixed 1 kHz frequency at its reference input, pin 1, and a signal from the divider at its variable input, pin 3. These two signals produce an output that characterizes their differences in frequency and phase. The charge pump, U9B receives this pulsed waveform from the phase detector outputs and translates them to fixed positive and negative-going amplitude levels (centered about 1.5 V).

These levels are filtered and integrated by the loop filter, Q4 and U9C, providing the tuning voltage for the VCO. A more complete description of the phase detector can be found in **paragraph 3.4.15.4.**

Buffer Q4 provides a high-input impedance for the preceeding stage. Positive and negative going pulses at the gate are developed across the source output and applied to inverting amplifier U9C. The output of U9C is coupled back to the gate of Q4, through R3 and C1, providing the integrating action. Potentiometer R1 establishes zero gate to source voltage (Vgs) to Q4.

Emitter-coupled oscillator Q1 with its external tank circuit comprises the VCO. Varactor diode CR1 receives a control voltage from the active filter and adjusts the tank circuit's frequency of oscillation to establish lock. The VCO operates from 4.461 to 4.639 MHz. Resistors R8, R9, and R10 form the dc bias network, and feedback capacitor C7 sustains oscillation along with tuned circuit C8 and L1. R11 and C9 form a low-pass filter for +15 V isolation, and the VCO's output is coupled to the next stage by C10.

Q2 and its surrounding components form a tuned amplifier for the incoming VCO output frequency. This VCO sine-wave frequency is then coupled to a sine-wave to TTL converter, Q3. From here, the digital signal returns as the clock input of the programmable divider, and is divided by 10 in U10 and provided as the BFO output signal.

### 3.4.21 TYPE 791600-1 TIME BASE CIRCUITS (A5A1A2)

The Time Base circuits are part of the Type 791600 board, A5A1A2. The Time Base circuits have two sources of reference from which to choose. A functional description is given along with the functional block diagram shown in **Figure 3-31.** Reference designations are included in the diagram and correlate with the Time Base portion of the 1st and 3rd LO/Time Base Schematic, **Figure 6-17.**

#### 3.4.21.1 Functional Description

The Time Base can be controlled internally with a 2 MHz temperature compensated crystal oscillator (TCXO) and divide-by-2 frequency divider, or witha 1 MHz external source.

This 1 MHz reference is divided down to 50 kHz, 40 kHz, 10 kHz, and 1 kHz. Buffer amplifiers Q6 and Q7 are used for isolation purposes. Synthesizers that need certain reference frequencies are listed below each frequency in the diagram. Refer to the schematic diagram in **Figure 6-17.** S2 in **Figure 3-31** represents the function of U23.


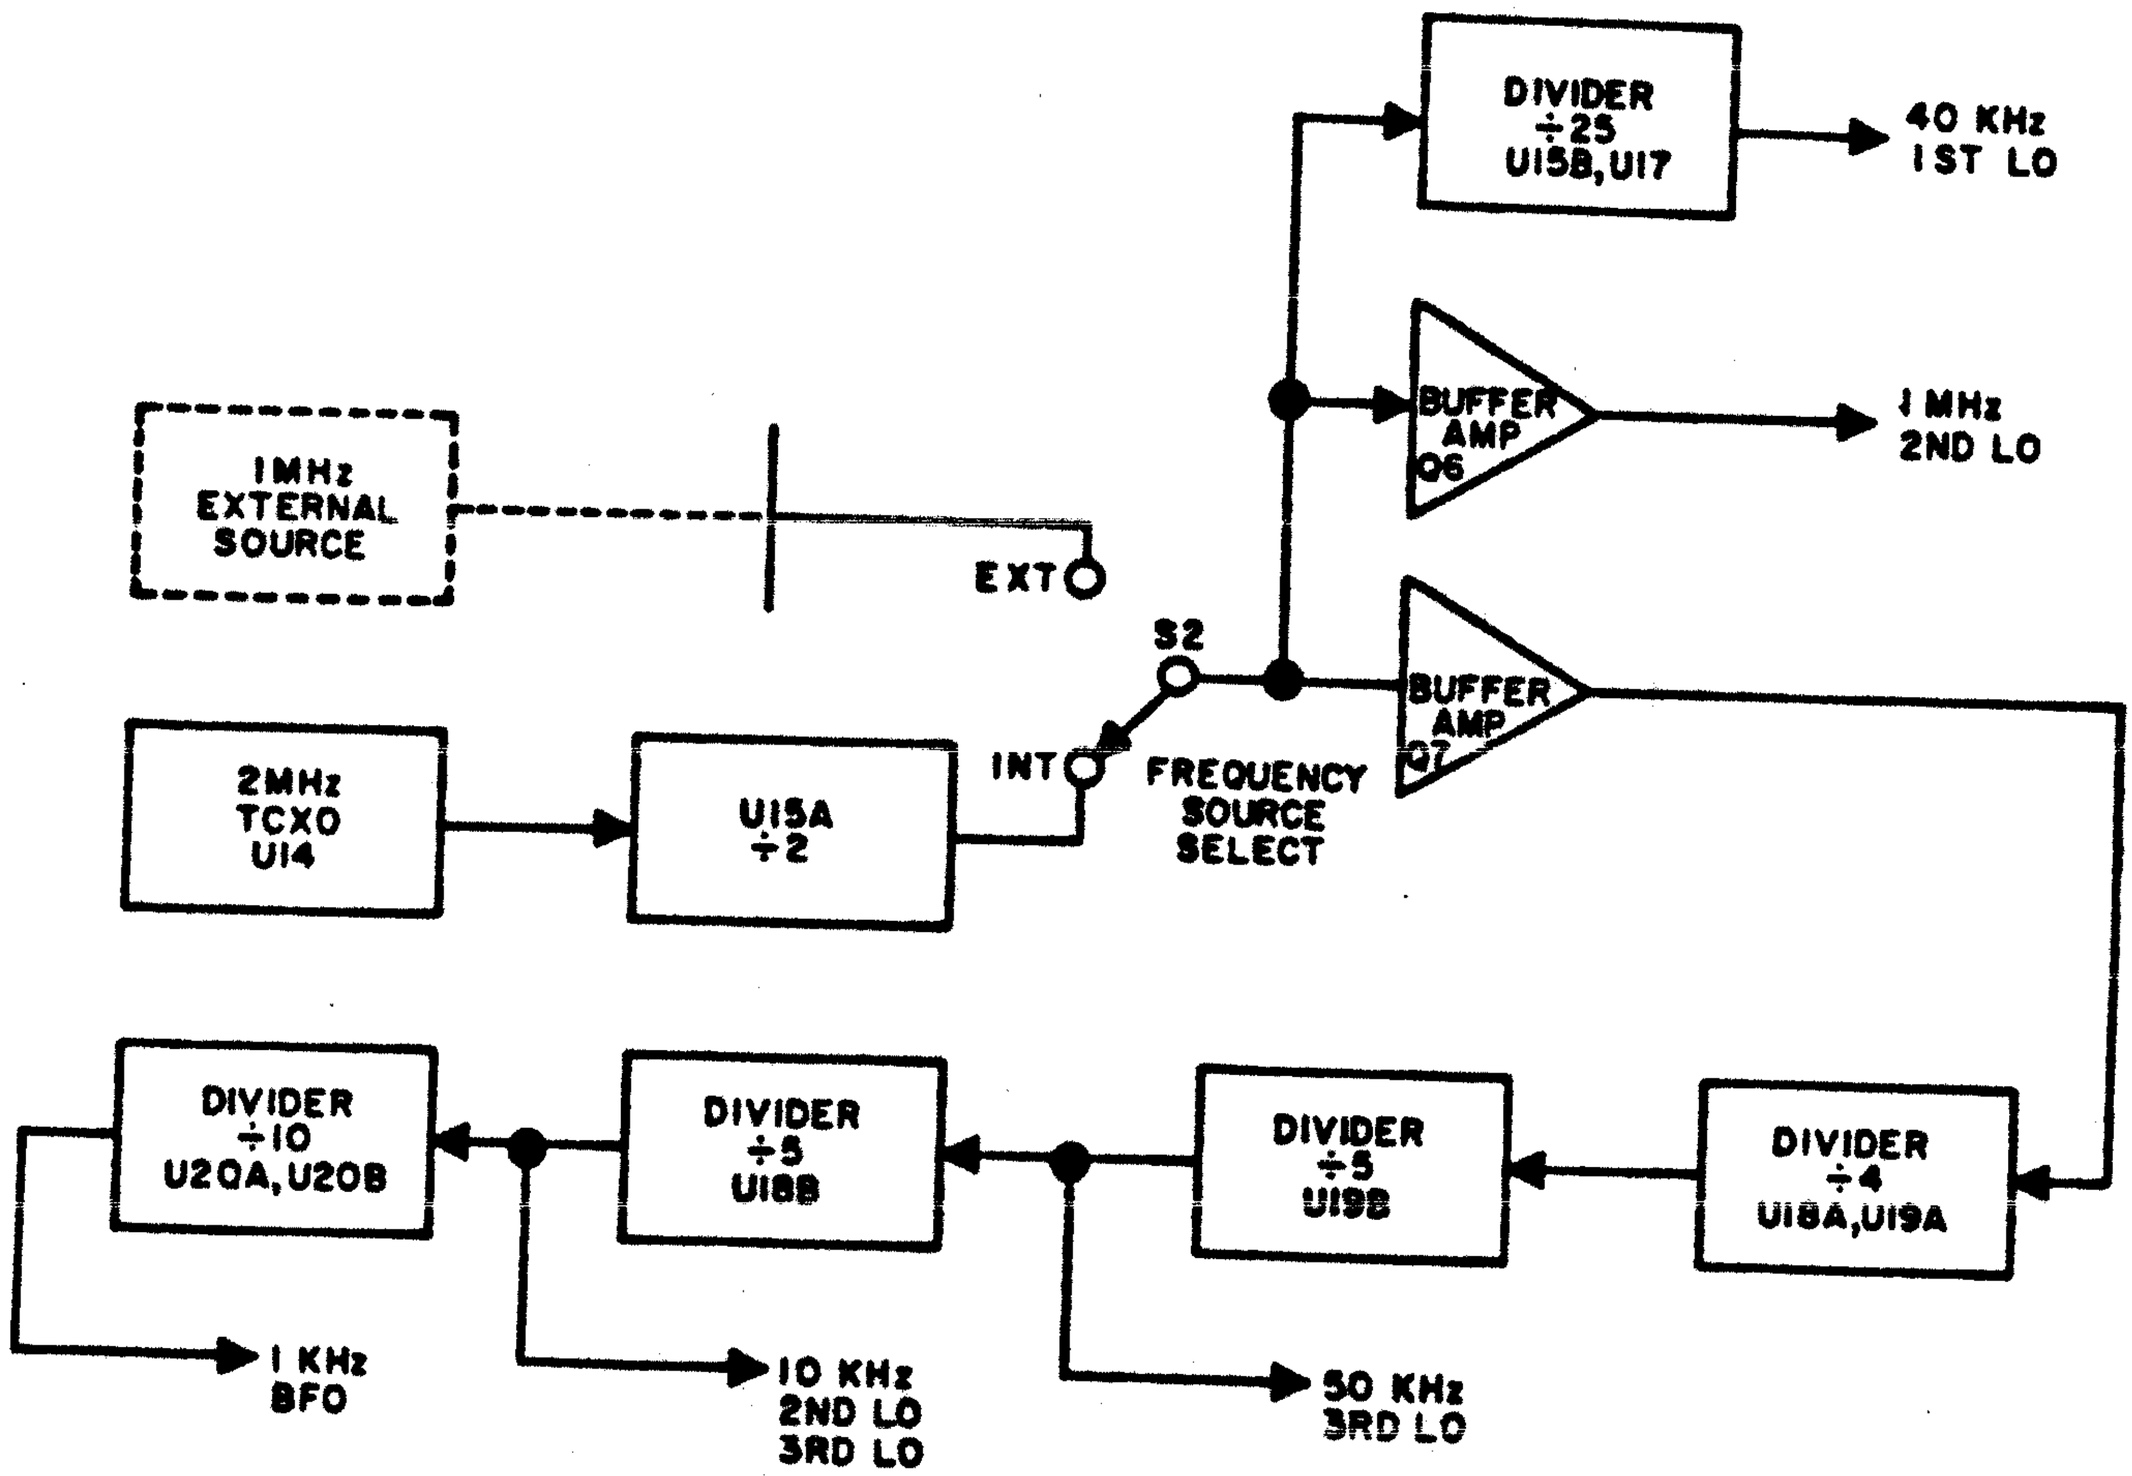



**Figure 3-31. Time Base Circuits Functional Block Diagram**

3.4.21.2 **Circuit Description**

An internal source of reference is provided by a 2 MHz TCXO, while an external source of reference must be a 1 MHz signal of approximately 50 mV. Tri-state buffers accomplish the switching of internal and external reference sources. A truth table of the tri-state buffers used is given in **Figure 3-32.** Getting information from input A to output Y depends upon the state of input C. Information passes from input A to output Y when the state of input C is low. Similarly, information is inhibited from the output when the state of input C is high.

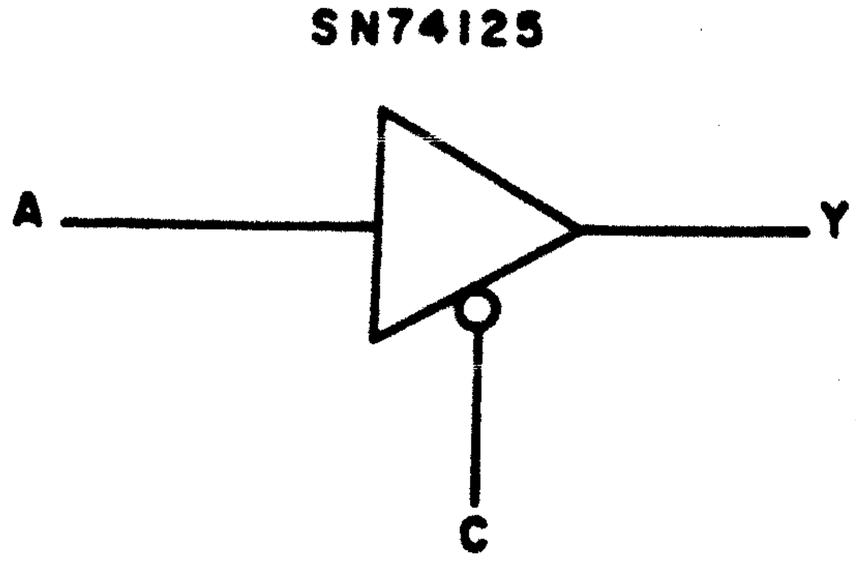When operating with an external source of reference, the external select (EXT SEL) line is grounded and the internal select (INT SEL) is pulled high by R84, and the externally supplied 1 MHz reference is seen at module pin A17, EXT/INT STD. The internal 1 MHz reference is inhibited when it reaches tri-state buffer U23B. Therefore, the only source for the 1 MHz signal to transformer T1 is the external one. T1 and C23 resonate at 1 MHz while the voltage divider of R34 and R35 shifts the 1 MHz signal to a 2.5 Vdc level. This signal enters U16 which converts the sine wave to TTL levels. The output of U16 passes through tri-state buffer U23A and on to the rest of the Time Base circuits.




U23A
U23B
U23C

TRUTH TABLE

| INPUTS | | OUTPUTS |
|---|---|---|
| A | C | Y |
| H | L | H |
| L | L | L |
| X | H | HI-Z |

**Figure 3-32. Tri-State Buffers**

Operation with the internal source grounds the internal select (INT SEL) line and allows the external select line to be pulled up by R85. Tri-state buffer U23 allows the 2 MHz signal that is divided to 1 MHz to be passed on to the rest of the circuitry. The 1 MHz reference splits to two parts of the circuit. In one direction, the reference signal passes through U23C and out the EXT/INT STD connection. The signal does continue to pass through U16 but is inhibited at U23A. In the other direction, the reference signal passes to pin 3 of U23A (EXT) or pin 11 of U23B (INT), and on to the rest of the time base circuitry.

For either source of reference, a 1 MHz TTL signal is present at the input of Q6 and U15B. This signal is divided by 25, through U15B and U17, to become a 40 kHz reference for the 1st LO. The 1 MHz signal also passes through an isolation amplifier Q6 to board pin A9 to be used as a reference for the 2nd LO. The 1 MHz signal also passes through another isolation amplifier, Q7, to be divided down to three more reference frequencies.

U18A and U19A form a divide-by-4 network whose input is 1 MHz and whose output is 250 kHz. This 250 kHz divides down to 50 kHz through divider U19B and is sent to U21B, the digital mixer of the 3rd LO. The output of U19B also enters U18B, whose output is a 10 kHz signal. This signal leaves the board to be used as a reference for the 2nd LO, and is divided to 5 kHz by U21A to act as a reference for the 3rd LO circuit. The 10 kHz signal also passes through a divide-by-10 network, consisting of U20A and U20B, for an output reference signal of 1 kHz.

### 3.4.22 TYPE 791630-1 1ST AND 3RD LO SYNTHESIZER/TIME BASE (A5A1)

This assembly is located in the right-hand side of the receiver and connects the 1st and 3rd LO/Time Base circuit board to the 1st LO VCO circuit board. The connections include three lines for the VCO band select code, two lines for the VCO tuning voltage, and one line connecting the VCO output to the 1st LO divider section. Also on this board is a -12 Vdc regulator that supplies voltage to both the 1st LO Synthesizer and the 1st LO VCO.

The schematic diagram corresponding to this circuit board is shown in **Figure 6-15.** The tuning voltage connects to the VCO through a 40 kHz trap (C1, C3, L1, L2, and L3) and a low-pass filter (C4, C6, C8, R4, and 14). CR1, CR2, and CR3 provide a 1.8 V potential on the tuning voltage reference line. A -15 Vdc potential from the 1st LO circuit board enters pin 3 of the voltage regulator VR1 and is regulated to a -12 Vdc output on pin 2. The -12 Vdc is supplied to the VCO, to power its circuits, and to the 1st LO Synthesizer to power lead-lag filter U7 and the band switching circuit.

### 3.4.23 TYPE 791575-1 MANUAL TUNING UP/DOWN COUNTER (A6A1)

The Manual Tuning Up/Down Counter contains the RF frequency data. This information is sent to the 1st and 2nd LO Synthesizers, and is encoded for multiplexing to the display board. The frequency data can be changed in two ways: from the Manual Tuning Module via front panel control, or from the Remote Input Jack by an external controller. A block diagram of the Up/Down Counter is shown in **Figure 3-33.** The functions of the Up/Down Counters and the multiplexer are presented below followed by an overall circuit description.

#### 3.4.23.1 Integrated Circuit Data

The 14510 is a presetable up/down decade counter and is shown in **Figure 3-34.** Pin 15 is the clock input. The counter will increment for each rising edge of the clock when the up/down input (pin 10) is high; when pin 10 is low, the counter will decrement. If the parallel enable input (pin 1) is high, clocking is inhibited and the information on the P inputs are transferred to the corresponding Q outputs. Cascading of counters is accomplished by tying the carry input (pin 5) of one counter to the carry output (pin 2) of the preceding counter and by connecting the control inputs (clock, up/down, parallel enable) in parallel. If the carry input is high, the counter is inhibited from clocking. The carry output, normally high, goes low during a carry condition. Carry conditions occur when the counter is in a 0 state during down counting or when the counter is in a 9 state during up counting. Therefore, any stage in a counter chain will clock only when all preceding stages are in a carry condition.

The 14512 is an eight-input data selector and is shown in **Figure 3-34.** Control inputs A, B, and C select which of the data inputs, $X_0$ to $X_7$, is gated to output Z. The data input selected is determined by the binary equivalent of the control inputs. When activated, the disable line will force a low on the Z output and the inhibit input will cause it to go to the high impedance state. Inhibit and disable inputs are not used in this application.

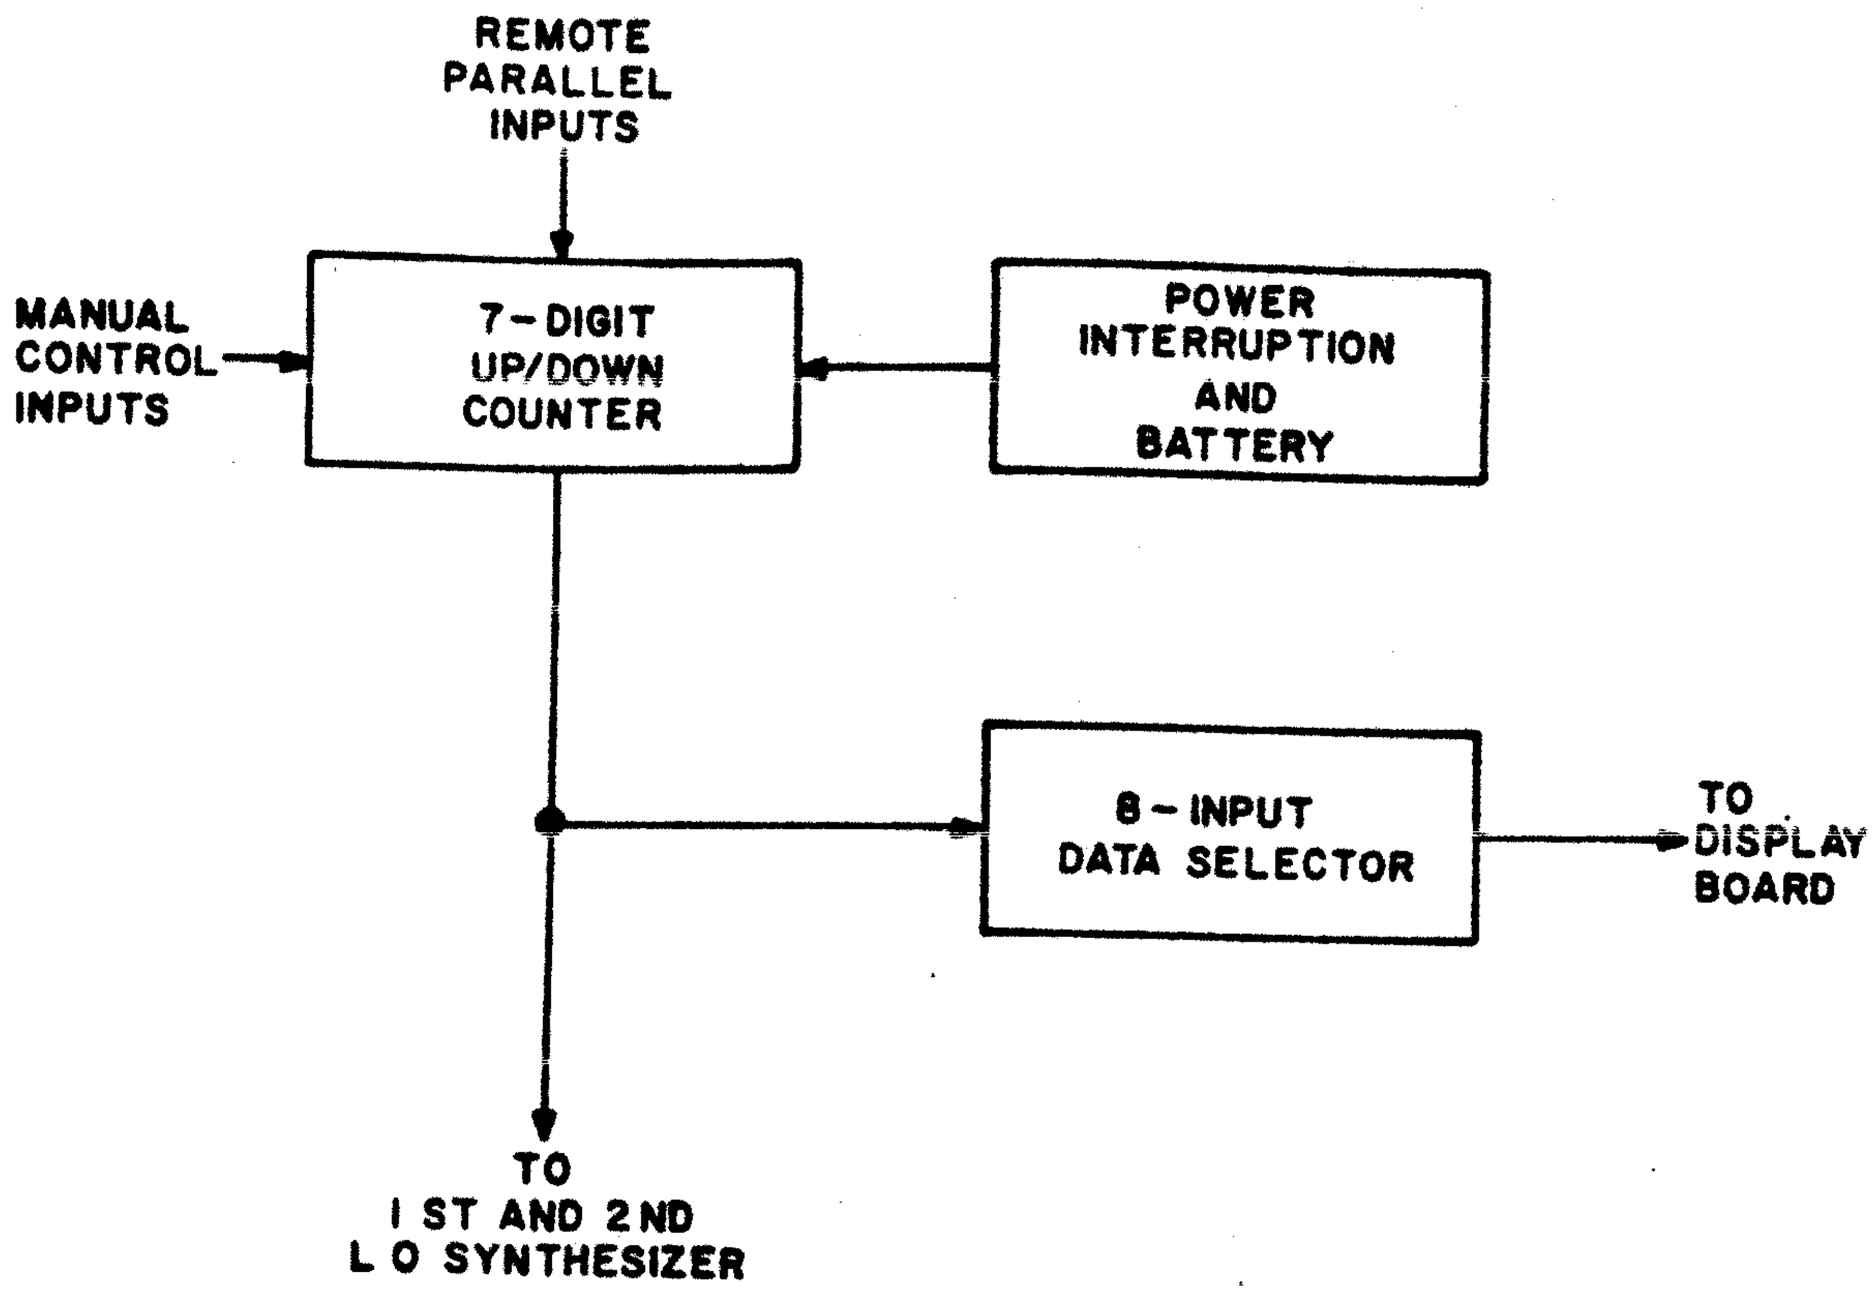



**Figure 3-33. Manual Tuning Up/Down Counter Block Diagram**

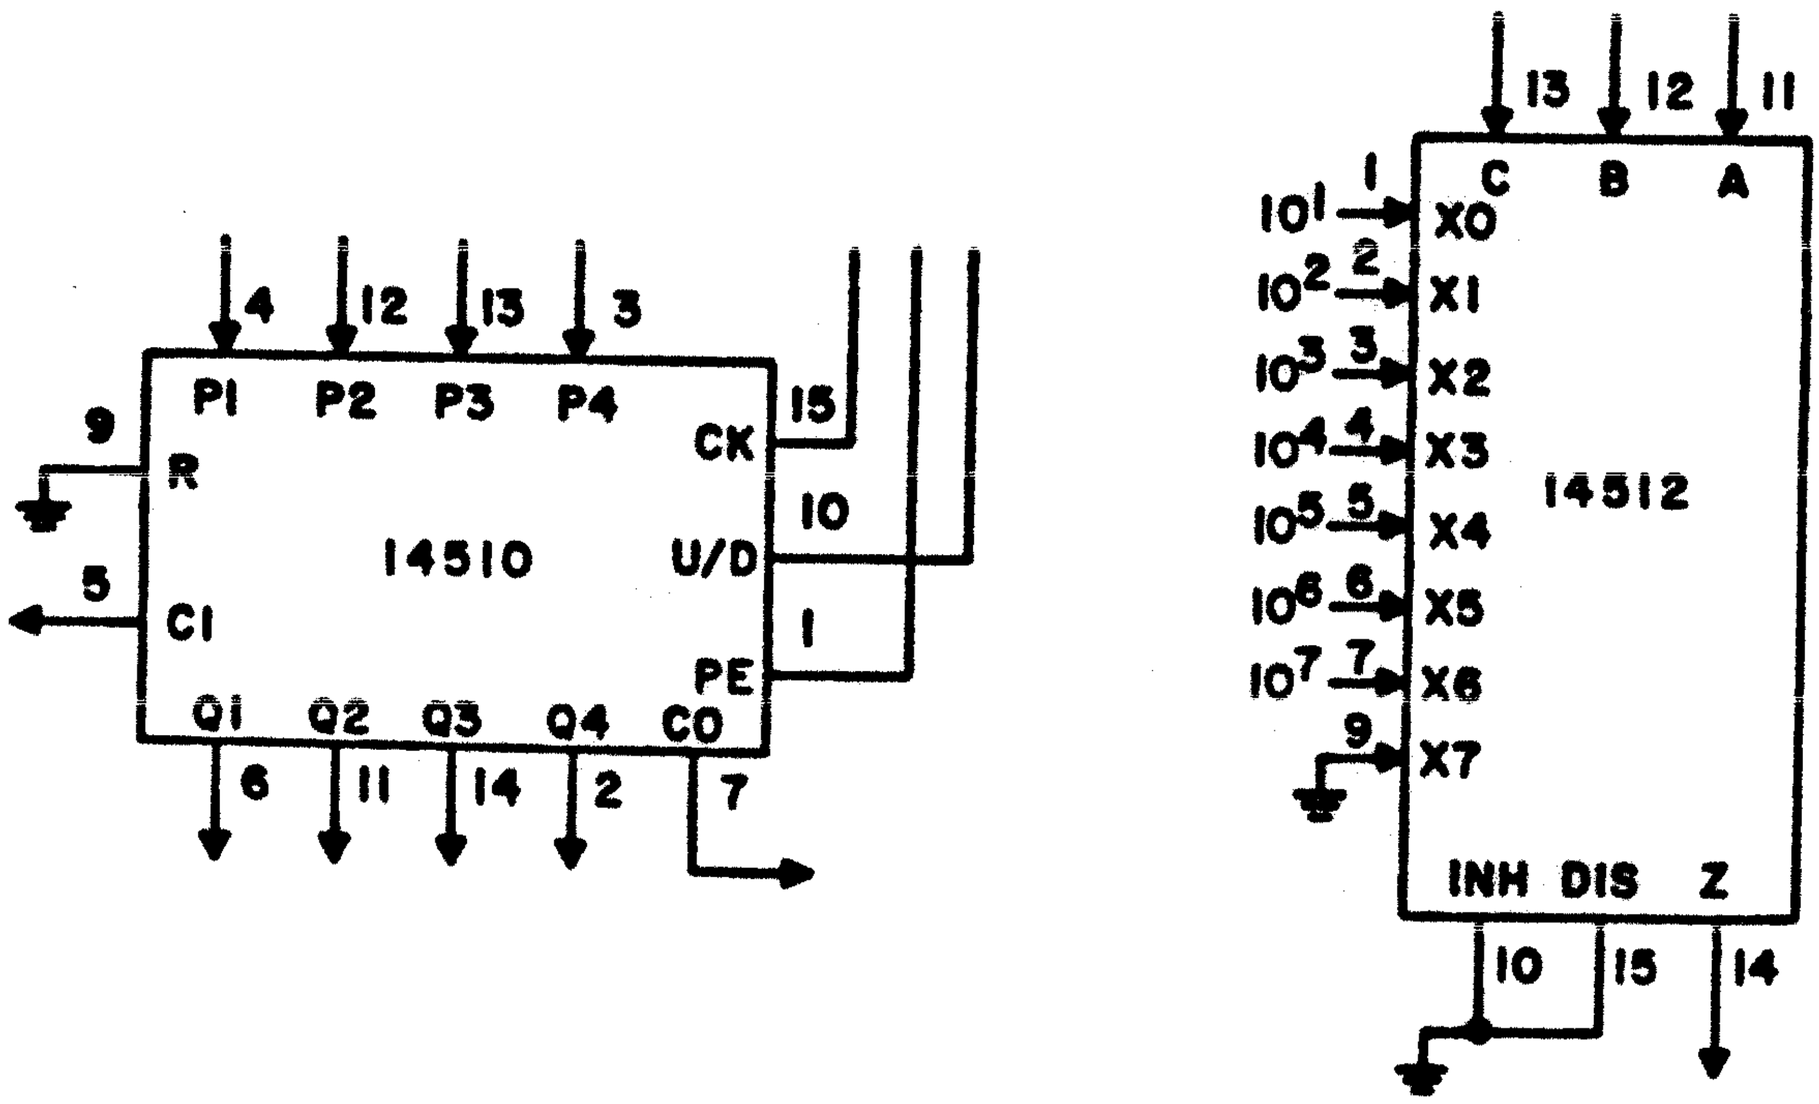



**Figure 3-34. Up/Down Counter Integrated Circuit Data**

### 3.4.23.2 Circuit Description

The schematic diagram for this circuit is shown in **Figure 6-21**. The Up/Down Counter is comprised of U2 through U11. U2 through U7 are MC14510s cascaded to form a six-digit presettable up/down decade counter. U1F, U8C, U9, U10, and U11 form the last stage of the counter. U9 is a dual JK flip-flop. U1F, U8C, U18B, U10B, and U10D form the logic to control the states of U9. During up counting, U9 will clock from 0 to 2 and then back to 0 again. Down counting will produce states in the opposite direction. U11, U10C, and U10A form the logic to preset U9. With the remote frequency load line low, the outputs of U11 will all be low, having no effect on U9. If the load line is high, U9A will reset if the $2^0$ of $10^7$ input is high and clear if it is low; U9B will reset if $2^1$ of $10^7$ is high and clear if it is low. U8A, U8B, and U8D are used to gate the carry outputs of the first three stages to be used for the tuning resolution select. The tuning resolution switches provide a short to the step select switch output (normally low) for the activated switch and an open circuit for the switches not chosen. Resistors R5 to R8 are pull-up resistors to provide a high level on the open circuited lines. If the $10^1$ switch is selected, counter U2 will be enabled. Since the other lines will all be high, all AND gates will be enabled. The resultant is a normal seven decade counter. If the $10^2$ step select is chosen, AND gate U8D will be disabled. U2 will be inhibited since its carry input will be high. Since the carry input of U3 is now always low, it will clock for each pulse received on its clock input. U8B and U8A will still be enabled allowing for normal carry operation. The counter now behaves as though counter U2 is no longer in the circuit. If the $10^3$ select is chosen, both U2 and U3 are disabled; if the $10^4$ is chosen, U2, U3, and U4 are disabled.

The clock and direction signals are from the Manual Tuning Module. When up counting is desired, the clock line lags the direction line by $90^\circ$; when down counting is desired, it leads by $90^\circ$. U1A and U1E are Schmitt triggers to buffer the input signals. Since both clock and direction lines are inverted, the relative sense between the two signals is maintained. During up counting, the rising edge of the clock will always occur when the direction line is high, causing the counter to increment. In down counting, the rising edge will always occur when the direction line is low, decrementing the counter.

The P inputs of the counters are connected to the Remote Input Jack, J1. When the remote frequency load line is pulsed high, the levels on the P lines will be transferred to the outputs of the counter. If the load line returns low the counter will resume clocking from the new data. The Remote Input Jack also contains lines from the IF bandwidth select circuitry. This allows remote control/monitor of the IF BW.

The RF frequency information is sent to the 1st and 2nd LO Synthesizers via the I/O and Synthesizer Motherboards. It is also sent to multiplexers U12 to U15. U12 receives the $2^0$ bit of each digit, U13 receives the $2^1$ bit, U19 received the $2^2$ bit, and U15 receives the $2^3$ bit. The control inputs out U12 to U15 are all tied in parallel and feed to a binary counter U16. This counter is continuously clocked from an oscillator formed by U1C, U1B, C2, and R14. The frequency of oscillation is approximately 2.3 kHz. The outputs of U16 are also sent to J2 for decoding on the display board. The outputs of U12 to U15 are buffered by U17.

Operation of the data selector is as follows: when the counter U16 has all zeros on its outputs, the A, B, and C inputs of U12 to U15 will be low. This will gate all $X_0$ inputs to their respective Z outputs. The information sent to the display board via J2 will be:

If $Q_2\ Q_1\ Q_0 = 000$, then:

$2^3\ 2^2\ 2^1\ 2^0 = 10^1$ Digit

When the oscillator clocks U16 again, the outputs will become 001. This will cause the $X_1$ input of each multiplexer to appear at its respective Z output. As the counter U16 clocks, all X inputs will be sent to the Z output in the code shown in **Table 3-8.**

**Table 3-8. Data Selector 14512, Digit Control Codes**

| $Q_2$ | $Q_1$ | $Q_0$ | $2^3\ 2^2\ 2^1\ 2^0$ |
|---|---|---|---|
| 0 | 0 | 0 | $10^1$ Digit |
| 0 | 0 | 1 | $10^2$ Digit |
| 0 | 1 | 0 | $10^3$ Digit |
| 0 | 1 | 1 | $10^4$ Digit |
| 1 | 0 | 0 | $10^5$ Digit |
| 1 | 0 | 1 | $10^6$ Digit |
| 1 | 1 | 0 | $10^7$ Digit |
| 1 | 1 | 1 | All Low |

This information can now be decoded on the display board. The display board determines which digit is present on the $2^3$, $2^2$, $2^1$, and $2^0$ lines by decoding the $Q_2$, $Q_1$, and $Q_0$ inputs.

During power down, the RF frequency is remembered by powering the Up/Down Counter from BT1 (2.5 V) mounted on the receiver rear panel. Diode CR1 is used to charge the Nicad battery when power is on and to isolate the battery from the rest of the receiver when power is down. It is a hot carrier diode, dropping only about 0.4 V when forward biased. When power is on, $V_{DD}$ is at 5 V, forward biasing the diode and charging the battery through R9. If power fails, $V_{DD}$ drops to 0 V and diode CR1 becomes reverse biased, allowing battery current to flow only to the chips connected to $V_{DD2}$.

The purpose of Q1 and its circuitry is to inhibit all counters when power down occurs. Without it, the counters could clock when power was again applied to the encoder assembly, because the clock input could go from a low (during power down) to a high (during power up).

Transistor Q1 controls the step select switch ground. When power is on, the 10 V across voltage divider R11 and R12 will turn Q1 on, which will place a low on the step select common. If the 10 V line drops below 7 V, the base of Q1 will drop below 0.7 V, and the transistor will turn off placing a high on the step select common through resistor R10. This high will prevent any of the step select lines from going low. The step select button chosen will short to a high level now, not a low, and the unchosen switches will still be pulled high by resistors R5 through R8.

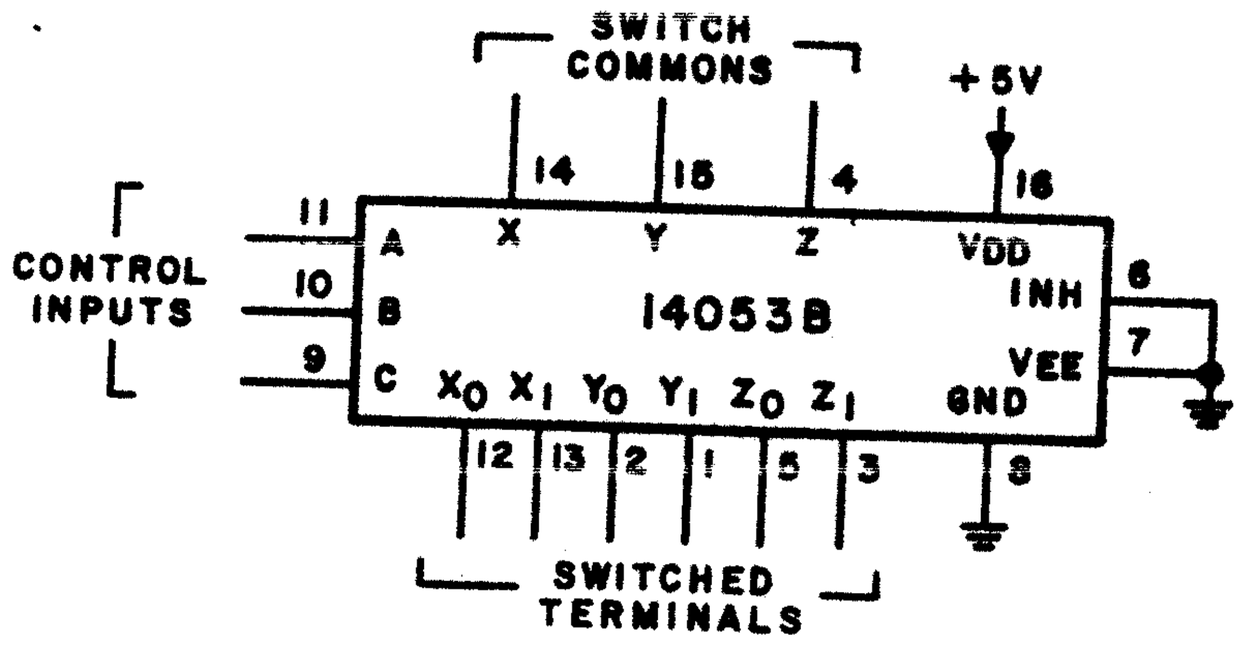
### 3.4.24 TYPE 791828-1 FRONT PANEL INTERCONNECT (A6A2)

This module translates information received from the manually controlled front panel into control information for the receiver. Front panel information entering this module controls detection mode, gain mode, meter mode, and IF bandwidth, in addition to headphone and RF gain levels. This information is then decoded, for use primarily in the IF stages of the receiver. Two output lines from the Front Panel Interconnect, however, control the BFO. The schematic diagram for this module is contained in the Front Panel Interconnect Schematic Diagram, **Figure 6-22.** I/O Motherboard Schematic Diagram, **Figure 6-20**, and Receiver Main Chassis Schematic Diagram, **Figure 6-25**, should be referred to as an aid in understanding Front Panel Interconnect Operation.

This circuit description will explain the operation of each manually-controlled input to this module and how it decodes and sends the information to the IF and BFO circuits. The Front Panel Interconnect board incorporates two integrated circuits, U1 and U2, which will be discussed below.

As can be seen from the schematic diagrams, most of the lines from the front panel are simply passed through to the rest of the receiver. For these lines, this module serves as a patch panel. For the IF bandwidth lines and certain detection mode lines, diode logic is performed by CR1-3, CR5-10 and U2 to control the combinations of IF filters, as described in **paragraph 3.3.3.9.**

The truth table for analog multiplexers U1 and U2 is shown in **Figure 3-35.** This IC performs as three digitally controlled SPDT switches. When control input A is logic low, terminals X and $X_0$ are internally connected. When A is logic high, X and $X_1$ are connected. Similarly, input B controls Y, $Y_0$, and $Y_1$ and input C controls Z, $Z_0$, and $Z_1$. This circuit performs most of the logic functions associated with the front panel pushbuttons for detection mode (on A10A1) and IF bandwidth (on A10A2). Refer to **Figures 6-20, 6-22** and **6-25** for the following descriptions. Notice that both A10A1 and A10A2 have their own set of "E" terminals to A10P1, using some of the same numbers.




| CONTROL INPUTS | | | ON SWITCHES | | |
|---|---|---|---|---|---|
| C | B | A | | | |
| 0 | 0 | 0 | $Z_0$ | $Y_0$ | $X_0$ |
| 0 | 0 | 1 | $Z_0$ | $Y_0$ | $X_1$ |
| 0 | 1 | 0 | $Z_0$ | $Y_1$ | $X_0$ |
| 0 | 1 | 1 | $Z_0$ | $Y_1$ | $X_1$ |
| 1 | 0 | 0 | $Z_1$ | $Y_0$ | $X_0$ |
| 1 | 0 | 1 | $Z_1$ | $Y_0$ | $X_1$ |
| 1 | 1 | 1 | $Z_1$ | $Y_1$ | $X_0$ |
| 1 | 1 | 1 | $Z_1$ | $Y_1$ | $X_1$ |

**Figure 3-35. Front Panel Interconnect Integrated Circuit Data**

When CW mode is selected, the detection mode switch connects E4 to E12, and E5 to E6. This places +5 V on the CW select line to IF Motherboard A4. Input B of U1 is controlled

by the remote bandwidth control line entering at XA2 pin 11. Since this line is logic low in local mode, U1 input B is normally low, and Y is connected to $Y_0$. Therefore, when E5 is connected to E6, the +5 V at U1 input A causes the +5 V line at X to be connected through X1, $Y_0$, and Y, to E19 and the IF bandwidth switch common line, enabling these switches. Therefore, any bandwidth may be selected in CW mode. If "0" is selected on the "+, 0 ,-" BFO switch, the switch common (ground) places a low on U1 input C, Z and $Z_0$ are connected, Q1 is turned off, and the resulting low voltage at XA2 pin 58 causes the BFO preset lines to be pulled low, producing a fixed 455 kHz BFO frequency. (Refer to **paragraph 3.4.20** for a description of the BFO presets.) If "+" or "-" is selected, the ground is removed and U1 input C is pulled high by R7, Q1 is turned on and power is applied to the BFO preset pull-up resistors, entering whatever frequency code is present at the BFO Switch. Therefore, the BFO may be either fixed or variable in the CW mode.

When AM mode is selected, the detection mode switch connects E4 to E16, and E5 and E14 to E6. This places +5 V on the AM select line (to A4) and allows +5 V on the bandwidth switch common line, enabling these switches. This also places +5 V on XA2 pin 60, which inhibits BFO operation.

When FM mode is selected, the detection mode switch connects E4 to E15, and E5 and E14 to E6. This places +5 V on the FM select line (to A4), enables the bandwidth switches and inhibits the BFO, as previously described.

When USB mode is selected, the detection mode switch connects E4 to E8 and grounds E5 and E14. This places +5 V on the USB select line (to A4) and places a low at U1 input A. This disables the IF bandwidth switches and turns off Q1, fixing the BFO at 455 kHz, as previously described.

When LSB mode is selected, the detection mode switch connects E4 to E7 and grounds E5 and E14. This places +5 V on the LSB select line, disables the IF bandwidth switches and fixes the BFO at 455 kHz.

When ISB mode is selected, the detection mode switch connects E4 to E11, E9 to E10, and opens the normal connection between E10 and E13. Connecting E4 to E11 places +5 V on the ISB select line to A4. In all other modes, the combined audio line is supplied to both audio amplifiers on A10A2, via E9 and E3. In ISB mode, the combined audio line to A10A2E9 is replaced by the ISB/LSB audio line, via the E9-E10 connection. Therefore, the USB audio is supplied to A10A2 headphone amplifier U1A via the combined audio line, and the LSB audio is supplied to amplifier U1B.

Integrated circuit U2 acts to control the routing of Bandwidth Select Voltages (see **paragraph 3.3.3.9**) during normal operation of the bandwidth select buttons. If any BW other than 0.3 or 1.0 kHz is selected, the A and B inputs to U2 are low. This connects X to $X_0$ and Y to $Y_0$, effectively connecting the cathodes of CR7 and CR8. Selection of 3.2 or 6 kHz BW will automatically select the wide position of A4A3 through CR7 and CR8 and XA2-49. Selection of 1.0 or 0.3 kHz BW brings the A or B input of U2 high, effectively disconnecting CR7 from CR8. At the same time, the 3.2 kHz position of A4A1 is selected by CR5 or CR6 through XA2-55.

### 3.4.25 TYPE 791874-1 MANUAL TUNING MODULE (A7)

The Manual Tuning Module controls the direction and rate of change of the tuned frequency. This module connects to the Manual Tuning Up/Down Counter (A6A1) and is

mounted behind the receiver front panel. The Manual Tuning Module consists of two parts: the encoder assembly and the Tuning Resolution switches. The schematic diagram of this module can be found in **Figure 6-21.**

### 3.4.25.1 Type 791589 Tuning Resolution (A7A1)

The Tuning Resolution switches select the desired tuning step to be used. The tuning steps are: 10 Hz, 100 Hz, 1 kHz, and 10 kHz. Switching is accomplished by connecting the desired tuning step to the step select switch line (+5 V) of the Manual Tuning Up/Down Counter board (A6A1). The schematic diagram for this circuit is shown in **Figure 6-25.**

When the 10 Hz button is depressed, E2 (10 Hz step line) connects to E16 (+5 V) and all digits are available for tuning. When the 100 Hz button is depressed, E10 (the 100 Hz step line) connects to E16 (+5 V). The 10 Hz digit is locked to the frequency indicated when the 100 Hz button was engaged, while all other digits are available for tuning. When the 1 kHz button is depressed, E12 connects to E16, thus the five most significant digits of the readout can be varied by the tuning knob. The two least significant digits will be locked to the frequency indicated when this button is engaged. When the 10 kHz button is selected, E8 connects to E16 and only the four most-significant digits of the readout can be varied by the tuning knob. The 1 kHz, 100 Hz, and 10 Hz digits will be locked to the frequency indicated when the 10 kHz button is engaged.

When the tuning disable button is engaged, the receiver locks to the frequency currently being displayed, any other tuning button will be released, manual tuning is disabled, and remote frequency control is enabled through A6A1.

### 3.4.25.2 Encoder Assembly (A7U1)

This assembly converts tuning knob rotation to digital pulses for the Manual Tuning Up/Down Counter. When the tuning knob is turned, each of the two output lines from the encoder will swing repeatedly between approximately +5 V and 0 V. If the knob is rotated at constant speed, these two outputs will appear as trains of square waves. Due to the internal mechanics of the encoder, the transitions of these two wave trains will be staggered in time with respect to each other. When the knob is rotated clockwise to increase tuned frequency, the square wave on the direction line will appear to lead that on the clock line as in **Figure 3-36.** The action of the up/down counter depends on the level of its up/down input at the instant its clock line goes high. The level of the up/down input at any other time has no effect. Therefore, clockwise rotation causes the counter to count up and the tuned frequency to increase.

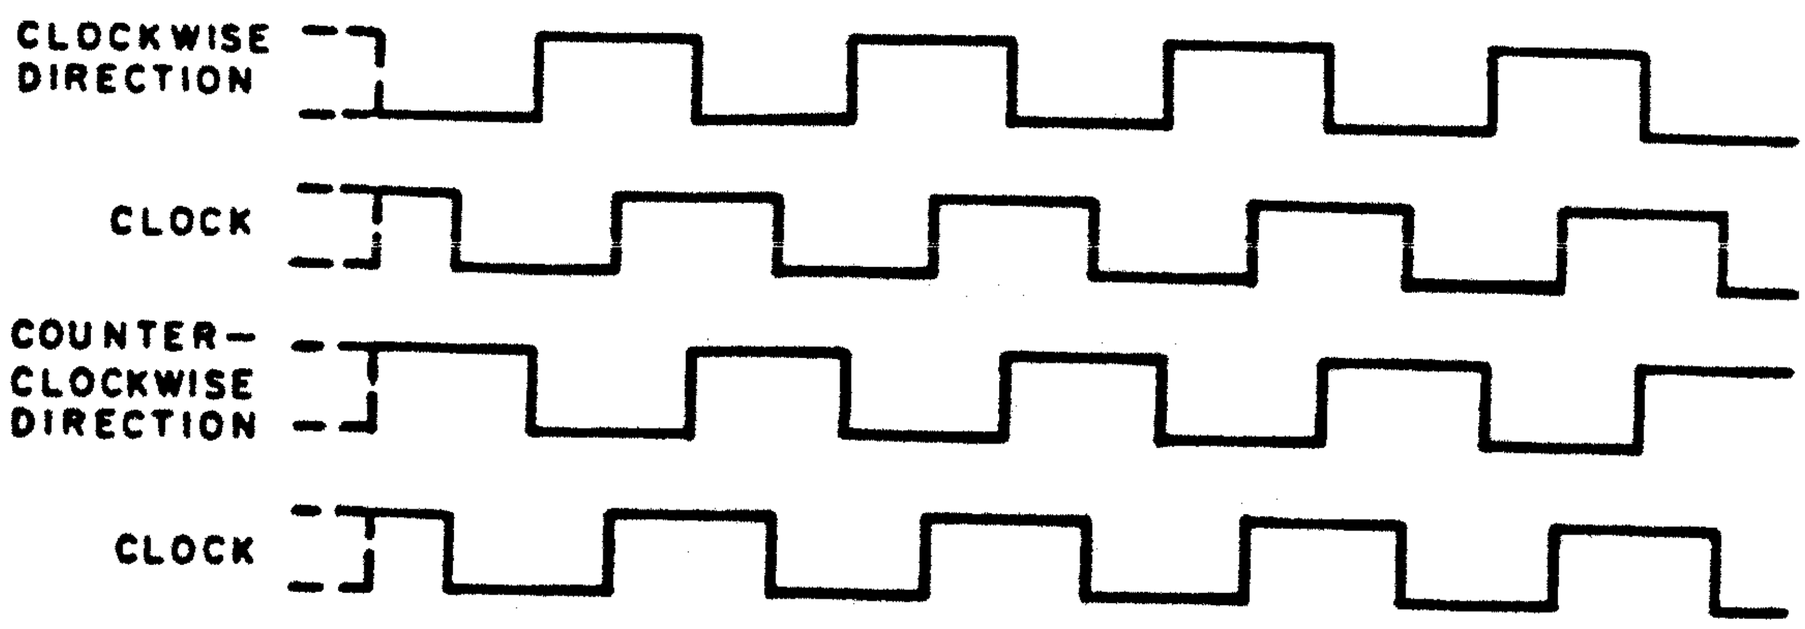



**Figure 3-36. Encoder Assembly Timing Diagram**

If the tuning knob is rotated counterclockwise, the sequence of outputs is reversed; the direction square wave lags the clock square wave. In this case the direction line will be low when the clock line swings high causing the counter to count down, thus reducing the tuned frequency.

The two outputs of the encoder go through approximately 120 cycles per revolution of its input shaft. This causes a tuning step for roughly each $3^{o}$ of knob rotation.

The encoder assembly uses infrared optics to accomplish its internal functions. It is not considered a repairable assembly.

### 3.4.26 TYPE 791578-1 FREQUENCY DISPLAY (A8)

The Frequency Display accepts the multiplexed information from the Manual Tuning Up/Down Counter via connector J2 and displays it on seven LEDs on the front panel. The schematic diagram for this circuit is shown in **Figure 6-23.**

U1 to U7 are the seven segment common-cathode LED displays. All segments of each display are connected in parallel to the corresponding outputs of U8, a BCD to seven-segment decoder/driver. U8 accepts a BCD word on its A, B, C and D inputs, converts it to a seven-segment equivalent, and places the information on its a to g outputs. The outputs are internally current-limited to provide about 50 mA so that external resistors are not needed. To turn a particular digit on, its common cathode input must be logic low. This selection is provided by U9, a binary to octal decoder. It accepts the Q0 to Q2 data on its A, B, and C inputs and places a high on the Q output with the equivalent binary value. U10 is an eight-section buffer inverter, capable of providing up to 500 mA of sink current.

Operation of the circuit is described below. The Up/Down Counter places digit display information into the A, B, and C inputs of U9. BCD information enters the A, B, C and D lines of U8. In U8, this information is decoded into a seven-segment number and sent to all the LEDs. U9 enables only one display at a time as commanded by its input information. Since the rate of change is 2 kHz, each digit is refreshed every 4 msec (2 kHz/8). This flicker rate is undetectable by the human eye.

Transistor Q1 is used for the intensity control. It is connected as a pass transistor from the unregulated 10 V to the supply voltage of U8. As the supply voltage of U8 is increased the current delivered to the LEDs will increase, giving more intensity. R1, R2, and R4 are a voltage divider which bounds the emitter voltage of Q1 between about 4.5 V and 7 V.

The decimal point, CR1, is always on, receiving its current from Q1 through resistor R3.

### 3.4.27 TYPE 791827 BFO SWITCH (A9)

The BFO Switch schematic diagram is **Figure 6-25.** Three thumbwheel switches provide a BFO variation of ±8.9 kHz from 455 kHz. The +, 0, -, thumbwheel provides the direction of offset, the second thumbwheel varies in range from 0 to 8, and the third thumbwheel varies in range from 0 to 9. A '0' setting of the direction thumbwheel causes the BFO to return automatically to 455 kHz (regardless of the other thumbwheel settings). The truth table for these switches is given in **Table 3-9.**

**Table 3-9. BFO Switch Truth Tables**

| NUMERIC | OUTPUT | | | | SIGN | OUTPUT |
|---|---|---|---|---|---|---|
| DIGIT | $2^3$ | $2^2$ | $2^1$ | $2^0$ | DIGIT | + 0 - |
| 0 | X | X | X | X | + | X O O |
| 1 | X | X | X | O | O | X X O |
| 2 | X | X | O | X | - | O O X |
| 3 | X | X | O | O | | |
| 4 | X | O | X | X | | |
| 5 | X | O | X | O | | |
| 6 | X | O | O | X | | |
| 7 | X | O | O | O | | |
| 8 | O | X | X | X | | |
| 9 | O | X | X | O | | |

X denotes shorted to common
O denotes open

### 3.4.28 TYPE 796053 FRONT PANEL CONTROL (A10)

The Front Panel Control consists of the Upper and Lower Panel Control boards joined by a 40-pin ribbon connector. This connector is attached to the Front Panel Interconnect (A6A2) and controls the manual selection of detection mode, gain mode, meter mode, IF bandwidth, RF gain, and headphone levels. Signals for the phone outputs also connect to the lower panel control through the Front Panel Interconnect. The functions of the IF bandwidth and detection mode switches are described in **paragraph 3.3.3.9** and **3.3.3.10.**

### 3.4.29 TYPE 791583 UPPER PANEL CONTROL (A10A1)

The Upper Panel Control allows selection of detection mode, gain mode, and meter mode. Each gang of switches mechanically operates to allow only one pushbutton to be depressed at any time. All control lines connect to the Front Panel Interconnect card. The schematic diagram for this circuit is shown in **Figure 6-25.**

### 3.4.30 TYPE 796054 LOWER PANEL CONTROL (A10A2)

The Lower Panel Control allows selection of IF bandwidth and variation of RF GAIN and PHONE LEVEL potentiometers. The schematic for this circuit is **Figure 6-25.** This card also contains the amplifiers to drive the headphone outputs. A simplified schematic of the headphone audio routing is shown in **Figure 3-37.** This circuit provides two new switches at the receiver front panel, designated ISB AUDIO "LSB" and ISB AUDIO "USB". When the receiver is operating in Independent Sideband mode (ISB), the upper sideband audio is applied to terminal E3 of A10A2, and the lower sideband audio is supplied to terminal E9. Switches S2A and S2B (ISB AUDIO) are interlocked such that only one may be depressed at a time. The switches are wired to supply the selected sideband audio to one end of both ganged potentiometers, R2A and R2B. The signal is then fed from the wiper of each potentiometer to the associated audio amplifier, U1A or U1B. Therefore, the selected sideband audio signal will be heard in both channels of a stereo headphone connected to the front panel phone jack, J13.

**NOTE:** The demodulated audio signals are always supplied to terminals E3 and E9 of the Lower Panel Control board, type 796054, for application to the headphone amplifiers, U1A and U1B. Refer to **Figure 3-37.** In all detection modes except ISB, the same audio signal line (COMBINED AUDIO) is connected to both terminals. When the ISB detection mode pushbutton (A10A1S3D) is depressed, the audio signal routing is changed. Terminal E3 is still connected to the COMBINED AUDIO line, but terminal E9 is now connected to the ISB/LSB AUDIO line. In this mode, terminal E3 receives the USB audio, and terminal E9 receives the LSB audio. The ISB AUDIO pushbuttons allow the operator to select either sideband signal to drive both headphone amplifiers. However, with a remote-control option installed, it is possible to remotely select a different detection mode (AM, FM, etc.) while the ISB detection mode pushbutton is depressed. In this case, the remotely selected detection mode audio will only appear on the COMBINED AUDIO line connected to E3. If neither ISB AUDIO pushbutton is depressed, the remotely selected detection mode audio will drive headphone amplifier U1A, but no LSB signal is supplied to U1B because the ISB Detector/Audio module is not switched on. If the ISB AUDIO pushbutton "USB" is depressed, both amplifiers are driven from COMBINED AUDIO, and the remotely selected detection mode audio will be heard in both phones. However, if the ISB AUDIO pushbutton "LSB" is depressed, both amplifiers are connected to the "dead" ISB/LSB AUDIO line, and no audio will be heard. Therefore, both ISB AUDIO pushbuttons should be left in the "OUT" (non-selected) position unless the receiver is being manually operated in the ISB detection mode. Also note that when the ISB detection mode is remotely selected, the lower sideband audio signal will not be supplied to the ISB AUDIO headphone circuit unless the ISB detection mode is manually selected.

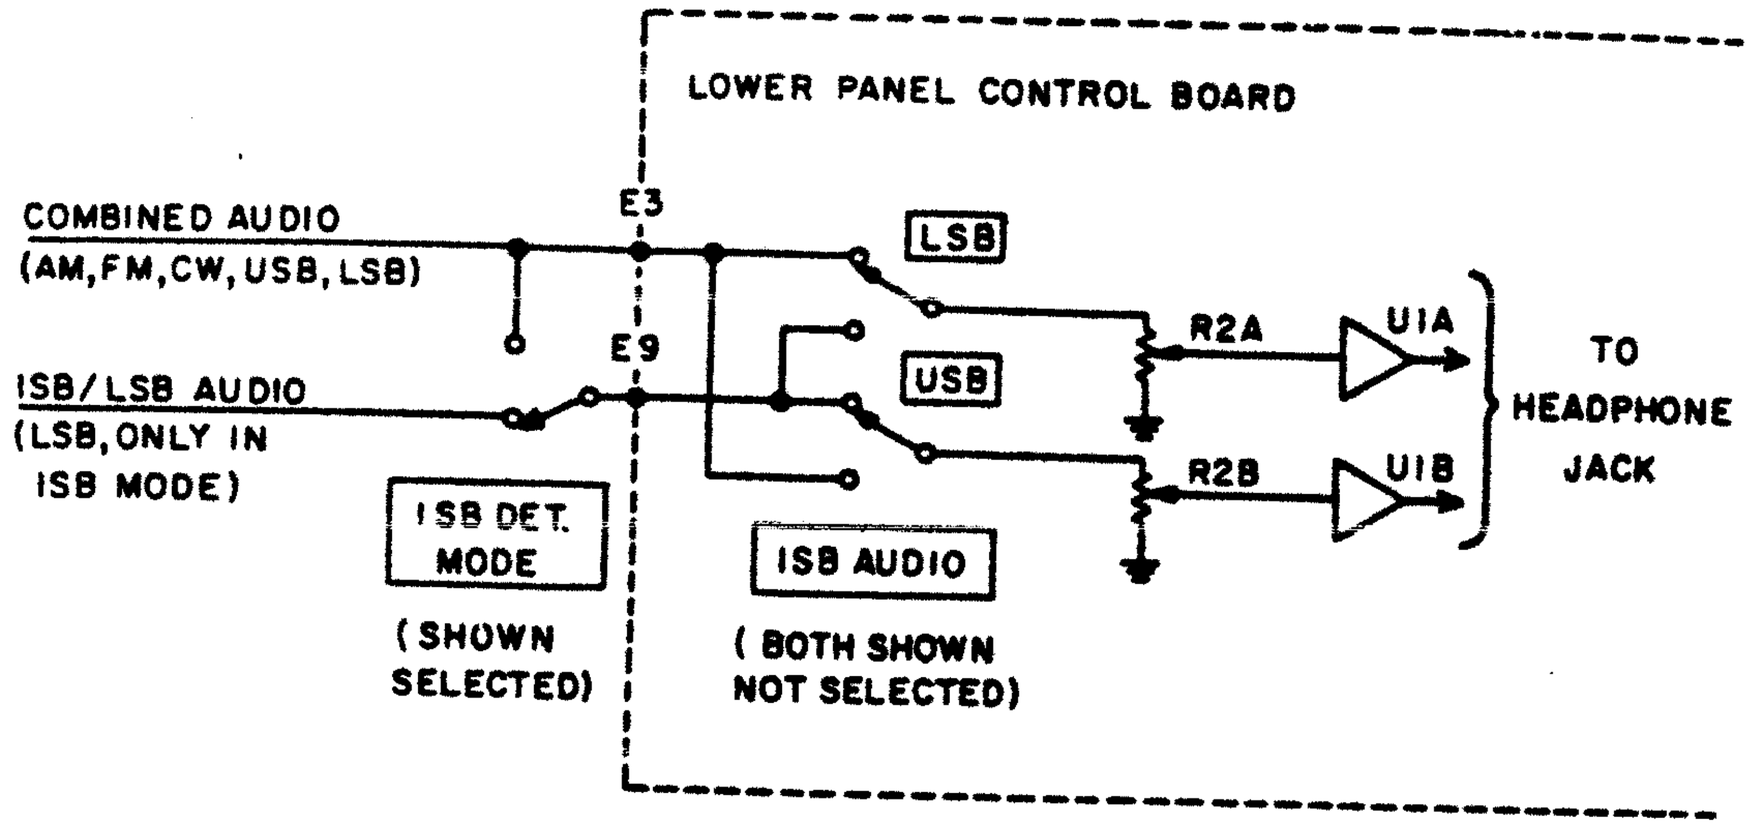



**Figure 3-37. Simplified Headphone Audio Routing.**

### 3.4.31 TYPE 791826 LOWER PANEL CONTROL (A10A2)

The Lower Panel Control allows selection of IF bandwidth and variation of RF gain and phone level potentiometers. The schematic diagram for this circuit is **Figure 6-20.** This card also contains the amplifiers to drive the headphone outputs. The amplifiers operate independently. They receive the same signal in all detection modes except ISB. In this mode, amplifier U1A receives the upper sideband information while U1B receives the lower sideband information. No damage will be done to the amplifiers when using mono headphones; however, LSB in the ISB mode will not be monitored.

### 3.4.32 MAIN CHASSIS REGULATOR, U4 (WJ-8718A/8718-9 only)

Main chassis IC voltage regulator U4 supplies +12 V to the line audio amplifier circuit on Type 746001 Audio Amplifier (A4A10). Regulator U4 is rated at 1 A, and will automatically shut down if the current exceeds that value.

### 3.4.33 MAIN CHASSIS BATTERY, BT1

Battery BT1 is a rear panel mounted 2.5 Volt nickel-cadmium battery connected to the Main Tuning Up/Down Counter, A6A1. When AC power is deenergized, BT1 keeps the A6A1 frequency memory alive, so that the receiver remembers the frequency it was tuned to prior to power interruption.

# SECTION IV

# MAINTENANCE

## 4.1 GENERAL

This section provides detailed procedures to perform preventive and corrective maintenance on the WJ-8718 Series HF Receiver. Preventive maintenance helps prevent malfunctions or breakdowns. Corrective maintenance includes procedures for returning a malfunctioning receiver to operating condition.

## 4.2 PREVENTIVE MAINTENANCE

Preventive maintenance consists of visual inspection, cleaning and lubrication. Although the WJ-8718 Series HF Receiver is designed for extended operation with little or no routine servicing, optimum long-term performance can only be achieved by a periodic preventive maintenance schedule.

### 4.2.1 VISUAL INSPECTION

A visual inspection of the receiver should be performed every 1200 hours of operation or less. The inspection should be performed thoroughly to uncover existing or potential component malfunctions. At a minimum, the following items should be checked.

1. Inspect the equipment covers and front panel for condition of finish and panel markings.
2. Inspect for dents, punctures, or warped areas.
3. Inspect quarter-turn fasteners and receptacles.
4. Inspect the external surfaces for loose or missing screws or washers.
5. Inspect the receptacles for conditions of pins, contacts, and mountings.
6. Inspect the internal components for signs of deterioration, discoloration, or charring. Check for melted insulation and damaged, cracked, or broken components.
7. Inspect the printed circuit boards for damaged tracks, loose connections, corrosion, or other signs of deterioration.
8. Inspect the PC connectors, interface connectors, and chassis wiring for excessive wear, looseness, misalignment, corrosion, or other signs of deterioration.

### 4.2.2 CLEANING

Receiver cleaning should be performed every 1200 hours of operation. Complete removal of dust, grease and other contamination is of prime importance in maintaining the reliability and useful life of the receiver. At a minimum, the following items should be cleaned.

**CAUTION**

Avoid the use of chemical cleaning agents containing benzene, toluene, zylene, acetone, or similar solvents. These chemicals may damage the plastics used in this receiver.

1. Exterior - Dust the cabinet off with a soft cloth. Dust the front panel controls with a small soft-bristled paint brush. Dirt clinging to the cabinet may be removed with a clean, lint-free cloth dampened with a mild detergent and water solution. Avoid using abrasive cleaners. They will scratch the front panel.

2. Interior - Dust in the interior of the unit should be removed before it builds up enough to cause arcing and short circuits during periods of high humidity. Dust is best removed by dry, low-pressure air. Dirt clinging to surfaces may be removed with a soft-bristled paint brush or a clean, lint-free cloth dampened with a mild detergent and water solution. Use a cotton-tipped applicator for cleaning in narrow spaces and on the circuit boards.

3. Switch Contacts - When maintenance is necessary due to accumulated dirt and dust on the contacts, observe the following precautions: Clean the switch contacts with isopropyl alcohol or a mild detergent solution. Avoid cleaning solutions containing benzene, acetone, or similar solvents.

### 4.2.3 LUBRICATION

The optical encoder assembly shaft requires lubrication every 720 hours of operation to prevent excessive wear. The other rotating assemblies in the receiver are sealed and do not require lubrication. To lubricate the encoder assembly shaft, perform the following steps:

**CAUTION**

Excessive lubrication of the encoder shaft may destroy the optical characteristics of the encoder wheel.

1. Place the receiver in a vertical position and remove the encoder knob.

2. Apply one (1) drop of SAE 5W-20W oil to the encoder shaft at the retaining ring.

3. Reassemble the encoder assembly knob and rotate the knob several times to distribute the lubricant.

## 4.3 CORRECTIVE MAINTENANCE

### 4.3.1 GENERAL

Corrective maintenance procedures consist of testing, troubleshooting, repairing and alignment information necessary to restore a malfunctioning receiver to normal operation. Maintenance information provided in this paragraph is divided into the following categories.

1. Checkout procedures to generate receiver fault symptoms **(Table 4-2).**

2. Troubleshooting procedures keyed to the checkout procedures to locate a malfunctioning module within the receiver **(Table 4-3).**

3. Individual module checkout and troubleshooting procedures to locate a defective component on a malfunctioning module **(Paragraph 4.3.5).**

4. Receiver alignment procedures to be performed after module or component replacement (**Paragraph 4.3.7**).

A receiver will normally require corrective maintenance for one of the following reasons:

1. Failure to pass any initial inspection testing.

2. Failure to meet minimum performance standards tested by the Receiver Checkout Procedure, **Table 4-2.**

3. Operator-observed malfunctions during normal operation of the receiver.

### 4.3.2 TEST EQUIPMENT REQUIRED

**Table 4-1** lists the test equipment required for corrective maintenance of the WJ-8718 Series HF Receiver. Equivalent equipment may be used.

**Table 4-1. Test Equipment Required**

| Instrument Type | Required Characteristics | Recommended Instrument |
|---|---|---|
| Signal Generator | AM, FM, CW, RF output, from -111 dBm to 0 dBm | HP8640B |
| Oscilloscope | dc to 50 MHz | HP180C |
| RF Voltmeter | 1 mV to 3.0 V; -50 dBm to +20 dBm | Boonton 92B |
| Digital Counter | 0 to 500 MHz | HP5303A |
| AC Voltmeter | 1 mV to 300 V, full scale | HP-400E |
| Digital Voltmeter | dc ranges; 1% or better | Fluke 8100A |
| Dummy Load, 600 Ω | 4-W dissipation | Two 1200 Ω, 2-W resistors in parallel |
| Dummy load, 600 Ω | 1/2-W dissipation | Two 1200 Ω, 1/4 - or 1/2-W resistors in parallel |
| Headphones | Stereo, 600 Ω impedance, or Mono | Telex 325-02 or Telex 820-4 |
| Sweep Generator | 100 kHz to 11.0 MHz | HP8601A |

### 4.3.3 RECEIVER CHECKOUT PROCEDURES

The checkout procedures test the receiver's ability to meet the minimum performance standards necessary for satisfactory receiver operation. The procedures are to be used to isolate and identify malfunctioning modules within the receiver and to verify receiver peformance after module or component replacement. They may also be used as an "Operational Quick Check" of receiver performance as part of a periodic maintenance schedule.

Checkout procedures for the receiver are contained in **Table 4-2**. **Figure 4-1** details the overall connections between the receiver and the test equipment.

4.3.3.1 **Procedure Guidelines**

The checkout procedures in **Table 4-2** are keyed to troubleshooting tables in **paragraph 4.3.4** by a step number in the IF INDICATION IS ABNORMAL column. To properly check out and troubleshoot a receiver, the following guidelines should be utilized:

1. Perform the preliminary set up procedure in **paragraph 4.3.3.2.**

2. Beginning with Step 1 in **Table 4-2,** perform each of the checkout procedures. Continue until a malfunction is encountered.

3. At the step where the malfunction is encountered, refer to the IF INDICATION IS ABNORMAL column. This column refers to a corresponding step in **Table 4-3,** Troubleshooting Procedures, listing the probable cause and additional test steps necessary to locate the defective receiver module.

4. Locate the step in **Table 4-3** referred to from the IF INDICATION IS ABNORMAL column in **Table 4-2.** Perform the additional test steps indicated for the fault. Replace the receiver module(s) indicated in the CORRECTIVE ACTION column and perform any required alignment(s).

5. Following module replacement, verify corrective action by reperforming the Checkout Procedure in **Table 4-2** that identified the malfunction. Additional troubleshooting will be necessary if the receiver still fails to produce the required NORMAL INDICATION.

6. Proceed to the next Checkout Procedure step in **Table 4-2** only after obtaining the required response as indicated in the NORMAL INDICATION column.

7. Defective receiver modules removed in Step 4 above may be repaired by referring to the appropriate module checkout and troubleshooting procedure in **Paragraph 4.3.4.**

4.3.3.2 **PRELIMINARY SET-UP PROCEDURE**

Prior to performing the Checkout Procedures in **Table 4-2,** perform the following Preliminary Setup Procedure.

1. With the receiver deenergized, connect the test equipment as shown in **Figure 4-1.** Remove receiver top and bottom covers.

2. Set the receiver input voltage selector to match the available AC line voltage.

3. Set the receiver to AM Detection Mode, 16 kHz Bandwidth and MAN Gain Mode. Rotate the PHONE LEVEL, RF GAIN and LINE AUDIO controls fully CCW.

4. Energize the receiver and test equipment. Allow 30 minutes for warm-up before proceeding to the Checkout Procedure.

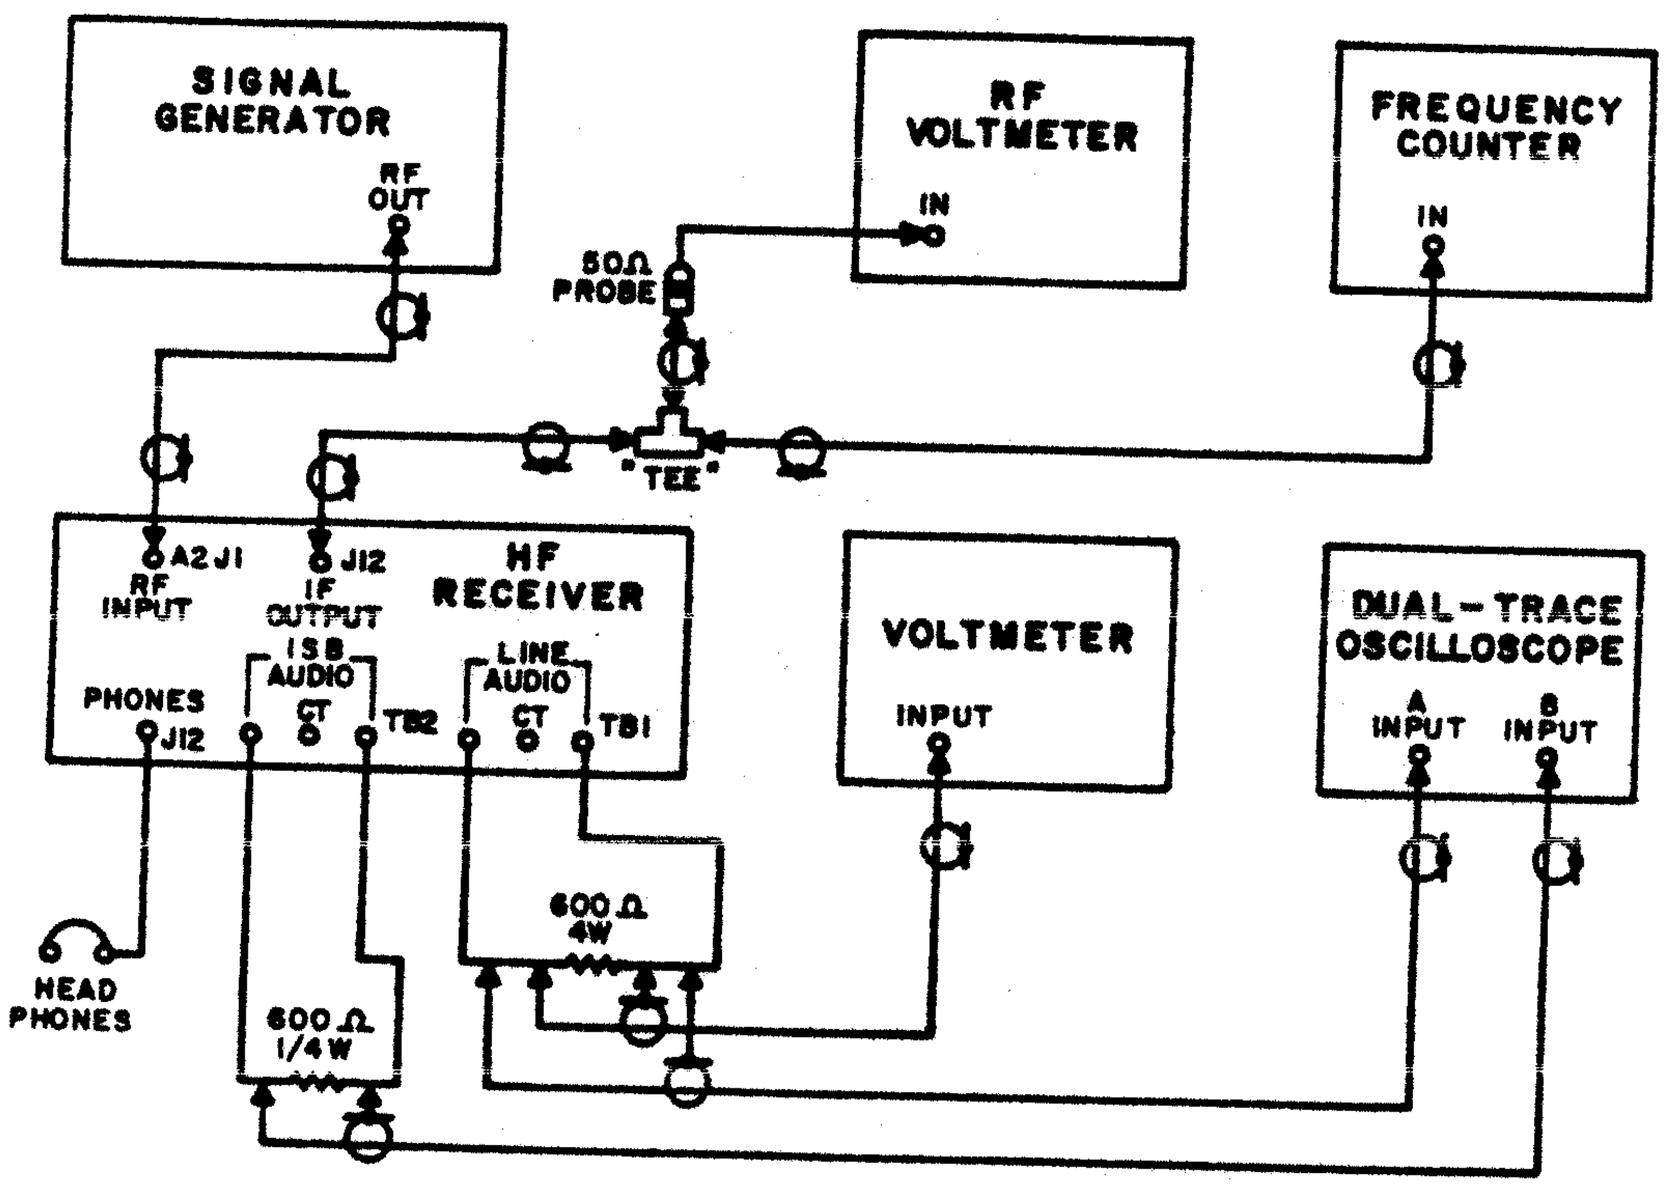



**Figure 4-1. Receiver Checkout Procedure, Test Setup.**

**Table 4-2. WJ-8718 Series HF Receiver Checkout Procedure.**

| Step | Test Equipment | Control Settings and Instructions | Normal Indication | IF Indication is Abnormal |
|---|---|---|---|---|
| 1. Preliminary | | a. After power-up in Par. 4.3.3.2, observe Freq. Display for brightness. | | Refer to Table 4-3, Steps 1a, 1b. |
| | | b. Tune receiver to 15.00500 MHz using all Tuning Res. positions. | All digits must increment smoothly | Refer to Table 4-3, Steps 1c, 1d, 1e. |
| 2. Power Supply | Fluke 8100A | a. Refer to Fig. 5-4 for location of Power Supply Test Points. | | |
| | | b. Measure Voltage at E1. | +15Vdc ±0.75 | Refer to Table-4-3, step 2a |
| | | c. Measure Voltage at E2. | -15Vdc ±0.75 | Refer to Table 4-3, step 2b |
| | | d. Measure Voltage at E3. | +10Vdc (min.) | Refer to Table 4-3, step 2c |
| | | e. Measure Voltage at C8 (WJ-8718A/8718-9 only) | +12Vdc ±0.75 | Refer to Table 4-3, step 2d |
| 3. IF Gain | HP8640B Boonton 92B | a. Set Sig. Gen. to 15.00500 MHz, -97dBm, Set RF Voltmeter to -10 dBm range | | |
| | | b. Adjust receiver RF Gain for -15 dBm on RF Voltmeter | -15 dBm | Refer to Table 4-3, step 3a, 3b, 3c |
| | | c. Depress 6 kHz, 3.2 kHz, 1.0 kHz and 0.3 kHz BW Switches. Read RF V.M. indication at each B.W. | -15 dBm ±4 | Refer to Table 4-3, step 3a, 3b, 3c |
| | | d. Increase Sig. Gen to 15.00650 MHz. Depress USB Mode Switch. Read RF V.M. indication. | -15 dBm ±4 | Refer to Table 4-3, step 3d |

**Table 4-2. WJ-8718 Series HF Receiver Checkout Procedure.** (Cont'd)

| Step | Test Equipment | Control Settings and Instructions | Normal Indication | IF Indication is Abnormal |
|---|---|---|---|---|
| 3. IF Gain (Cont'd) | | e. Depress ISB Mode Switch. Read RF V.M. indication. | -15 dBm ±4 | Refer to Table 4-3, step 3e |
| | | f. Decrease Sig. Gen. to 15.00350 MHz. Depress LSB Mode Switch. Read RF V.M. indication. | -15 dBm ±4 | Refer to Table 4-3, step 3f. |
| 4. Detection Mode | HP8640B<br>HP400-EL<br>HP180C<br>Boonton 92B | a. Set Sig. Gen. to 15.00500 MHz, -97dBm, 30% AM at 400 Hz. Set receiver to AM Mode, 16 kHz BW. On WJ-8718A/8718-9 Receivers, ensure that USB and LSB Audio buttons are deenergized. Set AC V.M. to 50 Vac range. Set HP180C A-input to 20 V/cm, B-input to 5 V/cm, time base to 1 msec. Set RF Gain for -15 dBm on RF V.M. | | |
| | | b. Rotate PHONE LEVEL control until 400 Hz is heard in headphones. | Clear, distinct tone, no distortion. | Refer to Table 4-3, step 4a. |
| | | c. Rotate LINE AUDIO LEVEL control until AC V.M. indicates 24.5 Vrms. | 24.5 Vrms | Refer to Table 4-3, step 4b. |
| | | d. Depress A-Input switch on oscilloscope and observe Line Audio waveform. | Clean sine wave, no clipping. | Refer to Table 4-3, step 4c. |
| | | e. Turn off Sig. Gen. modulation. Set receiver to CW mode, 1 kHz BW, -0.4 kHz BFO offset. Monitor Headphone. | Clear, distinct 400 Hz tone, no distortion. | Refer to Table 4-3, step 4d. |

**Table 4-2. WJ-8718 Series HF Receiver Checkout Procedure.** (Cont'd)

| Step | Test Equipment | Control Settings and Instructions | Normal Indication | IF Indication is Abnormal |
|---|---|---|---|---|
| 4. Detection Mode (Cont'd) | | f. Increase Sig. Gen. to 15.00540 MHz. Depress USB and ISB Mode Switches. Monitor headphones in both modes. | Clear, distinct 400 Hz tone, no distortion | Refer to Table 4-3, step 4e. |
| | | g. Decrease Sig. Gen. to 15.00460 MHz. Depress LSB Mode Switch. Monitor headphones. | Clear, distinct 400 Hz tone, | Refer to Table |
| | | h. Depress ISB Mode switch. Depress B-input switch on oscilloscope and observe ISB Audio Waveform. | 22 Vpp minimum at 400 Hz, no clipping. | Refer to Table 4-3, step 4g |
| 5. SNR | HP8640B HP400-EL | a. Set Sig. Gen. to 15.00500 MHz, -97 dBm, 50% AM at 400 Hz. Set RF Gain for -15 dBm on RF V.M. Set AC V.M. for convenient meter indication and note level. | | |
| | | b. Turn off Gen. modulation and note reduction in AC V.M. indication. | >10 dB reduction | Refer to Table 4-3, step 5a |
| 6. MAN/AGC Operation | HP8640B HP400-EL Boonton 92B | a. Set Sig. Gen. to 15.00500 MHz, -97 dBm, 30% AM at 400 Hz. Set receiver to AM Mode, 6 kHz BW, MAN GAIN mode. Set RF GAIN for -15 dBm on RF V.M. | | |
| | | b. Increase Sig. Gen. output to +3 dBm. Reduce RF GAIN setting until RF V.M. indicates -15 dBm or less. | MAN GAIN reduction >100 dB. | Refer to Table 4-3, step 6a |

**Table 4-2. WJ-8718 Series HF Receiver Checkout Procedure.** (Cont'd)

| Step | Test Equipment | Control Settings and Instructions | Normal Indication | IF Indication is Abnormal |
|---|---|---|---|---|
| 6. MAN/AGC Operation (Cont'd) | | c. Reduce Sig. Gen. output to -87 dBm. Set receiver to AGC Mode. Note AC V.M. reading. | | |
| | | d. Increase Sig. Gen. output to -7 dBm. Note increase in AC V.M. indication. | <6 dB increase, no clipping. | Refer to Table 4-3, step 6b |
| 7. Freq. Tuning Accuracy | HP8640B Boonton 92B HP5303A | a. Set Sig. Gen. to 00.50000 MHz, -60 dBm, unmodulated. Set receiver to 00.50000 MHz AM Mode, 1 kHz BW, MAN GAIN Mode. Set RF GAIN control for -15 dBm on RF V.M. | | |
| | | b. Read IF Frequency on Freq. Counter. | 455.000 kHz ±0.100 kHz | Refer to Table 4-3, step 7a |
| | | c. Increase both Sig. Gen. and receiver to 29.99990 MHz. | | |
| | | d. Read IF Frequency on Freq. Counter. | 455.000 MHz ±0.100 kHz | Refer to Table 4-3, step 7a |

## 4.3.4 RECEIVER TROUBLESHOOTING PROCEDURES

The troubleshooting procedures contained in **Table 4-3** are to be used in conjunction with the Receiver Checkout Procedures in **Table 4-2.** The checkout procedures are keyed to the troubleshooting procedures when a malfunction of the receiver is indicated. The troubleshooting procedures provide a listing of specific malfunctions that will result in failure to obtain the specific test results called for in the checkout procedures. Probable causes of the malfunctions and necessary corrective action are also listed. When a malfunction can be caused by more than a single source, the procedures give additional test steps that will permit more positive identification of the trouble.

**Table 4-3** will aid the location of a defective module in the receiver. To locate a defective component on a module known to be defective, refer to **paragraph 4.3.5** for individual module testing and troubleshooting.

**Table 4-3. WJ-8718 Series HF Receiver Troubleshooting Procedures.**

| Step | Fault | Probable Cause | Additional Test | Corrective Action |
|---|---|---|---|---|
| 1. | a. No display brightness | Misadjusted Display brightness control. | | Adjust A8R2 for for proper brightness. |
| | b. Same | Defective Frequency Display | | Replace A8. |
| | c. Display will not increment | Up/Down Counter circuit malfunctioning. | Check CLOCK and DIR outputs from Encoder U5. | Replace U5 if incorrect. Replace A6A1 if correct. |
| | d. Same | Tuning Res. Faulty | | Check or replace A7 |
| | e. Not all Freq. digits increment. | Faulty Up/Down Counter or Display. | Check BCD data on lines corresponding to faulty digit. | IF data increments replace A8. IF not, replace A6A1. |
| 2. | a. Incorrect +15 V at E1 | Faulty U1 | Check for +24 V at A1J7 | IF correct, replace U1. If not, check components on A1. |
| | b. Incorrect -15 V at E2 | Faulty U2 | Check for -24 V at A1J12 | If correct, replace U2. If not, check components on A1. |
| | c. Incorrect +10 V at E3. | Faulty CR1, CR3 | | Check CR1 and CR3 |
| | d. Incorrect voltage at C8. | Faulty U4 (8718A/8718-9) | | Replace U4 |
| 3. | a. IF output dead on all | Faulty LO signals | Check 1st LO at A1J2: 57.91 MHz at +20 dBm. | Check BCD presets to A5A1. If correct, replace A5A1. If not replace A6A1 |

**Table 4-3. WJ-8718 Series HF Receiver Troubleshooting Procedures.** (Cont'd)

| Step | Fault | Probable Cause | Additional Test | Corrective Action |
|---|---|---|---|---|
| 3. | | | Check 2nd LO at A2J1: 32.20500 MHz at 0 dBm. | Check BCD presets to A5A2. If correct, replace A5A2. If not replace A6A1. |
| | | | Check 3rd LO at A4A2-13: 11.155 MHz at -6 dBm. | If incorrect replace A5A1. |
| | | Faulty A4A7 | Check A4A7-47 for 0 Vdc. | If correct, replace A4A7,repeat step 3b Table 4-2. If not, check or replace A4A6. |
| | | Faulty A4A2 | | Replace A4A2. Repeat step 3b, Table 4-2 |
| | | Faulty A3 | Check A3C1 for 0 Vdc. | If correct, replace A3, repeat step 3b Table 4-2. If not, check or replace A4A6. |
| | b. If output dead on 1 or more BWs. | Faulty Filter Switch A4A1 or A4A3. | Check BW Select voltages, pins 15, 17, 19 or A4A1 and A4A3: +3 Vdc for selected BW. | If correct, replace A4A1 or A4A3, repeat Step 3b, 3c, Table 4-2. If not, check or replace A6A2. |
| | c. IF output level out of limits on 1 or more BWs. | Incorrect Alignment. | | Perform A4A1 Alignment, Para. 4.3.7.3.2 and and A4A7 Alignment, Para. 4.3.7.3.4. |
| | d. Incorrect USB IF output in USB Mode. | Faulty A4A4 | Check USB Select voltage at A4A4-49: +3 Vdc in USB Mode. | If correct, replace A4A4, repeat step 3d, Table 4-2. If not, check or replace A6A2. |
| | | Incorrect Alignment | | Adjust A4A4R23 for -15 dBm IF output level. |

**Table 4-3. WJ-8718 Series HF Receiver Troubleshooting Procedures.** (Cont'd)

| Step | Fault | Probable Cause | Additional Test | Corrective Action |
|---|---|---|---|---|
| | e. Incorrect USB IF output in ISB Mode. | Faulty A6A2 | | Check or replace A6A2. |
| | f. Incorrect LSB IF output in LSB Mode. | Faulty A4A5 | Check LSB Select voltage at A4A5-49: +3 Vdc in LSB Mode. | If correct, replace A4A5, repeat step 3f, Table 4-2. If not, check or replace A6A2. |
| 4. | a. No 400 Hz tone in earphone (AM Mode) | Faulty A4A10 | Check signal at A4A10-51: 0.7 Vrms at 400 Hz. | If incorrect, replace A4A7. If correct, perform next test. |
| | | | Check signal at A4A10-55: 0.7 Vrms at 400 Hz. | If incorrect replace A4A10. If correct, check Headphone Amp. A10A2U1. |
| | b. No Line Audio Output (AM Mode) | Faulty A4A10 | Check signal at A4A10-11, 13 with R1 at max CW: 3 Vrms at 400 Hz | If incorrect, replace A4A10. If correct, replace T2. |
| | c. Line Audio Output distorted. (AM Mode) | Faulty A4A10 | | Replace A4A10. If problem not corrected, replace T2. |
| | d. No 400 Hz tone in earphone (CW Mode) | Faulty A4A9 | Check Audio Signal at A4A9-57. 0.7 Vrms at 400 Hz. | If correct, replace A4A10. If correct, perform next test. |
| | | | Check BFO Signal at A4A9-17: 454.600 kHz at 40 mV. | If incorrect, check or replace A5A3. If correct, perform next test. |
| | | | Check CW/SSB Select voltage, A4A9-43: 3 Vdc in CW mode. | If incorrect, check or replace A6A2. If correct, replace A4A9. |

**Table 4-3. WJ-8718 Series HF Receiver Troubleshooting Procedures.** (Cont'd)

| Step | Fault | Probable Cause | Additional Test | Corrective Action |
|---|---|---|---|---|
| 4. | e. No 400 Hz tone in earphone (USB,ISB) | Faulty A6A2 | Check SSB Select Voltages at A4A4-49 (USB), A4A4-51 (ISB), A4A9-43 (SSB): 3 Vdc in selected modes. | If incorrect, check or replace A6A2. If correct, perform next test. |
| | | Faulty A5A3 | Check BFO Signal at A4A9-17: 455.000 kHz at 40 mV. | If incorrect, check or replace A5A3. If correct, check A4A9. |
| | f. No 400 Hz tone in earphone, (LSB Mode) | Faulty A6A2 | | Check or replace A6A2. |
| | g. No ISB Line Audio Output. | Faulty A4A8 | | Check or replace A4A8. |
| 5. | a. Low SNR. | Faulty RF Filter | | Check or replace RF Filter. |
| | | Faulty A3 | Check 1st and 2nd LO signals for adequate levels:<br>1st LO: +20 dBm<br>2nd LO: 0 dBm | If incorrect, replace A5A1 or A5A2 If correct, substitute new A3 and repeat Step 5, Table 4-2. |
| 6. | a. MAN GAIN range is 100 dB | Faulty A4A6 | Check AGC outputs for correct swing as RF Gain is rotated CCW to CW: A4A6-47, 0 to -3.5 V, A4A6-19, 0 to +0.8 V. | If either output is incorrect check or replace A4A6. If both outputs are correct, check A3, then check A4A7. |
| | b. AGC control range is 80 dB. | Faulty A4A6 | Check input to AGC at A4A6-51: 2 Vdc. | If correct, replace A4A6. If incorrect, receiver gain is low Repeat step 3, Table 4-2. |

**Table 4-3. WJ-8718 Series HF Receiver Troubleshooting Procedures.** (Cont'd)

| Step | Fault | Probable Cause | Additional Test | Corrective Action |
|---|---|---|---|---|
| 7. | a. IF output freq. error >±100 Hz. | Time Base misadjusted. | With receiver and sig. gen. tuned to 29.99990 MHz, adjust A5A1U14 for 0 Hz error in IF output. Repeat step 7, Table 4-3. | If receiver still fails test, check BCD presets to A5A1 and A5A2 at 00.50000 and 29.99990 MHz receiver tuned frequencies. If correct, replace A5A1 or A5A2. If incorrect, replace A6A1. |

### 4.3.5 MODULE TROUBLESHOOTING PROCEDURES

Module troubleshooting procedures consist of checkout, fault-isolation and repair information necessary to restore a malfunctioning module to normal operation. Troubleshooting information provided in this paragraphs consists of the following categories:

1. Module checkout procedures to verify module fault symptoms.
2. Fault isolation tables to help isolate defective components on the modules. Semiconductor voltage tables are also provided to help locate defective transistors and integrated circuits.
3. A Parts Replacement Guide, **Paragraph 4.3.6,** to assist in repairing a defective module.

In addition to using the information provided in this paragraph, reference to the Circuit Description in Section III and Schematic Diagrams in Section VI is essential for efficient module troubleshooting.

#### 4.3.5.1 Procedure Guidelines

To properly check-out and troubleshoot a defective module, the following guidelines should be utilized:

1. Allow the test equipment a 30 minute warm-up before any check out.
2. Refer to the Testing and Troubleshooting paragraph for the desired module. Configure the receiver and test equipment as stated in the Checkout Procedure for the desired module.

3. Perform the Checkout Procedure in the sequence given. If any desired result is not obtained, refer to the Fault Isolation paragraph for the module to locate the defective component.

4. Refer to the Parts Replacement Guide, **Paragraph 4.3.6**, to assist in replacing any components found to be defective. Following component replacement, re-perform the Module Checkout Procedure. If the module still fails, additional troubleshooting using the Circuit Descriptions in Section III and Schematic Diagrams in Section VI is necessary.

#### 4.3.5.2 RF Filter Testing And Troubleshooting

RF Filter Testing and Troubleshooting includes a checkout procedure and fault isolation information. A Signal Generator, an RF Voltmeter, and a Digital Voltmeter (see **Table 4-1**) are required to perform the tests outlined below.

##### 4.3.5.2.1 RF Filter Checkout Procedure

Perform the following procedure in the sequence given. If any specified result is not obtained, refer to **paragraph 4.3.5.2.2** for fault isolation.

1. Disconnect A2P1 from A3A1J1 on the Input Converter.
2. Connect an RF Voltmeter and 50 Ω adapter to A2P1.
3. Connect the output of a Signal Generator to A2J1 on the rear panel of the receiver.
4. Set the RF Voltmeter to the 0 dBm range.
5. Set the Signal Generator output frequency to 1.0 MHz and output level to 0 dBm.
6. The RF Voltmeter should indicate a level between 0 dBm and -1.0 dBm.
7. Tune the Signal Generator to 10 MHz and 20 MHz, and 30 MHz successively, maintaining the output level at 0 dBm for each frequency. The filter output level should not be less than -3.0 dBm for each frequency.
8. Disconnect the test equipment from the receiver.
9. Reconnect A2P1 to A3A1J1.

#### 4.3.5.2.2 RF Filter Fault Isolation

1. Remove the filter from the receiver and remove the filter's protective cover.
2. Check all capacitors and the two Zener diodes for leakage to ground.
3. Check all inductors for continuity.
4. Field realignment of the filter is not practical.

### 4.3.5.3 Input Converter Testing And Troubleshooting

Input Converter Testing and Troubleshooting includes a checkout procedure and fault isolation information. A Signal Generator and an RF Voltmeter (**see Table 4-1**) are required to perform the tests outlined below.

#### 4.3.5.3.1 Input Converter Checkout Procedure

Perform the following procedure in the sequence given. If any specified result is not obtained, refer to **paragraph 4.3.5.3.2** for fault isolation.

1. Deenergize the receiver.
2. Disconnect A2P1 from A3A1J1 and P28 from A3A2J2. Terminate A3A2J2 with 50 Ω.
3. Set the receiver front panel controls as follows:
   a. Gain Mode - Manual
   b. RF Gain - Maximum Clockwise
4. Connect the RF Voltmeter to connector A3A2J2 using a short coaxial cable (a "TEE" connector should be used to maintain 50 Ω termination).
5. Connect the Signal Generator to connector A3A1J1 using a short coaxial cable. Set the Generator output frequency to 15.00500 MHz and output level to -7 dBm.
6. Energize the receiver and tune to 15.00500 MHz.
7. The RF Voltmeter should display a level of 350 mV.

8. Deenergize the receiver and disconnect test equipment, if no further tests are to be performed.

### 4.3.5.3.2 Input Converter, A3, Fault Isolation

**Table 4-4**, Input Converter Fault Isolation Chart, is used to isolate the module fault to a stage or circuit. Set up the Test Equipment as stated in **Paragraph 4.3.5.3.1** and check the Test Points given in **Table 4-4** with an RF Voltmeter and high impedance probe. When a faulty signal is encountered, replace the key components indicated and repeat the Checkout Procedure in **Paragraph 4.3.5.3.1. Table 4-5**, Input Converter Voltage Table, and **Figure 6-2**, Input Converter Schematic Diagram should be referred to if additional signal tracing/fault isolation is necessary.

**Table 4-4. Input Converter Fault Isolation Chart**

| Test Point | Normal Signal | Key Components | Comments |
|---|---|---|---|
| A1J2 | 1.8 V at 57.91 MHz | Check 1st LO | 1st LO Signal |
| U1-8 | 74 mV at 42.905 MHz | U1 | 1st IF |
| FL1-IN | 200 mV at 42.905 MHz | U2 | |
| FL1-OUT | 80 mV at 42.905 MHz | FL1 | |
| A2Q2-S | 40 mV at 42.905 MHz | Input Matching Network | |
| A2Q2-D | 500 mV at 42.905 MHz | A2Q2, T1, C16, CR2 | |
| A2J1 | 260 mV at 32.205 MHz | Check 2nd LO | 2nd LO Signal |
| A2Q6-B | 500 mV at 32.205 MHz | A2Q5 | |
| A2Q6-C | 1.3 V at 32.205 MHz | A2Q6 | |
| A201-3 | 130 mV at 10.7 MHz | A2U1 | 2nd IF |
| A2Q3-C | 1.3 V at 10.7 MHz | Q3, Q4, T2 | |
| A252 | 350 mV at 10.7 MHz | FL1 | |

**Table 4-5. Input Converter Voltage Table**

| TRANSISTOR PIN | | VOLTAGE | TRANSISTOR PIN | | VOLTAGE |
|---|---|---|---|---|---|
| A2Q1 | E | + 0.45 | A2Q4 | E | + 1.25 |
| | B | + 1.1 | | B | + 1.95 |
| | C | + 1.9 | | C | + 7 |
| A2Q2 | S | + 1.95 | A2Q5 | E | - 12 |
| | G | 0.0 | | B | - 11 |
| | D | + 15 | | C | 0.0 |
| A2Q2 | S | + 1.95 | A2Q6 | E | - 10 |
| | G | + 1.1 | | B | - 9.5 |
| | C | + 1.9 | | C | 0.0 |
| A2Q3 | E | + 8 | A2Q6 | E | - 10 |
| | B | + 8.8 | | B | - 9.5 |
| | C | + 14 | | C | 0.0 |

4.3.5.4 **10.7 MHz Filter Switch Testing and Troubleshooting**

10.7 MHz Filter Switch Testing and Troubleshooting includes a checkout procedure and fault isolation information. A Signal Generator and an RF Voltmeter (**Table 4-1**) are required to perform the tests outlined below.

4.3.5.4.1 **10.7 MHz Filter Switch Checkout Procedure**

Perform the following procedure in the sequence given. If any specified result is not obtained, refer to **paragraph 4.3.5.4.2** for fault isolation.

1. Deenergize the receiver.
2. Disconnect connector P19 from A4XA1.
3. Place PC board A4A1 in an extender.
4. Depress the receiver 3.2 kHz BW button.

5. Connect the RF Voltmeter to A4XA1 pin 57 using a short coaxial cable with clip leads on one end.

6. Connect the Signal Generator to A4XA1 pin 13 using a short coaxial cable with clip leads on one end. Set the Generator output frequency to 10.7 MHz and output level to -27 dBm.

7. Energize the receiver. The RF Voltmeter should display a level of 50 mV.

8. Depress the 6 kHz BW button and then the 16 kHz BW button. The RF Voltmeter should display a level of 50 mV in both BW position.

9. Deenergize the receiver and disconnect test equipment if no further tests are to be performed.

### 4.3.5.4.2 10.7 MHz Filter Switch, A4A1, Fault Isolation

**Table 4-6**, 10.7 MHz Filter Switch Fault Isolation Chart, is used to isolate the module fault to a stage or circuit. Set up the Test Equipment as stated in **paragraph 4.3.5.4.1** and check the Test Points given in **Table 4-6** with an RF Voltmeter and high impedance probe. When faulty signal is encountered, replace the key components indicated and repeat the Checkout Procedure in **paragraph 4.3.5.4.1. Table 4-7**, 10.7 MHz Filter Switch Voltage Table, and **Figure 6-4**, 10.7 MHz Filter Switch Schematic Diagram should be referred to if additional signal tracing/fault isolation is necessary.

**Table 4-6. 10.7 MHz Filter Switch Fault Isolation Chart.**

| Test Point | Normal Signal | Key Components | Comments |
|---|---|---|---|
| C1/L1 junction | 33 mV at 10.7 MHz | C1, L1 | All BW positions |
| Q1-C | 110 mV at 10.7 MHz | Q1 | Depress 3 kHz BW |
| FL1-OUT | 65 mV at 10.7 MHz | FL1 | |
| Q4-B | 12 mV at 10.7 MHz | R26, Q4 | |
| Q2-C | 120 mV at 10.7 MHz | Q2 | Depress 6 kHz BW |
| FL2-OUT | 65 mV at 10.7 MHz | FL2 | |
| Q5-B | 10 mV at 10.7 MHz | R28, Q5 | |
| Q3-C | 90 mV at 10.7 MHz | Q3 | Depress 16 kHz BW |
| Q6-B | 10 mV at 10.7 MHz | R30, Q6 | |
| A1-57 | 50 mV at 10.7 MHz | Q4, Q5, Q6, U1, U2 | All BW positions |

**Table 4-7. 10.7 MHz Filter Switch Voltage Chart**

| PIN | | Bandwidth (kHz) 16 | 6 | 3.2 |
|---|---|---|---|---|
| Q1 | C | +15.26 | +15.26 | +14.50 |
| | B | - 2.38 | - 2.38 | + 2.68 |
| | E | 0.00 | 0.00 | + 2.04 |
| Q2 | C | +15.26 | +14.49 | +15.26 |
| | B | - 2.53 | + 2.85 | - 2.53 |
| | E | 0.00 | + 2.19 | 0.00 |
| Q3 | C | +15.17 | +15.25 | +15.26 |
| | B | + 2.76 | - 2.36 | - 2.36 |
| | E | + 2.01 | 0.00 | 0.00 |

| PIN | | Bandwidth (kHz) 16 | 6 | 3.2 |
|---|---|---|---|---|
| Q4 | C | +15.32 | +15.32 | +15.29 |
| | B | - 2.24 | - 2.24 | + 2.48 |
| | E | 0.00 | 0.00 | + 1.83 |
| Q5 | C | +15.32 | +15.29 | +15.32 |
| | B | - 2.21 | + 2.44 | - 2.21 |
| | E | 0.00 | + 1.78 | 0.00 |
| Q6 | C | +15.29 | +15.32 | +15.32 |
| | B | + 2.50 | - 2.23 | - 2.23 |
| | E | + 1.88 | 0.00 | 0.00 |

### 4.3.5.5 10.7 MHz/455 kHz Converter Testing and Troubleshooting

10.7 MHz/455 kHz Converter Testing and Troubleshooting includes a checkout procedure and fault isolation information. A Signal Generator and an RF Voltmeter (**Table 4-1**) are required to perform the tests outlined below.

#### 4.3.5.5.1 10.7 MHz/455 kHz Converter Checkout Procedure

Perform the following in the sequence given. If any specified result is not obtained, refer to **paragraph 4.3.5.5.2** for fault isolation.

1. Deenergize the receiver.
2. Place PC board A4A2 on an extender. Remove PC board A4A1.
3. Connect the RF Voltmeter to A4XA2 pin 19 using a short coaxial cable with clip leads on one end. Connect cable shield to the IF Motherboard ground plane.
4. Connect the Signal Generator RF output to A4XA2 pin 57 using a short coaxial cable with clip leads on one end. Connect cable shield to the IF Motherboard ground plane. Set the Generator output frequency to 10.7 MHz and output level to -27 dBm.

5. Energize the receiver. The Oscilloscope should display a level of 22 mV.

6. Deenergize the receiver and disconnect Test Equipment if no further tests are to be performed. Replace A4A1.

4.3.5.5.2 **10.7 MHz/455 kHz Converter, A4A2, Fault Isolation**

**Table 4-8**, 10.7 MHz/455 kHz Converter Fault Isolation Chart, is used to isolate the module fault to a stage or circuit. Set up the Test Equipment as stated in **paragraph 4.3.5.5.1** and check the Test Points given in **Table 4-7** with an RF Voltmeter and high impedance probe. When a faulty signal is encountered, replace the key components indicated and repeat the Checkout Procedure in **paragraph 4.3.5.5.1. Table 4-9**, 10.7 MHz/455 kHz Converter Voltage Table, and **Figure 6-5**, 10.7 MHz/455 kHz Converter Schematic Diagram should be referred to if additional signal tracing/fault isolation is necessary.

**Table 4-8. 10.7 MHz/455 kHz Converter Fault Isolation Chart.**

| Test Point | Normal Signal | Key Components | Comments |
|---|---|---|---|
| A4A2-13 | 150 mV at 11.155 MHz | Check 3rd LO | 3rd LO Signal |
| Q1-C | 2.5 V at 11.155 MHz | Q1 | |
| U1-2 | 350 mV at 11.155 MHz | L2, C6, C7, C8 | |
| U1-4 | 5 mV at 455 kHz | U1 | 3rd IF Signal |
| A4A2-19 | 22 mV at 455 kHz | L3, L4, C9, C10, C11 | |

**Table 4-9. 10.7 MHz/455 kHz Converter Voltage Table.**

| | | |
|---|---|---|
| A2Q1 | EMITTER | + 3.24 |
| | BASE | + 3.96 |
| | COLLECTOR | +14.8 |

4.3.5.6 **455 kHz Filter Switch Testing and Troubleshooting**

455 kHz Filter Switch Testing and Troubleshooting includes a checkout procedure and fault isolation information. A Signal Generator and an RF Voltmeter (**Table 4-1**) are required to peform the following tests.

4.3.5.6.1 **455 kHz Filter Switch Checkout Procedure**

Perform the following procedure in the sequence given. If any specified result is not obtained, refer to **paragraph 4.3.5.6.2** for fault isolation.

1. Deenergize the receiver.
2. Remove PC board A4A2. Place PC board A4A3 on an extender.
3. Depress the receiver 3.2 kHz BW button.
4. Connect the RF Voltmeter input to A4XA3 pin 57 using a short coaxial cable with clip leads on one end. Connect cable shield to the IF Motherboard ground plane.
5. Connect the Signal Generator RF output to A4XA3 pin 13 using a short coaxial cable with clip leads on one end. Terminate the generator with a 50 Ω load. Connect cable shield to the IF Motherboard ground plane. Set the Generator output frequency to 455 kHz and output level to -27 dBm.
6. Energize the receiver. The RF Voltmeter should display a level of 25 mV.
7. Depress the 1.0 kHz BW button and then the 0.3 kHz BW button. The RF Voltmeter should display no less than 20 mV in both BW positions.
8. Deenergize the receiver and disconnect test equipment if no further tests are to be performed.

4.3.5.6.2 **455 kHz Filter Switch, A4A3, Fault Isolation**

**Table 4-10**, 455 kHz Filter Switch Fault Isolation Chart, is used to isolate the module fault to a stage or circuit. Set up the Test Equipment as stated in **paragraph 4.3.5.6.1** above and check the Test Points given in **Table 4-10** with an RF Voltmeter and high impedance probe. When a faulty signal is encountered, replace the key components indicated and repeat the Checkout Procedure in **paragraph 4.3.5.6.1**. **Table 4-11**, 455 kHz Filter Switch Voltage Table, and **Figure 6-6,** 455 kHz Filter Switch Schematic Diagram should be referred to if additional signal tracing/fault isolation is necessary.

**Table 4-10. 455 kHz Filter Switch Fault Isolation Chart.**

| Test Point | Normal Signal | Key Components | Comments |
|---|---|---|---|
| Q5-C | 23 mV at 455 kHz | Q5 | Depress 3.2 kHz BW |
| Q3-C | 27 mV at 455 kHz | Q3 | Depress 1.0 kHz BW |
| Q4-B | 17 mV at 455 kHz | FL2, Q4 | |
| Q1-C | 19 mV at 455 kHz | Q1 | Depress 0.3 kHz BW |
| Q2-B | 17 mV at 455 kHz | Fl1, Q2 | |
| A4A3-57 | 25 mV at 455 kHz | Q2, Q4, Q6 | 3.2 kHz BW |
| A4A3-57 | 20 mV at 455 kHz | Q2, Q4, Q6 | 1.0, 0.3 kHz BW |

**Table 4-11. 455 kHz Filter Switch Voltage Table**

| | | BANDWIDTH (kHz) | | |
|---|---|---|---|---|
| | PIN | 16/6/3.2 | 1.0 | 0.3 |
| U1 | 1 | - 12.9 | + 13.5 | - 12.9 |
| | 3 | 0.0 | + 4.6 | 0.0 |
| | 5 | + 4.4 | 0.0 | 0.0 |
| | 7 | + 13.6 | - 13 | - 13 |
| | 11 | - 14 | - 14 | - 14 |
| | 12 | 0.0 | 0.0 | + 4.6 |
| | 13 | + 2.7 | + 2.7 | + 2.7 |
| | 14 | - 13 | - 13 | + 13.6 |
| Q1 | E | 0.0 | 0.0 | 0.0 |
| | B | - 1.8 | - 1.8 | + 1.8 |
| | C | + 14.9 | + 14.9 | + 14.9 |
| Q2 | E | 0.0 | 0.0 | + 0.9 |
| | B | - 1.5 | - 1.5 | + 1.5 |
| | C | 14 | 14 | 14 |
| Q3 | E | 0.0 | + 2.3 | 0.0 |
| | B | - 3 | + 3 | - 3 |
| | C | 14.9 | 14.3 | 14.8 |
| Q4 | E | 0.0 | 0.8 | 0.0 |
| | B | - 1.4 | + 1.4 | - 1.4 |
| | C | 14 | 14 | 14 |

**Table 4-11. 455 kHz Filter Switch Voltage Table** (Cont'd)

| | | BANDWIDTH (kHz) | | |
|---|---|---|---|---|
| | PIN | 16/6/3.2 | 1.0 | 0.3 |
| Q5 | E | 1.25 | 0.0 | 0.0 |
| | B | + 1.9 | - 1.9 | - 1.9 |
| | C | + 14.7 | + 14.7 | + 14.7 |
| Q6 | E | + 0.8 | 0.0 | 0.0 |
| | B | + 1.4 | - 1.4 | - 1.4 |
| | C | + 14 | + 14 | + 14 |

#### 4.3.5.7 USB Filter Switch Testing and Troubleshooting

USB Filter Switch Testing and Troubleshooting includes a checkout procedure and fault isolation information. A Signal Generator and an RF Voltmeter (**Table 4-1**) are required to perform the tests outlined below.

##### 4.3.5.7.1 USB Filter Switch Checkout Procedure

Perform the following procedure in the sequence given. If any specified result is not obtained, refer to **paragraph 4.3.5.7.2** for fault isolation.

1. Deenergize the receiver.
2. Remove PC board A4A2. Place PC board A4A4 on an extender board.
3. Connect the RF Voltmeter Input to A4XA4 pin 57 using a short coaxial cable with clip leads on one end. Connect cable shield to the IF Motherboard ground plane.
4. Connect the Signal Generator RF output to A4XA4 pin 13 using a short coaxial cable with clip leads on one end. Connect cable shield to the IF Motherboard ground plane. Terminate the generator with a 50 Ω load. Set the Generator output frequency to 456.8 kHz and output level to -27 dBm.
5. Energize the receiver and depress the USB and then the ISB Mode buttons. The RF Voltmeter should display a level of 25 mV in both modes.
6. Deenergize the receiver and disconnect test equipment if no further tests are to be performed.

### 4.3.5.7.2 USB Filter Switch, A4A4, Fault Isolation

**Table 4-12**, USB Filter Switch Fault Isolation Chart, is used to isolate the module fault to a stage or circuit. Set up the Test Equipment as stated in **paragraph 4.3.5.7.1** and check the Test Points given in **Table 4-12** with an RF Voltmeter and high impedance probe. When a faulty signal is encountered, replace the key components indicated and repeat the Checkout Procedure in **paragraph 4.3.5.7.1. Table 4-13**, USB Filter Switch Voltage Table, and **Figure 6-7**, USB Filter Switch Schematic Diagram should be referred to if additional signal tracing/fault isolation is necessary.

**Table 4-12. USB Filter Switch Fault Isolation.**

| Test Point | Normal Signal | Key Components | Comments |
|---|---|---|---|
| Q1-C | 38 mV at 456.8 kHz | Q1, L1, CR1, U1 | Depress USB Switch |
| Q2-B | 14 mV at 456.8 kHz | FL1, Q2 | Depress USB Switch |
| Q2-C | 28 mV at 456.8 kHz | Q2, L2 | Depress USB Switch |
| Q2-C | 28 mV at 456.8 kHz | CR2 | Depress ISB Switch |

**Table 4-13. USB Filter Switch, A4A4, Voltage Table**

| PIN | | USB MODE | OTHER MODE |
|---|---|---|---|
| Q1 | C | + 14.69 | + 15.38 |
| | B | + 2.34 | - 2.15 |
| | E | + 1.68 | 0.00 |
| Q2 | C | + 14.78 | + 15.38 |
| | B | + 1.80 | - 1.76 |
| | E | + 1.14 | 0.00 |

### 4.3.5.8 ISB/LSB Filter Switch Testing and Troubleshooting

ISB/LSB Filter Switch Testing and Troubleshooting includes a checkout procedure and fault isolation information. A Signal Generator and an RF Voltmeter (**Table 4-1**) are required to perform the tests outlined below.

6. Move the RF Voltmeter clip lead to A4XA7 pin 13. The Oscilloscope should display a level of 20 mV.

7. Turn on the Signal Generator AM Modulation and set it for 50% modulation at 400 Hz.

8. Connect the Oscilloscope vertical input to A4XA7 pin 51 using a coaxial with clip leads on one end. The Oscilloscope should display a level of 1.0 V p-p at ≈400 Hz superimposed on a dc level of + 3.8 Vdc.

9. Deenergize the receiver and disconnect test equipment if no further tests are to be done.

### 4.3.5.9.2 455 kHz Amplifier/AM Detector, A4A7, Fault Isolation

**Table 4-16,** 455 kHz Amplifier/AM Detector Fault Isolation Chart, is used to isolate the module fault to a stage or circuit. Set up the Test Equipment as stated in **paragraph 4.3.5.9.1** and check the Test Points given in **Table 4-16** with an oscilloscope or RF Voltmeter with high impedance probe, as indicated. When a faulty signal is encountered, replace the key components indicated and repeat the Checkout Procedure in **paragraph 4.3.5.9.1. Table 4-17,** 455 kHz Amplifier/AM Detector Voltage Table, and **Figure 6-10,** 455 kHz Amplifier/AM Detector Schematic Diagram should be referred to if additional signal tracing/fault isolation is necessary.

**Table 4-16. Amplifier/AM Detector Fault Isolation Chart.**

| Test Point | Normal Signal | Key Components | Comments |
|---|---|---|---|
| Q1-1 | 12 mV at 455 kHz | Q1, CR1, L1 | No Gen. Modulation |
| Q2-1 | 19 mV at 455 kHz | Q2, CR2, L2, R7 | |
| Q3-E | 20 mV at 455 kHz | Q3, L3 | |
| Q4-C | 300 mV at 455 kHz | Q4, T1 | |
| A4A7-17 | 90 mV at 455 kHz | T1 | |
| Q5-B | 1 V at 455 kHz | Q5 | |
| CR3/L6 junction | 3.1 V at 455 kHz | Q5, L5 | |
| Q6-B | 4.6 Vdc/1 Vpp - 400 Hz | CR3, Q6 | Turn on Gen. Modulation; use oscilloscope. |
| A4A7-51 | 3.8 Vdc/1 Vpp - 400 Hz | Q6, L7 | Turn on Gen. Modulation; use oscilloscope. |

**Table 4-17. 455 kHz Amplifier/AM Detector Voltage Table.**

| | PIN | VOLTAGE | | PIN | VOLTAGE |
|---|---|---|---|---|---|
| Q1 | 1<br>2<br>3<br>3<br>4 | + 13.7<br>+ 3.75<br>+ 0.87<br>+ 0.87 | Q4 | E<br>B<br>C<br>C | + 3.5<br>+ 4.1<br>+ 14.4<br>+ 14.4 |
| Q2 | 1<br>2<br>3<br>4 | + 15<br>+ 3.8<br>+ 0.9<br>+ 1.4 | Q5 | E<br>B<br>C | - 0.7<br>- 0.1<br>+ 14.2 |
| Q3 | E<br>B<br>C | - 0.5<br>0.0<br>+ 15.0 | Q6 | E<br>B<br>C | + 3.3<br>+ 0.95<br>+ 15.0 |

**NOTE**

Above readings taken in Fast AGC Mode with no RF input signal.

### 4.3.5.10 FM/CW/SSB Detector Testing and Troubleshooting

FM/CW/SSB Detector Detector Testing and Troubleshooting includes a CW/SSB Detector Checkout procedure, an FM Detector Checkout Procedure and fault isolation information. A Signal Generator, RF Voltmeter and an Oscilloscope (**Table 4-1**) are required to perform the tests outlined below.

#### 4.3.5.10.1 CW/SSB Detector Checkout Procedure

Perform the following procedure in the sequence given. If any specified result is not obtained, refer to **paragraph 4.3.5.10.3** for fault isolation.

1. Deenergize the receiver.
2. Remove PC board A4A7. Place PC board A4A9 on an extender.
3. Connect the Oscilloscope Vertical Input to A4XA9 pin 57 using a short coaxial cable with clip leads on one end. Connect cable shield to the IF Motherboard ground plane.

4. Connect the Signal Generator RF output to A4XA9 pin 13 using a short coaxial cable with clip leads on one end. Connect cable shield to the ground plane. Terminate the generator with a 50 Ω load. Set the Generator output frequency to 455.4 MHz and output level to -33 dBm.

5. Energize the receiver and depress the USB Mode button. The Oscilloscope should display a level of 0.5 V p-p at 400 Hz. The waveform should be a clean sine save.

6. Deenergize the receiver and disconnect test equipment if no further tests are to be done.

### 4.3.5.10.2 FM Detector Checkout Procedure

Perform the following procedure in the sequence given. If any specified result is not obtained, refer to **paragraph 4.3.5.10.3** for fault isolation.

1. Deenergize the receiver.

2. Remove PC board A4A7. Place PC board A4A9 on an extender.

3. Connect the Oscilloscope Vertical Input to A4XA9 pin 57 using a short coaxial cable with clip leads on one end. Connect cable shield to the IF Motherboard ground plane.

4. Connect the Signal Generator RF output to A4XA9 pin 13 using a short coaxial cable with clip leads on one end. Connect cable shield to the IF Motherboard ground plane. Terminate the generator with a 50 Ω load. Set the generator output frequency to 455 kHz and output level to -33 dBm. Set the Generator for FM Modulation at 400 Hz and 4.8 kHz deviation.

5. Energize the receiver and depress the FM Mode button. The Oscilloscope should display a level of 1 V p-p at 400 Hz. The waveform should be a clean sine wave.

6. Deenergize the receiver and disconnect test equipment if no further tests are to be done.

### 4.3.5.10.3 FM/CW/SSB Detector, A4A9, Fault Isolation

**Table 4-18,** FM/CW/SSB Detector Fault Isolation Chart, is used to isolate the module fault to a stage or circuit. Set up the Test Equipment as stated in **paragraph 4.3.5.10.1** and check the Test Points given in **Table 4-18** with an oscilloscope or RF Voltmeter with high impedance probe, as indicated. When a faulty signal is encountered, replace the key components indicated and repeat the Checkout Procedure in **paragraph 4.3.5.10.1. Table 4-19,** FM/CW/SSB Detector Voltage Table, and **Figure 6-12,** FM/CW/SSB Detector Schematic Diagram should be referred to if additional signal tracing/fault isolation is necessary.

**Table 4-18. FM/CW/SSB Detector Fault Isolation Chart.**

| Test Point | Normal Signal | Key Components | Comments |
|---|---|---|---|
| U2-8 | 200 mV at 455 kHz | Check BFO | Depress CW Switch |
| U3-5 | 4 Vpp at 400 Hz | U2, Q3, Q4 | Depress CW Switch<br>Use oscilloscope |
| A4A9-57 | 0.5 Vpp at 400 Hz | U3 | Depress CW Switch<br>Use oscilloscope |
| U1-5 | 2 V at 455 kHz | U1, Q1, Q2 | Depress FM Switch |
| U3-3 | 4 Vpp at 400 Hz | CR1, CR2, T1 | Turn on FM Modulation. Use Oscilloscope. |
| A4A9-57 | 1 Vpp at 400 Hz | U3 | Turn on FM Modulation. Use Oscilloscope. |

**Table 4-19. FM/CW/SSB Detector Voltage Table**

| Component Pin | AM | FM | CW & SB | Component Pin | AM | FM | CW & SB |
|---|---|---|---|---|---|---|---|
| Q1 E | 9.6 | 8.1 | 9.2 | U2 1 | - 1.6 | - 1.6 | - 1.6 |
| Q1 B | 9.5 | 7.3 | 9.2 | U2 3 | - 1.7 | - 1.7 | - 1.7 |
| Q1 C | 0.0 | 8.0 | 0.0 | U2 4 | - 1.6 | - 1.6 | - 1.6 |
| | | | | U2 5 | - 3.8 | - 3.8 | - 3.8 |
| Q2 E | 0.0 | 2.0 | 0.0 | U2 6 | - 0.7 | - 0.7 | 3.8 |
| Q2 B | 0.0 | 0.62 | 0.0 | U2 7 | 0.0 | 0.0 | 0.0 |
| Q2 C | 9.9 | 0.0 | 9.2 | U2 8 | - 0.1 | - 0.1 | 0.0 |
| | | | | U2 9 | - 0.0 | 0.0 | 0.0 |
| Q3 E | 9.6 | 8.7 | 9.0 | U2 12 | - 0.7 | - 0.7 | 4.0 |
| Q3 B | 9.6 | 8.7 | 8.4 | U2 13 | - 0.7 | - 0.7 | 4.0 |
| Q3 C | -1.8 | -1.8 | 9.0 | U2 14 | -13.0 | -13.0 | -13.0 |
| Q4 E | 0.0 | 0.0 | 0.0 | U3 1 | 0.0 | 0.3 | 0.0 |
| Q4 B | 0.0 | 0.0 | 0.7 | U3 2 | 0.0 | 0.63 | 0.0 |
| Q4 C | 9.6 | 8.8 | 0.0 | U3 3 | 0.0 | 0.64 | 0.0 |
| | | | | U3 4 | 14.0 | 12.5 | 13.5 |
| U1 1 | 0.0 | 2.0 | 0.0 | U3 5 | 0.0 | 0.0 | 0.0 |
| U1 2 | 0.0 | 2.0 | 0.0 | U3 6 | 0.0 | 0.0 | 0.0 |
| U1 3 | 0.0 | 2.0 | 0.0 | U3 7 | 0.0 | 0.0 | 0.0 |
| U1 4 | 0.0 | 2.0 | 0.0 | U3 8 | 0.0 | - 0.0 | 0.0 |
| U1 5 | 0.0 | 5.6 | 0.0 | U3 9 | 0.0 | 0.0 | 0.0 |
| U1 6 | 0.0 | 0.0 | 0.0 | U3 10 | 0.0 | 0.0 | 0.0 |
| U1 7 | 0.0 | 0.0 | 0.0 | U3 11 | -13.0 | -13.0 | -13.0 |
| U1 8 | 0.0 | 0.0 | 0.0 | U3 12 | 9.4 | 8.5 | 9.1 |
| U1 9 | 0.0 | 0.8 | 0.0 | U3 13 | 9.4 | 8.5 | 9.1 |
| U1 10 | 0.0 | 5.6 | 0.0 | | | | |

### 4.3.5.11 Audio Amplifier Testing and Troubleshooting

Audio Amplifier Testing and Troubleshooting includes a checkout procedure and fault isolation information. A Signal Generator and an Oscilloscope (**Table 4-1**) are required to perform the tests outlined below.

#### 4.3.5.11.1 Audio Amplifier Checkout Procedure

Perform the following procedure in the sequence given. If any specified result is not obtained, refer to **paragraph 4.3.5.11.2** for fault isolation.

1. Deenergize the receiver.
2. Remove PC boards A4A6, A4A7, and A4A9. Place PC board A4A10 on an extender.
3. Set the receiver Line Audio Level control to Maximum Clockwise and the Phone Level control to mid-range.
4. Connect the Oscilloscope Vertical Input to A4XA10 pin 55 using a short coaxial cable with clip leads on one end. Connect shield to IF Motherboard ground plane.
5. Connect the Signal Generator AM output to A4XA10 pin 51 using a short coaxial cable with clip leads on one end. Connect cable shield to IF Motherboard ground plane. Set the Signal Generator Modulation Frequency to 400 Hz, set Audio Output Level to 0.2 V rms and set AM switch to INT.
6. Energize the receiver and depress the AM Mode button. The Oscilloscope should display a level of 0.3 V p-p at 400 Hz. The waveform should be a clean sine wave.
7. Use the Oscilloscope lead to probe A4XA10 pin 13 and A4XA10 pin 11. The Oscilloscope should display a level of 15 V p-p at 400 Hz on each pin.
8. Connect the Oscilloscope clip lead to A4XA10 pin 41. The Oscilloscope should indicate a level of -10.8 Vdc.
9. Move the Oscilloscope clip lead to A4XA10 pin 19. The Oscilloscope should display a level of 7 V p-p at 400 Hz.
10. Deenergize the receiver and disconnect test equipment if no further tests are to be done.

### 4.3.5.11.2 Audio Amplifier, A4A10, Fault Isolation

**Table 4-20**, Audio Amplifier Fault Isolation Chart, is used to isolate the module fault to a stage or circuit. Set up the Test Equipment as stated in **paragraph 4.3.5.11.2** and check the Test Points given in **Table 4-20** with an oscilloscope. When a faulty signal is encountered, replace the key components indicated and repeat the Checkout Procedure in **paragraph 4.3.5.11.2.** **Table 4-21**, Audio Amplifier Voltage Table, and **Figure 6-13,** Audio Amplifier Schematic Diagram (Type 746001) should be referred to if additional signal tracing/fault isolation is necessary.

**Table 4-20. Audio Amplifier Fault Isolation Chart.**

| Test Point | Normal Signal | Key Components | Comments |
|---|---|---|---|
| Q1-D | 0.45 Vpp at 400 Hz | Q1, U1, CR1 | Select AM Mode |
| U1-14 | 0.3 Vpp at 400 Hz | U1 | |
| C8, R18 junction | 300 mVpp at 400 Hz | Line Audio Control | |
| U2-2, 13 | 15 Vpp at 400 Hz | U2 | |
| R7, R8 | 20 mVpp at 400 Hz | Phone Level Control | |
| T1-5 | 7 Vpp at 400 Hz | U1, T1 | |

**Table 4-21. Audio Amplifier Voltage Table**

| | PIN | AM MODE ACTIVE | OTHER MODES ACTIVE |
|---|---|---|---|
| Q1 | S | 0.0 | 0.0 |
| | D | 0.0 | 0.0 |
| | G | 0.0 | - 13 |
| U1 | 1 | + 14 | - 14 |
| | 2 | + 1.6 | + 1.6 |
| | 3 | + 5 | 0.0 |
| U2 | 2 | + 6 | + 6 |
| | 13 | + 6 | + 6 |
| | 14 | + 12 | + 12 |

### 4.3.5.12 ISB Detector/Audio Testing and Troubleshooting

ISB Detector/Audio Testing and Troubleshooting includes a checkout procedure and fault isolation information. A Signal Generator, an RF Voltmeter and an Oscilloscope (**Table 4-1**) are required to perform the tests outlined below.

#### 4.3.5.12.1 ISB Detector/Audio Checkout Procedure

Perform the following procedure in the sequence given. If any specified result is not obtained, refer to **paragraph 4.3.5.12.2** for fault isolation.

1. Deenergize the receiver.
2. Remove PC board A4A5. Place PC board A4A8 on an extender.
3. Connect the Oscilloscope Vertical Input to A4XA8 pin 41 using a short coaxial cable with clip leads on one end. Connect cable shield to the IF Motherboard ground plane.
4. Connect the Signal Generator RF output to A4XA8 pin 53 using a short coaxial cable with clip leads on one end. Connect cable shield to the IF Motherboard ground plane. Terminate the generator with a 50 Ω load. Set the Generator output frequency to 454.6 kHz and output level to -47 dBm.
5. Energize the receiver and depress the ISB Mode button. The Oscilloscope should display a level of 0.7V p-p at 400 Hz. The waveform should be a clean sine wave.
6. Move the Oscilloscope clip lead to A4XA8 pin 44. Move shield clip lead to A4XA8 pin 48. Adjust A8R36 for an Oscilloscope reading of 8 V p-p at 400 Hz. The waveform should be a clean sine wave.
7. Move the Oscilloscope clip lead to A4XA8 pin 43. Connect cable shield to IF Motherboard ground plane. The Oscilloscope should display 0.0 Vdc.
8. Increase the Generator output level to -20 dBm. The level displayed on the Oscilloscope should increase to -6 Vdc.
9. Deenergize the receiver and disconnect the test equipment if no further tests are to be done..

#### 4.3.5.12.2 ISB Detector/Audio, A4A8, Fault Isolation

**Table 4-22,** ISB Detector/Audio Fault Isolation Chart, is used to isolate the module fault to a stage or circuit. Set up the Test Equipment as stated in **paragraph 4.3.5.12.1** and check the Test Points given in **Table 4-22** with an oscilloscope or RF Voltmeter and high

impedance probe as indicated. When a faulty signal is encountered, replace the key components indicated and repeat the Checkout Procedure in **paragraph 4.3.5.12.1.** **Table 4-23,** ISB Detector/Audio Voltage Table, and **Figure 6-11,** ISB Detector/Audio Schematic Diagram should be referred to if additional signal tracing/fault isolation is necessary.

**Table 4-22. ISB Detector/Audio Fault Isolation Chart.**

| Test Point | Normal Signal | | | Key Components | Comments |
|---|---|---|---|---|---|
| Q1-1 | 3.5 mV | at | 455 kHz | Q1, CR1, L1 | Use RF Voltmeter |
| Q2-3 | 0.9 mV | at | 455 kHz | R8 | Use RF Voltmeter |
| Q2-1 | 9.5 mV | at | 455 kHz | Q2 | Use RF Voltmeter |
| U1-8 | 200 mV | at | 455 kHz | Check BFO | BFO Signal |
| R33/C18 junction | 50 mV | at | 400 Hz | U1 | Use Oscilloscope |
| U3-1 | 4 Vpp | at | 400 Hz | U3 | Use Oscilloscope |
| U2-7, 8 | 20 Vpp | at | 400 Hz | U2 | Use Oscilloscope |
| A4A8-44 to 48 | 8 Vpp | at | 400 Hz | T1 | Use Oscilloscope |
| U2-12 | +2.1 Vdc | | | Q4, CR4 | Increase Gen. to -20 dBm. Use Oscilloscope. |
| U3-14 | -5.8 Vdc | | | U2, U3, Q3 | Increase Gen. to -20 dBm. Use Oscilloscope. |
| U3-8 | -3.35 Vdc | | | U3, Q5 | Increase Gen. to -20 dBm. Use Oscilloscope. |

**Table 4-23. ISB Detector/Audio Voltage Table**

| | PIN | ISB | OTHER MODES |
|---|---|---|---|
| U1 | 1 | - 7.5 | - 7.5 |
| | 4 | - 7 | - 7 |
| | 5 | - 13.5 | - 13.5 |
| | 6 | + 1.3 | - 0.8 |
| | 12 | + 1 | - 0.8 |
| | 14 | + 15 | + 15 |
| U2 | 1 | + 14 | - 13.5 |
| | 2 | + 1.5 | + 1.5 |
| | 3 | + 5 | 0.0 |
| | 4 | + 15 | + 15 |
| | 11 | - 15 | - 15 |
| | 12 | 0.0 | 0.0 |
| | 13 | + 1 | + 5 |
| | 14 | + 1 | + 5 |
| U3 | 4 | + 15 | + 15 |
| | 8 | 0.0 | 0.0 |
| | 9 | 0.0 | 0.0 |
| | 10 | 0.0 | 0.0 |
| | 11 | - 15 | - 15 |
| | 12 | 0.0 | 0.0 |
| | 13 | 0.0 | 0.0 |
| | 14 | 0.0 | 0.0 |

| | PIN | ISB | OTHER MODES |
|---|---|---|---|
| Q1 | 1 | + 14.5 | + 14.5 |
| | 2 | + 3.3 | + 3.3 |
| | 3 | + 0.9 | + 0.9 |
| | 4 | + 1 | + 1 |
| Q2 | 1 | + 14 | + 14 |
| | 2 | + 3.3 | + 3.3 |
| | 3 | + 0.8 | + 0.8 |
| | 4 | + 1 | + 1 |
| Q3 | E | 0.0 | + 7.5 |
| | B | + 0.2 | + 0.2 |
| | C | 0.0 | 0.0 |
| Q4 | E | 0.0 | 0.0 |
| | B | 0.0 | 0.0 |
| | C | + 15 | + 15 |
| Q5 | E | 0.0 | 0.0 |
| | B | + 2.8 | - .5 |
| | C | 0.0 | 0.0 |

### 4.3.5.13 AGC Testing and Troubleshooting

AGC Testing and Troubleshooting includes a checkout procedure and fault isolation information. A Signal Generator and a Digital Voltmeter (**Table 4-1**) are required to perform the tests outlined below.

#### 4.3.5.13.1 AGC Checkout Procedure

Perform the following procedure in the sequence given. If any specified result is not obtained, refer to **paragraph 4.3.5.13.2** for fault isolation.

1. Deenergize the receiver.
2. Remove PC boards A4A3, A4A4, A4A5, and A4A10.
3. Set the receiver Gain Mode to Fast AGC and Meter switch to Line Audio.

4. Connect the Digital Voltmeter input to A4XA6 pin 47 using a short cable with clip leads on one end. Connect the common lead to the IF Motherboard ground plane. Set the Digital Voltmeter to the 20 Vdc range.

5. Connect the Signal Generator output to A4XA7 pin 57 using a short coaxial cable with clip leads on one end. Connect cable shield to the IF Motherboard ground plane. Set the Generator output frequency to 455 kHz and output level to -40 dBm.

6. Energize the receiver. The Digital Voltmeter should indicate -3.5 Vdc.

7. Select the receiver MAN Gain Mode. Adjust the RF Gain control until the Digital Voltmeter indicates the same level indicated in step 7.

8. Select the Fast AGC Mode.

9. Connect the Digital Voltmeter clip lead to A4XA6 pin 19. The Voltmeter should indicate +0.7 Vdc.

10. Connect the Digital Voltmeter clip lead to A4XA6 pin 41. The Voltmeter should indicate -3.0 Vdc.

11. Deenergize the receiver and disconnect test equipment if no further tests are to be done.

### 4.3.5.13.2 AGC, A4A6, Fault Isolation

**Table 4-24**, AGC Fault Isolation Chart, is used to isolate the module fault to a stage or circuit. Set up Test Equipment as stated in **paragraph 4.3.5.13.2** and check the Test Points given in **Table 4-24** with a Digital Voltmeter. When a fault signal is encountered, replace the key components indicated and repeat the Checkout Procedure in **paragraph 4.3.513.2. Table 4-25**, AGC Voltage Table, and **Figure 6-9**, AGC Schematic Diagram should be referred to if additional signal tracing/fault isolation is necessary.

**Table 4-24. AGC Fault Isolation Chart.**

| Test Point | Normal Signal | Key Components | Comments |
|---|---|---|---|
| A4A6-51 | +3.2 Vdc | Check A4A7 | AGC Mode |
| Q1-E | +2.7 Vdc | Q1 | |
| U1-1 | +2.7 Vdc | U1 | |
| Q2-C | +0.13 Vdc | CR9, Q2, Q6 | |
| U2-7 | -6.6 Vdc | U2 | |
| U1-14 | -3.5 Vdc | U1 | |
| U2-10 | -0.06 Vdc | Q5 | |
| U2-8 | -0.32 Vdc | U2 | |
| U2-1 | +1.07 Vdc | U2 | |

## Table 4-25. AGC Voltage Table

| | | INPUT SIGNAL | | | NO SIGNAL | | |
|---|---|---|---|---|---|---|---|
| TRANSISTOR | | MAN | SLOW | FAST | MAN | SLOW | FAST |
| Q1 | E | 1.7 | 3.2 | 3.2 | 0.05 | 0.06 | 0.06 |
| | B | 2.0 | 2.7 | 2.7 | + 0.4 | 0.38 | 0.38 |
| | C | 14.3 | 14.3 | 14.4 | 14.4 | 14.3 | 14.4 |
| Q2 | E | 0.77 | 0.77 | 0.77 | 0.06 | 0.06 | 0.06 |
| | B | 0.18 | 0.20 | 0.20 | 0.02 | 0.2 | 0.02 |
| | C | 0.0 | 0.13 | 0.13 | 0.0 | 0.0 | 0.0 |
| Q3 | E | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| | B | 0.6 | 0.0 | 0.0 | 0.59 | 0.0 | 0.0 |
| | C | 0.0 | 0.0 | 0.0 | 0.01 | 0.0 | 0.0 |
| Q4 | E | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| | B | - 2.3 | - 2.3 | - 2.3 | - 2.3 | - 2.3 | - 2.3 |
| | C | - 0.06 | - 0.6 | - 0.6 | 0.0 | 0.0 | 0.0 |
| Q5 | E | - 2.9 | - 2.8 | - 2.8 | - 0.50 | 0.07 | 0.07 |
| | B | - 2.3 | - 2.3 | - 2.3 | - 2.3 | - 2.3 | - 2.3 |
| | C | - 0.6 | - 0.6 | - 0.6 | 0.0 | 0.0 | 0.0 |
| Q6 | E | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | B | 0.58 | 0.0 | 0.54 | 0.0 | 0.0 | |
| | C | 0.05 | 0.13 | 0.13 | 0.01 | 0.0 | 0.0 |
| Q7 | E | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| | B | - 3.9 | 0.62 | - 3.9 | - 3.9 | 0.63 | - 3.9 |
| | C | N/A | N/A | N/A | N/A | N/A | N/A |
| U1 | 1 | 2.0 | 2.7 | 2.7 | 0.06 | 0.07 | 0.07 |
| | 2 | 2.0 | 2.7 | 2.7 | 0.06 | 0.07 | 0.07 |
| | 3 | 2.0 | 2.7 | 2.7 | 0.05 | 0.06 | 0.05 |
| | 4 | 14.3 | 14.3 | 14.4 | 14.4 | 14.3 | 14.4 |
| | 5 | 0.0 | 5.0 | 0.0 | 0.0 | 5.0 | 0.0 |
| | 6 | 1.5 | 1.7 | 1.7 | 1.7 | 1.7 | 1.7 |
| | 7 | -12.6 | 12.9 | -12.6 | -12.9 | 12.9 | -12.6 |
| | 8 | - 2.0 | - 2.2 | - 2.2 | - 0.05 | - 0.05 | - 0.05 |
| | 9 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| | 10 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| | 11 | -13.8 | -13.8 | -13.8 | -13.8 | -13.9 | -13.8 |
| | 12 | - 3.5 | - 3.5 | - 3.5 | - 0.5 | 0.07 | 0.07 |
| | 13 | - 3.5 | - 3.5 | - 3.5 | - 0.5 | 0.07 | 0.07 |
| | 14 | - 3.5 | - 3.5 | - 3.5 | - 0.5 | 0.07 | 0.07 |

**Table 4-25. AGC Voltage Table** (Concluded)

| TRANSISTOR | | INPUT SIGNAL | | | NO SIGNAL | | |
|---|---|---|---|---|---|---|---|
| | | MAN | SLOW | FAST | MAN | SLOW | FAST |
| U2 | 1 | 0.86 | 0.82 | 0.83 | - 0.08 | - 0.08 | - 0.08 |
| | 2 | 0.86 | 0.82 | 0.83 | - 0.08 | - 0.8 | - 0.8 |
| | 3 | 0.86 | 0.82 | 0.83 | - 0.08 | - 0.08 | - 0.08 |
| | 4 | 14.3 | 14.4 | 14.4 | 14.3 | 14.3 | |
| | 5 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 6 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| | 7 | - 6.6 | - 6.6 | - 6.6 | - 0.8 | 0.12 | 0.12 |
| | 8 | - 0.32 | - 0.32 | - 0.32 | 0.03 | 0.03 | 0.03 |
| | 9 | - 0.05 | - 0.06 | 0.0 | 0.0 | 0.0 | |
| | 10 | - 0.06 | - 0.06 | - 0.06 | 0.0 | 0.0 | 0.0 |
| | 11 | -13.8 | -13.8 | -13.8 | -13.8 | -13.9 | -13.8 |
| | 12 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| | 13 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| | 14 | 0.85 | 0.82 | 0.8 | 0.0 | 0.0 | 0.0 |

**NOTE**

Two sets of data are given: one with an input signal and one without. When using the input signal data, tune the receiver to 15.00500 MHz and inject an unmodulated signal of 15.00500 MHz at -40 dBm into RF Input jack A2J1. Nominal voltage values are given for each of the three gain modes: Manual, Fast AGC, and Slow AGC. The RF Gain Control must be set maximum clockwise while using Manual Mode No Signal data. To use data for Manual Mode with Input Signal, reduce gain control setting to achieve the same meter reading as in AGC Mode.

4.3.5.14 **Front Panel Interconnect Testing and Troubleshooting**

Front Panel Interconnect Testing and Troubleshooting includes a checkout procedure and fault isolation information. A Digital Voltmeter (**Table 4-1**) is required to perform the tests outlined below.

4.3.5.14.1 **Front Panel Interconnect Checkout Procedure**

Perform the following procedure in the sequence given. If any specified result is not obtained, refer to **paragraph 4.3.5.14.2** for fault isolation.

1. Deenergize the receiver.

2. Connect the common (-) input of the Digital Voltmeter to A6XA2 pin 5 using a short test lead.

3. Energize the receiver.

4. Refer to **Table 4-15** and depress the indicated Mode and BW pushbuttons in succession. For each Mode or BW selected, use the Digital Voltmeter positive (+) test lead to probe for high (>2.5 Vdc) or low (<0.5 Vdc) conditions as indicated.

5. Deenergize the receiver and disconnect test equipment.

**Table 4-26. Front Panel Interconnect Voltage Table**

| Pin Nos. | AM | CW | FM | USB | LSB | ISB |
|---|---|---|---|---|---|---|
| A6XA2-5 | LO | LO | LO | LO | HI | LO |
| A6XA2-3 | LO | LO | LO | HI | LO | LO |
| A6XA2-1 | LO | LO | LO | LO | LO | HI |
| A6XA2-18 | LO | HI | LO | HI | HI | HI |
| A6XA2-16 | LO | LO | HI | LO | LO | LO |
| A6XA2-48 | HI | LO | LO | LO | LO | LO |
| A6XA2-58 | HI | HI | HI | LO | LO | LO |
| A6XA2-60 | HI | LO | HI | LO | LO | LO |
| A10J1-22 | HI | HI | HI | LO | LO | LO |
| A10J1-37 | HI | HI | HI | LO | LO | LO |
| A10J1-16 | HI | HI | HI | LO | LO | LO |
| Pin Nos. | 16 kHz | 6 kHz | 3 kHz | 1 kHz | .3 kHz | USB/LSB/ISB |
| A6XA2-49 | HI | HI | HI | LO | LO | LO |
| A6XA2-51 | HI | LO | LO | HI | HI | HI |
| A6XA2-53 | LO | HI | LO | LO | LO | LO |
| A6XA2-55 | LO | LO | HI | LO | LO | LO |
| A6XA2-47 | LO | LO | LO | HI | LO | LO |
| A6XA2-45 | LO | LO | LO | LO | HI | LO |

4.3.5.14.2 **Front Panel Interconnect Fault Isolation**

The following list of Supplementary Troubleshooting Data should be used to isolate the fault and locate the defective component or connection. After the fault has been

corrected, check the Front Panel Interconnect for normal operation by repeating the Checkout Procedure in **paragraph 4.3.5.14.1** above.

| | | |
|---|---|---|
| 1. | Figure 6-22. | Front Panel Interconnect Schematic |
| 2. | Paragraph 3.4.24. | Front Panel Interconnect Circuit Description |

### 4.3.5.15 Lower Panel Control Testing and Troubleshooting

Lower Panel Control Testing and Troubleshooting includes a checkout procedure and fault isolation information. A Signal Generator and an Oscilloscope (**Table 4-1**) are required to perform the tests outlined below. Procedures in this paragraph are applicable to both Type 791826 and Type 796054 Lower Panel Controls, except where noted.

#### 4.3.5.15.1 Lower Panel Control Checkout Procedure

Perform the following procedure in the sequence given. If any specified result is not obtained, refer to **paragraph 4.3.5.15.2** for fault isolation.

1. Deenergize the receiver. Select any mode other than ISB. On the WJ-8718A/8718-9 Receiver, ensure that USB and LSB Audio buttons are deenergized.

2. Remove the front panel and gently pull it out several inches from the receiver main chassis, being careful not to place any strain on the interconnecting cables.

3. Connect the Oscilloscope Vertical input to connector A10A2J3 using a short coaxial cable with clip leads on one end. Connect cable shield to terminal A10A2E1.

4. Connect the Signal Generator AM Output to terminal A10A2E3 using a short coaxial cable with clip leads on one end. Connect cable shield to terminal A10A2E1. Set the Signal Generator Modulation Frequency to 400 Hz, set Audio Output Level to 70 mV and set AM switch to INT.

5. Energize the receiver and rotate the Phone Level control fully clockwise. The Oscilloscope should display a level of >20 V p-p. The waveform should be a clean sine wave.

6. Move the Oscilloscope input lead to connector A10A2-J2. The Oscilloscope should display a level of >20 V p-p. The waveform should be a clean sine wave.

7. Deenergize the receiver and disconnect test equipment

### 4.3.5.15.2 Lower Panel Control Fault Isolation

The following list of Supplementary Troubleshooting Data should be used to isolate the fault and locate the defective component or connection. After the fault has been corrected, check the Lower Panel Control for normal operation by repeating the procedure in **paragraph 4.3.5.15.1.**

| | | |
|---|---|---|
| 1. | Figure 6-24. | Lower Panel Control Schematic Diagram (Type 796054) |
| 2. | Figure 6-24. | Lower Panel Control Schematic Diagram (Type 791826) |
| 3. | Paragraph 3.4.42. | Lower Panel Control Circuit Description |

### 4.3.5.16 1st LO Synthesizer Testing and Troubleshooting

1st LO Synthesizer Testing and Troubleshooting includes a checkout procedure and fault isolation. A Frequency Counter, wideband Oscilloscope and RF Voltmeter (**Table 4-1**) are required to perform the tests outlined below.

#### 4.3.5.16.1 1st LO Synthesizer Checkout Procedure

Perform the following procedure in the sequence given. If any specified result is not obtained, refer to **paragraph 4.3.5.16.2** for Fault Isolation.

1. Deenergize the receiver.
2. Disconnect connector from A1J2.
3. Connect the Frequency Counter to W2P3.
4. Energize the receiver and tune it to 00.00000 MHz. The Frequency Counter should indicate 42.91 MHz.
5. Rotate the tuning knob counterclockwise and tune receiver to 29.99999 MHz. The Frequency Counter should indicate 72.90 MHz.
6. Disconnect the Frequency Counter and connect the RF Voltmeter and 50 Ω Probe to W2P3. The Voltmeter should indicate +20 dBm ±2dBm.
7. Deenergize the receiver and disconnect test equpment. Reconnect W2P3.

#### 4.3.5.16.2 1st LO Synthesizer, P/O A5A1, Fault Isolation

1st LO Synthesizer Fault Isolation includes Troubleshooting Tests to aid in isolating a fault to a defective stage or circuit. Supplementary Troubleshooting Data is provided in

**paragraph 4.3.15.16.3** to aid in tracing the fault to a defective component or connection.

1. VCO Band Select Circuitry - **Table 4-27** below checks for proper operation of U13, diodes CR8 through CR10, and Q1 through Q3, while dialing different frequencies on the front panel.

**Table 4-27. VCO Band Select Code**

| TUNED FREQUENCY | BAND SELECT OUTPUT (Vdc) | | |
|---|---|---|---|
| | E3 | E2 | E1 |
| 0.00 - 3.99 MHz | + 15 | + 15 | + 15 |
| 4.00 - 7.99 MHz | + 15 | + 15 | - 12 |
| 8.00 - 11.99 MHz | + 15 | - 12 | + 15 |
| 12.00 - 15.99 MHz | + 15 | - 12 | - 12 |
| 16.00 - 19.99 MHz | - 12 | + 15 | + 15 |
| 20.00 - 23.99 MHz | - 12 | + 15 | - 12 |
| 24.00 - 27.99 MHz | - 12 | - 12 | + 15 |
| 28.00 - 29.99 MHz | - 12 | - 12 | - 12 |

2. Divider Section - With a tuned frequency of 00.00000 MHz, or a 1st LO input to J1 of 171.64 MHz, the following frequencies in **Table 4-28** should be found at the corresponding IC pins using a Digital Counter.

**Table 4-28. 1st LO Frequency Chart**

| IC | PIN | FREQ (Hz) | IC | PIN | FREQ (Hz) |
|---|---|---|---|---|---|
| U1 | 7 | 17 MHz | U9 | 7 | 1.68 MHz |
| U1 | 9 | 3.4 MHz | U9 | 9 | 80 kHz |
| U1 | 10 | 40 kHz | U9 | 15 | 40 kHz |
| U2 | 12 | 3.4 MHz | U10 | 7 | 840 kHz |
| U3 | 7 | 40 kHz | U10 | 7 | 200 kHz |
| U3 | 9 | 40 kHz | U11 | 6 | 40 kHz |
| U6 | 3 | 40 kHz | U11 | 7 | 40 kHz |
| U8 | 7 | 340 kHz | U12 | 5 | 40 kHz |
| U9 | 1 | 40 kHz | U12 | 9 | 40 kHz |

3. Phase Detector U5 - Check for 40 kHz signal at input pin 3 of U5. If signal is not present, troubleshoot Time Base Circuits.

Check for 40 kHz signal at pin 1 of U5. If not present, troubleshoot 1st LO counter circuits. Refer to **Figure 4-2** to understand the function of the phase detector.

4. 1st LO VCO - The 1st LO VCO is located on the 1st and 3rd LO PC board. It is recommended to read the circuit description of the VCO before troubleshooting (**paragraph 3.4.17**). The frequency of the oscillator, Q1, is controlled by the band select code and the tuning voltage. The correct VCO output frequency can be found by adding 42.91 MHz to the tuned frequency in **Table 4-28** and multiplying the result by 4.

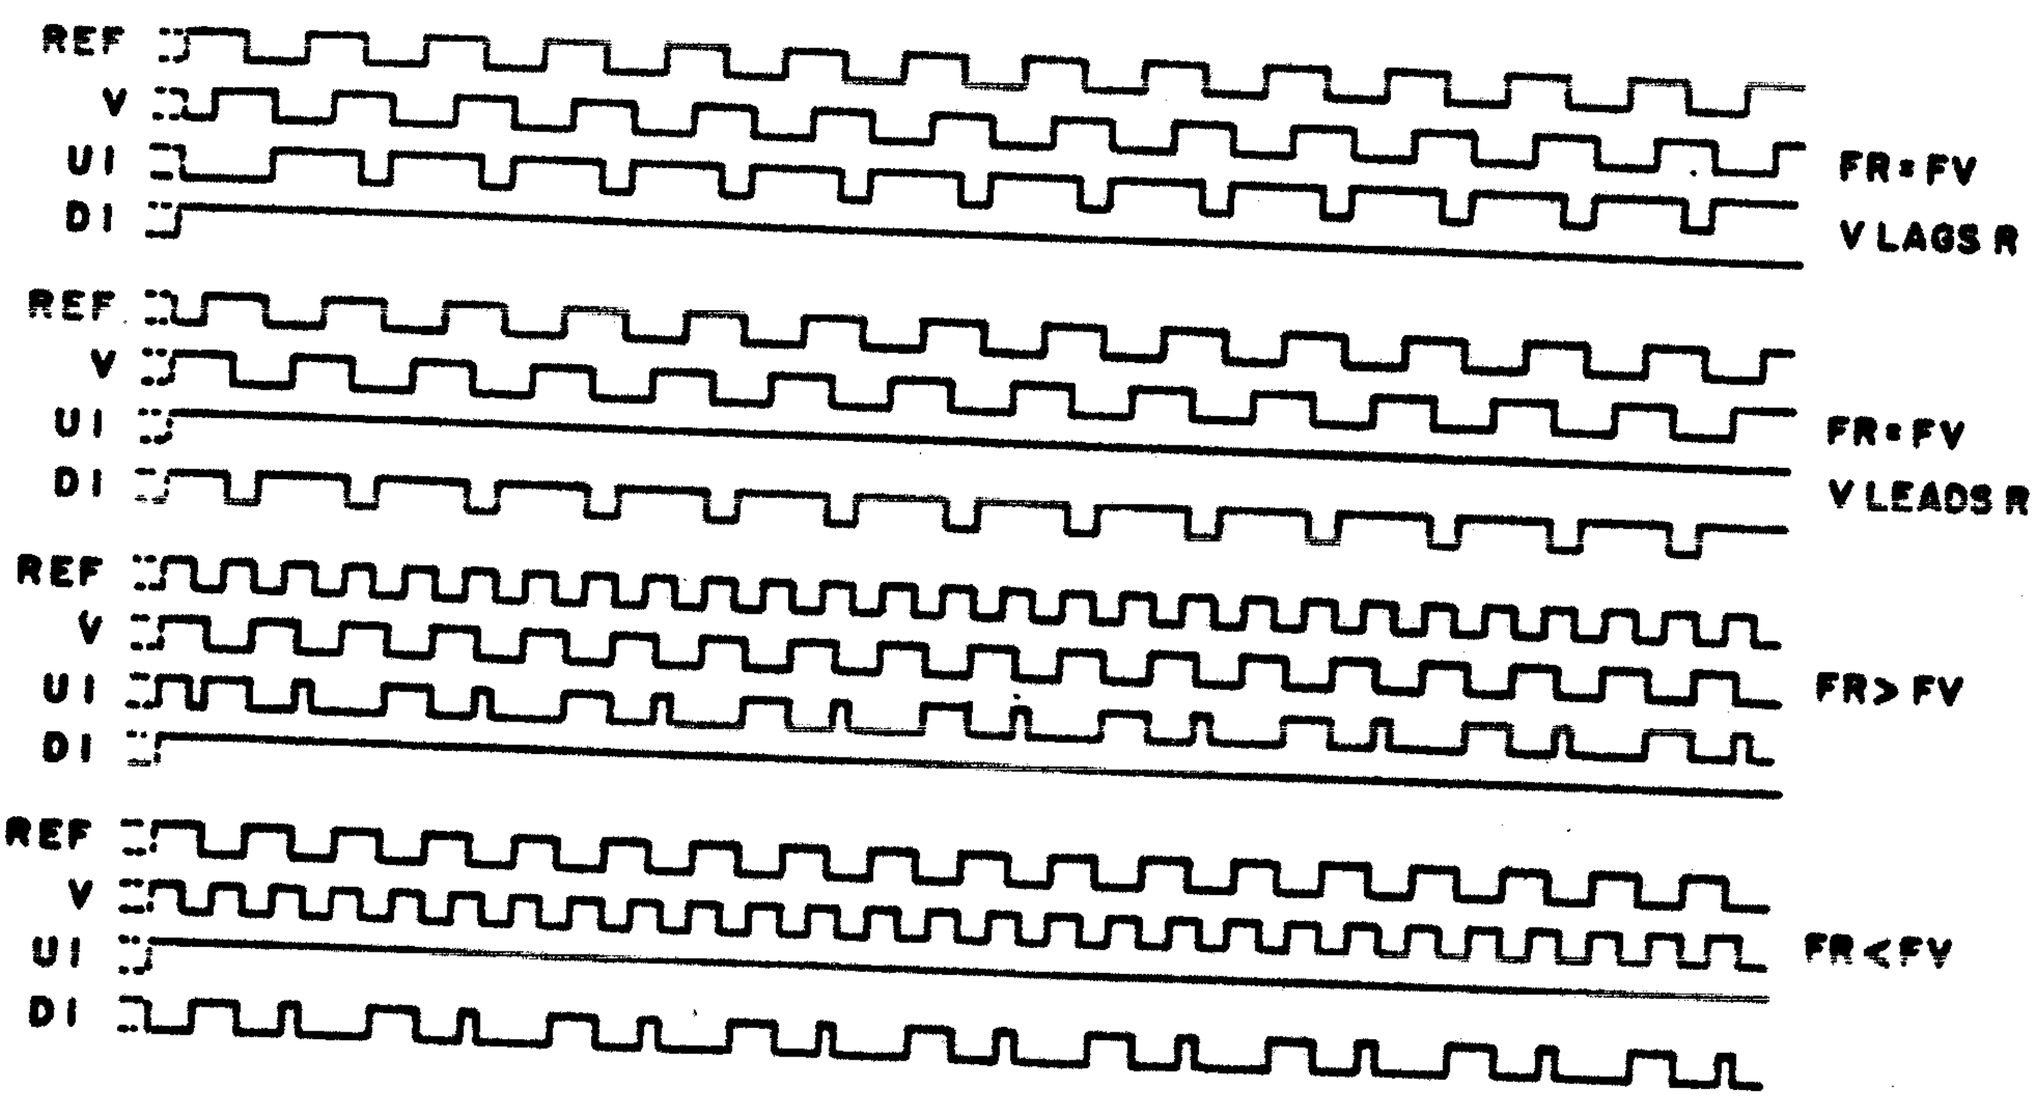



**Figure 4-2. Phase Detector Timing Diagram**

### 4.3.5.16.3 1st LO Synthesizer Supplementary Troubleshooting Data

The following Supplementary Troubleshooting Data is used in conjunction with the Troubleshooting Tests above as an aid in correcting 1st LO Synthesizer faults.

1. Figure 6-15. 1st LO Synthesizer Schematic Diagram
2. Paragraph 3.4.16. 1st LO Synthesizer Circuit Description
3. Paragraph 4.3.7.2.1. 1st LO Synthesizer Alignment

### 4.3.5.17 2nd LO Synthesizer Testing and Troubleshooting

2nd LO Synthesizer Testing and Troubleshooting includes a checkout procedure and fault isolation information. A Frequency Counter, wideband Oscilloscope, and RF Voltmeter (**Table 4-1**) are required to perform the tests outlined below.

#### 4.3.5.17.1 2nd LO Synthesizer Checkout Procedure

Perform the following procedure in the sequence given. If any specified result is not obtained, refer to **paragraph 4.3.5.17.2** for fault isolation.

1. Deenergize the receiver.
2. Disconnect connector W4P4 from A2J1.
3. Connect the Frequency Counter to P4.
4. Energize the receiver and tune to 00.00000 MHz. The Frequency Counter should indicate 32.21 MHz.
5. Tune the receiver to 00.00999 MHz. The Frequency Counter should indicate 32.20001 MHz.
6. Disconnect the Frequency Counter and connect the RF Voltmeter and 50 Ω probe to W4P4. The Voltmeter should indicate 0 dBm ± 2 dBm.
7. Deenergize the receiver and disconnect test equipment. Reconnect P4.

#### 4.3.5.17.2 2nd LO Synthesizer, A5A2, Fault Isolation

2nd LO Synthesizer Fault Isolation includes Troubleshooting Tests to aid in isolating a fault to a defective stage or circuit. Supplementary Troubleshooting Data is provided in **paragraph 4.3.5.17.3** to aid in tracing the fault to a defective component or connection.

1. Determine which of the phase lock loops is causing the problem. When the problem loop is determined, troubleshoot as described below.

   a. 32 MHz Loop - Proper operation of this loop is indicated by a 32.00000 MHz signal on the transistor case (or collector) of Q1. If not, proceed to Step 2 below.

b. Programmable Loop - Proper operation of this loop is indicated by a 200 kHz signal at pin 1 of U6 when the receiver is tuned to 15.00999 MHz and a 210 kHz signal at pin 1 of U6 when the receiver is tuned to 15.00000 MHz. Illumination of LED CR1 indicates a faulty loop. If a problem is not detected, proceed to step 3 below.

c. Output Loop - Troubleshooting this loop is required when no problems exist in the two loops tested above and 32.20001 to 32.21 MHz is not seen at module pin B15. If this loop has failed, proceed to Step 4.

2. 32 MHz Loop

a. U3 and U2 - U3 is a divide-by-2 counter. The time for two input waveforms at pin 3 of U3 equals the time for one output waveform at pin 5 of U3. If not, determine that the input levels are correct for TTL (low state less than 0.8 V, high state greater than 2.0 V). If these levels do exist and the output is not correct, replace U3. U2 is a divide-by-16 counter. The time for 16 input waveforms at pin 8 of U2 equals the time for one output waveform at pin 12 of U2. If not, replace U2.

b. Verify proper operation of phase detector U1. Check 1 MHz reference at pin 1 of U1. If wrong or no signal, troubleshoot Time Base circuits. A working voltage may vary from 2.0 to 3.5 Vdc (at pin 8 of U1).

c. Vary capacitor C51 (inside shielded unit) until 2.7 Vdc (nominal) is seen at test point E1, when the tuning tool is withdrawn from the shield.

3. Programmable Loop

a. U19, U17 and U6 - The time for one waveform at pin 5 of U19 equals 10 waveforms at pin 6 of U19. If not, replace U19. The time for one waveform at pin 12 of U17 equals 10 waveforms at pin 8 of U17. If not, replace U17. The time for one waveform at pin 7 of U16 equals 10 waveforms at pin 15 of U16 (difficult to read with scope since frequency at pin 15 varies from 200 - 210 MHz). If not, replace U16.

b. Operation of 100/ 101 prescaler - Tune the receiver to 15.00999 MHz. The time for 10 input waveforms at pin 2 of U14 equals one output waveform at pin 11 of U14. If not, replace U14.

c. Operation of Counters - Tune the receiver to 15.00000 MHz. This sets all inputs (A, B, C, and D) to U7, U8 and U9 with 0 Vdc. Using a frequency counter with an input impedance of greater than 1000 Ω, the frequencies in **Table 4-29** should be found at the corresponding pins. If not, replace that IC.

d. Phase Detector U12 - Check for 10 kHz signal at Pin 1 of U12. If incorrect or no signal, troubleshoot Time Base Circuits. Compare inputs (pins 1 and 3) and outputs 2 and 13 to **Figure 4-2** of the lst LO Troubleshooting Test.

e. Tune the receiver to 15.00499 MHz. Spread or compress the turns of coil L8 until 4.0 Vdc is seen at test point E3. Recheck the voltage at test point E3 to be certain that it remains between +2.0 Vdc and 6.5 Vdc as the receiver is tuned from 15.00000 to 15.00999 MHz.

f. If the problem appears to be in the VCO, read Section III, **paragraph 3.4.18** then troubleshoot.

4. Output Loop

a. Measure the frequency of the output at module pin B15. If no signal is present, there is a problem in the VCO or its output amplifier. Check gate 1 of Q3 (pin 3) for signal. If there is none, the problem is with the VCO circuit of Q6. If the signal is there, the problem is in the circuit of amplifier Q3. If the signal is present at pin B15, adjust C61 to bring it as close as practical to 32.300 MHz.

b. With the VCO very near 32.200 MHz, check the signals at pins 1 and 3 of U6. Both should be TTL level signals of approximately 200 kHz (that is low less than 0.8 V and high greater than 2.0 V). If the wrong signal is at pin 1, troubleshoot the programmable loop Step 3; if the wrong signal is at pin 3, proceed below.

c. Check the base of Q2. The signal there should be roughly sinusoidal and about 0.5 V p-p. If so, the problem is in the circuits of U14 and U5.

**Table 4-29. 2nd LO Frequency Chart**

| IC PIN | FREQUENCY | IC PIN | FREQUENCY |
|---|---|---|---|
| U7 Pin 14 | 2.09 MHz | U9 Pin 3 | 1.05 MHz |
| U7 Pin 13 | 100 kHz | U9 Pin 13 | 130 kHz |
| U8 Pin 4 | 100 kHz | U10 Pin 14 | 130 kHz |
| U8 Pin 13 | 10 kHz | U10 Pin 12 | 10 kHz |
| U9 Pin 14 | 2.09 MHz | U10 Pin 11 | 10 kHz |

d. Because of the low signal levels at the inputs of U4 and U5, signal tracing is difficult. The signal at U4 pin 1 should be 32.2 MHz, at U4 pin 7 should be 32.0 MHz, and at U5 pins 1 and 2 should be 200 kHz. Grounding of the scope probe is critical if the true signal is to be isolated. It is more likely that careful visual inspection of these circuits and a few voltage checks will be useful. The voltage at pins 1 and 2 of U15 will be approximately +5 V and must be equal within 0.2 Vdc. If they differ by more than this, replace U4. If the 200 kHz at pins 1 and 2 of U5 can be measured, the output at pin 6 should be amplified by about 10 times from that level. There may be some distortion present at the output of U5 which is reduced at the base of Q2.

e. If the signals at Pins 1 and 3 of U6 both appear correct, compare its outputs at Pins 2 and 13 with those of **Figure 4-2.** If these appear correct the problem must be in the amplifier section of U6 pins 8 and 9 and its connection to the VCO.

#### 4.3.5.17.3 2nd LO Synthesizer Supplementary Troubleshooting Data

The following Supplementary Troubleshooting Data is used in conjunction with the Troubleshooting Tests above as an aid in correcting 2nd LO Synthesizer faults:

1. Figure 6-18. 2nd LO Synthesizer Schematic Diagram
2. Paragraph 3.4.18. 2nd LO Synthesizer Circuit Description
3. Paragraph 4.3.7.2.2. 2nd LO Synthesizer Alignment

### 4.3.5.18 3rd LO Synthesizer Testing and Troubleshooting

3rd LO Synthesizer Testing and Troubleshooting includes a checkout procedure and fault isolation information. A Frequency Counter, wideband Oscilloscope, and RF Voltmeter (**Table 4-1**) are required to perform the tests outlined below.

### 4.3.5.18.1 3rd LO Synthesizer Checkout Procedure

Perform the following procedure in the sequence given. If any specified result is not obtained, refer to **paragraph 4.3.5.18.2** for fault isolation.

1. Deenergize the receiver.
2. Disconnect connector W6P10 from J7.
3. Connect the Frequency Counter to W6P10.
4. Energize the receiver. The Frequency Counter should indicate 11.155 MHz.
5. Disconnect the Frequency Counter and connect the RF Voltmeter and 50 Ω probe to W6P10. The Voltmeter should indicate -8 dBm minimum.
6. Deenergize the receiver and disconnect test equipment. Reconnect W6P10.

### 4.3.5.18.2 3rd LO Synthesizer, P/O A5A1, Fault Isolation

3rd LO Synthesizer Fault Isolation includes Troubleshooting Tests to aid in isolating a fault to a defective stage or circuit. Supplementary Troubleshooting Data is provided in **paragraph 4.3.5.18.3** to aid in tracing the fault to a defective component or connection.

1. Verify all inputs to the 3rd LO circuitry are correct. If not, troubleshoot Time Base circuits.
   a. 50 kHz signal at pin 11 of U21.
   b. 10 kHz signal at pin of U21.
2. Operation of U21 - The time for two input waveforms at Pin 3 of U21 equals one output waveform at pin 5 of U21. If not, replace U21.
3. Operation of U22 - Observe inputs (pins 1 and 3) and output voltage (pins 2 and 13) and compare to Figure 4-18. If a difference exists, replace U22. A normal value for the output (pin 8) is 2.0 to 3.0 Vdc.
4. Proper alignment of C33 is indicated by an approximate 2.75 Vdc at pin 8 of U22.
5. If problems lead to the VCO, read **paragraph 3.4.19** in the Circuit Description Section and troubleshoot.

#### 4.3.5.18.3 3rd LO Synthesizer Supplementary Troubleshooting Data

The following Supplementary Troubleshooting Data is used in conjunction with the Troubleshooting Tests above as an aid in correcting 3rd LO Synthesizer faults.

1. Figures 6-17. 1st & 3rd LO Synthesizer Schematic Diagram
2. Paragraph 3.4.19. 3rd LO Synthesizer Circuit Description
3. Paragraph 4.3.7.2.4. 3rd LO Synthesizer Alignment

### 4.3.5.19 BFO Synthesizer Testing and Troubleshooting

BFO Synthesizer Testing and Troubleshooting includes a checkout procedure and fault isolation information. A Frequency Counter and wideband Oscilloscope (**Table 4-1**) are required to perform the tests outlined below.

#### 4.3.5.19.1 BFO Synthesizer Checkout Procedure

Perform the following procedure in the sequence given. If any specified result is not obtained, refer to **paragraph 4.3.5.19.2** for Fault Isolation.

1. Deenergize the receiver.
2. Disconnect connector W7P11 from J8.
3. Connect the Frequency Counter to W7P11.
4. Energize the receiver and select CW Mode. Set the BFO offset to +0.0 kHz. The Frequency Counter should read 455.000 kHz.
5. Set the BFO Offset first to +8.9 kHz and then to -8.9 kHz. The Frequency Counter should read 463.900 kHz and 446.1 kHz respectively.
6. Disconnect the Frequency Counter and reconnect W7P11 to J8.
7. Connect the Oscilloscope input to A4TP15 using a shielded cable with clip leads on one end. Connect cable shield to the IF Motherboard ground plane. The Oscilloscope should display a level of 120 mV p-p at 446.1 kHz.
8. Deenergize the receiver and disconnect test equipment.

#### 4.3.5.19.2 BFO Synthesizer, A5A3, Fault Isolation

BFO Synthesizer Fault Isolation includes Troubleshooting Tests to aid in isolating a fault to a defective stage or circuit. Supplementary Troubleshooting Data is provided in

**paragraph 4.3.5.19.3** to aid in tracing the fault to a defective component or connection.

1. Set front panel BFO thumbwheel switches to "+0.0".

2. Programmable Circuits - Use this procedure when a 1 kHz signal is not seen entering the phase detector, pin 3 of U9.

   a. The frequencies in **Table 4-30** should be found at the corresponding IC pins. If a problem is detected, troubleshoot and/or replace the IC from which the signal originates.

**Table 4-30. BFO Frequency Chart**

| IC | PIN | FREQ | IC | PIN | FREQ | IC | PIN | FREQ |
|---|---|---|---|---|---|---|---|---|
| U1 | 2 | 910 kHz | U2 | 2 | 91 kHz | U3 | 2 | 9 kHz |
| U1 | 3 | 2.275 | U2 | 3 | 228 kHz | U3 | 3 | 23 kHz |
| U1 | 4 | 0 | U2 | 4 | 455 kHz | U3 | 4 | 46 kHz |
| U1 | 6 | 455 kHz | U2 | 6 | 46 kHz | U3 | 6 | 5 kHz |
| U1 | 7 | 455 kHz | U2 | 7 | 46 kHz | U3 | 7 | 5 kHz |
| U1 | 11 | 1 kHz | U2 | 11 | 1 kHz | U3 | 11 | 1 kHz |
| U1 | 14 | 4.55 MHz | U2 | 14 | 4.55 MHz | U3 | 14 | 4.55 MHz |
| U4 | 2 | 1 kHz | U5 | 2 | 1 kHz | U6 | 10 | 27 kHz |
| U4 | 3 | 3 kHz | U5 | 4 | 1 kHz | U6 | 11 | 24 kHz |
| U4 | 4 | 5 kHz | U5 | 5 | 5 kHz | U6 | 12 | 12 kHz |
| U4 | 6 | 1 kHz | U5 | 6 | 5 kHz | U6 | 13 | 13 kHz |
| U4 | 7 | 1 kHz | U6 | 1 | 5 kHz | U7 | 1 | 455 kHz |
| U4 | 11 | 1 kHz | U6 | 2 | 46 kHz | U7 | 2 | 455 kHz |
| U4 | 14 | 4.55 MHz | U6 | 3 | 12 kHz | U7 | 4 | 910 kHz |
| U5 | 8 | 27 kHz | U6 | 4 | 228 kHz | U7 | 5 | 2.275 kHz |
| U5 | 9 | 9 kHz | U6 | 5 | 455 kHz | U7 | 6 | 455 kHz |
| U5 | 10 | 23 kHz | U6 | 6 | 24 kHz | U7 | 8 | 4.55 kHz |
| U5 | 12 | 46 kHz | U6 | 8 | 1 kHz | U7 | 9 | 4.55 kHz |
| U5 | 13 | 91 kHz | U6 | 9 | 1 kHz | U8 | 2 | 1 kHz |

3. Phase Detector U9

   a. 1 kHz signal should be seen at pin 1 of U9. If not, troubleshoot Time Base circuits.

   b. A voltage level of roughly 1.25 Vdc should be seen at pin 10 of U9. If not, replace U9.

   c. Adjust capacitor C8 until a 2.7 Vdc level is seen at module pin 7.

4. Amplifier Q2 and Sine Wave to TTL Converter Q3 should be checked when the signal from the VCO through capacitor C10 is not amplified at the collector of Q3. Refer to the circuit description for these circuits, Section 3.

5. Output Divider U10 - Use **Table 4-31** below to check the operation of U10 with the BFO thumbwheel settings set to "+0.0".

**Table 4-31. Output Divider U10 Frequency Chart**

| IC | PIN | FREQ |
|---|---|---|
| U10 | 1 | 4.55 MHz |
| U10 | 11 | 910 kHz |
| U10 | 12 | 455 kHz |
| U10 | 14 | 910 kHz |

#### 4.3.5.19.3 BFO Synthesizer Supplementary Troubleshooting Data

The following Supplementary Troubleshooting Data is used in conjunction with the Troubleshooting Test above as an aid in correcting BFO Synthesizer Faults.

1. Figure 6-19. BFO Synthesizer Schematic Diagram
2. Paragraph 3.4.20. BFO Synthesizer Circuit Description
3. Paragraph 4.3.7.2.6. BFO Synthesizer Alignment

### 4.3.5.20 Time Base Testing and Troubleshooting

Time Base Testing and Troubleshooting includes a checkout procedure and fault isolation information. A Frequency Counter and a wideband Oscilloscope (Table 4-1) are required to perform the tests outlined below.

#### 4.3.5.20.1 Time Base Checkout Procedure

Perfom the following procedure in the sequence given. If any specified result is not obtained, refer to **paragraph 4.3.5.20.2** for Fault Isolation.

1. Deenergize the receiver.

2. Connect the Frequency Counter input to A5XA1 pin A9 using a short coaxial cable with clip leads on one end. Connect cable shield to Motherboard ground plane.

3. Energize the receiver. The Frequency Counter should read 1.000000 MHz ±3 Hz.

4. Move the Frequency Counter clip lead to A5XA1 pin A47. The Frequency Counter should read 10.000 kHz ±1 Hz.

5. Move the Frequency Counter clip lead to A5XA1 pin A53. The Frequency Counter should read 1.000 kHz ±1 Hz.

6. Move the Frequency Counter clip lead to test point A5A1A2 pin E6. The Frequency counter should read 40.000 kHz ±1 Hz.

7. Deenergize the receiver and disconnect test equipment.

### 4.3.5.20.2 Time Base, P/O A5A1, Fault Isolation

Time Base Fault Isolation includes Troubleshooting Tests to aid in isolating a fault to a defective stage or circuit. Supplementary Troubleshooting Data is provided in **paragraph 4.3.5.20.3** to aid in tracing the fault to a defective component or connection.

Using the internal frequency source, the frequencies in **Table 4-32** should be found at the corresponding IC pins. A Digital Counter is the recommended method to check the frequencies, however, an Oscilloscope may be used remembering the time for one input waveform is proportional to the time for one output waveform by the dividing ratio of the IC.

**Table 4-32. Time Base Frequency Chart**

| IC | PIN | FREQUENCY | IC | PIN | FREQUENCY |
|---|---|---|---|---|---|
| U15 | 5 | 1 MHz | U18 | 12 | 10 kHz |
| U15 | 6 | 1 MHz | U19 | 5 | 250 kHz |
| U15 | 8 | 2 MHz | U19 | 12 | 50 kHz |
| U15 | 12 | 200 kHz | U20 | 5 | 5 kHz |
| U17 | 12 | 40 kHz | U20 | 12 | 1 kHz |
| U18 | 5 | 500 kHz | U23 | 8 | 1 MHz |
| U18 | 8 | 1 MHz | U23 | 11 | 1 MHz |

### 4.3.5.20.3 Time Base Supplementary Troubleshooting Data

The following list of Supplementary Troubleshooting Data is used as an aid in correcting Time Base faults.

| | | |
|---|---|---|
| 1. | Figures 6-15. | 1st and 3rd LO Synthesizer/Time Base Schematic Diagram |
| 2. | Paragraph 3.4.21. | Time Base Circuits Description |
| 3. | Paragraph 4.3.7.2.5. | 2 MHz Time Base Alignment |

### 4.3.6 PARTS REPLACEMENT GUIDELINES

This paragraph provides techniques to assist the Technician in replacing components on PC boards.

**WARNING**

**To prevent electrical shock or damage to the receiver, always disconnect the receiver from the ac power source before soldering or replacing components.**

#### 4.3.6.1 Soldering Techniques

When removing components from a printed circuit board for inspection or replacement, be especially careful not to damage the track. The soldering iron power should be no larger than 40 W, and a solder sipper or wicking procedure should be employed when removing solder. Non-corrosive soldering flux should be used when removing solder by wicking. In returning components to the board, make sure that holes are clear and that leads do not catch the edge of the track and lift it from the board. A good grade of rosin core 60/40 solder should be used. Heat no longer than is necessary to achieve a good joint. A heat sink should be used where possible.

#### 4.3.6.2 Component Replacement

Specific guidelines for replacing the various kinds of components are as follows.

1. When soldering or unsoldering diodes or resistors, solder quickly to allow as little heat conduction as possible. When wiring permits, use a heat sink between the soldering iron and the part.

2. When soldering or unsoldering transistors, use a low wattage iron and a heat sink. Solder as quickly as possible. The use of a circular soldering tip to heat all three or four joints simultaneously is recommended.

3. When soldering or unsoldering glass or ceramic capacitors, use a heat sink between the capacitor and the iron. Excessive heat will crack the capacitor body.

4. When any electronic part is removed, note the position of the part and its leads, and replace it the same way.

#### 4.3.6.3 Realignment

Replacement of semiconductors or tuned circuit components may affect the alignment of the PC board being repaired. Realignment may be necessary to return the PC board to normal operation.

## 4.3.7 ADJUSTMENT/ALIGNMENT PROCEDURES

### 4.3.7.1 General

The following Adjustment and Alignment Procedures should not be performed on a routine basis, but instead, should be used as aids in troubleshooting and post-repair testing. Before alignment is attempted, the technician should first perform the relevant procedures to determine which module needs alignment. These procedures may be used for testing or aligning new and repaired modules.

### 4.3.7.2 Synthesizer Alignment

#### 4.3.7.2.1 1st LO Synthesizer Alignment

The only alignment points for the 1st LO Synthesizer are in the 1st LO VCO (A5A1A1) which is a very sensitive circuit; care must be taken to ensure proper operation. This procedure should be performed only when a definite alignment is needed. **Table-4-33** lists the components and their parameters used in this alignment procedure.

1. Mount the 1st and 3rd LO on an extender card.
2. Remove the VCO front plate.
3. Connect a Digital Voltmeter to module pin B1.
4. Beginning at Band 0, align the 8 Vco Bands indicated in **Table 4-33.** Alignment is accomplished by monitoring the voltage at pin B1 and adjusting the indicated components. Note that L2, L3 and L4 will cause interaction between the alignment of several bands.
5. Check the 1st LO frequency band (test point E3 in the VCO) while dialing the tuned frequency in 10 kHz steps starting with 00.00000 MHz.

**Table 4-33. VCO Alignment Parameters**

| VCO Band | 1st LO FREQ BAND (MHz) | VOLTAGE Pin B1 (Typical) | ALIGNMENT COMPONENT |
|---|---|---|---|
| 0 | 42.91-46.90 | -8.5 to 6.0 | C6*, L1 |
| 1 | 46.91-50.90 | -7.5 to 4.1 | L2 |
| 2 | 50.91-54.90 | -7.2 to 2.8 | L3 |
| 3 | 54.91-54.90 | -5.3 to 3.9 | L2, L3 |
| 4 | 58.91-62.90 | -6.6 to 2.7 | L4 |
| 5 | 62.91-66.90 | -6.0 to 2.2 | L4, L2 |
| 6 | 66.91-70.90 | -6.2 to 0.4 | L3, L4 |
| 7 | 70.91-72.90 | -5.7 to -3.0 | L4, L3, L2 |
| * Factory Select Value | | | |

### 4.3.7.2.2 2nd LO Synthesizer Alignment (A5A2)

The 2nd LO Synthesizer procedure consists of a 32 MHz Loop Alignment, a Programmable Loop Alignment, and an Output Loop Alignment. Perform the procedure in the given sequence.

**CAUTION**

For optimum results, the 2nd LO Synthesizer Alignment should be performed in an ambient temperature of +25° C ±5° C.

1. Preliminary Setup

   a. Remove the top protective cover from the receiver.

   b. Mount the 2nd LO Synthesizer board (A5A2) on an extender card.

   c. Energize the receiver and allow 30 minutes warm-up time.

   d. Using a Digital Voltmeter, verify that +15 Vdc ±0.25 Vdc is present at pins B5, B41, and A59, and that +5 Vdc ±0.25 Vdc is present at pins A1, B1, and B45.

   e. Using a Frequency Counter, verify that the 1 MHz reference frequency at pin B49 is 1.000000 MHz and that the 10 kHz reference frequency at pin A57 is 10.000 kHz.

**NOTE**

If the two reference frequencies are not correct, perform the Time Base Adjustment Procedure before proceeding with the 2nd LO Synthesizer Alignment.

2. 32 MHz Loop Alignment

   a. Connect the Digital Voltmeter to test point E1.

   b. Adjust capacitor C51 until a Voltmeter reading of +3.0 Vdc is observed with the alignment tool withdrawn from the VCO shield.

3. Programmable Loop Alignment

   a. Connect the Digital Voltmeter to test point E3.

b. Tune the receiver to 00.00499 MHz.

c. Insert an alignment tool in the VCO shield opening and spread or squeeze the turns of L8 until a Voltmeter reading of +4.0 Vdc is observed with the alignment tool withdrawn from the VCO shield.

4. Output Loop Alignment

a. Connect the Digital Voltmeter to test point E2.

b. Tune receiver to 00.00499 MHz.

c. Adjust capacitor C61 until a Voltmeter reading of +3.0 Vdc is observed with the alignment tool withdrawn from the VCO shield.

d. Using the Frequency Counter, verify that a frequency of 32.205010 MHz ±3 Hz is present at output pin B15.

5. Final Adjustments

a. Deenergize the receiver.

b. Remove the 2nd LO Synthesizer board from the extender card and return it to the receiver.

c. Mount the top protective cover on the receiver (use only four fasteners to secure the top cover).

d. Energize the receiver and allow it to operate for a minimum of 30 minutes.

e. Tune the receiver to 00.00499 MHz.

f. With the receiver in operation, remove the bottom protective cover.

g. Using the Digital Voltmeter, check the Loop Test Point Voltages as indicated in **Table 4-34.**

**Table 4-34. Loop Test Point Voltages**

| Parameter | Pin Number | Test Point Voltage |
|---|---|---|
| 32 MHz Loop TP | A5XA2-B57 | +3 Vdc ±0.1 Vdc |
| Programmable Loop TP | A5XA2-A51 | +4 Vdc ±0.1 Vdc |
| Output Loop TP | A5XA2-A55 | +3 Vdc ±0.1 Vdc |

**NOTE**

Test Point Voltages may drift from initial settings. If any Test Point Voltage is not within tolerance, repeat the appropriate loop alignment procedure. Set the Test Point Voltage(s) high or low as required to compensate for any drift observed in Step g. Do not proceed to Step h until the voltages in **Table 4-34** are observed after the receiver has been in operation for 30 minutes with both covers in place.

h. Using the Frequency Counter, verify that a frequency of 32.205010 MHz ±3 Hz is present at pin A5XA2-B15.

i. Tune the receiver first to 00.00000 MHz and then to 00.00999 MHz. The appropriate Loop Test Point Voltages and the 2nd LO Output Frequency are given in **Table 4-35.**

**Table 4-35. 2nd LO Synthesizer Tuning Parameters**

| Parameter | Pin Number | Receiver Tuned Frequency | |
|---|---|---|---|
| | | 00.00000 MHz | 00.00999 MHz |
| 32 MHz Loop TP | A5XA2-B57 | +3 Vdc ±0.2 Vdc | +3 Vdc ±0.2 Vdc |
| Programmable Loop TP | A5XA2-A51 | >1.5 Vdc | <7.0 Vdc |
| Output Loop TP | A5XA2-A55 | +3 Vdc ±0.2 Vdc | +3 Vdc ±0.2 Vdc |
| 2nd LO Frequency | A5XA2-B15 | 32.21000 MHz | 32.20001 MHz |

j. Mount the top protective cover on the receiver.

k. This completes the 2nd LO Synthesizer Alignment Procedure.

4.3.7.2.3 **2nd LO Filter Adjustment**

1. Deenergize the receiver.

2. Disconnect connector P4 from A2J1 of Input Converter (A3).

3. Connect the RF Voltmeter and 50 Ω adapter to P4.

4. Set Voltmeter to 0 dBm (0.3 mV) scale and energize the receiver.

5. Adjust A5C13 for maximum Voltmeter reading. A5C13 is located on the bottom side of the Synthesizer Motherboard (A5) near the front panel of the receiver.

### 4.3.7.2.4 3rd LO Synthesizer Alignment

1. Deenergize the receiver.
2. Mount the 1st and 3rd LO Synthesizer (A5A1A2) on extender cards and connect the Digital Voltmeter to Pin 8 of U22.
3. Energize the receiver. Adjust capacitor C33 until a reading of 3.0 Vdc is seen on the Voltmeter.
4. Deenergize the receiver and disconnect Digital Voltmeter.

### 4.3.7.2.5 2 MHz Time Base Adjustment

**NOTE**

**Before performing the following adjustment, the receiver should have been in operation for at least one hour at normal operation temperature to allow the circuit to stabilize.**

1. Deenergize the receiver.
2. Mount 1st and 3rd LO Synthesizer (A5A1A2) on extender cards.
3. Connect the Digital Counter to rear panel 1 MHz Ref connector J11.
4. Set the Clock switch S2 to INT position.
5. Energize the receiver. Allow at least a 5 minute warm-up to stabilize the circuits. (This assumes power was not off more than 5 minutes to make the cable connections.)
6. While observing the Counter display, adjust 2 MHz Crystal Oscillator (U14) for a reading of 1.000000 MHz ±3 Hz.
7. Deenergize the receiver and disconnect Digital Counter. Replace A5A1A2 board into the proper slots.

### 4.3.7.2.6 BFO Synthesizer Alignment

Two alignments are required for the BFO Synthesizer (A5A3). Capacitor C8 and resistor R1 are interdependent and must be aligned simultaneously.

1. Mount the BFO Synthesizer board on extender cards.
2. Adjust C8 until the closest reading to 3.0 Vdc is seen at module pin 7.

3. Adjust R1 until the voltage difference between gate to source of Q4 (Pins 3 and 2) is 0 Vdc. (The voltage from gate to ground and from source to ground will be approximately 1.2 Vdc.)

4. Adjust C8 again until the closer reading to 3.0 Vdc is seen at module pin 7.

### 4.3.7.3 Receiver Alignment

#### 4.3.7.3.1 Input Converter Alignment

1. Deenergize the receiver and loosen the two (2) captivated screws holding the A3 module to the chassis. Pull the A3 module out and remove its cover. Connect test equipment as shown in **Figure 4-3.** Be careful that Input Converter does not short to the adjacent power supply circuitry.

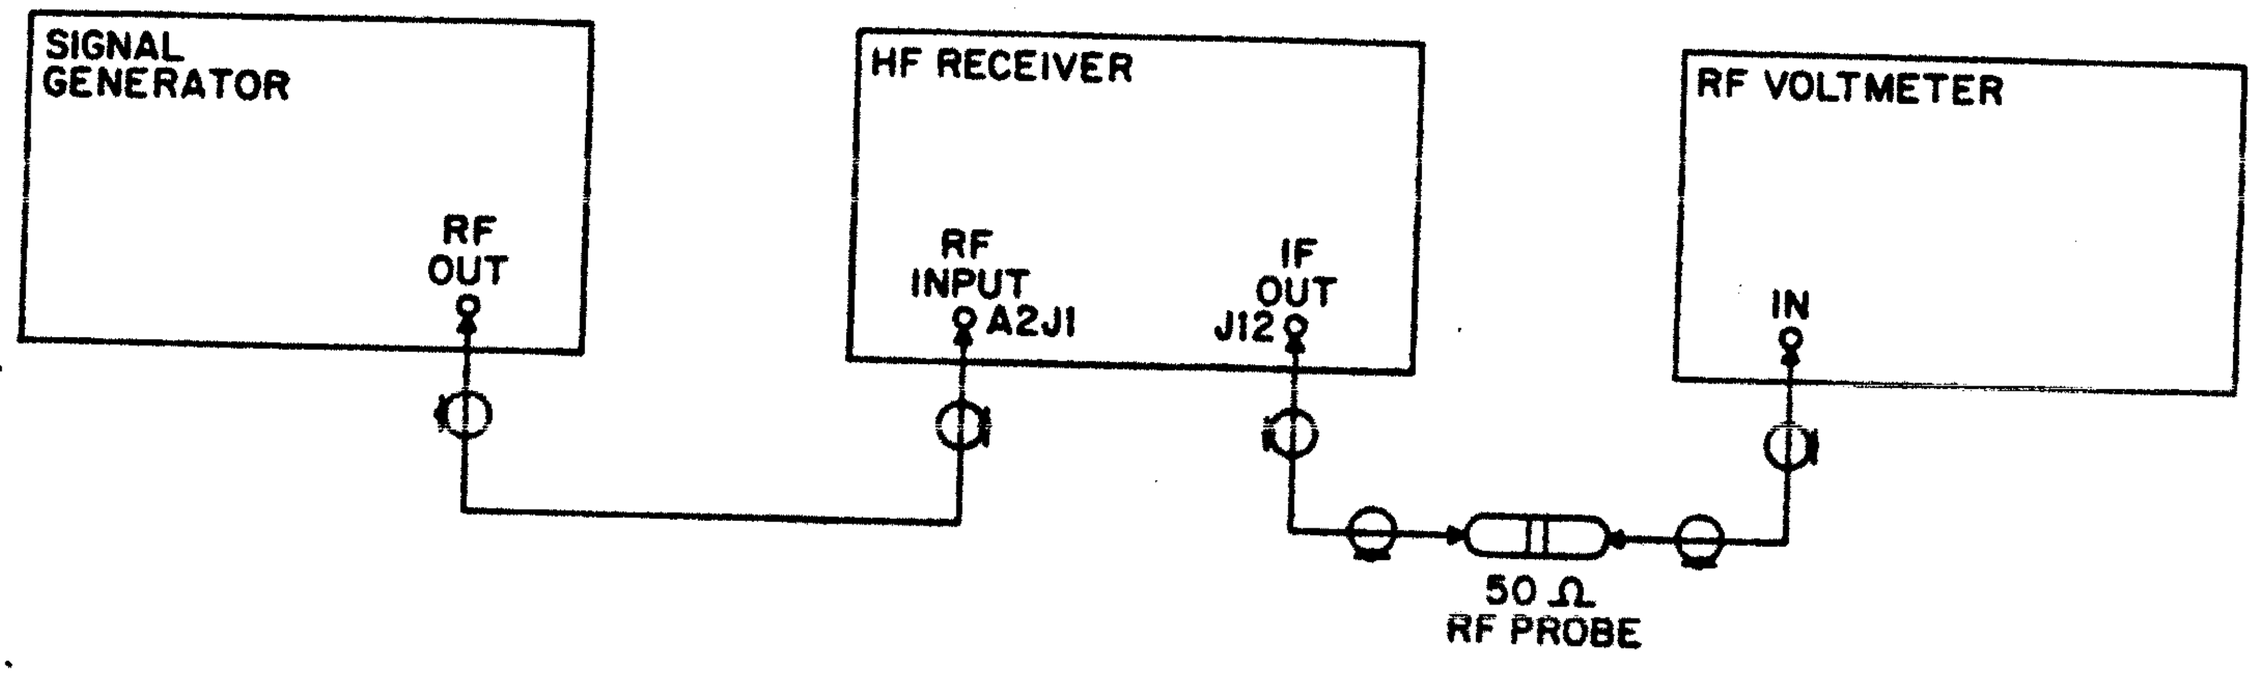



**Figure 4-3. Input Converter Alignment Test Setup**

2. Set receiver controls as follows:

| | | | |
|---|---|---|---|
| a. | Meter | - | Signal Strength |
| b. | Gain Mode | - | Manual |
| c. | Detection Mode | - | AM |
| d. | RF Gain | - | Maximum Clockwise |
| e. | Phone Level | - | N/A |
| f. | IF Bandwidth | - | 16 kHz |
| g. | BFO offset | - | N/A |

3. Energize the receiver.

4. Set the Signal Generator to -97 dBm, unmodulated at 15.0050 MHz. Tune receiver to 15.00500 MHz.

5. While observing RF Voltmeter, adjust C3 of A3A1 and C1 of A3A2 for a maximum meter reading of approximately -15 dBm (40 mV).

6. Deenergize the receiver and disconnect test equipment.

7. Replace the cover on the Input Converter (A3). Install the Input Converter in chassis.

### 4.3.7.3.2 10.7 MHz Filter Switch Adjustment

1. Deenergize the receiver.

2. Connect the test equipment as shown in **Figure 4-4**. Set the Generator for 15.005 MHz, unmodulated, at -64 dBm.

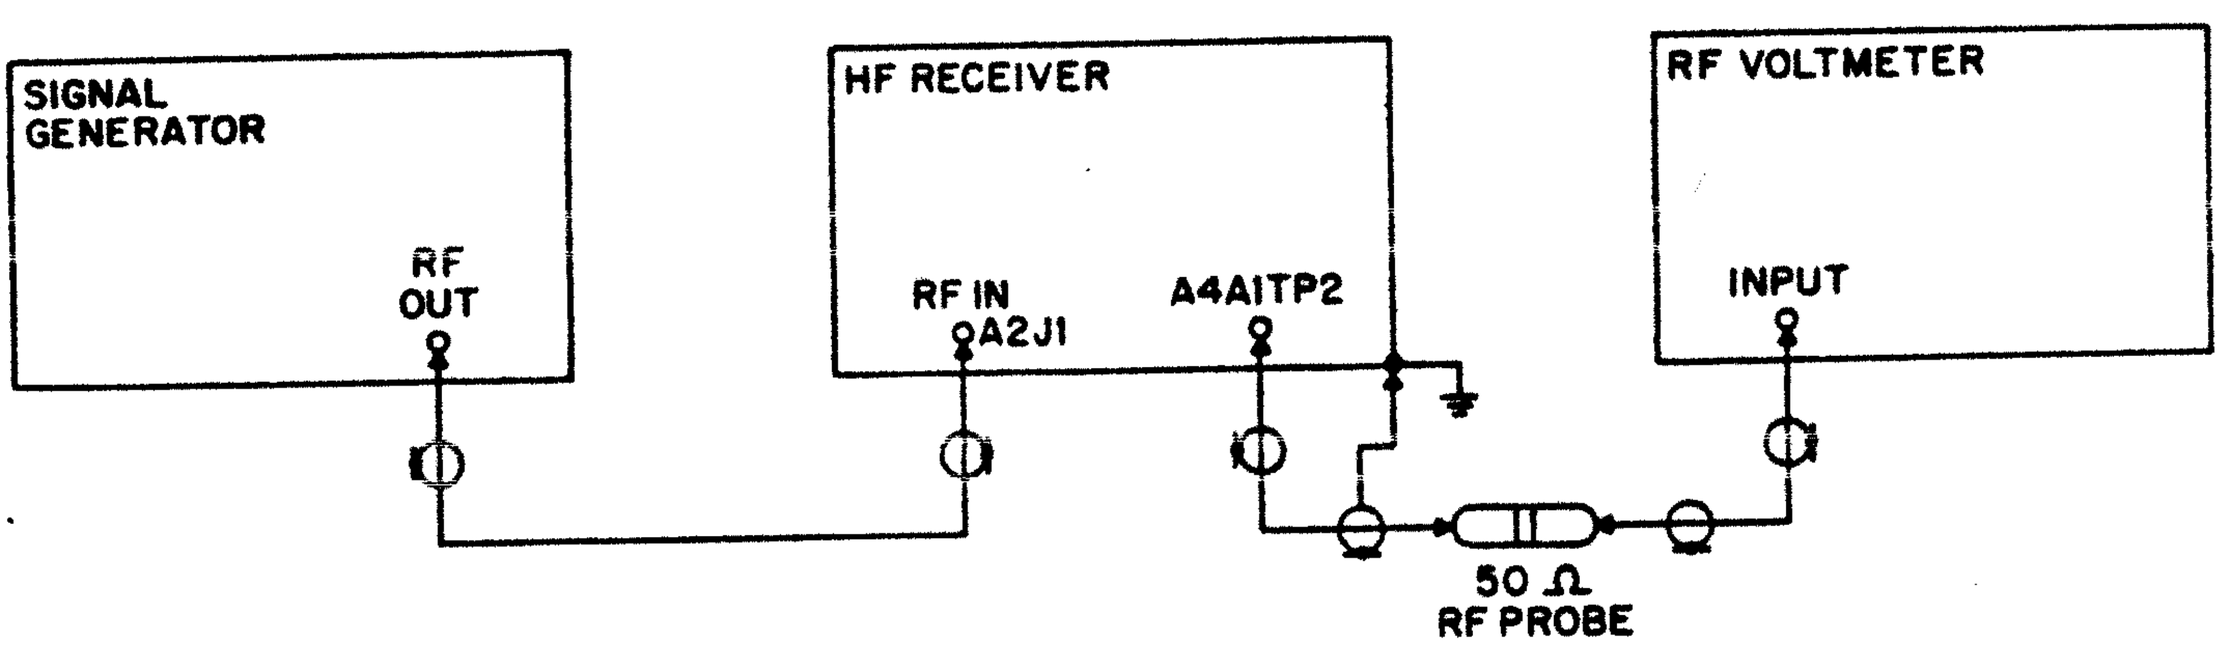



**Figure 4-4. 10.7 MHz Filter Switch Adjustment, Test Setup**

3. Remove A4A1 and A4A2 boards.

**NOTE**

A4A2 is removed to eliminate loading.

4. Place A4A1 on an extender card.

5. Energize the receiver and tune to 15.00500 MHz.

6. Depress the 3.2 kHz IF Bandwidth button and adjust A4A1R26 for a -36 dBm (3.5 mV) RF Voltmeter reading.

**NOTE**

If -36 dBm cannot be obtained, adjust for maximum dBm reading. Record this reading.

7. Depress the 6 kHz IF Bandwidth button and adjust A4A1R28 for the same dBm reading obtained in step 6.

8. Depress the 16 kHz IF Bandwidth button and adjust A4A1R30 for the same dBm reading obtained in step 6.

9. Deenergize the receiver and disconnect test equipment.

10. Install A4A2 and A4A1 into the proper slots.

### 4.3.7.3.3 455 kHz Amplifier/AM Detector Response Alignment

1. Deenergize the receiver.

2. Remove cards A4A3 and A4A10. Place A4A7 on an extender card.

3. Connect the test equipment as shown in **Figure 4-5**.

4. Set up the Sweep Generator as follows:

| | | | |
|---|---|---|---|
| a. | Power | - | ON |
| b. | CW/Sweep | - | SYM |
| c. | Trig/Line/Free | - | Line |
| d. | Fast/Slow/Manual | - | Fast |
| e. | Crystal Cal | - | OFF |
| f. | Range | - | 11 |
| g. | Sym Sweep Width Vernier | - | .1/1 |
| h. | 1 kHz Mod | - | OFF |
| i. | Output Level | - | -60 dBm |
| j. | Frequency | - | 455 kHz |

5. Set up the Marker Generator for a 455 kHz output, unmodulated, at -80 dBm.

6. Set the receiver controls as follows:

| | | | |
|---|---|---|---|
| a. | Meter | - | N/A |
| b. | Gain Mode | - | Manual |

| | | | |
|---|---|---|---|
| c. | Detection Mode | - | N/A |
| d. | RF Gain | - | Maximum Clockwise |
| e. | Phone Level | - | N/A |
| f. | IF Bandwidth | - | N/A |
| g. | Receiver Frequency | - | N/A |
| h. | BFO offset | - | N/A |

7. Energize the receiver. Adjust Sweep Generator Frequency control to center the response pattern on the Oscilloscope screen.

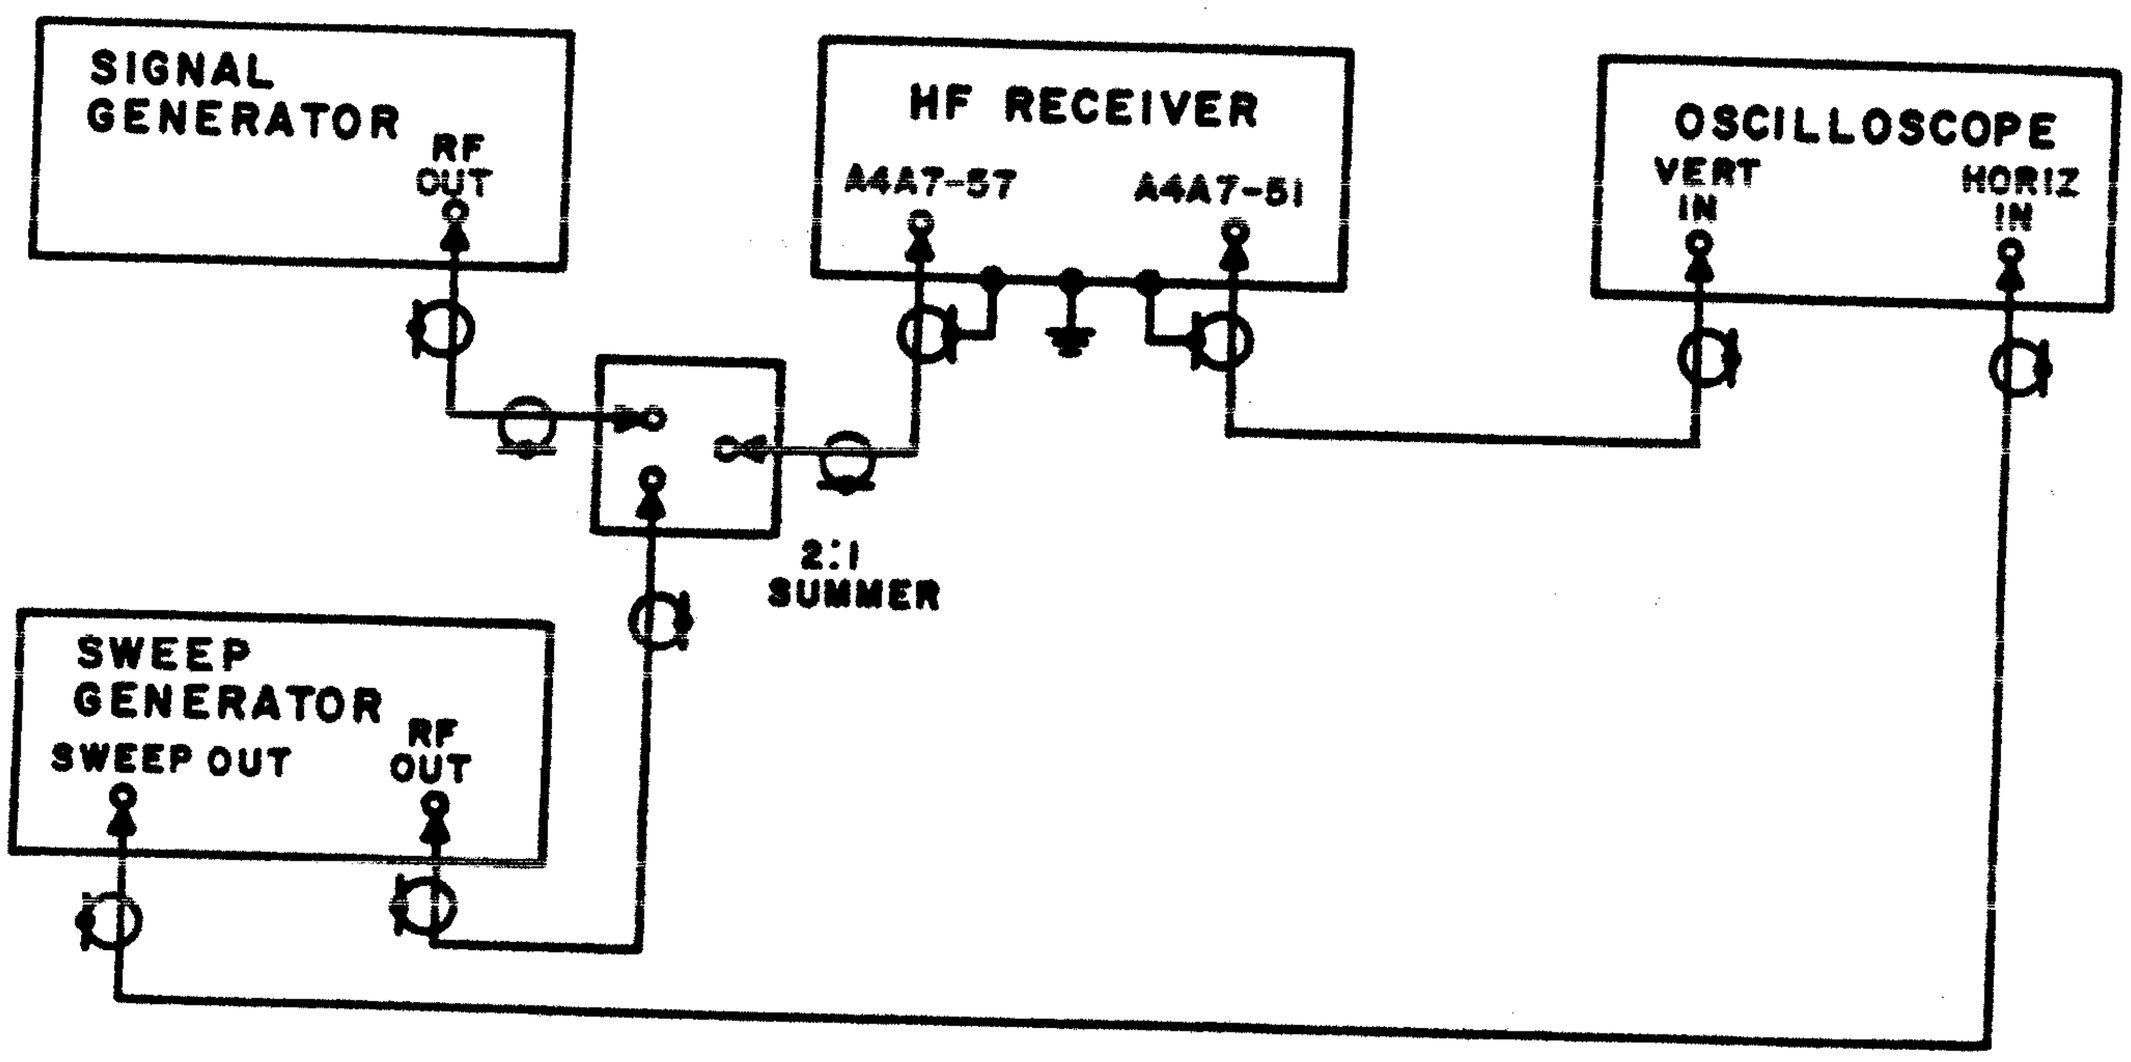



**Figure 4-5. 455 kHz Amplifier/AM Detector Response Alignment, Test Setup**

8. Adjust A4A7L2 and A4A7L3 for an Oscilloscope waveform which has maximum amplitude and is symmetrical about the marker. See **Figure 4-6** for a typical waveform.

9. Deenergize the receiver and disconnect test equipment.

10. Install A4A3 and A4A10 cards in the proper card slots.

FIGURE 4-6
FIGURE 4-7

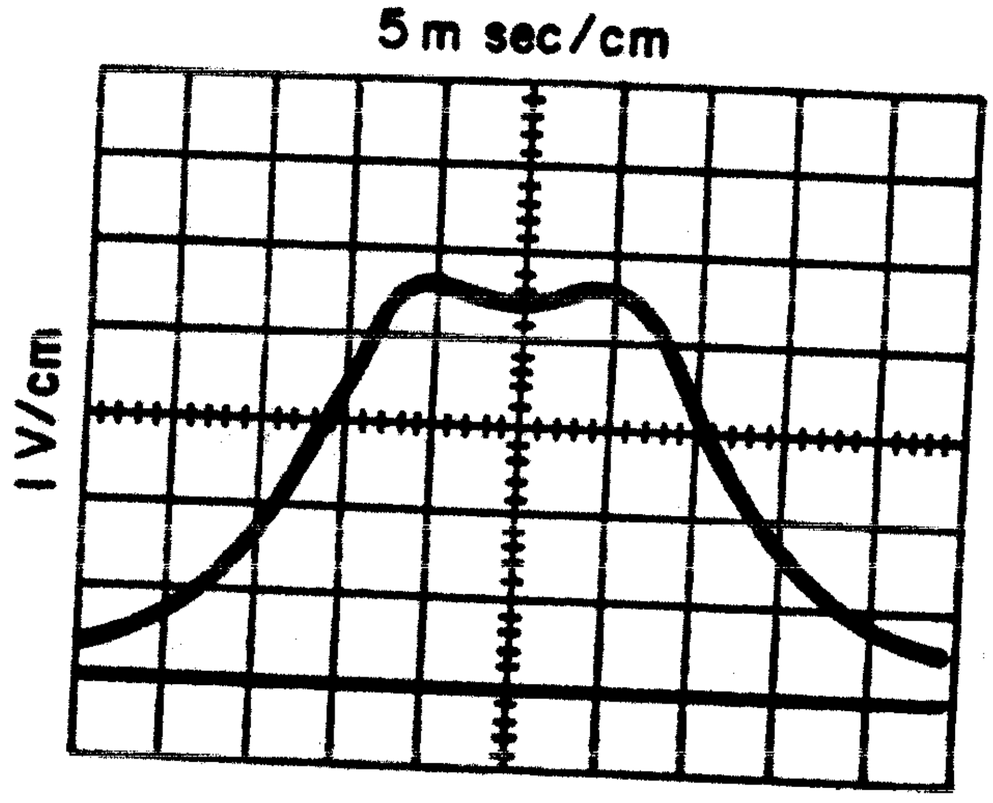



**Figure 4-6. 455 kHz Amplifier/AM Detector Response Alignment, Typical Response**

#### 4.3.7.3.4 455 kHz Amplifier/AM Detector Gain Adjustment

1. Connect the test equipment as shown in **Figure 4-7.**
2. **Set the receiver controls as follows:**

| | | | |
|---|---|---|---|
| a. | Meter | - | Signal Strength |
| b. | Gain Mode | - | Manual |
| c. | Detection Mode | - | AM |
| d. | RF Gain | - | Maximum Clockwise |
| e. | Phone Level | - | N/A |
| f. | IF Bandwidth | - | 6 kHz |
| g. | BFO offset | - | N/A |

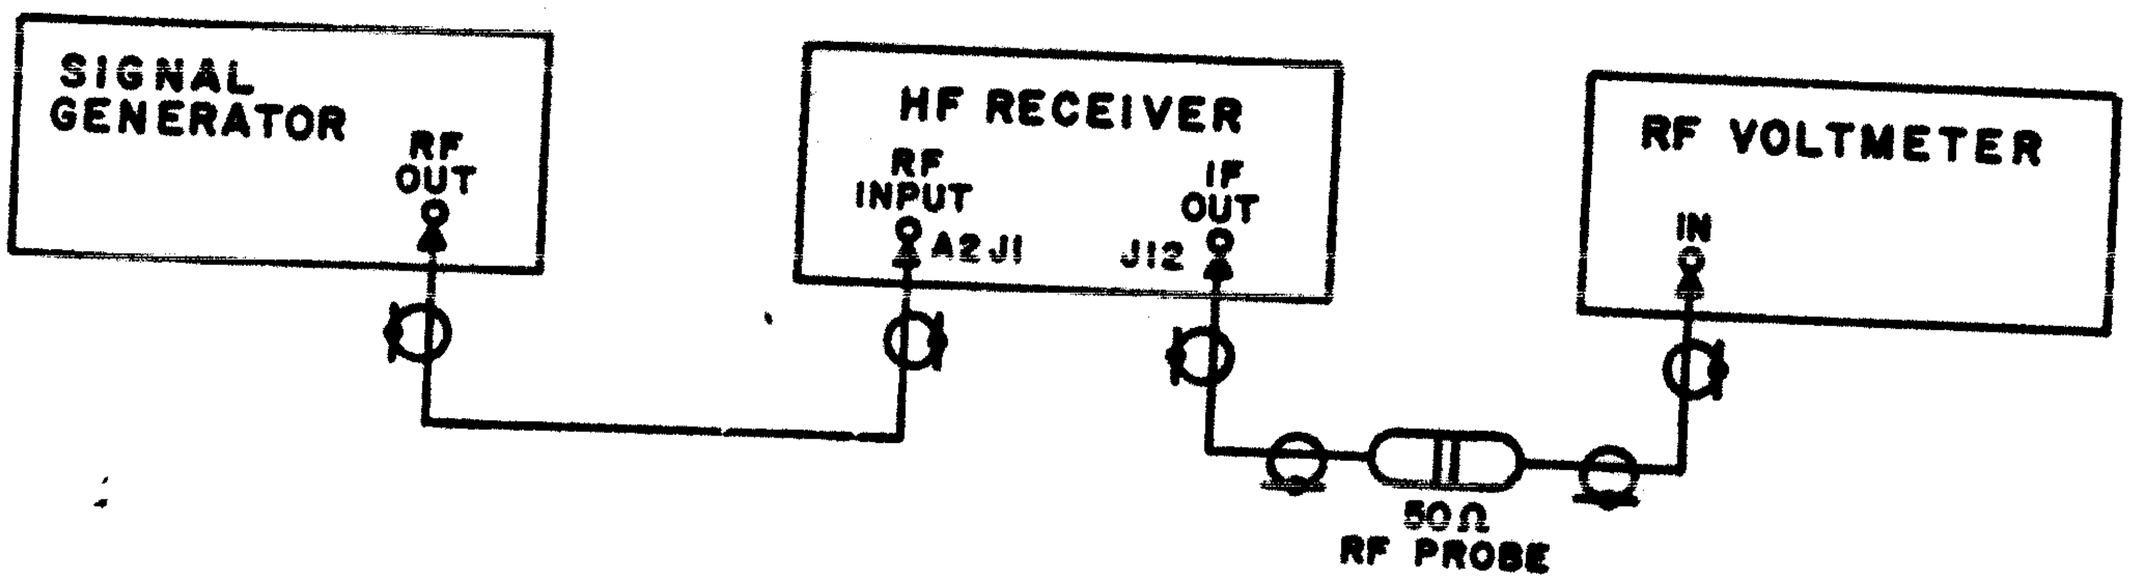



**Figure 4-7. 455 kHz Amplifier/AM Detector Gain Adjustment, Test Setup**

3. Energize the receiver.

4. Set the RF Voltmeter to the 100 mV scale.

5. Set the Signal Generator to 15.0050 MHz, unmodulated at -97 dBm (3 µV). Also tune receiver to 15.00500 MHz.

6. Adjust A4A7R7 for a 40 mV reading on the RF Voltmeter.

7. Deenergize the receiver and disconnect test equipment.

### 4.3.7.3.5 USB Filter Switch and ISB/LSB Filter Switch Adjustment

The purpose of this adjustment is to equalize the output levels of A4A4 and A4A5.

1. Deenergize the receiver.

2. Connect the RF output of the Signal Generator to RF Input connector A2J1.

3. Put A4A5 on an extender card and A4A4 on two extender cards.

4. Set the receiver controls as follows:

| | | | |
|---|---|---|---|
| a. | Meter | - | Signal Strength |
| b. | Gain Mode | - | Manual |
| c. | Detection Mode | - | AM |
| d. | RF Gain | - | Maximum Clockwise |
| e. | Phone Level | - | Midway |
| f. | IF Bandwidth | - | 16 kHz |
| g. | BFO offset | - | N/A |

5. Energize the receiver.

6. Tune the receiver to 15.00500 MHz and set the Signal Generator to a 15.0050 MHz unmodulated signal.

7. Adjust the Signal Generator output level until the Signal Strength meter reads the SET level.

8. Change the Signal Generator frequency to 15.0054 MHz and receiver detection mode to USB.

9. Adjust potentiometer A4A4R23 until the meter reads the set level or until R23 is at its maximum setting, whichever occurs first. Record the meter level.

10. Change the Signal Generator frequency to 15.0046 MHz and receiver detection mode to LSB.

11. Adjust potentiometer A4A5R32 until the meter reads the level obtained in step 8. If the step 8 level cannot be obtained, set A4A5R32 at its maximum setting, record the meter reading, and perform steps 12 and 13.

12. Change the Signal Generator frequency to 15.0054 MHz and receiver detection mode to USB.

13. Adjust potentiometer A4A4R23 until the meter reads the level obtained in step 10.

14. Deenergize the receiver and disconnect test equipment.

4.3.7.3.6 **ISB Detector/Audio Adjustment** (Applies to WJ-8718/8718A/8718-9 Receivers)

1. Deenergize the receiver and connect the equipment as shown in **Figure 4-8.**

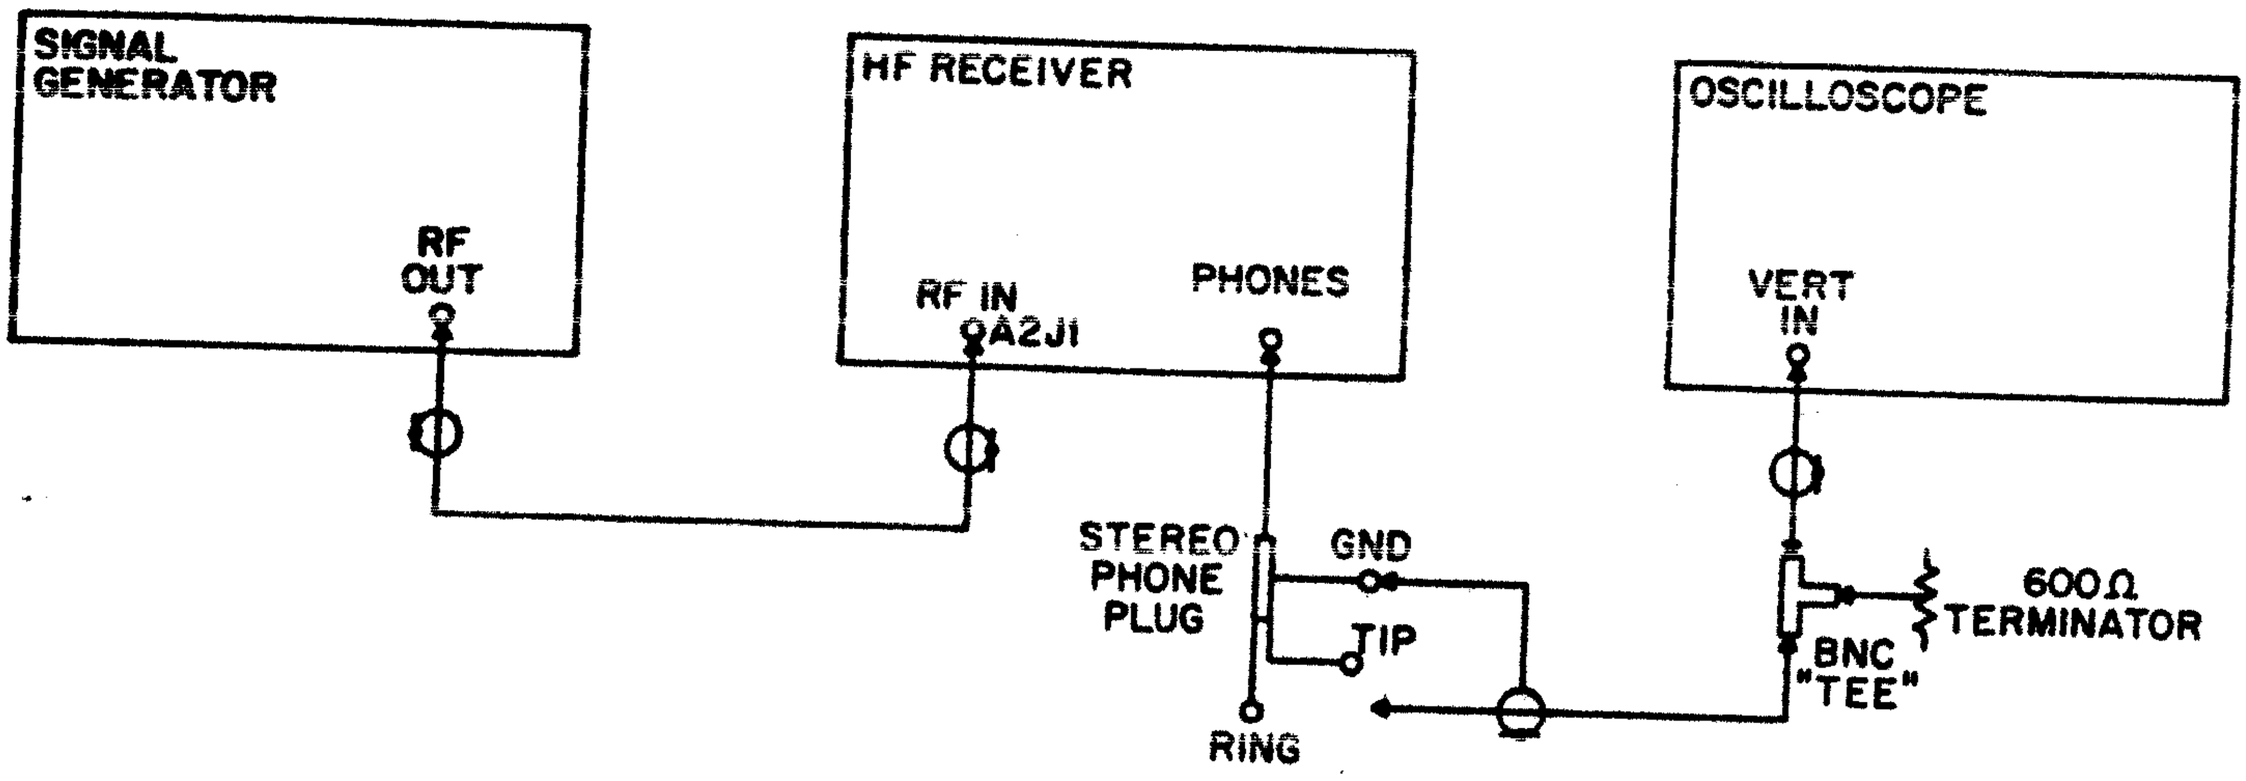



**Figure 4-8. ISB Detector/Audio Adjustment, Test Setup**

2. Set the receiver controls as follows:

| | | | |
|---|---|---|---|
| a. | Meter | - | N/A |
| b. | Gain Mode | - | Manual |
| c. | Detection Mode | - | ISB |
| d. | RF Gain | - | Maximum Clockwise |
| e. | Phone Level | - | Maximum Clockwise (Initial Setting) |
| f. | IF Bandwidth | - | N/A |

3. Energize the receiver. Connect oscilloscope to the "tip" on the phone plug. On WJ-8718A/8718-9 Receivers, ensure that USB and LSB Audio buttons are deenergized.

4. Set the Signal Generator to a -105 dBm unmodulated signal at 15.0054 MHz. Also tune the receiver to 15.00500 MHz.

5. With equipment connected properly, a 400 Hz audio output should be seen on the Oscilloscope.

6. Adjust the Phone Level gain control on the front panel for the maximum Oscilloscope waveform, without clipping or distortion present. Record this reading. This is the Upper Sideband signal.

7. Change the Signal Generator frequency to 15.0046 MHz.

8. Connect the Oscilloscope to the "ring" on the phone jack. This is the Lower Sideband signal.

9. Adjust A4A8R8 to obtain the same output obtained in step 5 above, or until output is at its maximum.

10. If the same level as in step 5 cannot be obtained, repeat steps 1 through 8, with the exception of increasing ISB IF gain via A4A5R32 slightly each time, so that step 5 (USB) and step 8 (LSB) waveforms are the same.

11. Deenergize the receiver and disconnect test equipment.

### 4.3.7.3.7 FM Discriminator Alignment

1. Deenergize the receiver.

2. Remove cards A4A7, A4A9, and A4A10.

3. Put A4A9 on an extender card.

4. Connect the test equipment as shown in **Figure 4-9.**

5. Set up the Sweep Generator as follows:

| | | | |
|---|---|---|---|
| a. | Power | - | ON |
| b. | CW/Sweep | - | SYM |
| c. | Trig/Line/Free | - | Line |
| d. | Fast/Slow/Manual | - | Fast |
| e. | Crystal Cal | - | OFF |
| f. | Range | - | 11 |
| g. | Sym Sweep Width Vernier | - | .1/1 |
| h. | 1 kHz Mod | - | OFF |
| i. | Output Level | - | -10 dBm |
| j. | Frequency | - | 455 kHz |

6. Set up the Marker Generator for a 455 kHz output, unmodulated, at -25 dBm.

7. Set the receiver controls as follows:

| | | | |
|---|---|---|---|
| a. | Meter | - | N/A |
| b. | Gain Mode | - | N/A |
| c. | Detection Mode | - | FM |
| d. | RF Gain | - | N/A |
| e. | Phone Level | - | N/A |
| f. | IF Bandwidth | - | N/A |
| g. | Receiver Frequency | - | N/A |
| h. | BFO offset | - | N/A |

8. Energize the receiver. Adjust Sweep Generator Frequency control to center the response pattern on the Oscilloscope screen.

9. Adjust A4A9L1 and A4A9T1 for an Oscilloscope waveform which has maximum amplitude and is symmetrical and linear about the marker. See **Figure 4-10** for a typical waveform.

10. Deenergize the receiver.

11. Disconnect the test equipment and install A4A7, A4A9, and A4A10 boards into the proper slots.

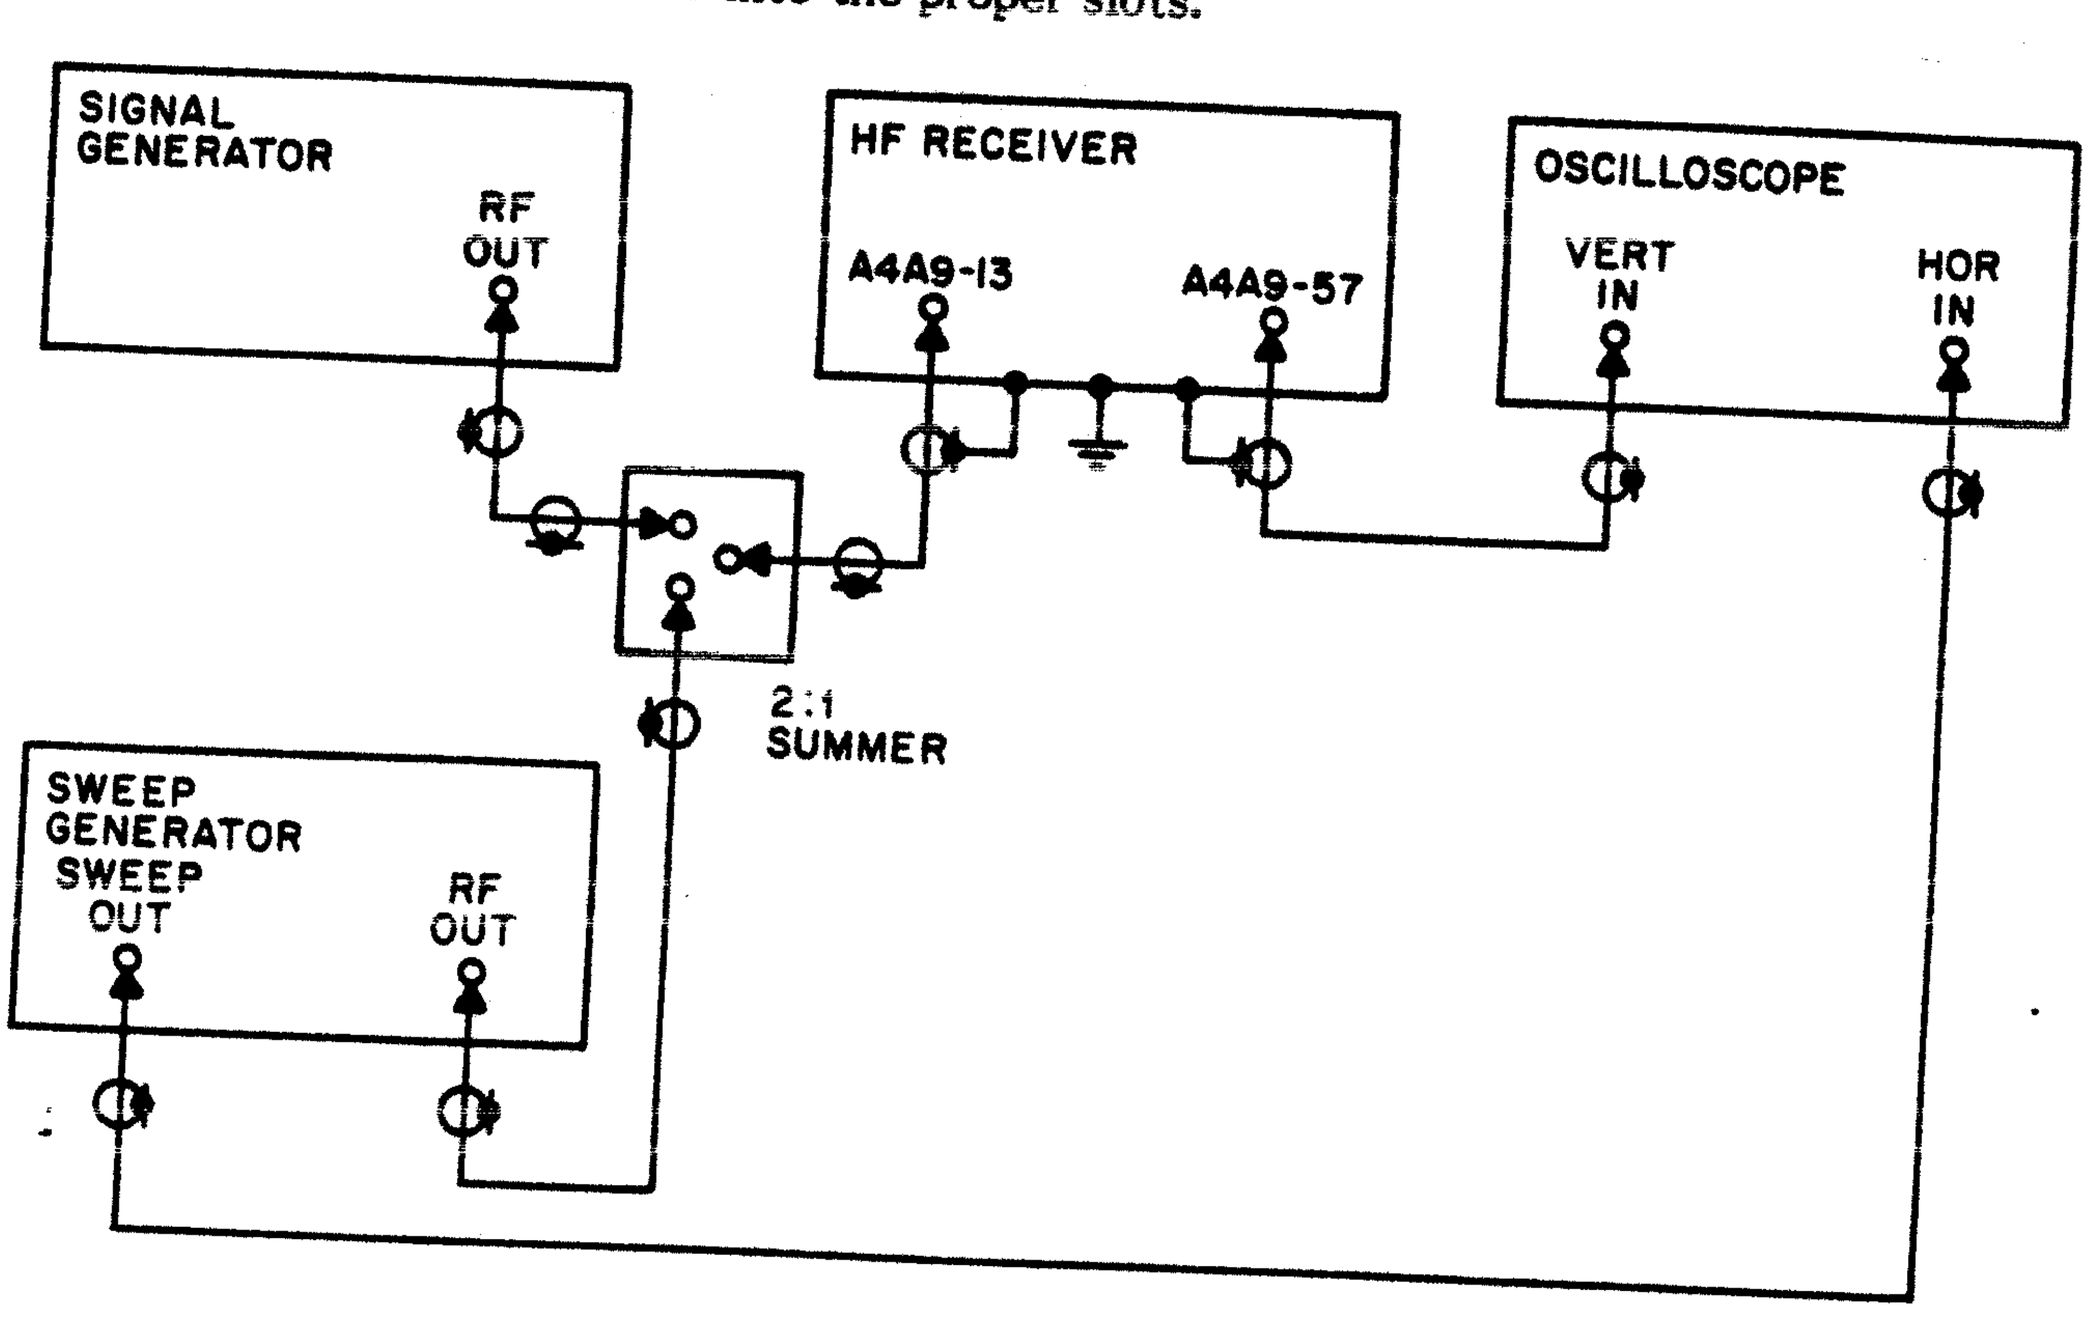



**Figure 4-9. FM Discriminator Alignment, Test Setup**

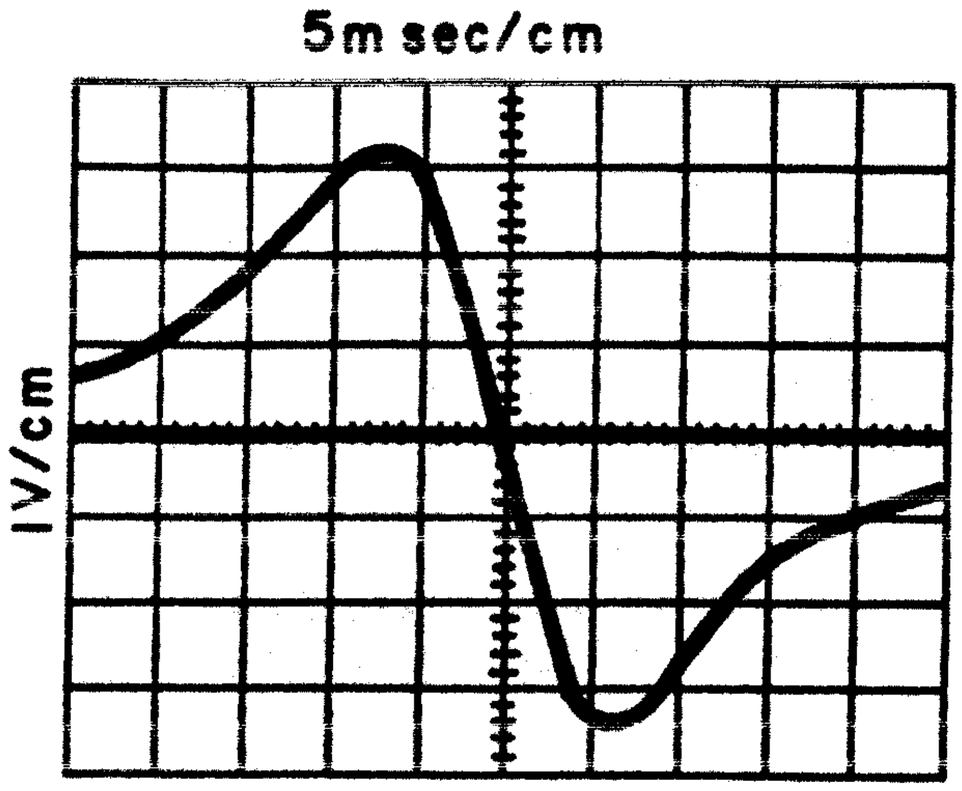



**Figure 4-10. FM Discriminator Alignment, Typical Response**

### 4.3.7.4 LED Intensity Adjustment

The intensity of the front panel Frequency Display can be varied by potentiometer R2, which is located inside the front panel on the left side of the Frequency Display LED's. Turning R2 clockwise increases the LED intensity.

# SECTION V

# REPLACEMENT PARTS LIST

## 5.1 UNIT NUMBERING METHOD

The unit numbering method of assigning reference designations (electrical symbol numbers) has been used to identify assemblies, subassemblies (and modules) and parts. An example of the unit numbering method follows:

| Subassembly Designation A1 | R1 Class and No. of Item |
|---|---|
| Identify from right to left as: | First (1) resistor (R) of first (1) subassembly (A) |

As shown on the main chassis schematic, components which are an integral part of the main chassis have no subassembly designation.

## 5.2 REFERENCE DESIGNATION PREFIX

Partial reference designations have been used on the equipment and on the illustrations in this manual. The partial reference designations consist of the class letter(s) and identifying item number. The complete reference designations may be obtained by placing the proper prefix before the partial reference designations. Reference Designation Prefixes are provided on drawings and illustrations in parentheses within the figure titles.

## 5.3 LIST OF MANUFACTURERS

| Mfr. Code | Name and Address |
|---|---|
| 00779 | AMP, Incorporated<br>P.O. Box 3608<br>Harrisburg, PA 17105 |
| 01121 | Allen-Bradley Company<br>1201 South 2nd Street<br>Milwaukee, WI 53204 |
| 01295 | Texas Instruments, Inc.<br>Semiconductor-Components Div.<br>15300 North Central Expressway<br>Dallas, TX 75231 |
| 02114 | Ferroxcube Corporation<br>P.O. Box 359<br>Mt. Marion Road<br>Saugerties, NY 12477 |
| 02735 | RCA Corporation<br>Solid State Division<br>Route 202<br>Somerville, NJ 08876 |
| 04013 | Taurus Corporation<br>1 Academy Hill<br>Lambertville, NJ 08530 |
| 04713 | Motorola Incorporated<br>Semiconductor Products Div.<br>5005 East McDowell Road<br>Phoenix, AZ 85008 |
| 06978 | Vernitron Corp.<br>AIE Div.<br>701 Murfreesboro Rd.<br>Nashville, TN 37210 |

| Mfr. Code | Name and Address |
|---|---|
| 07263 | Fairchild Camera & Instr. Corp.<br>Semiconductor Division<br>464 Ellis Street<br>Mountain View, CA 94040 |
| 07388 | Toretel Incorported<br>13402 South 71 Highway<br>Grandview, MO 64030 |
| 09021 | Airco Inc.<br>Airco Electronics<br>Bradford, PA 17055 |
| 09353 | C & K Components, Inc.<br>103 Morse Street<br>Watertown, MA 02172 |
| 12498 | Teledyne Crystalonics<br>147 Sherman Street<br>Cambridge, MA 02140 |
| 13103 | Thermalloy Company<br>2021 W. Valley View Lane<br>Dallas, TX 75234 |
| 14632 | Watkins-Johnson Company<br>700 Quince Orchard Road<br>Gaithersburg, MD 20878 |
| 14655 | Cornell-Dubilier Electronics<br>Div. of Federal Pacific<br>Electric Company<br>150 Avenue L<br>Newark, NJ 07101 |
| 15818 | Teledyne Semiconductor<br>Teledyne Inc. Company<br>1300 Tera Bella Ave.<br>Mountain View, CA 94043 |
| 16428 | Belden Corporation<br>P.O. Box 1101<br>Richman, IN 47374 |
| 17856 | Siliconix, Inc.<br>2201 Laurelwood Road<br>Santa Clara, CA 95050 |
| 18324 | Signetics Corporation<br>811 East Arques Avenue<br>Sunnyvale, CA 94086 |
| 18565 | Chomerics Inc.<br>Woburn, MA 01801 |
| 18714 | RCA Corporation<br>Solid State Division<br>Fostoria Road<br>Findlay, OH 45840 |
| 19080 | Robison Electronics Inc.<br>3580 Sacramento Dr.<br>P.O. Box Y<br>San Luis Obispo, CA 93406 |
| 19209 | General Electric Company<br>Battery Business Department<br>P.O. Box 114<br>Gainsville, FL 32602 |
| 19505 | Applied Eng. Products, Co.<br>Division of Samarious, Inc.<br>300 Seymour Avenue<br>Derby, CT 06418 |
| 21604 | The Buckeye Stamping Co.<br>555 Marion Road<br>Columbus, OH 43207 |
| 22526 | Du Pont EI De Nemours and Co.<br>Inc.<br>Photo Products Dept.<br>Berg Electronics Div.<br>Route 83<br>New Cumberland, PA 17070 |
| 25088 | Siemens America, Inc.<br>186 Wood Avenue<br>S. Iselin, NJ 08830 |

| Mfr. Code | Name and Address |
|---|---|
| 27014 | National Semi-Conductor Corp.<br>2950 San Ysidro Way<br>Santa Clara, CA 95051 |
| 27956 | Relcom<br>3333 Hillview Avenue<br>Palo Alto, CA 94304 |
| 28480 | Hewlett-Packard Company<br>Corporate Headquaters<br>1501 Page Mill Road<br>Palo Alto, CA 94304 |
| 31918 | IEE/Schadow Incorporated<br>8081 Wallace Road<br>Eden Prairie, MN 55343 |
| 33095 | Spectrum Control, Inc.<br>152 E. Main Street<br>Fairview, PA 16415 |
| 52673 | KSW Electronics Corp.<br>Burlington, MA 01803 |
| 56289 | Sprague Electric Company<br>Marshall Street<br>North Adams, MA 01247 |
| 71279 | Cambridge Thermionic Corp.<br>445 Concord Avenue<br>Cambridge, MA 02138 |
| 71400 | Bussman Manufacturing<br>Division of McGraw-Edison Co.<br>2536 W. University Street<br>St. Louis, MO 63107 |
| 71785 | TRW Electronic Components<br>Cinch Connector Operations<br>1501 Morse Avenue<br>Elk Grove Village, IL 60007 |
| 72136 | Electro Motive Mfg. Co., Inc.<br>South Park & John Streets<br>Willimantic, CT 06226 |
| 72982 | Erie Technological Prod., Inc.<br>644 West 12th Street<br>Erie, PA 16512 |
| 73138 | Beckman Instruments, Inc.<br>Helipot Division<br>2500 Harbor Boulevard<br>Fullterton, CA 92634 |
| 74306 | Piezo Crystal Company<br>100 K Street<br>Carlisle, PA 17013 |
| 74868 | Bunker Ramo Corporation<br>The Amphenol RF Division<br>33 East Franklin Street<br>Danbury, CT 06810 |
| 75042 | TRW Electronic Components<br>IRC Fixed Resistors<br>401 North Broad Street<br>Philadelphia, PA 19108 |
| 75915 | Littlefuse, Incorporated<br>800 E. Northwest Highway<br>Des Plaines, IL 60016 |
| 80058 | Joint Electronic Type<br>Designation System |
| 80103 | Lambda Electronics Corp.<br>Div. of Veeco Instr., Inc.<br>51 Broad Hollow Road<br>Melville, NY 11746 |
| 80131 | Electronic Industries Assoc.<br>2001 Eye Street, N.W.<br>Washington, DC 20006 |
| 81312 | Winchester, Electronics<br>Division of Litton Ind.<br>Oakville, CT 06779 |
| 81349 | Military Specifications |

| Mfr. Code | Name and Address |
|---|---|
| 81350 | Joint Army-Navy Specifications |
| 82389 | Switchcraft, Incorporated<br>5555 North Elston Avenue<br>Chicago, IL 60630 |
| 84411 | TRW Electric Components<br>TRW Capacitors<br>112 W. First Street<br>Ogallala, NE 69153 |
| 88245 | Litton Industries<br>USECO Division<br>13536 Saticoy Street<br>Van Nuys, CA 91409 |
| 91293 | Johanson Manufacturing Co.<br>P.O. Box 329<br>Boonton, NJ 07005 |
| 91418 | Radio Materials Company<br>4242 West Bryn Mawr Avenue<br>Chicago, IL 60646 |
| 91984 | Maida Development Co.<br>205 Libby<br>P.O. Box 3529<br>Hampton, VA 23663 |
| 92825 | Whitso Incorporated<br>93330 Bryon Street<br>Schiller Park, IL 60176 |
| 93332 | Sylvania Elec. Products, Inc.<br>Semiconductor Products Div.<br>100 Sylvan Road<br>Woburn, MA 01801 |
| 93958 | Republic Electronics Corp.<br>176 East 7th Street<br>Paterson, NJ 07524 |
| 95121 | Quality Components, Inc.<br>P.O. Box 113<br>St. Mary's, PA 15857 |
| 96733 | San Fernando Electric Mfg. Co.<br>San Fernando, CA 91341 |
| 98291 | Sealectro Corporation<br>225 Hoyt<br>Mamaroneck, NY 10544 |
| 98978 | International Electronic<br>Research Corporation<br>135 West Magnolia Blvd.<br>Burbank, CA 91502 |
| 99800 | American Precision Industries<br>Delevan Electronics Division<br>270 Quaker Road<br>East Aurora, NY 14052 |
| 99848 | Wilco Corporation<br>4030 West 10th Street<br>P.O. Box 22248<br>Indianapolis, IN 46222 |

## 5.4 PARTS LIST

The parts list which follows contains all electrical parts used in the equipment and certain mechanical parts which are subject to unusual wear or damage. When ordering replacement parts from Watkins-Johnson Company, specify the type and serial number of the equipment and the reference designation and description of each part ordered. The list of manufacturers provided in paragraph 5.3 and the manufacturer's part number for components are included as a guide to the user of the equipment in the field. These parts may not necessarily agree with the parts installed in the equipment; however, the parts specified in this list will provide satisfactory operation of the equipment. Replacement parts may be obtained from any manufacturer as long as the physical and electrical parameters of the part selected agree with the original indicated part. In the case of components defined by a military or industrial specification, a vendor which can provide the necessary component is suggested as a convenience to the user.

**NOTE**

As improved semi-conductors become available, it is the policy of Watkins-Johnson to incorporate them in proprietary products. For this reason some transistors, diodes, and integrated circuits installed in the equipment may not agree with those specified in the parts list and schematic diagrams of this manual. However, the semi-conductors designated in the manual may be substituted in every case with satisfactory results.

## 5.5 ASSEMBLY REVISION LEVEL

The purpose of the Assembly Revision Level is to identify the "as built" configuration of an assembly or subassembly. The parts list and illustrations that follow, depict the revision levels of the assemblies and subassemblies at the time of preparation of the manual, which may or may not agree with the purchased equipment. However, they will serve as a guide for any necessary maintenance to be performed. Refer to **Table 5-1** for the equipment assembly revision level record(s).

## Table 5-1. Equipment Assembly Revision Level Record

| TYPE NUMBER | REF DESIG | DESCRIPTION | ASSY. REV LEVEL |
|---|---|---|---|
| WJ-8718 | | HF Receiver, Main Chassis | E |
| WJ-8718-9 | | HF Receiver, Main Chassis | E |
| WJ-8718A | | HF Receiver, Main Chassis | A |
| 76240 | A1 | Power Distribution | B |
| 791616-1 | A2 | RF Filter Assembly | A |
| 280093 | A2A1 | 30 MHz Low Pass Filter | A |
| 791592-1 | A3 | Input Converter | B |
| 370611-1 | A3A1 | 1st Mixer/1st IF | A |
| 370646-1 | A3A2 | 2nd Mixer/2nd IF | A |
| 791569-1 | A4 | IF Motherboard | A |
| 791594-1 | A4A1 | 10.7 MHz Filter Switch | C |
| 71430-1 | A4A2 | 10.7 MHz/455 kHz Converter | A |
| 791595-1 | A4A3 | 455 kHz Filter Switch | A |
| 791596-1 | A4A4 | USB Filter Switch | A |
| 791597-1 | A4A5 | ISB/LSB Filter Switch | B |
| 78112-1 | A4A6 | AGC Amplifier | A |
| 72488-1 | A4A7 | 455 kHz Amplifier/Am Detector | A |
| 791598-1 | A4A8 | ISB Detector/Audio | B |
| 791599-1 | A4A9 | FM, CW and SSB Detector | B |
| 746001-1 | A4A10 | Audio Amplifier | A |
| 791570-1 | A5 | Synthesizer Motherboard | B |
| 791630-1 | A5A1 | 1st & 3rd LO Synthesizer/Timebase | C |
| 791629 | A5A1A1 | 1st LO/VCO Assembly | B |
| 34750 | A5A1A1A1 | 1st LO VCO P.C. Assembly | A |
| 791600-1 | A5A1A2 | 1st & 3rd LO Synthesizer | D |
| 791601 | A5A2 | 2nd LO Synthesizer | A |
| 791576-1 | A5A3 | BFO Synthesizer | A |
| 791580 | A6 | I/O Motherboard | B |
| 791575-3 | A6A1 | Manual Tuning Up/Down Counter | A |
| 791828-1 | A6A2 | Front Panel Interconnect | A |
| 791874-1 | A7 | Manual Tuning Module | A |
| 791589 | A7A1 | Tuning Resolution | A |
| 791578-1 | A8 | Frequency Display | B |
| 791827 | A9 | BFO Switch | A |
| 791684-2 | A10 (1) | Front Panel Control | A |
| 796053 | A10 (2) | Front Panel Control | A |
| 791583 | A10A1 | Upper Panel Control | B |
| 791826 | A10A2 (1) | Lower Panel Control | B |
| 796054 | A10A2 (2) | Lower Panel Control | B |

(1) WJ-8718
(2) WJ-8718-9 and WJ-8718A

5.6 **TYPES WJ-8718, WJ-8718-9 AND WJ-8718A HF RECEIVER, MAIN CHASSIS**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| A1 | Power Distribution | 1 | 76240 | 14632 | |
| A2 | Input Filter | 1 | 791616 | 14632 | |
| A3 | Input Converter | 1 | 791592 | 14632 | |
| A4 | IF Motherboard | 1 | 791569 | 14632 | |
| A5 | Synthesizer Motherboard | 1 | 791570 | 14632 | |
| A6 | I/O Motherboard | 1 | 791580 | 14632 | |
| A7* | Manual Tuning Module (Not optional on WJ-8718A) | 1 | 791874-1 | 14632 | |
| A8 | Frequency Display | 1 | 791578 | 14632 | |
| A9 | BFO Switch | 1 | 791827 | 14632 | |
| A10 | Front Panel Control (WJ-8178 only) | 1 | 791684-2 | 14632 | |
| A10 | Front Panel Control (WJ-8718-9 and WJ-8718A only) | 1 | 796053 | 14632 | |
| BT1 | Battery | 1 | 41B901BD16G1 | 19209 | |
| C1 | Capacitor, Ceramic, Disc: 0.1 µF, 20%, 50 V | 4 | 34475-1 | 14632 | |
| C2 | Same as C1 | | | | |
| C3 | Same as C1 | | | | |
| C4 | Same as C1 | | | | |
| C5 | Capacitor, Ceramic, Disc: 0.47 µF, 20%, 50 V | 2 | 34452-1 | 14632 | |
| C6 | Same as C5 | | | | |
| C7 | Capacitor, Feedthru: 0.01 µF, 20%, 600 V | 6 | F1A6103K | 96733 | |
| C8 Thru C12 | Same as C7 | | | | |
| C13 | Not Used | | | | |
| C14 | Capacitor, Ceramic, Disc: 0.01 µF, 20%, 50 V (WJ-8718-9 and WJ-8718A only) | 1 | 34453-1 | 14632 | |
| CR1 | Diode | 2 | 1N1614 | 80131 | 02735 |
| CR2 | Same as CR1 | | | | |
| E1 | Terminal, Standoff | 3 | 7A1A1 | 92825 | |
| E2 | Same as E1 | | | | |
| E3 | Same as E1 | | | | |
| E4 | Terminal, Standoff | 1 | 160-2381-01-05-00 | 71279 | |
| E5 | Terminal, Feedthru (WJ-8718 and WJ-8718-9 only) | 4 | SFU16Y | 04013 | |
| E5 | Terminal, Feedthru (WJ-8718A only) | 7 | SFU16Y | 04013 | |
| E6 Thru E8 | Same as E5 | | | | |
| E9 | Same as E5 (WJ-8718A only) | | | | |
| E10 | Same as E5 (WJ-8718A only) | | | | |
| F1 | Fuse Cartridge: 1 AMP, 3 AG Slow-blow | 1 | MDL1 | 71400 | |
| F2 | Fuse Cartridge: 1/2 AMP, 3 AG, Slow-blow | 1 | MDL1/2 | 71400 | |

* Part of MCM-2 Option.

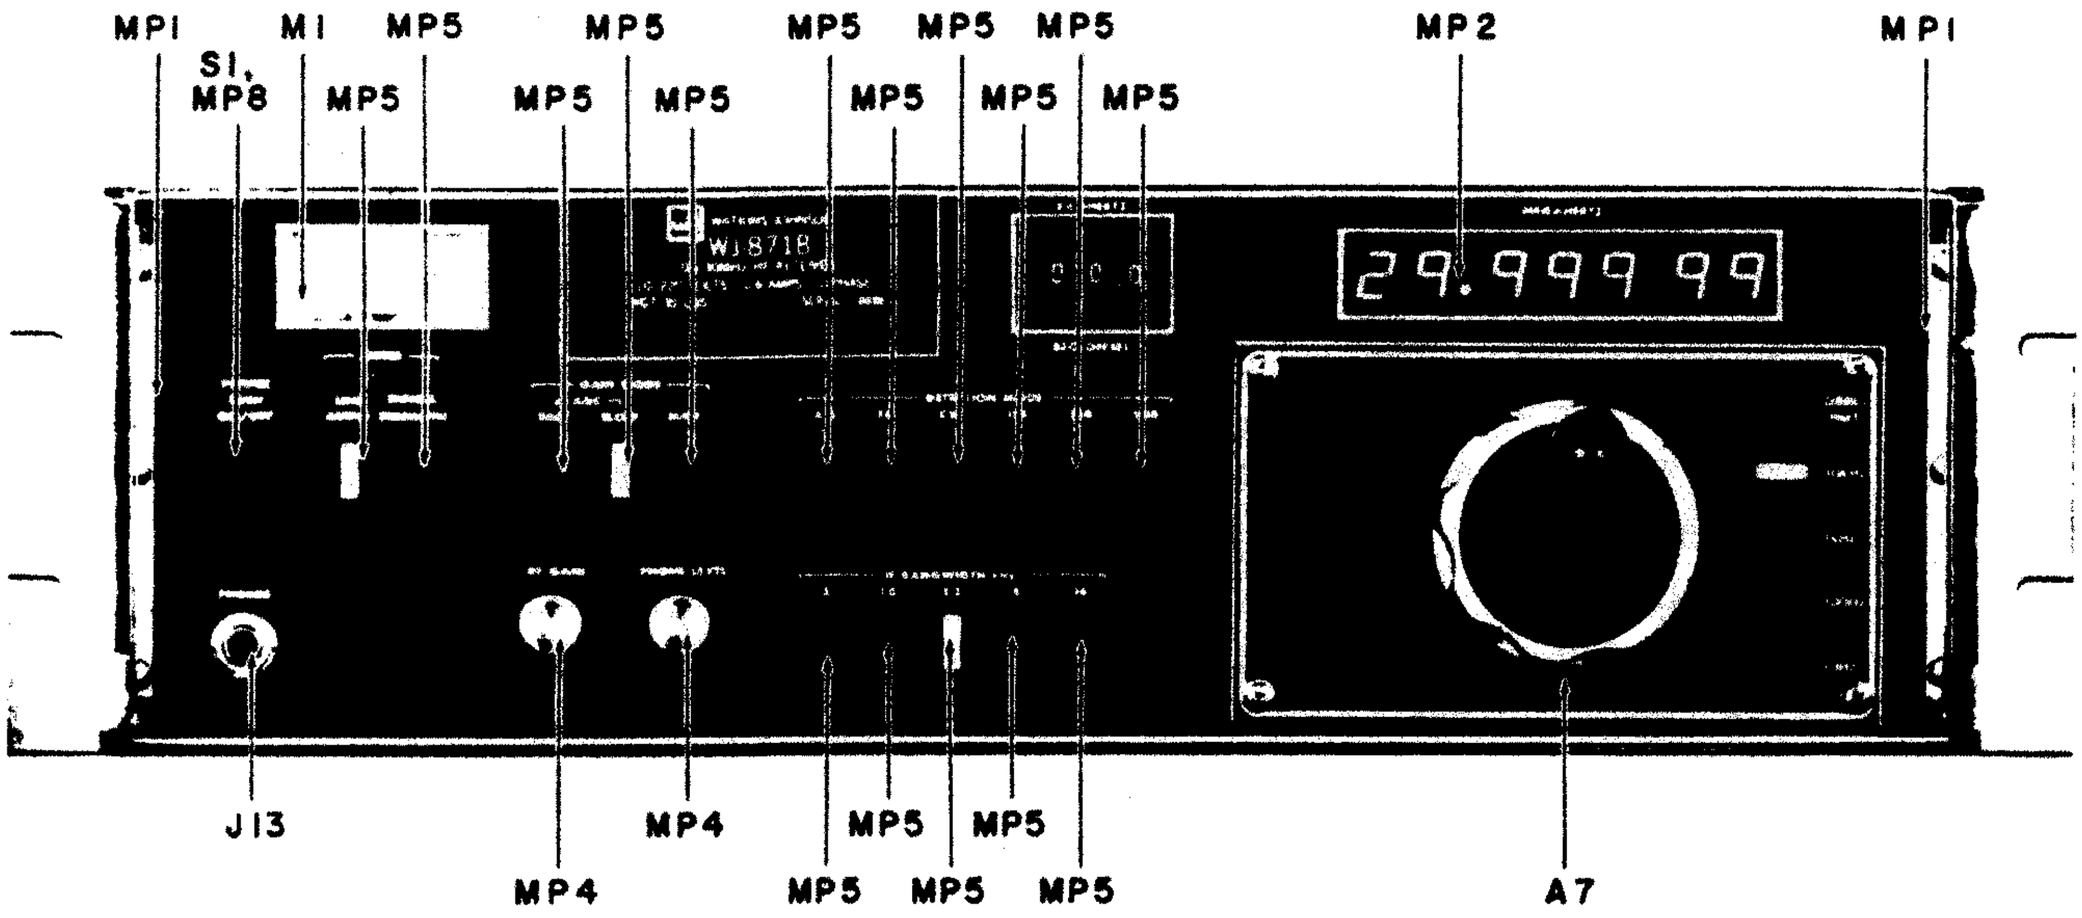



Figure 5-1. WJ-8718 HF Receiver, Front Panel, Location of Components

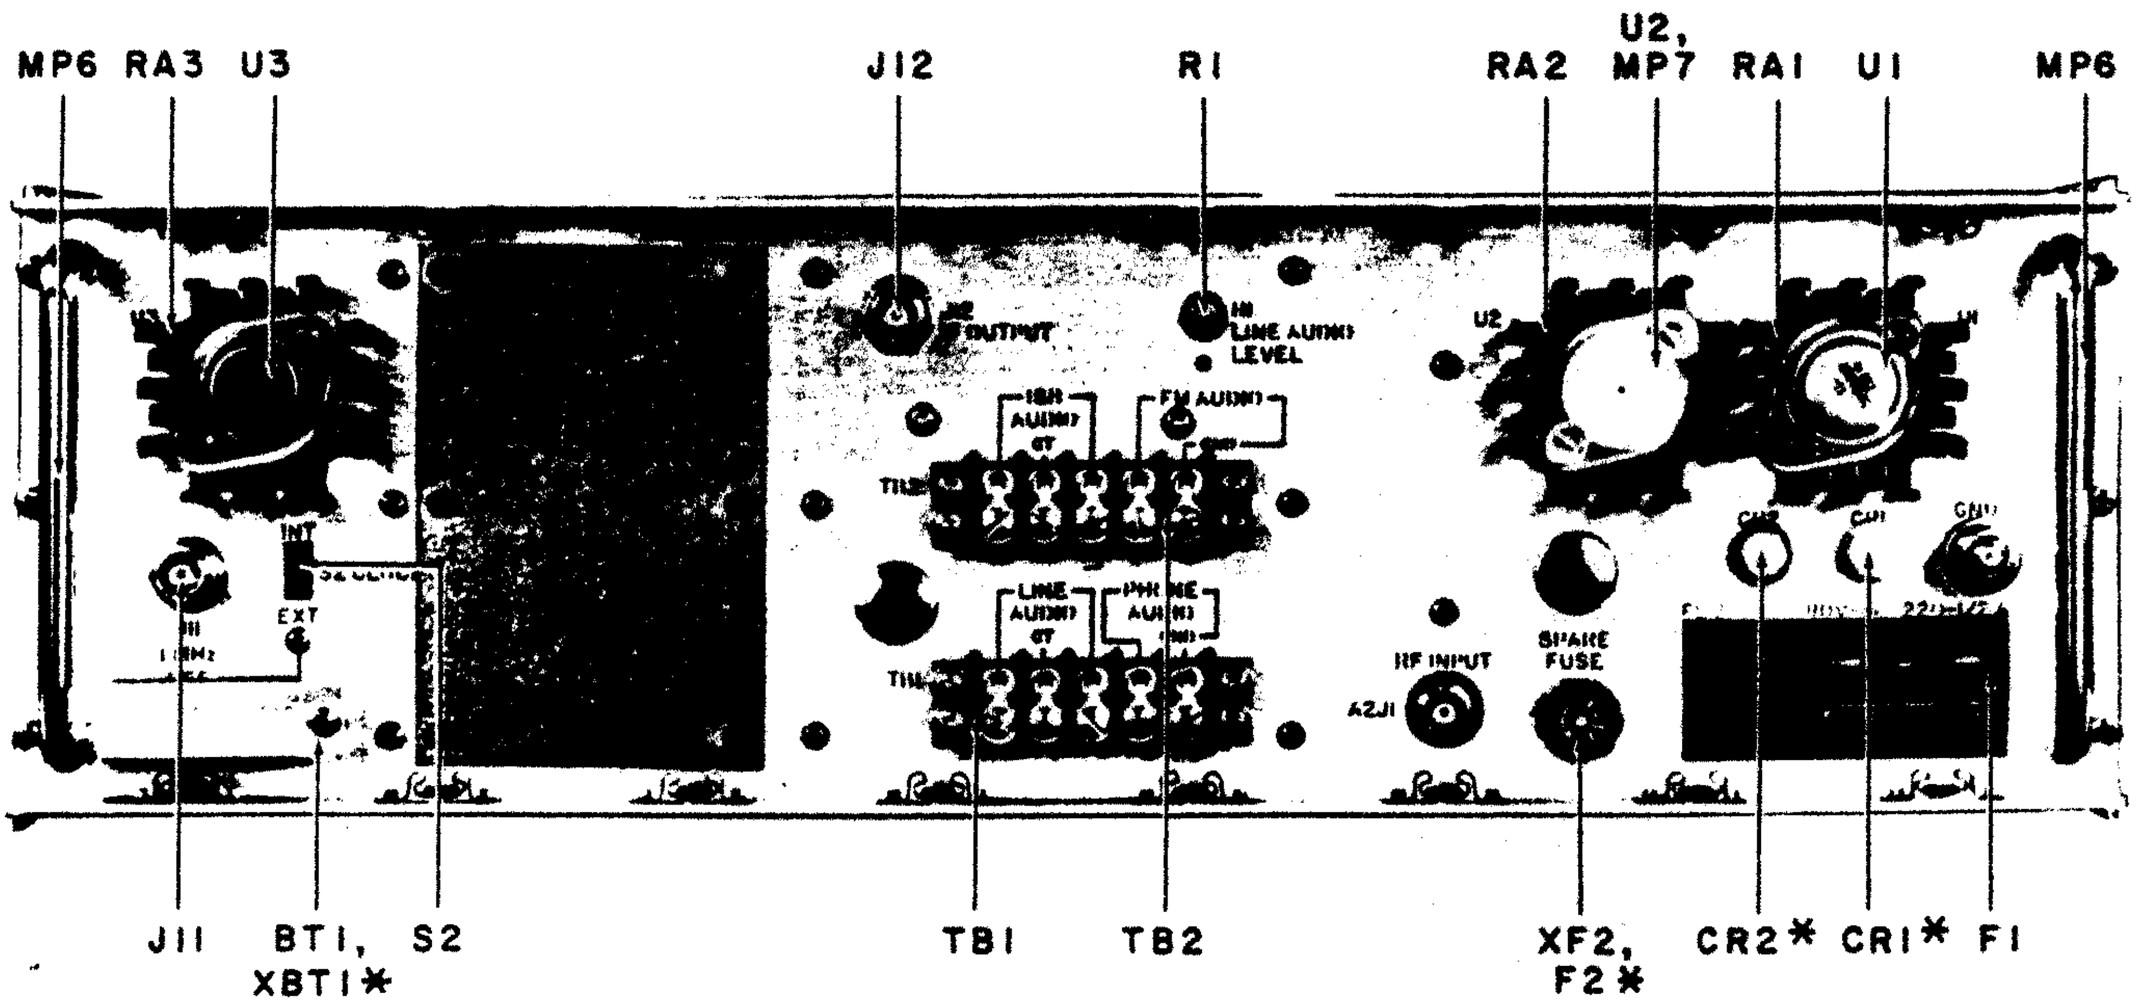



Figure 5-2. WJ-8718 HF Receiver, Rear Panel, Location of Components

FIGURE 5-3
FIGURE 5-4

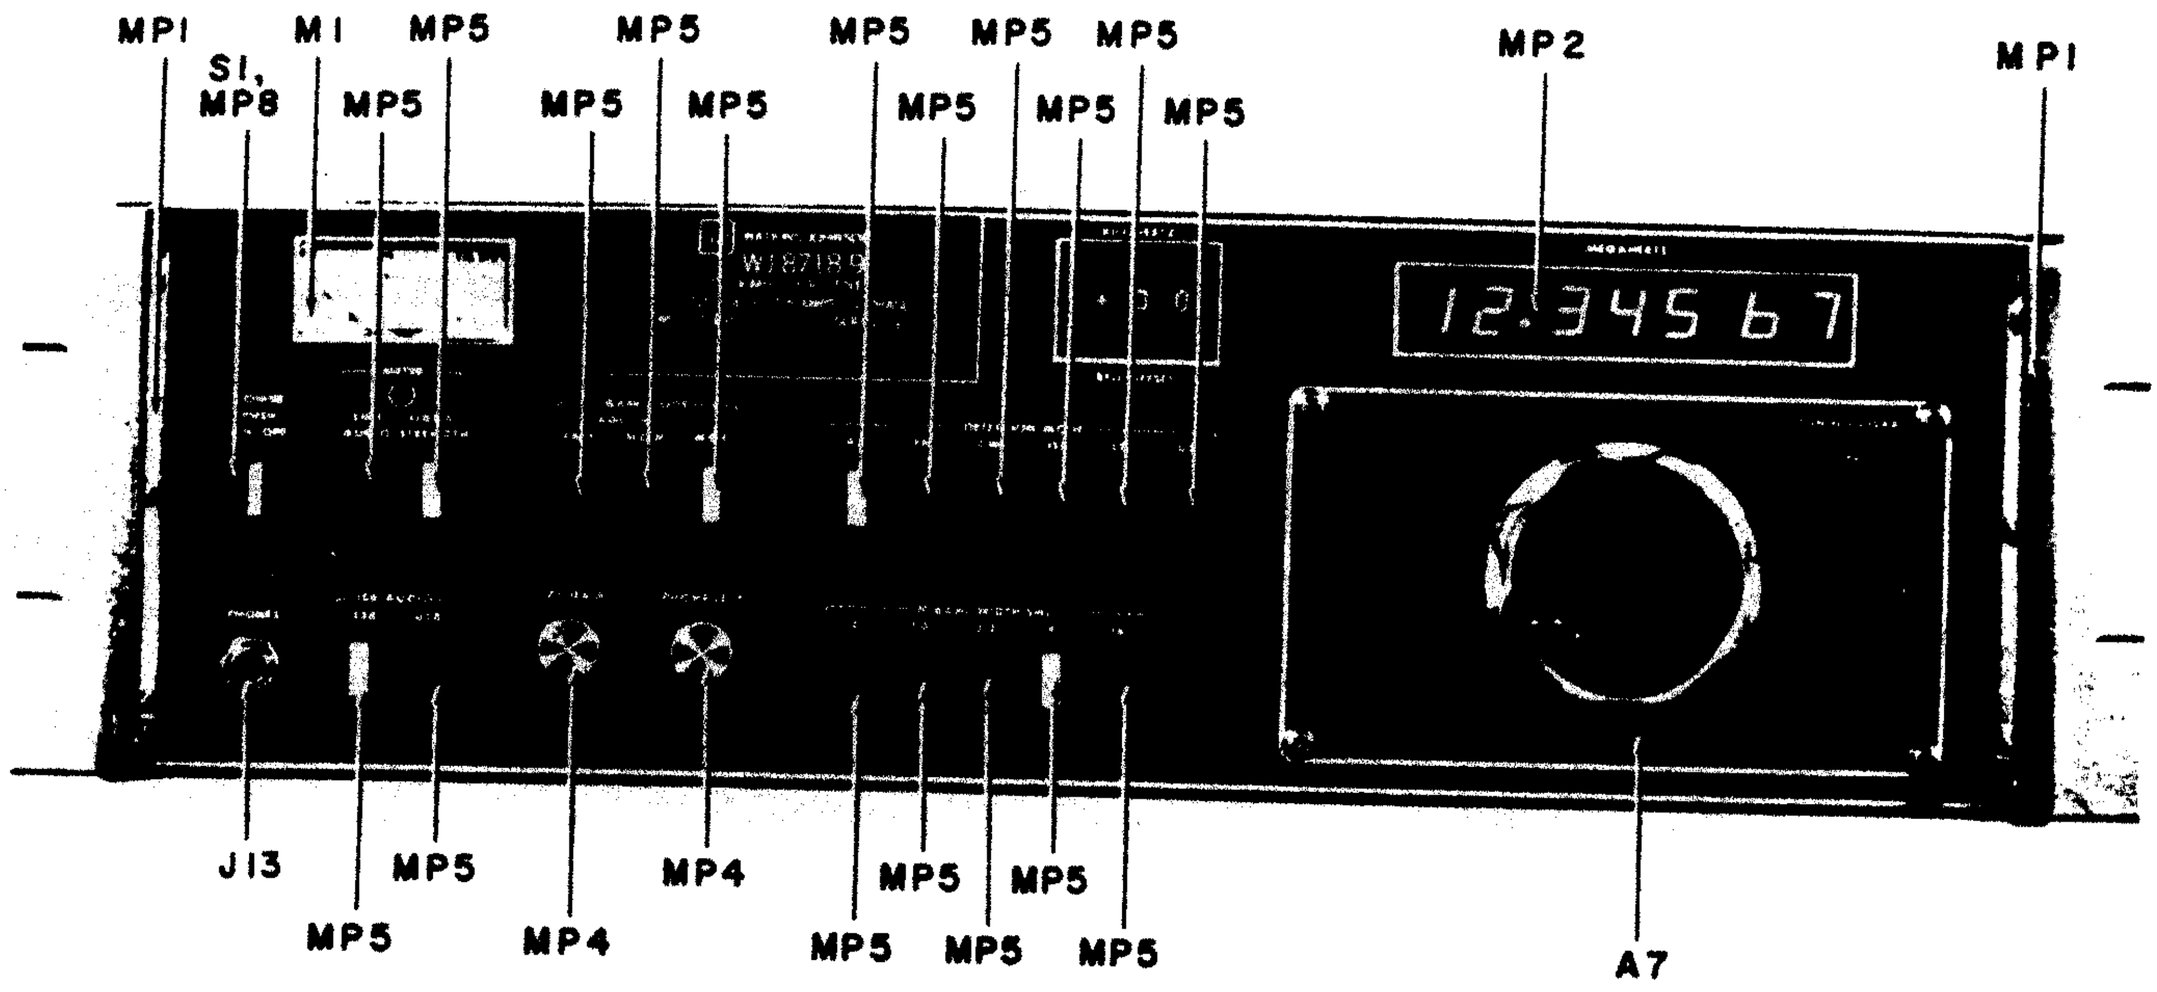



Figure 5-3. WJ-8718-9 HF Receiver, Front Panel, Location of Components

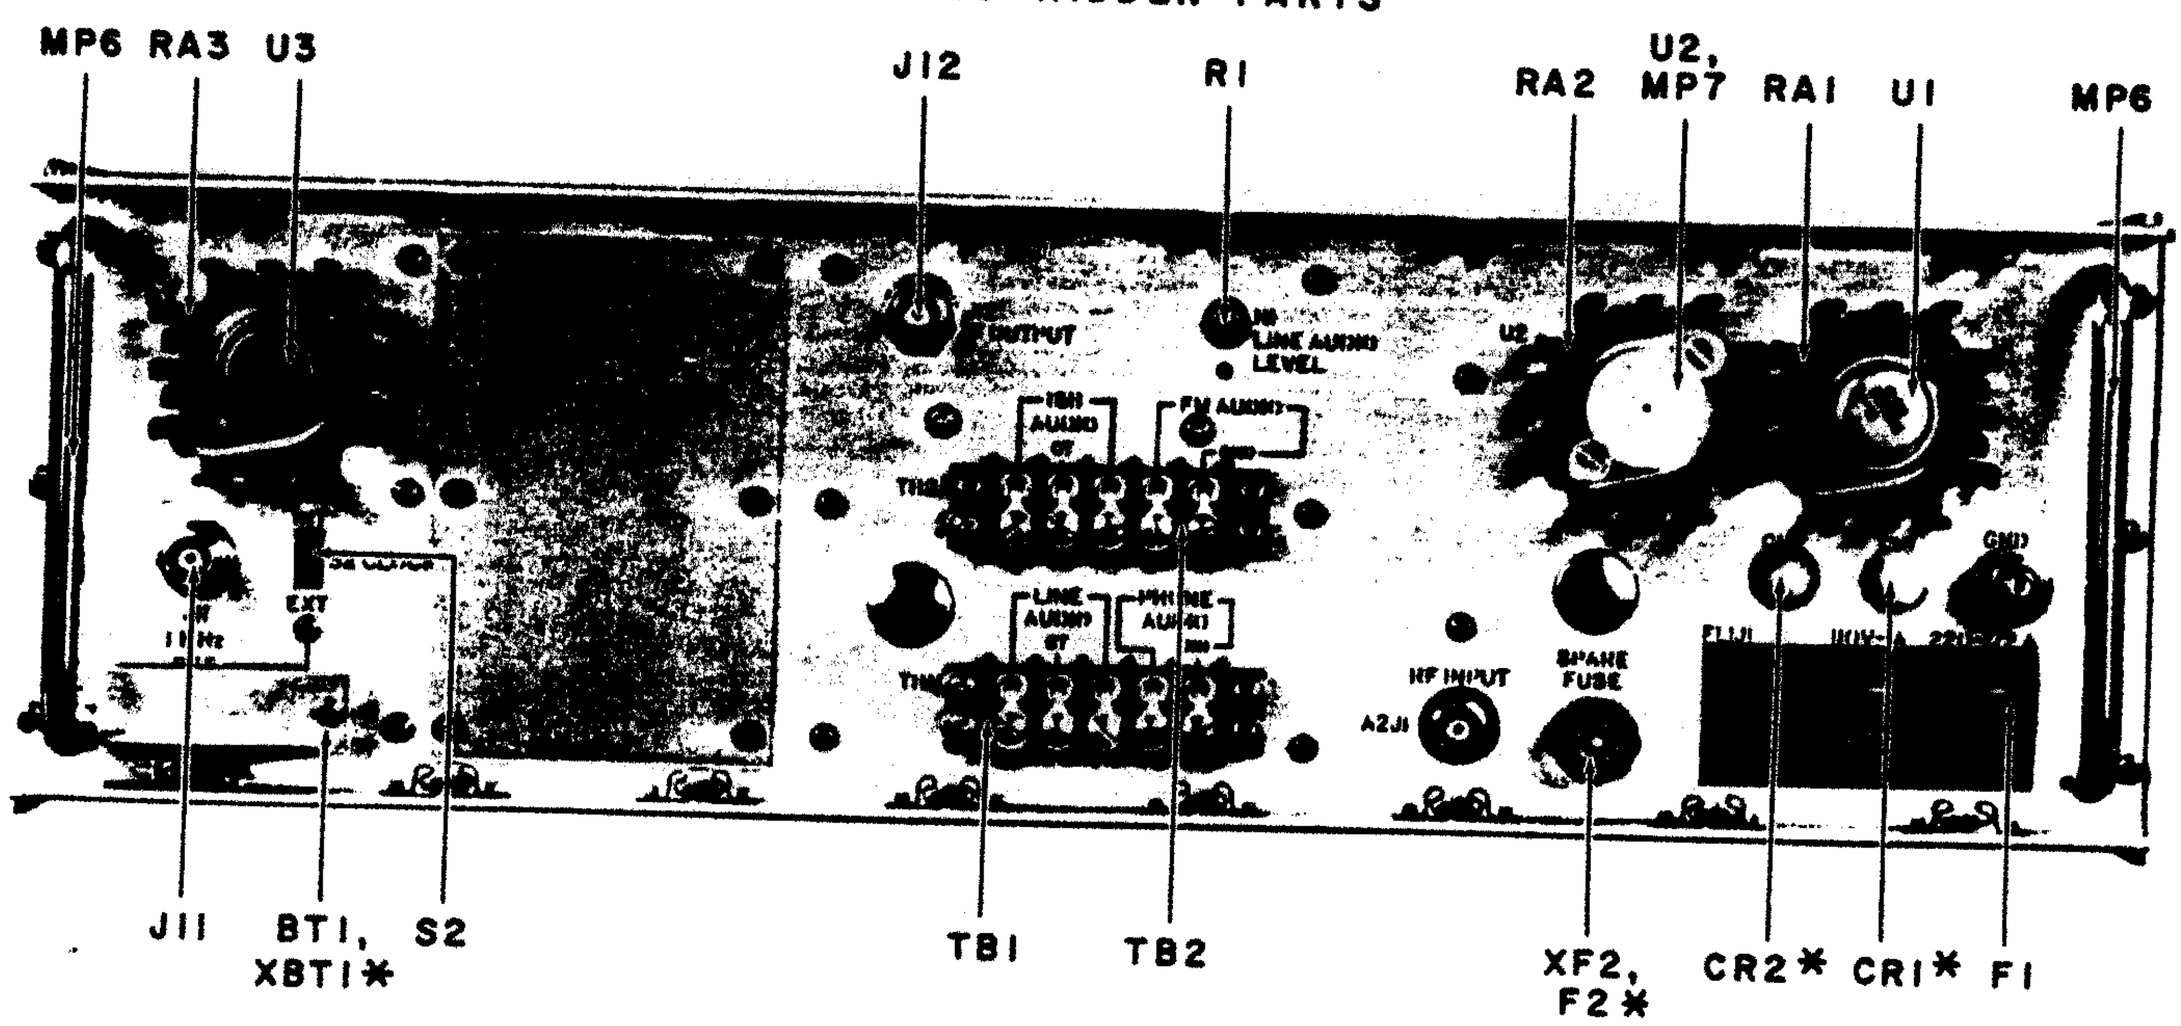



Figure 5-4. WJ-8718-9 HF Receiver, Rear Panel, Location of Components

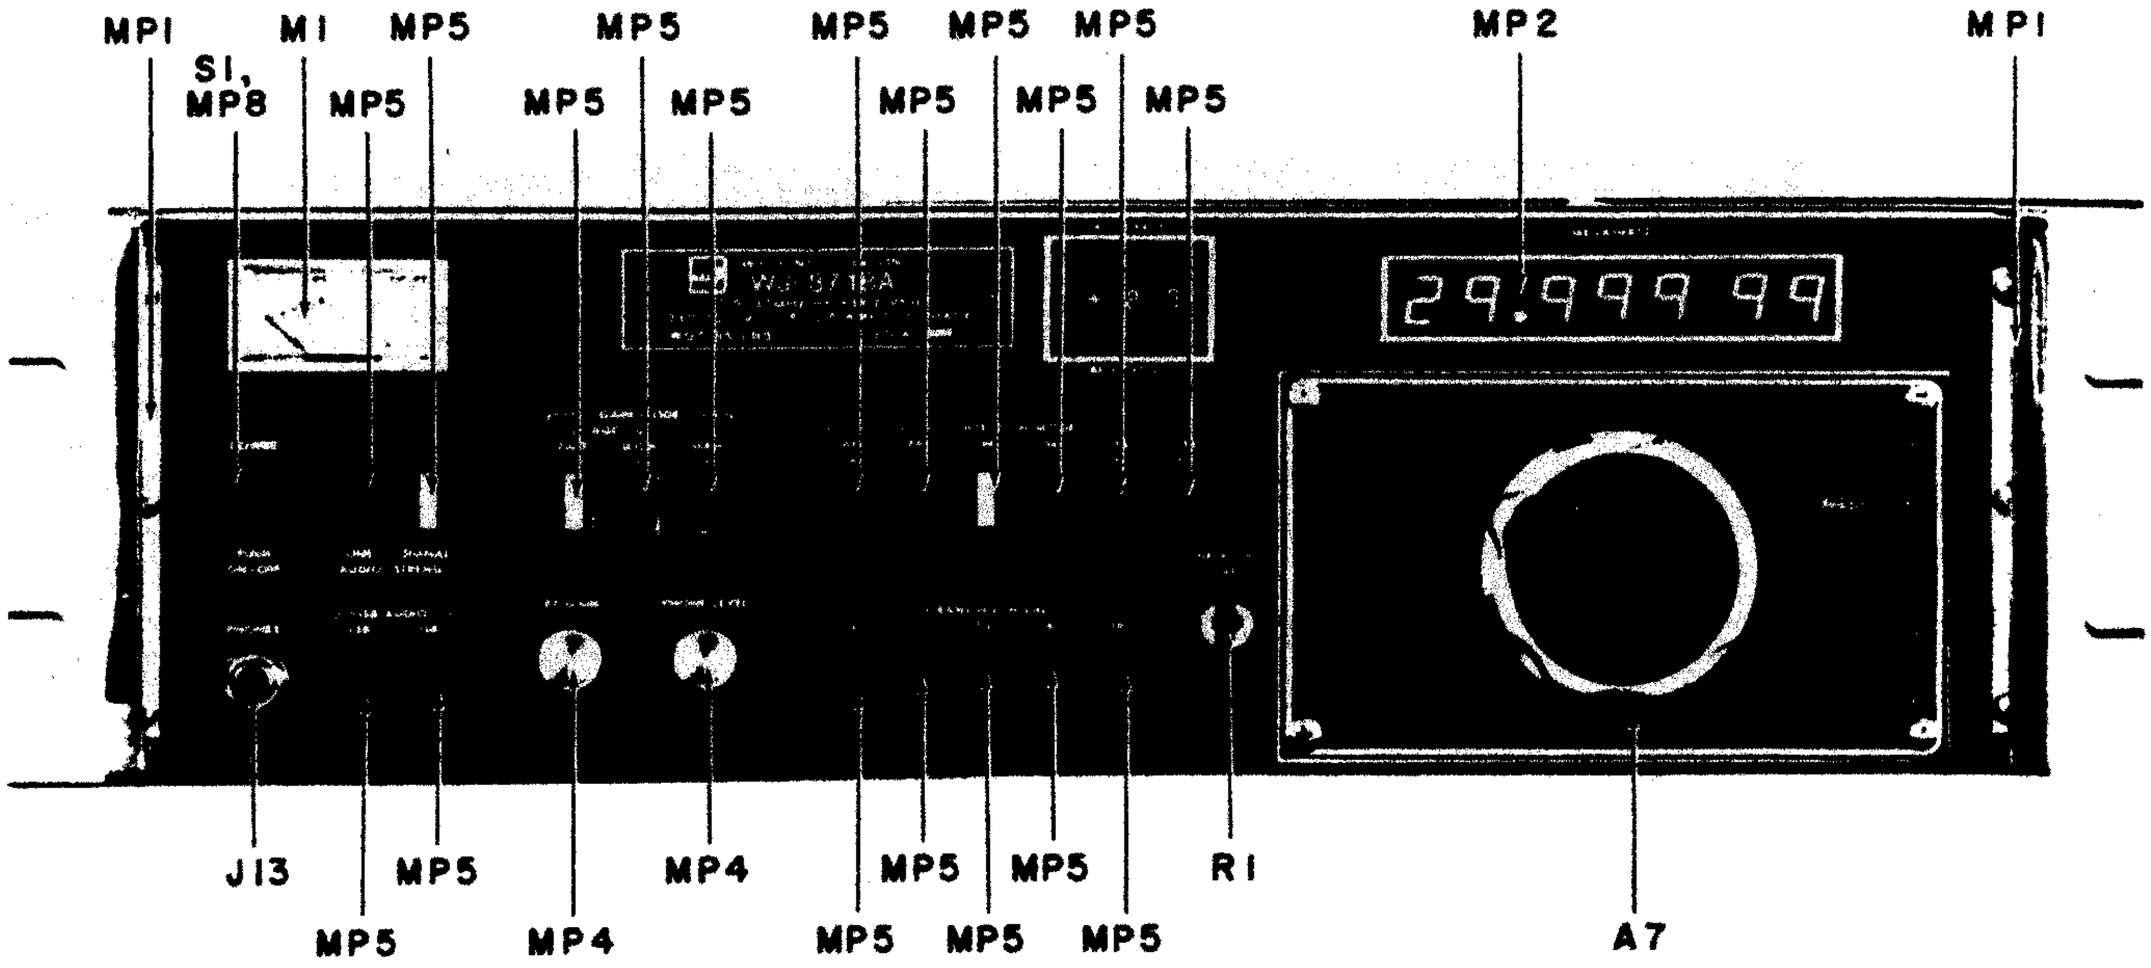



Figure 5-5. WJ-8718A HF Receiver, Front Panel, Location of Components


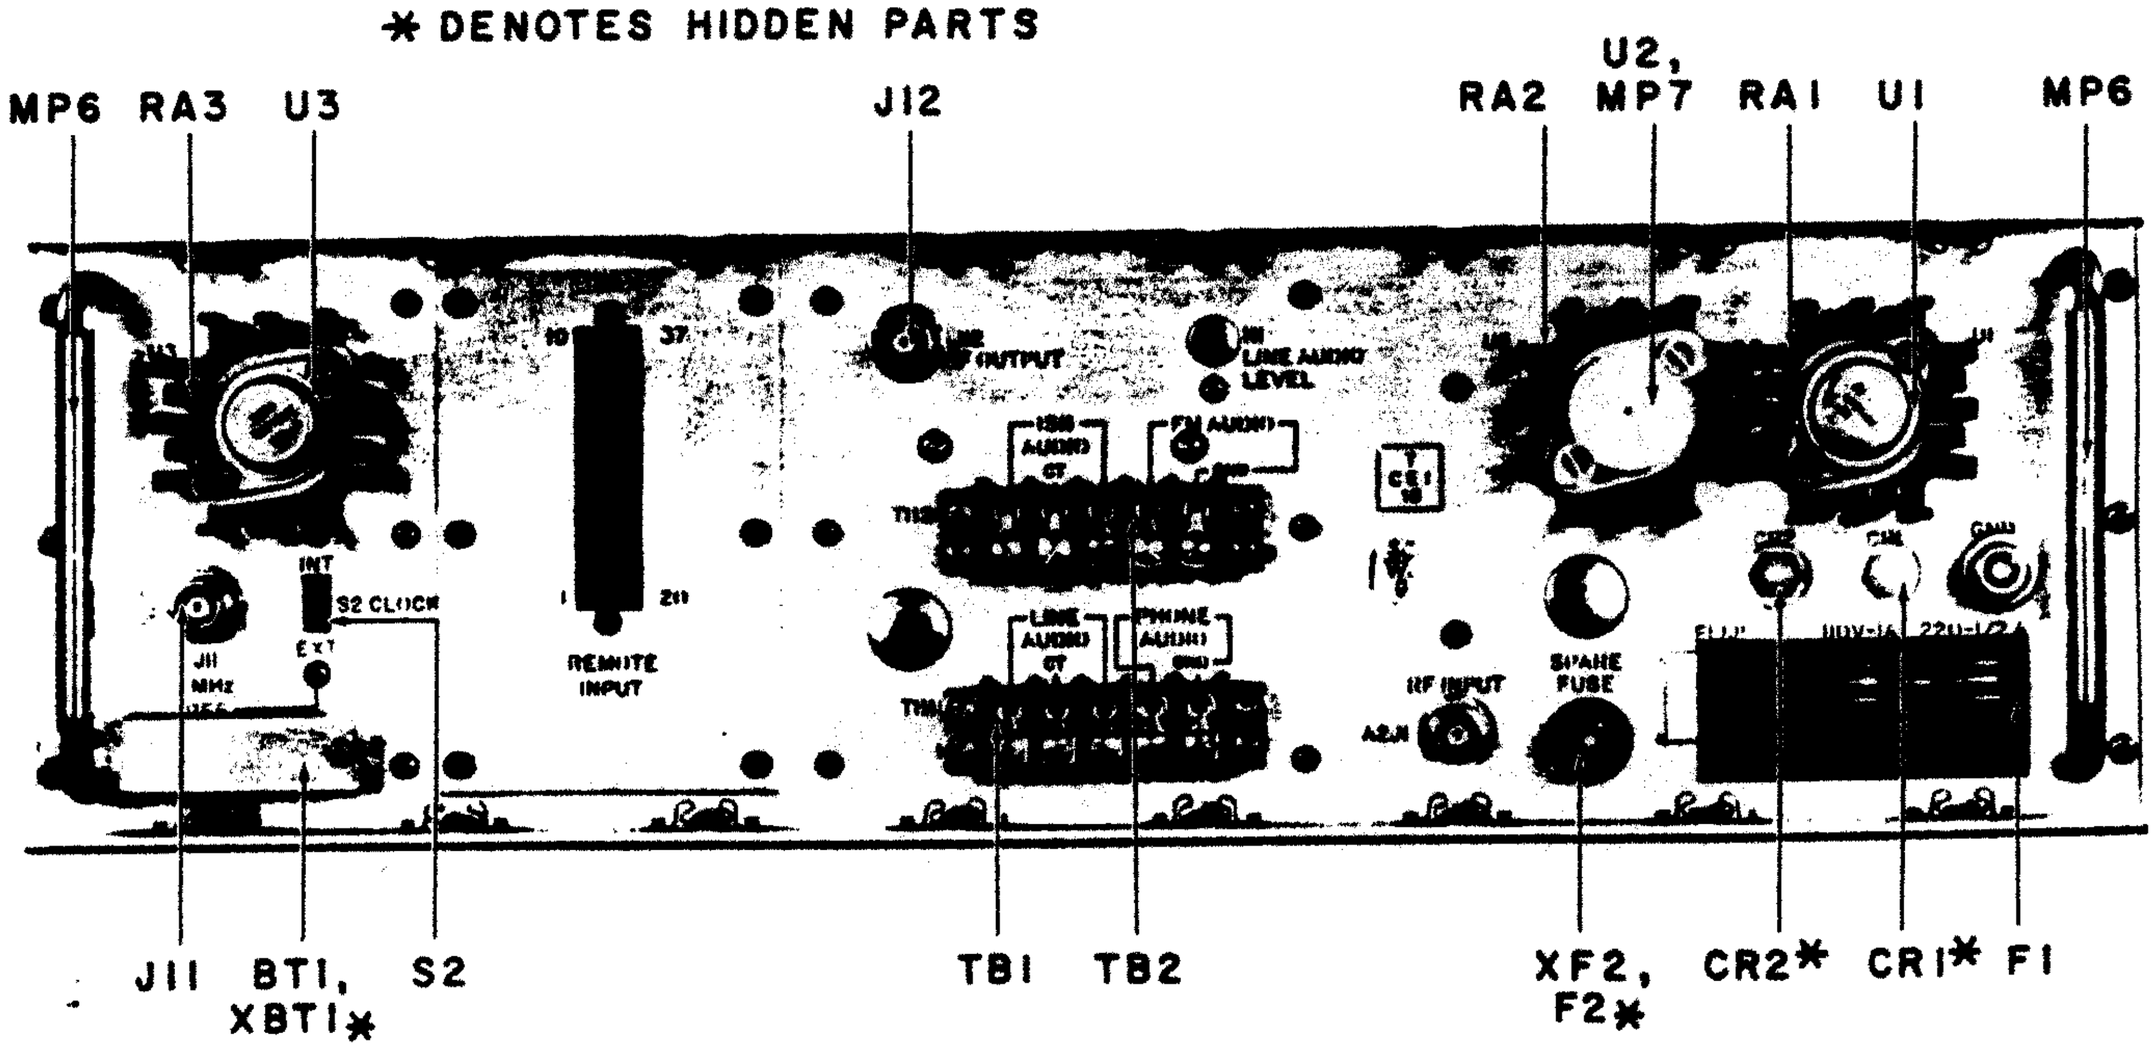



Figure 5-6. WJ-8718A HF Receiver, Rear Panel, Location of Components

MAIN CHASSIS

| REF DESIG | DESCRIPTION | | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|---|
| FL1 | Filter, Power | | 1 | 34505-1 | 14632 | |
| FL2 | Filter, Mono | | 1 | 92241 | 14632 | |
| J1 | Connector, Plug: SMC Series | Part of W14 | 8 | UG1468/U | 80058 | 19505 |
| J2 | Connector, Receptacle | | 1 | 205203-1 | 00779 | |
| J3 | Same as J1 | Part of W2 | | | | |
| J4 | Same as J1 | Part of W3 | | | | |
| J5 | Same as J1 | Part of W4 | | | | |
| J6 | Not Used | | | | | |
| J7 | Same as J1 | Part of W12 | | | | |
| J8 | Same as J1 | Part of W13 | | | | |
| J9 | Same as J1 | Part of W9 | | | | |
| J10 | Same as J1 | Part of W10 | | | | |
| J11 | Connector, Receptacle: BNC Series | Part of W11 | 2 | 225398-7 | 00779 | |
| J12 | Same as J11 | Part of W15 | | | | |
| J13 | Connector, Phone Jack | | 1 | L12B | 82389 | |
| M1 | Meter | | 1 | 34455-1 | 14632 | * |
| MP1 | Handle, Front Panel | | 2 | 32306-1 | 14632 | |
| MP2 | Display Window | | 1 | 18390-1 | 14632 | |
| MP3 | Housing, Receptacle (WJ-8718 and WJ-8718-9 only) | | 30 | 1-480417-0 | 00779 | |
| MP3 | Housing, Receptacle (WJ-8718A only) | | 31 | 1-480417-0 | 00779 | |
| MP4 | Knob, Round, Indicator Dot | | 2 | PS70D1/B | 21604 | |
| MP5 | Button, Black Shell with Yellow Indicator (WJ-8718) | | 16 | FA101-BLK/YEL | 31918 | |
| MP5 | Button, Black Shell with Yellow Indicator (WJ-8718A and WJ-8718-9 only) | | 18 | FA101-BLK/YEL | 31918 | |
| MP6 | Handle, Round, Rear Panel | | 2 | B1012-12 | 88245 | |
| MP7 | Cover, Transistor | | 1 | 8903NW | 13103 | |
| MP8 | Button, Black Shell with Red Indicator | | 1 | FA101-BLK/RED | 31918 | |
| MP9 | Cover Assembly, Top (WJ-8718 and WJ-8718-9 only) | | 1 | 580031-1 | 14632 | |
| MP9 | Cover Assembly, Top (WJ-8718A only) | | 1 | 580048-4 | 14632 | |
| MP10 | Cover Assembly, Bottom (WJ-8718 & WJ-8718-9 only) | | 1 | 580031-2 | 14632 | |
| MP10 | Cover Assembly, Bottom (WJ-8718A only) | | 1 | 580048-5 | 14632 | |
| P1 | Connector, Plug | Part of W1 | | | | |
| P2 | Connector, Plug | Part of W1 | | | | |
| P3 | Connector, Plug: SMC Series | Part of W2 | 7 | UG1466/U | 80058 | 19505 |
| P4 | Same as P3 | Part of W4 | | | | |
| P5 | Same as P3 | Part of W3 | | | | |
| P6 | Faston, Receptacle (WJ-8718 and WJ-8718-9 only) | | 30 | 42236-1 | 00779 | |
| P6 | Faston, Receptacle (WJ-8718A only) | | 33 | 42236-1 | 00779 | |
| P7 | Same as P3 | Part of W5 | | | | |
| P8 | Same as P3 | Part of W5 | | | | |
| P9 | Connector, Plug: SMC Series | Part of W6 | | | | |

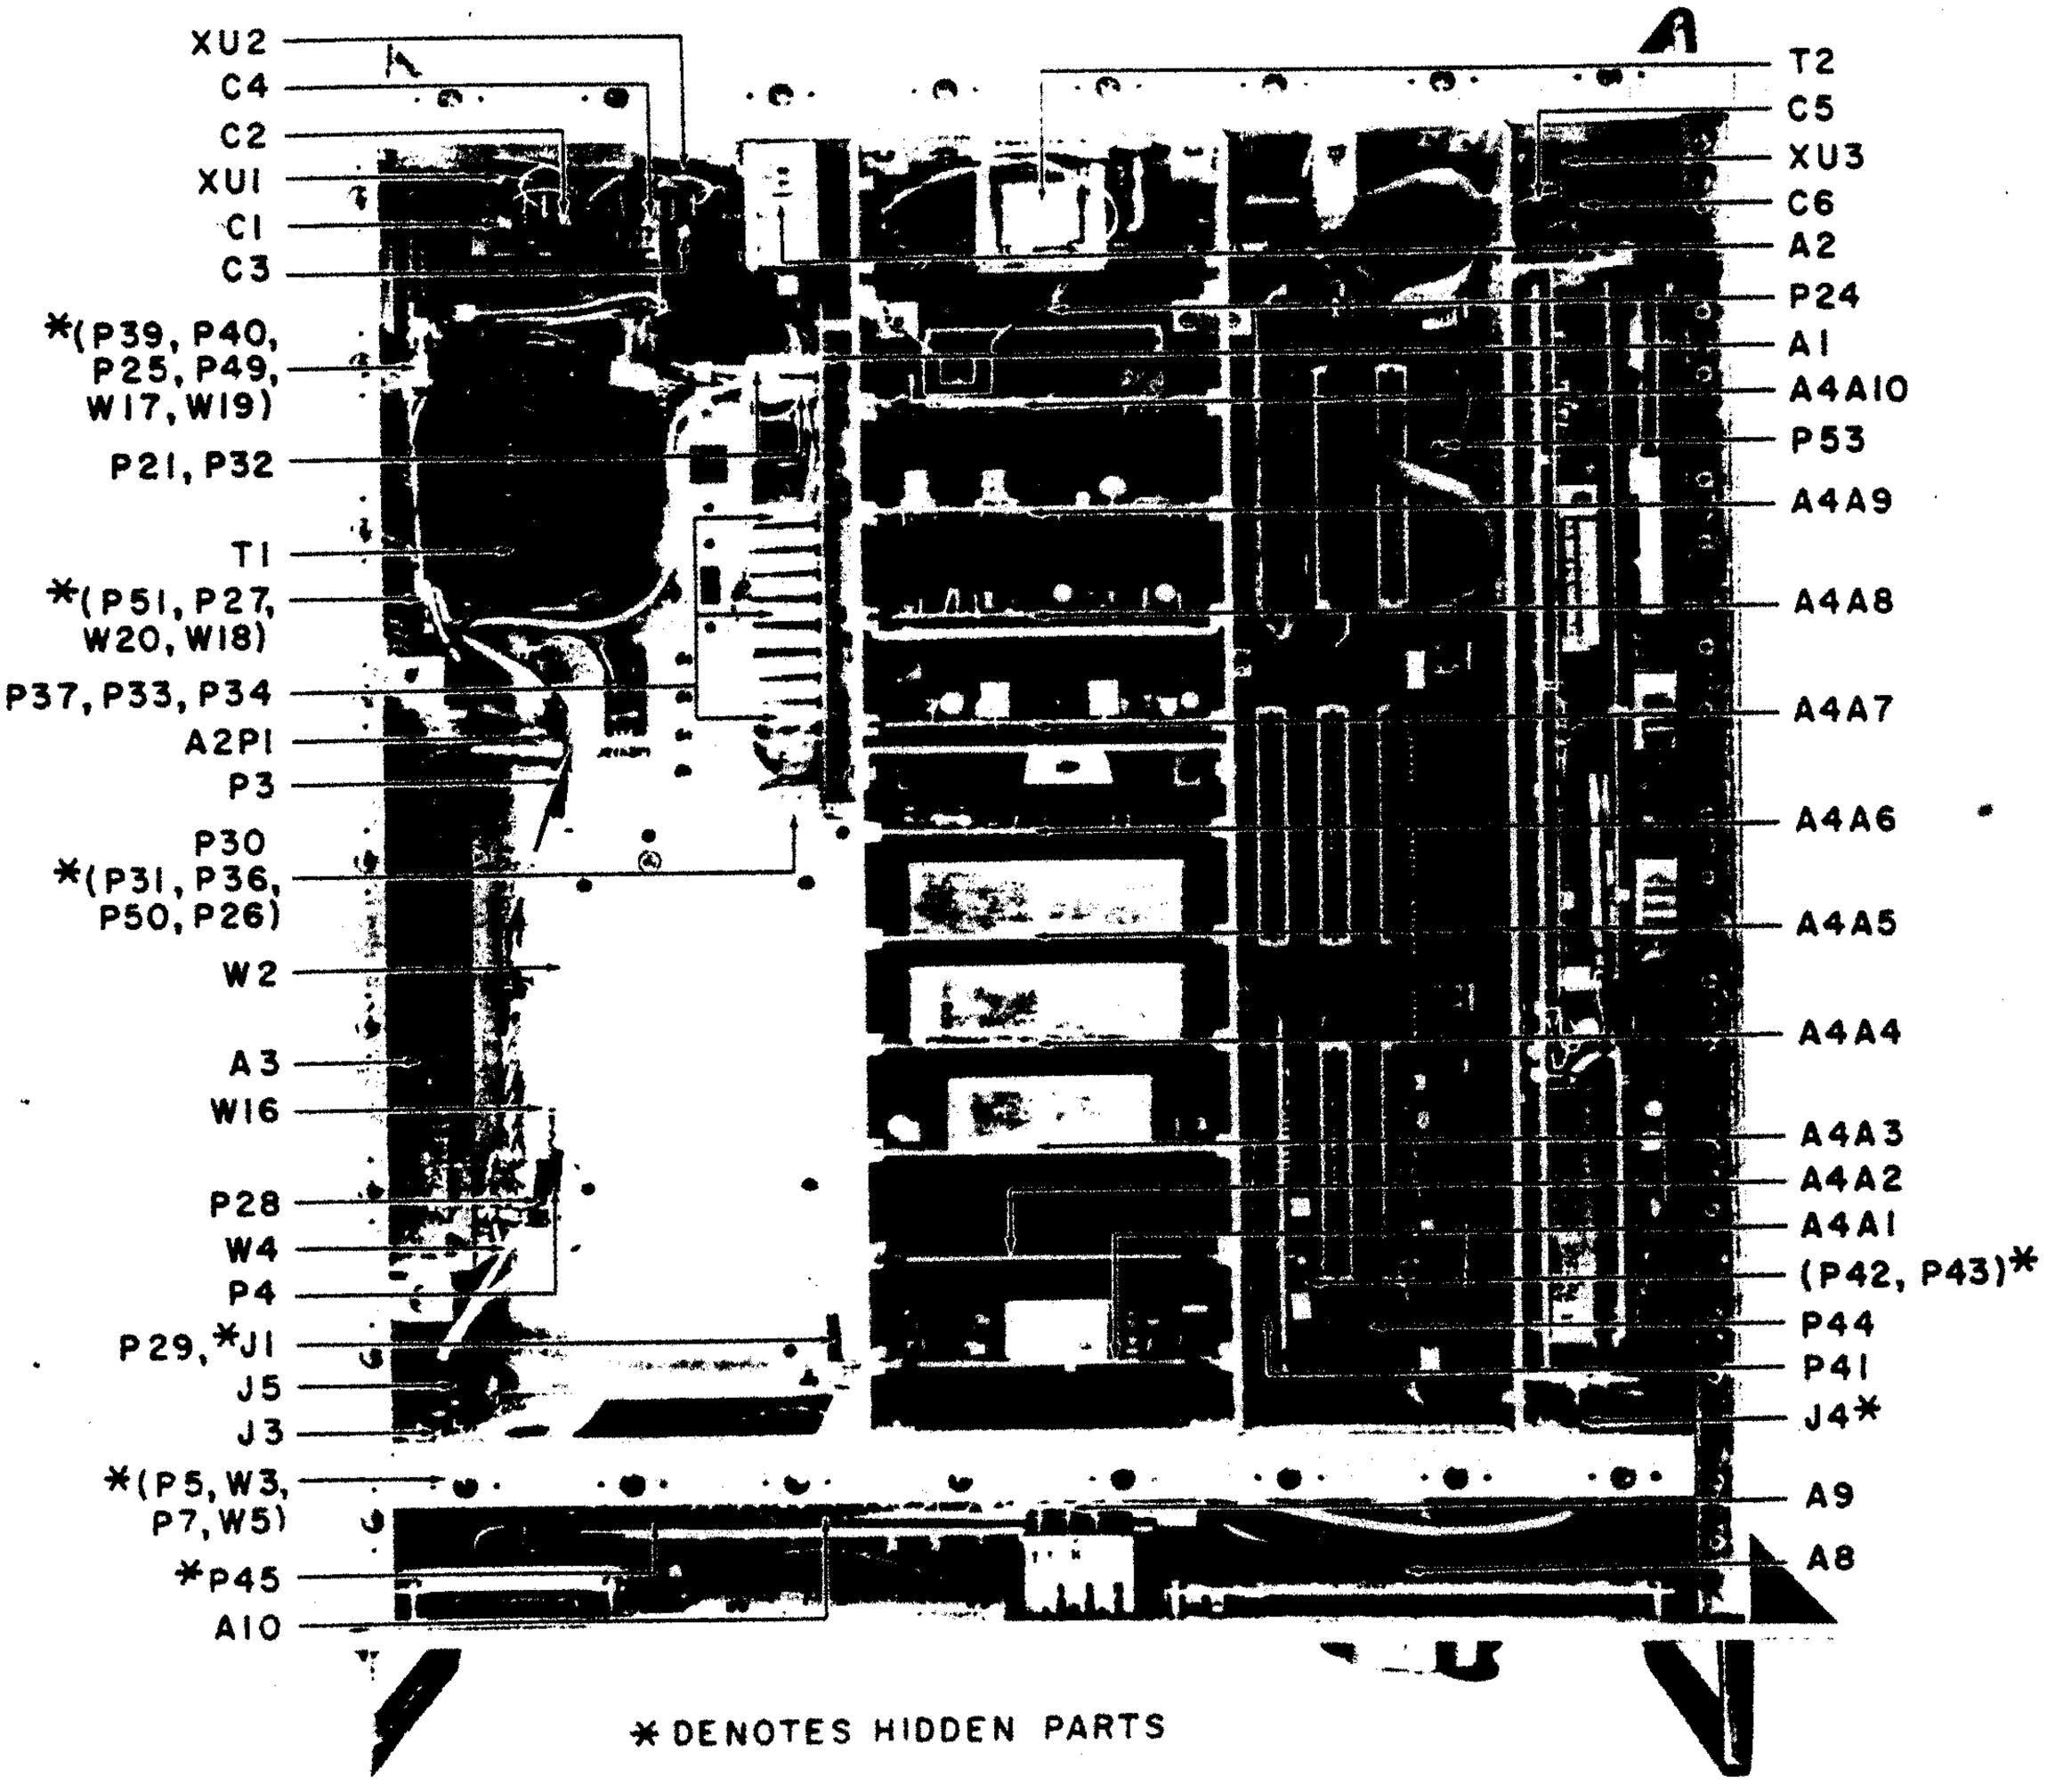


*DENOTES HIDDEN PARTS

Figure 5-7. WJ-8718 Series HF Receiver, Top View. Location of Components

MAIN CHASSIS

| REF DESIG | DESCRIPTION | | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|---|
| P10 | Same as P9 | Part of W6 | | | | |
| P11 | Same as P9 | Part of W7 | | | | |
| P12 | Same as P9 | Part of W7 | | | | |
| P13 | Plug Assembly | | 1 | 34704-1 | 14632 | |
| P14 | Plug Assembly | Part of W9 | 1 | 87499-5 | 00779 | |
| P15 | Same as P14 | Part of W10 | | | | |
| P16 | Same as P14 | Part of W11 | | | | |
| P17 | Same as P14 | Part of W12 | | | | |
| P18 | Same as P14 | Part of W13 | | | | |
| P19 | Same as P14 | Part of W14 | | | | |
| P20 | Same as P14 | Part of W15 | | | | |
| P21 | Same as P6 | Part of W17 | | | | |
| P22 | Plug Assembly | | 1 | 34529-2 | 14632 | |
| P23 | Plug Assembly | | 1 | 34529-3 | 14632 | |
| P24 | Plug Assembly (WJ-8718 and WJ-8718-9 only) | | 1 | 43594-1 | 14632 | |
| P24 | Plug Assembly (WJ-8718A only) | | 1 | 470487-1 | 14632 | |
| P25 | Connector, Plug Faston | Part of W17 | 11 | 2-350804-2 | 00779 | * |
| P26 | Same as P6 | Part of W18 | | | | |
| P27 | Same as P25 | Part of W18 | | | | |
| P28 | Same as P3 | Part of W16 | | | | |
| P29 | Same as P3 | Part of W16 | | | | |
| P30 | Same as P6 | | | | | |
| P31 | Same as P6 | | | | | |
| P32 | Same as P6 | Part of W19 | | | | |
| P33 Thru P36 | Same as P6 | | | | | |
| P37 | Not Used | | | | | |
| P38 | Same as P6 | | | | | |
| P39 | Same as P25 | | | | | |
| P40 | Same as P25 | | | | | |
| P41 Thru P47 | Same as P6 | | | | | |
| P48 | Plug Assembly | | 1 | 34529-1 | 14632 | |
| P49 | Same as P25 | Part of W19 | | | | |
| P50 | Same as P6 | Part of W20 | | | | |
| P51 | Same as P25 | Part of W20 | | | | |
| P52 | Connector, Plug (WJ-8718A only) | Part of W8 | 1 | 1-87456-2 | 00779 | |
| P53 | Same as P6 (WJ-8718A only) | | | | | |
| P54 | Plug Assembly (WJ-8718A only) | | 1 | 34529-4 | 16432 | |
| P55 | Same as P6 (WJ-8718A only) | | | | | |
| P56 | Connector, MINI (WJ-8718A only) | Part of W8 | 1 | 65051-034 | 22526 | |

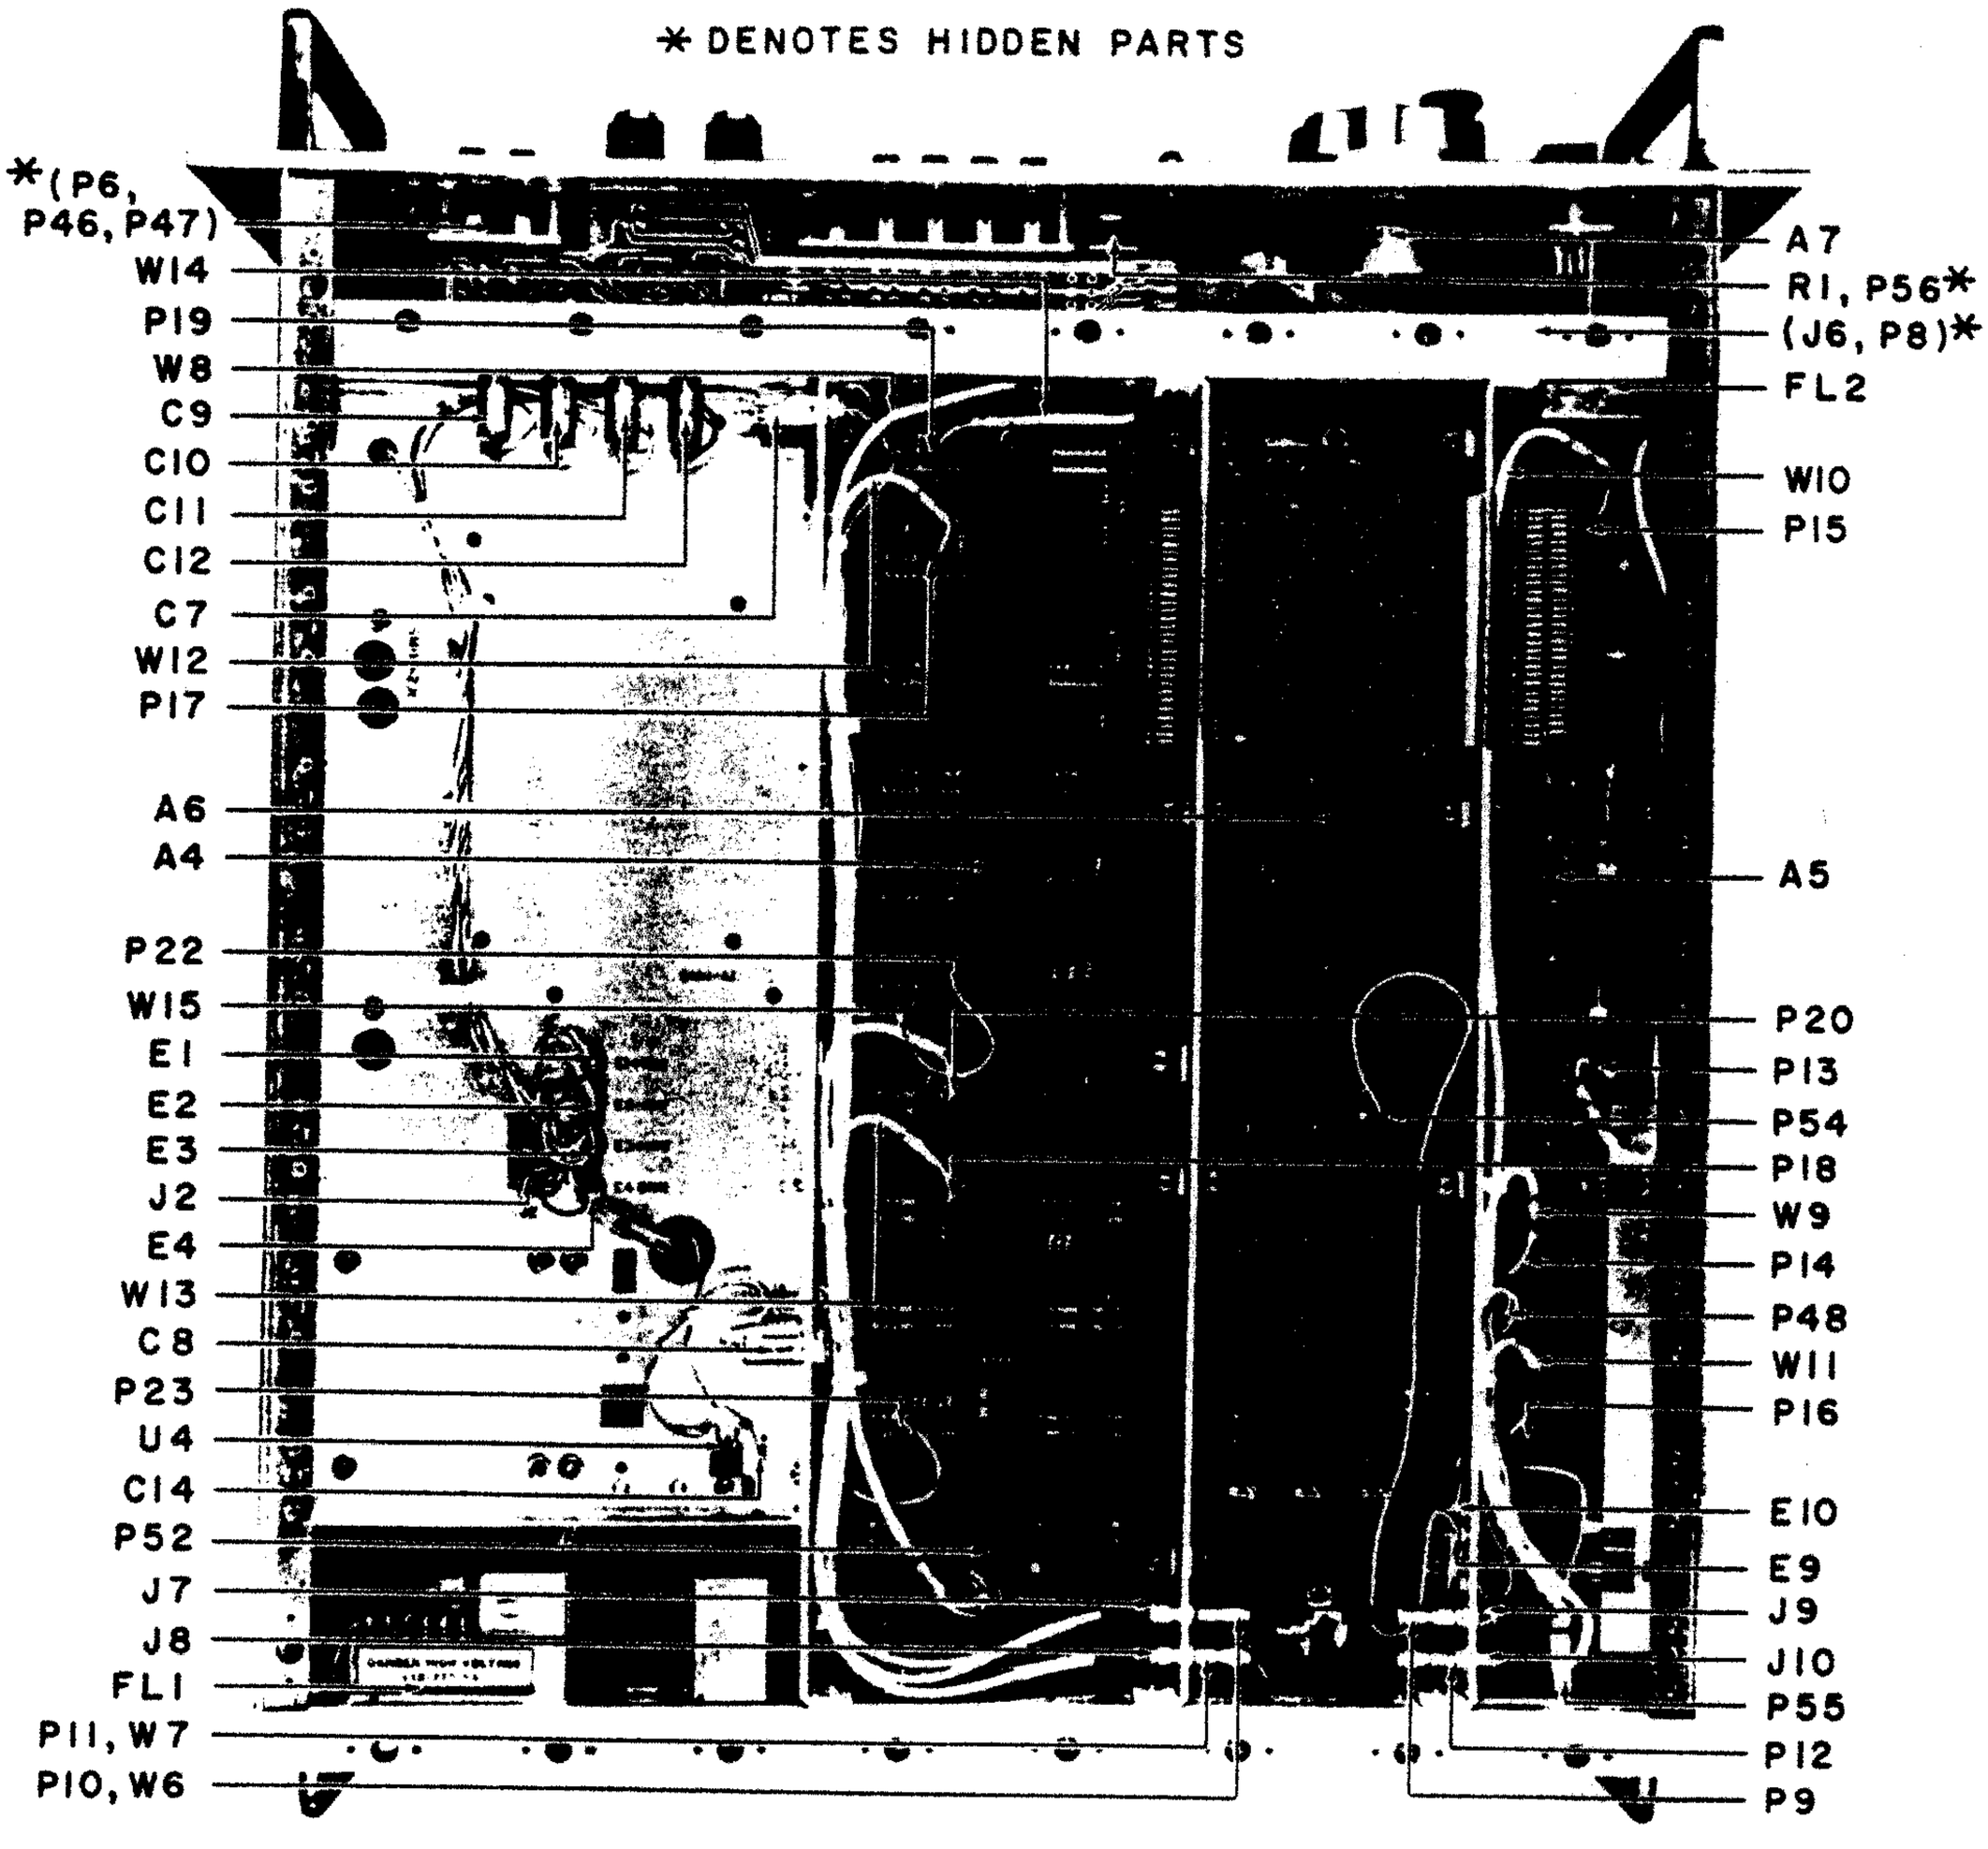



Figure 5-8. WJ-8718 Series HF Receiver, Bottom View, Location of Components

MAIN CHASSIS

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| R1 | Resistor, Variable, Composition: 25 kΩ, 10%, 1 W | 1 | 70A3L036L253A | | |
| R2 | Not Used | | | | |
| RA1 | Radiator, Heat | 3 | UP2-T03-CB | 98978 | |
| RA2 | Same as RA1 | | | | |
| RA3 | Same as RA1 | | | | |
| S1 | Switch, Pushbutton | 1 | 18542 | 14632 | |
| S2 | Switch, Slide | 1 | 11A1211 | 82389 | |
| T1 | Transformer, Power | 1 | 380083 | 14632 | |
| T2 | Transformer, Audio | 1 | 841004 | 14632 | |
| TB1 | Terminal Board | 2 | 353-18-05-001 | | |
| TB2 | Same as TB1 | | | | |
| U1 | Voltage Regulator (WJ-8718 and WJ-8718-9 only) | 1 | LAS15A15 | 80103 | |
| U1 | Voltage Regulator (WJ-8718A only) | 1 | LM340AKC15 | 27014 | |
| U2 | Voltage Regulator | 1 | LAS18A15 | 80103 | |
| U3 | Voltage Regulator | 1 | LAS1405 | 80103 | |
| U4 | Voltage Regulator | 1 | 7812UC | 07263 | |
| W1 | Cable Assembly, Power Line Cord | 1 | 17250 | 16428 | |
| W2 | Cable Assembly | 1 | 34701-1 | 14632 | |
| W3 | Cable Assembly | 1 | 34701-2 | 14632 | |
| W4 | Cable Assembly | 1 | 34701-3 | 14632 | |
| W5 | Cable Assembly | 1 | 34701-4 | 14632 | |
| W6 | Cable Assembly | 1 | 34701-5 | 14632 | |
| W7 | Cable Assembly | 1 | 34701-6 | 14632 | |
| W8 | Not Used (WJ-8718 and WJ-8718-9 only) | | | | |
| W8 | Cable Assembly (WJ-8718A only) | 1 | 370732 | 14632 | |
| W9 | Cable Assembly | 1 | 34700-1 | 14632 | |
| W10 | Cable Assembly | 1 | 34700-2 | 14632 | |
| W11 | Cable Assembly | 1 | 34702-1 | 14632 | |
| W12 | Cable Assembly | 1 | 34700-3 | 14632 | |
| W13 | Cable Assembly | 1 | 34700-4 | 14632 | |
| W14 | Cable Assembly | 1 | 34700-5 | 14632 | |
| W15 | Cable Assembly | 1 | 34702-2 | 14632 | |
| W16 | Cable Assembly | 1 | 34701-7 | 14632 | |
| W17 | Cable Assembly | 1 | 380005-1 | 14632 | |
| W18 | Cable Assembly | 1 | 380005-2 | 14632 | |
| W19 | Cable Assembly | 1 | 380005-3 | 14632 | |
| W20 | Cable Assembly | 1 | 380005-4 | 14632 | |
| XBT1 | Socket, Battery (WJ-8718A only) | 1 | 794298 | 14632 | |
| XF2 | Fuseholder | 1 | 342004 | 75915 | |

**MAIN CHASSIS**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| XU1 | Socket Assembly | 1 | 34506-1 | 14632 | |
| XU2 | Socket Assembly | 1 | 34506-2 | 14632 | |
| XU3 | Socket Assembly | 1 | 34506-3 | 14632 | |

5.6.1 **TYPE 76240 POWER DISTRIBUTION**

REF DESIG PREFIX A1

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| C1 | Capacitor, Electrolytic, Aluminum: 2200 µF, -10 + 75%,25 V | 2 | 39D228G025HP4 | 56289 | |
| C2 | Same as C1 | | | | |
| C3 | Capacitor, Electrolytic, Aluminum: 8000 µF, -10 + 75%,15 V | 2 | 39D808G015JT4 | 56289 | |
| C4 | Same as C3 | | | | |
| CR1 | Diode | 3 | 1N4998 | 80131 | 04713 |
| CR2 Thru CR4 | Same as CR1 | | | | |
| J1 | Connector, Receptacle: Faston Tab | 20 | 62073-1 | 00779 | |
| J2 Thru J14 | Same as J1 | | | | |
| J15 Thru J18 | Not Used | | | | |
| J19 Thru J21 | Same as C1 | | | | |
| J22 Thru J30 | Not Used | | | | |
| J31 | Same as J1 | | | | |
| J32 | Same as J1 | | | | |
| J33 | Not Used | | | | |
| J34 | Not Used | | | | |
| J35 | Same as J1 | | | | |

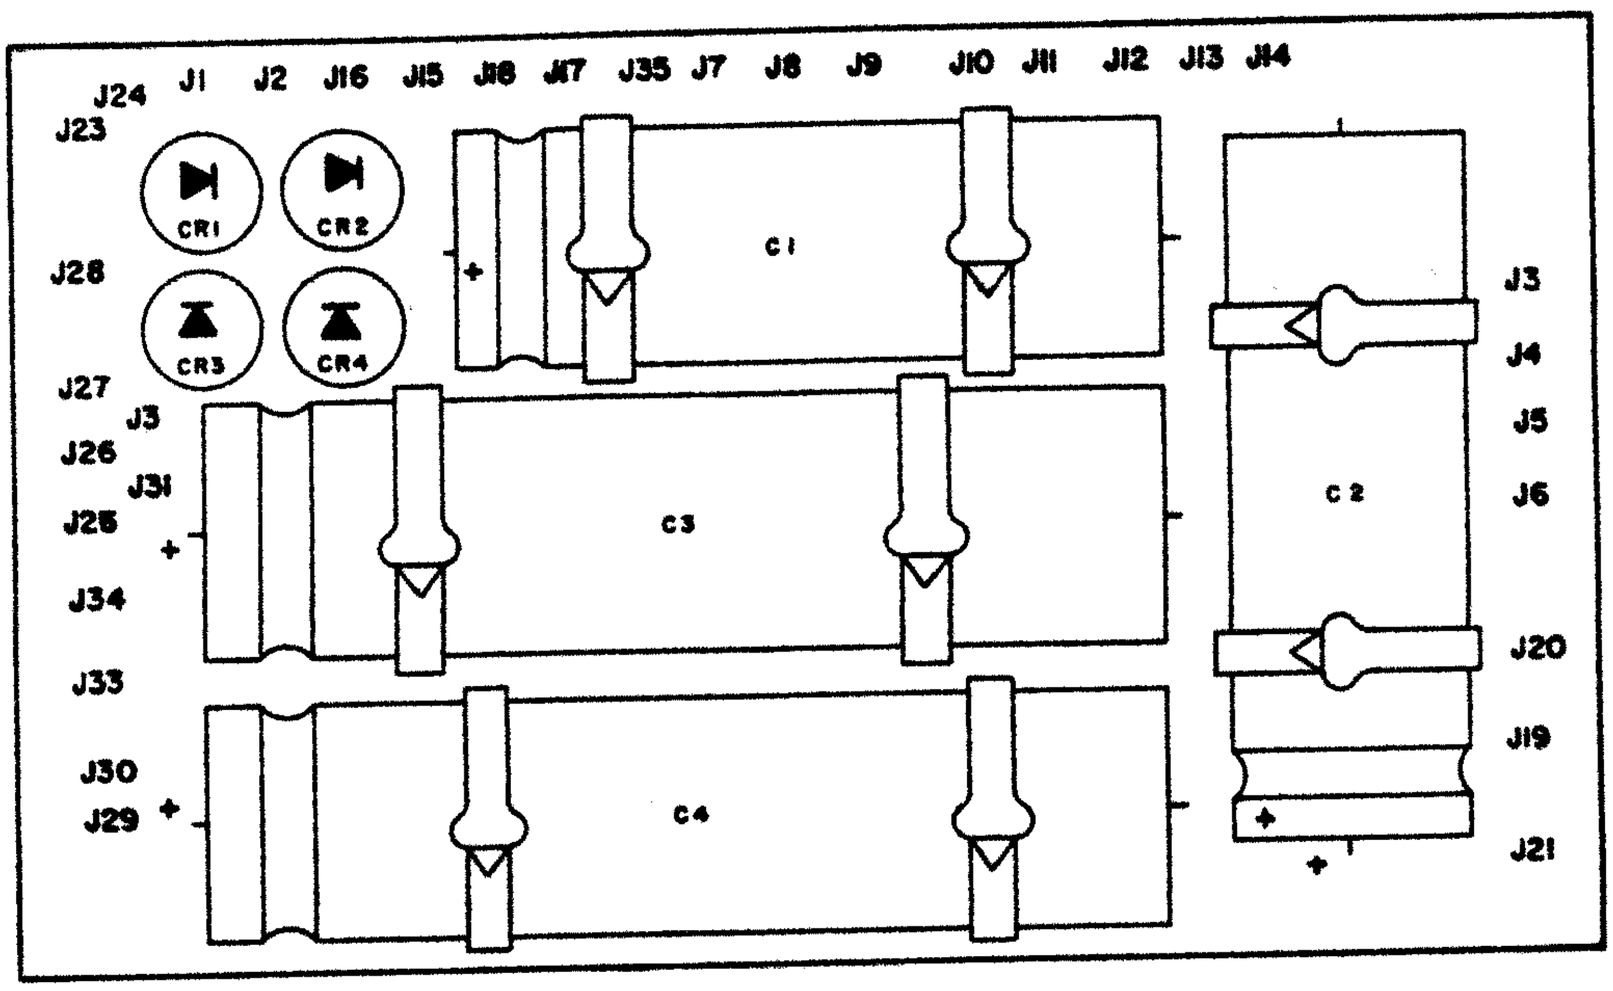



Figure 5-9. Type 76240 Power Distribution (A1), Location of Components

5.6.2 **TYPE 791616-1 RF FILTER** REF DESIG PREFIX **A2**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| A1 | 30 MHz Low Pass Filter | 1 | 280093 | 14632 | |
| J1 | Connector, Receptacle: BNC Series | 1 | UG1094/U | 80058 | 74868 |
| L1 | Coil, Toroidal | 1 | 20681-208 | 14632 | |
| MP1 | Cover Assembly (Not Shown) | 1 | 280091-1 | 14632 | |
| R1 | Resistor, Fixed, Composition: 8.2Ω, 5%, 1/8W | 1 | CF1/8-8.2 OHMS/J | 09021 | |
| R2 | Resistor, Fixed, Composition: 560Ω, 5%, 1/8 W | 2 | CF1/8-560 OHMS/J | 09021 | |
| R3 | Same as R2 | | | | |

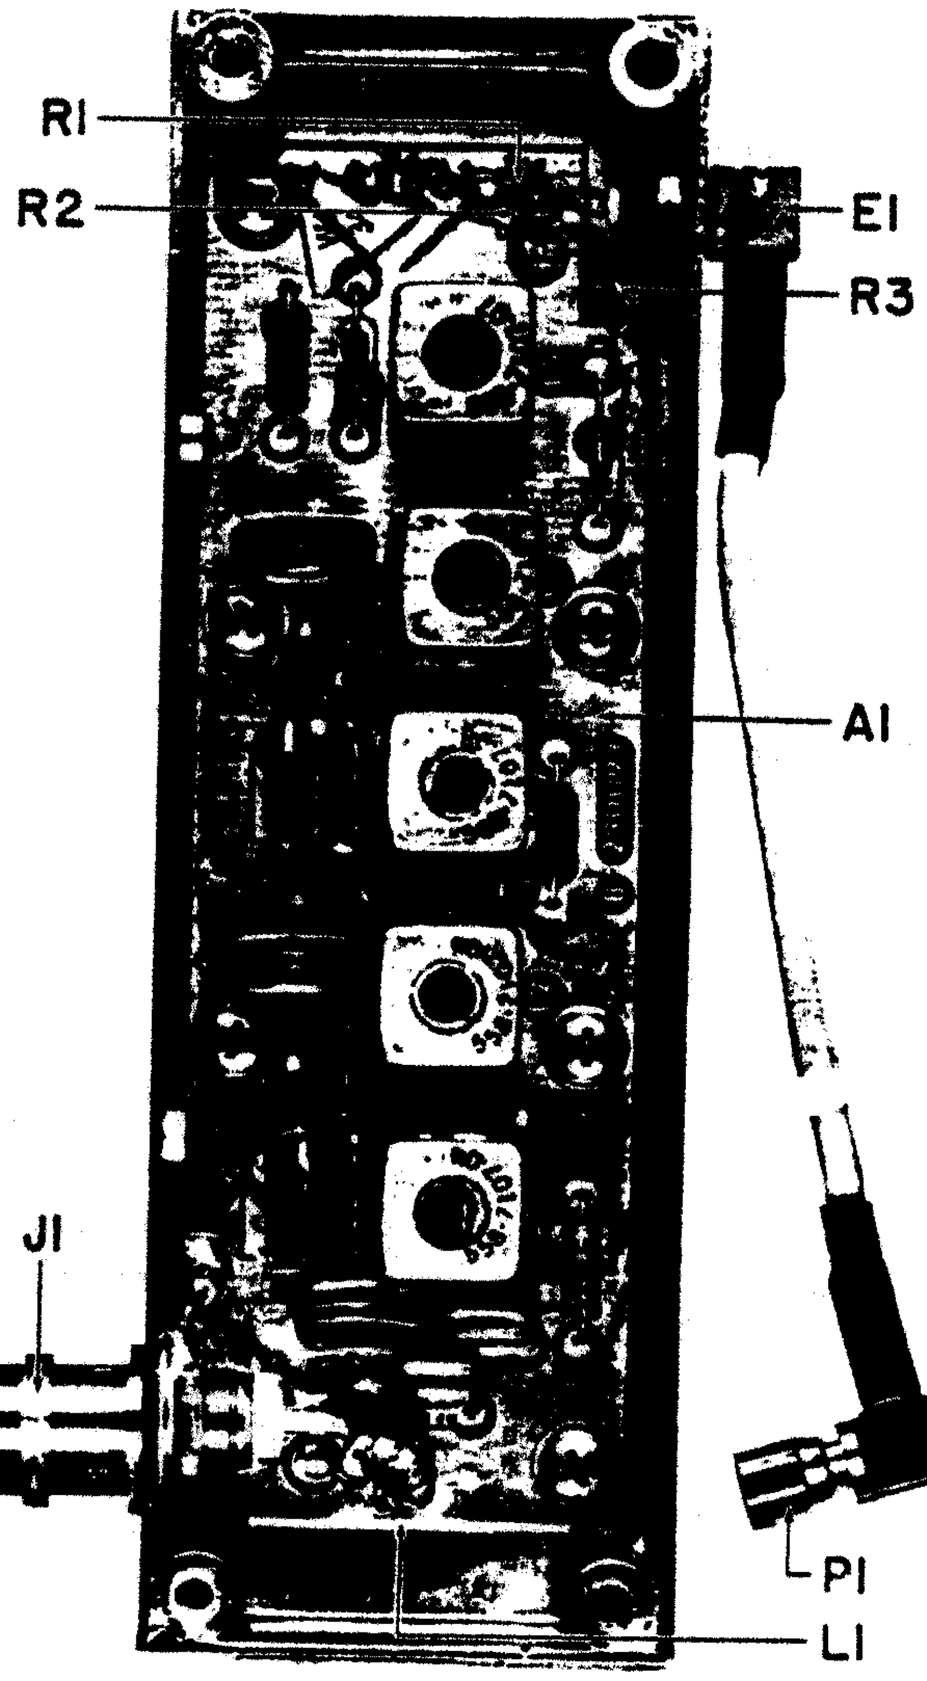



Figure 5-10. Type 791616-1 Input Filter (A2), Location of Components

5.6.2.1 **Part 280093 30 MHz Low Pass Filter** REF DESIG PREFIX **A2A1**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| C1 | Capacitor, Ceramic, Disc: 0.47 µF, 20%, 50 V | 2 | 34452-1 | 14632 | |
| C2 | Capacitor, Mica, Dipped: 120 pF, 2%, 500 V | 1 | CM05FD121G03 | 81349 | 72136 |
| C3 | Capacitor, Mica, Dipped: 10 pF, ±0.5 pF, 500 V | 1 | CM05CD100D03 | 81349 | 72136 |
| C4 | Capacitor, Mica, Dipped: 180 pF, 2%, 500 V | 1 | CM05FD181G03 | 81349 | 72136 |
| C5 | Capacitor, Mica, Dipped: 33 pF, 2%, 500 V | 1 | CM05ED330G03 | 81349 | 72136 |
| C6 | Capacitor, Mica, Dipped: 150 pF, 2%, 500 V | 3 | CM05FD151G03 | 81349 | 72136 |
| C7 | Capacitor, Mica, Dipped: 39 pF, 2%, 500 V | 1 | CM05ED390G03 | 81349 | 72136 |
| C8 | Same as C6 | | | | |
| C9 | Capacitor, Mica, Dipped: 18 pF, 5%, 500 V | 1 | CM05CD180J03 | 81349 | 72136 |
| C10 | Same as C6 | | | | |
| C11 | Same as C1 | | | | |
| C12 | Capacitor, Ceramic, Disc: 47 pF, 5%, 100 V | 1 | 8111-100-C0G0-470J | 72982 | |
| CR1 | Diode | 2 | 1N4449 | 80131 | 93332 |
| CR2 | Same as CR1 | | | | |
| L1 | Coil, Variable: 0.351-0.429 µH | 4 | 558-7107-08 | 71279 | |
| L2 Thru L4 | Same as L1 | | | | |
| L5 | Coil, Variable: 0.297-0.363 µH | 1 | 558-7107-07 | 71279 | |
| R1 | Resistor, Fixed, Composition: 10 kΩ, 5%, 1/4 W | 1 | CF1/4-10K/J | 09021 | |
| VR1 | Diode, Zener: 6.2 V | 2 | 1N753A | 80131 | 04713 |

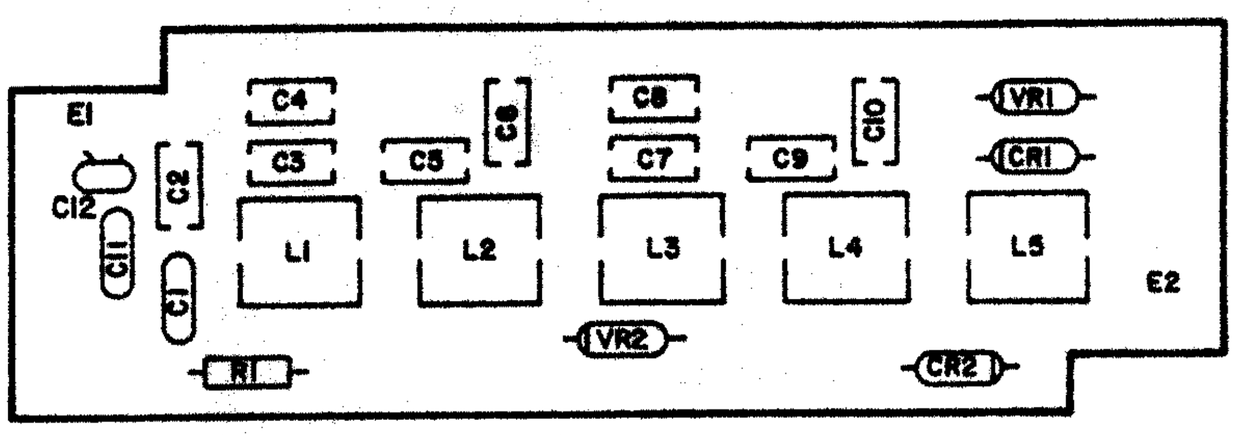



Figure 5-11. Part 280093 30 MHz Low Pass Filter (A2A1), Location of Components

5.6.3 **TYPE 791592-1 INPUT CONVERTER** REF DESIG PREFIX **A3**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| A1 | 1st Mixer, 1st IF | 1 | 370611-1 | 14632 | |
| A2 | 2nd Mixer, 2nd IF | 1 | 370646-1 | 14632 | |
| C1 | Capacitor, Ceramic, Feedthru: 1000 pF, GMV, 500 V | 4 | 54-794-009-102W | 33095 | |
| C2 Thru C4 | Same as C1 | | | | |
| C5 | Capacitor, Ceramic, Disc: 68 pF, 5%, 100 V | 1 | 8121-100-C0G0-680J | 72982 | |
| P1 | Connector, Plug | 1 | 205204-1 | 00779 | |

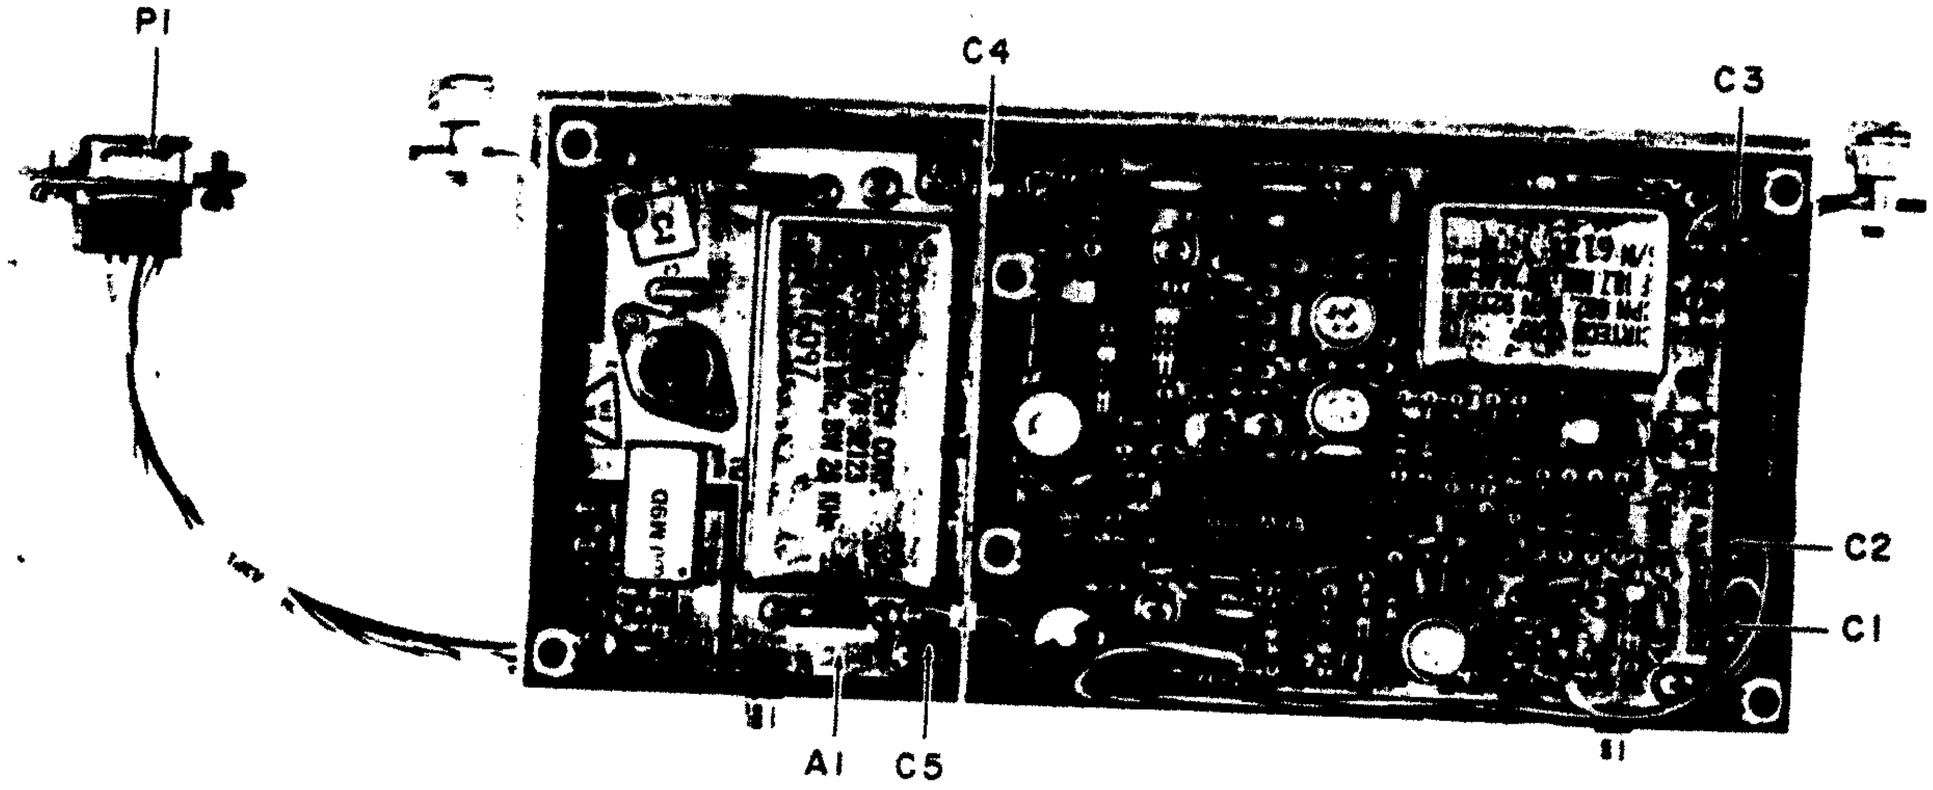



Figure 5-12. Type 791592-1 Input Converter (A3), Location of Components

5.6.3.1 **Part 370611-1 1st Mixer, 1st IF** REF DESIG PREFIX **A3A1**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| C1 | Capacitor, Ceramic, Disc: 0.01 µF, 20%, 50 V | 1 | 34453-1 | 14632 | |
| FL1 | Filter, Bandpass: 43 MHz | 1 | 92123 | 14632 | |
| J1 | Connector, Receptacle: SMC Series | 2 | 34520-1 | 14632 | |
| J2 | Same as J1 | | | | |
| L1 | Coil, Fixed: 10 µH | 1 | 1537-36 | 99800 | |
| L2 | Coil, Fixed: 0.15 µH | 1 | 1537-00 | 99800 | |
| U1 | Mixer, Balanced | 1 | M9D | 27956 | |
| U2 | Amplifier: 5-500 MHz | 1 | A58 | 27956 | |

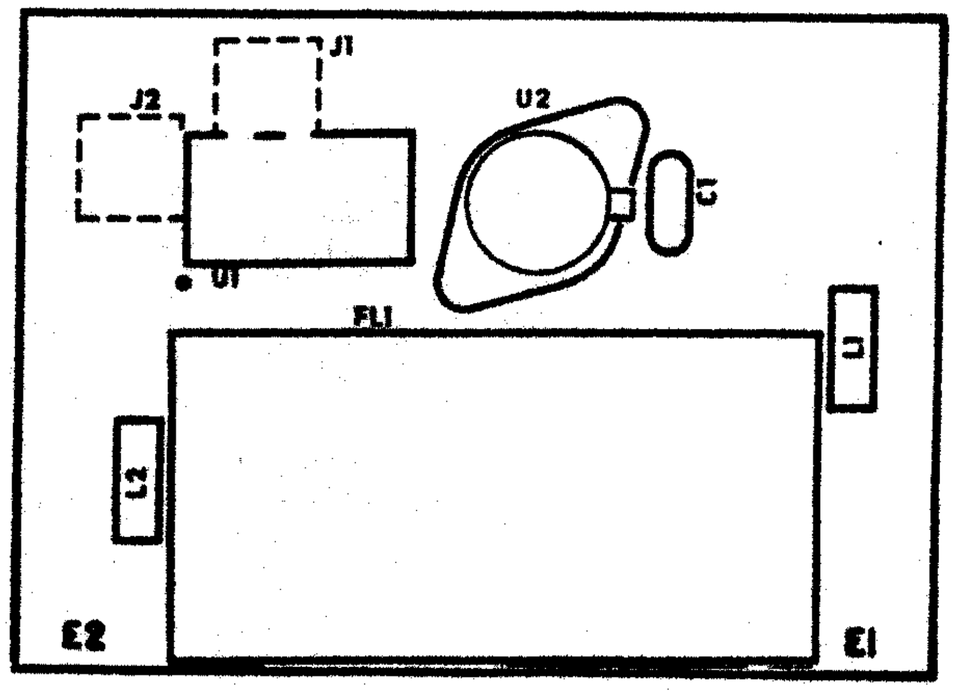



Figure 5-13. Part 370611-1 1st Mixer, 1st IF (A3A1), Location of Components

5.6.3.2 **Part 370646-1 2nd Mixer, 2nd IF** REF DESIG PREFIX **A3A2**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| C1 | Capacitor, Variable, Ceramic: 2.5-11 pF, 350 V | 1 | 538-011B2.5-11 | 72982 | |
| C2 | Capacitor, Ceramic, Disc: 1000 pF, GMV, 500 V | 2 | B-GP1000PFP | 91418 | |
| C3 | Same as C2 | | | | |
| C4 | Capacitor, Ceramic, Disc: 0.01 µF, 20%, 50 V | 5 | 34453-1 | 14632 | |
| C5 Thru C8 | Same as C4 | | | | |
| C9 | Capacitor, Ceramic, Disc: 0.1 µF, 20%, 50 V | 1 | 34475-1 | 14632 | |
| C10 | Capacitor, Ceramic, Disc: 470 pF, 20%, 1000 V | 5 | BHD470-20PCT | 91418 | |
| C11 Thru C13 | Same as C10 | | | | |
| C14 | Capacitor, Mica, Dipped: 47 pF, 2%, 500 V | 1 | CM05ED470G03 | 81349 | 72136 |
| C15 | Same as C10 | | | | |
| C16 | Capacitor, Ceramic, Disc: 4.7 pF, ±0.25 pF, 100 V | 1 | 8101-100-C0H0-479C | 72982 | |
| C17 | Capacitor, Ceramic, Disc: 0.47 µF, 20%, 50 V | 1 | 34452-1 | 14632 | |
| C18 | Capacitor, Electrolytic, Tantalum: 4.7 µF, 20%, 35 V | 1 | 196D475X0035JE3 | 56289 | |
| C19 | Capacitor, Variable, Ceramic: 9-35 pF, 350 V | 1 | 538-011D9-35 | 72982 | |
| CR1 | Diode | 1 | 1N4446 | 80131 | 93332 |
| CR2 | Diode | 1 | 5082-3039 | 28480 | |
| FB1 | Ferrite Bead | 3 | 56-590-65-4A | 02114 | |
| FB2 | Same as FB1 | | | | |
| FB3 | Same as FB1 | | | | |
| FL1 | Filter, Bandpass: 10.7 MHz | 1 | 92124 | 14632 | |
| J1 | Connector, Receptacle: SMC Series | 2 | 34520-1 | 14632 | |
| J2 | Same as J1 | | | | |
| L1 | Coil, Fixed: 10 µH | 4 | 1537-36 | 99800 | |
| L2 | Same as L1 | | | | |
| L3 | Same as L1 | | | | |
| L4 | Coil, Fixed: 0.56 µH | 1 | 202-11 | 99848 | |
| L5 | Same as L1 | | | | |
| L6 | Coil, Fixed: 0.15 µH | 1 | 1537-00 | 99800 | |
| L7 | Coil, Fixed: 0.33 µH | 1 | 1537-04 | 99800 | |
| L8 | Coil, Fixed: 1.8 µH | 1 | 1537-18 | 99800 | |
| MP1 | Transipad | 2 | 7717-89DAP | 13103 | |
| MP2 | Transipad | 2 | 7717-22DAP | 13103 | |
| MP3 | Transipad | 1 | 7717-46DAP | 13103 | |
| Q1 | Transistor | 1 | 2N2222A | 80131 | 04713 |
| Q2 | Transistor | 1 | CP643 | 12498 | |
| Q3 | Transistor | 3 | 2N5109 | 80131 | 02735 |
| Q4 | Same as Q3 | | | | |
| Q5 | Transistor | 1 | 2N2857/JAN | 81350 | |

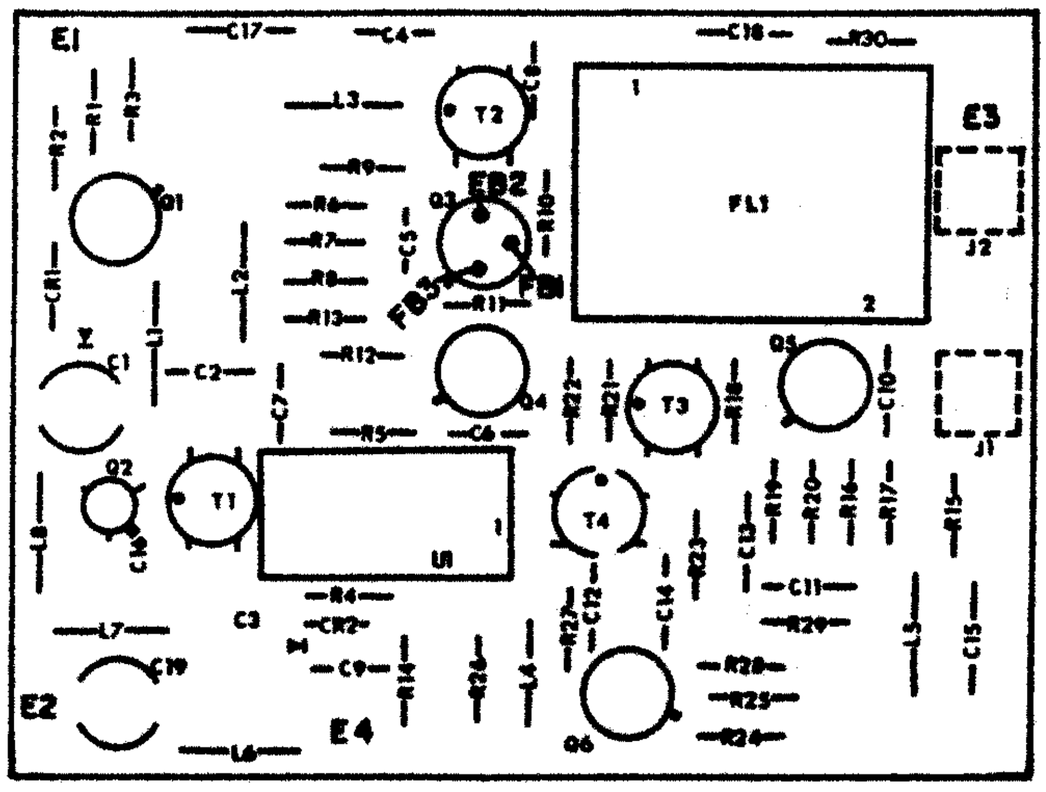




**Figure 5-14. Part 370646-1 2nd Mixer, 2nd IF (A3A2), Location of Components**

REF DESIG PREFIX **A3A2**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| Q6 | Same as Q3 | | | | |
| R1 | Resistor, Fixed, Composition: 2.2 kΩ, 5%, 1/4 W | 2 | CF1/4-2.2K/J | 09021 | |
| R2 | Resistor, Fixed, Composition: 82Ω, 5%, 1/4 W | 1 | CF1/4-82 OHMS/J | 09021 | |
| R3 | Resistor, Fixed, Composition: 10Ω, 5%, 1/4 W | 5 | CF1/4-10 OHMS/J | 09021 | |
| R4 | Resistor, Fixed, Composition: 1.8 kΩ, 5%, 1/4 W | 1 | CF1/4-1.8K/J | 09021 | |
| R5 | Resistor, Fixed, Composition: 220Ω, 5%, 1/4 W | 2 | CF1/4-220 OHMS/J | 09021 | |
| R6 | Resistor, Fixed, Composition: 3.3 kΩ, 5%, 1/4 W | 1 | CF1/4-3.3K/J | 09021 | |
| R7 | Same as R1 | | | | |
| R8 | Resistor, Fixed, Composition: 1.0 kΩ, 5%, 1/4 W | 3 | CF1/4-1.0K/J | 09021 | |
| R9 | Resistor, Fixed, Composition: 200Ω, 5%, 1/4 W | 1 | CF1/4-200 OHMS/J | 09021 | |
| R10 | Same as R3 | | | | |
| R11 | Resistor, Fixed, Composition: 47Ω, 5%, 1/4 W | 1 | CF1/4-47 OHMS/J | 09021 | |
| R12 | Resistor, Fixed, Composition: 4.7Ω, 5%, 1/4 W | 1 | CF1/4-4.7 OHMS/J | 09021 | |
| R13 | Resistor, Fixed, Composition: 68Ω, 5%, 1/4 W | 2 | CF1/4-68 OHMS/J | 09021 | |
| R14 | Resistor, Fixed, Composition: 390Ω, 5%, 1/4 W | 1 | CF1/4-390 OHMS/J | 09021 | |
| R15 | Same as R13 | | | | |
| R16 | Resistor, Fixed, Composition: 2.7 kΩ, 5%, 1/4 W | 1 | CF1/4-2.7K/J | 09021 | |
| R17 | Same as R8 | | | | |
| R18 | Same as R3 | | | | |
| R19 | Resistor, Fixed, Composition: 22Ω, 5%, 1/4 W | 1 | CF1/4-22 OHMS/J | 09021 | |
| R20 | Same as R5 | | | | |
| R21 | Resistor, Fixed, Composition: 560Ω, 5%, 1/4 W | 1 | CF1/4-560 OHMS/J | 09021 | |
| R22 | Resistor, Fixed, Composition: 150Ω, 5%, 1/4 W | 2 | CF1/4-150 OHMS/J | 09021 | |
| R23 | Resistor, Fixed, Composition: 15Ω, 5%, 1/4 W | 1 | CF1/4-15 OHMS/J | 09021 | |
| R24 | Same as R8 | | | | |
| R25 | Resistor, Fixed, Composition: 470Ω, 5%, 1/4 W | 1 | CF1/4-470 OHMS/J | 09021 | |
| R26 | Resistor, Fixed, Composition: 330Ω, 5%, 1/4 W | 1 | CF1/4-330 OHMS/J | 09021 | |
| R27 | Same as R3 | | | | |
| R28 | Resistor, Fixed, Composition: 12Ω, 5%, 1/4 W | 1 | CF1/4-12 OHMS/J | 09021 | |
| R29 | Same as R22 | | | | |
| R30 | Same as R3 | | | | |
| RA1 | Heatsink | 1 | 1118C | 13103 | |
| T1 | Transformer Assembly | 1 | 22295-53 | 14632 | |
| T2 | Transformer Assembly | 1 | 22295-54 | 14632 | |
| T3 | Transformer Assembly | 1 | 22295-56 | 14632 | |
| T4 | Transformer Assembly | 1 | 22295-55 | 14632 | |
| U1 | Mixer, Balanced: 0.05-200 MHz | 1 | M9A | 27956 | |

5.6.4 **TYPE 791569-1 IF MOTHERBOARD** REF DESIG PREFIX **A4**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| A1 | 10.7 MHz Filter Switch | 1 | 791594 | 14632 | |
| A2 | 10.7 MHz/455 kHz Converter | 1 | 71430 | 14632 | |
| A3 | 455 kHz Filter Switch | 1 | 791595 | 14632 | |
| A4* | USB/LSB Filter Switch (Not Optional on WJ-8718A) | 1 | 791596 | 14632 | |
| A5* | ISB/LSB Filter Switch (Not Optional on WJ-8718A) | 1 | 791597 | 14632 | |
| A6 | AGC Amplifier | 1 | 78112 | 14632 | |
| A7 | 455 kHz Amplifier/AM Detector | 1 | 72488 | 14632 | |
| A8* | ISB Detector/Audio (Optional on WJ-8718-9 only) | 1 | 791598 | 14632 | |
| A9 | FM, CW and SSB Detector | 1 | 791599 | 14632 | |
| A10 | Audio Amplifier | 1 | 746001 | 14632 | |
| C1 | Capacitor, Ceramic, Disc: 0.01 µF, 20%, 50 V | 29 | 34453-1 | 14632 | |
| C2 Thru C29 | Same as C1 | | | | |
| J1 | Feedthru, Post | 2 | PE914031-2 | 00779 | |
| L1 | Ferrite Choke | 2 | VK200-10-38 | 02114 | |
| L2 | Same as L1 | | | | |
| -- | Cable Assembly | 1 | 34832 | 14632 | |
| P1 | Plug Assembly | 1 | 88523-1 | 00779 | |
| XA1 | Connector, P.C. Board | 11 | MK30C-14-195-4381 | 81312 | |
| XA2 Thru XA11 | Same as XA1 | | | | |
| * | Part of ISB Option | | | | |

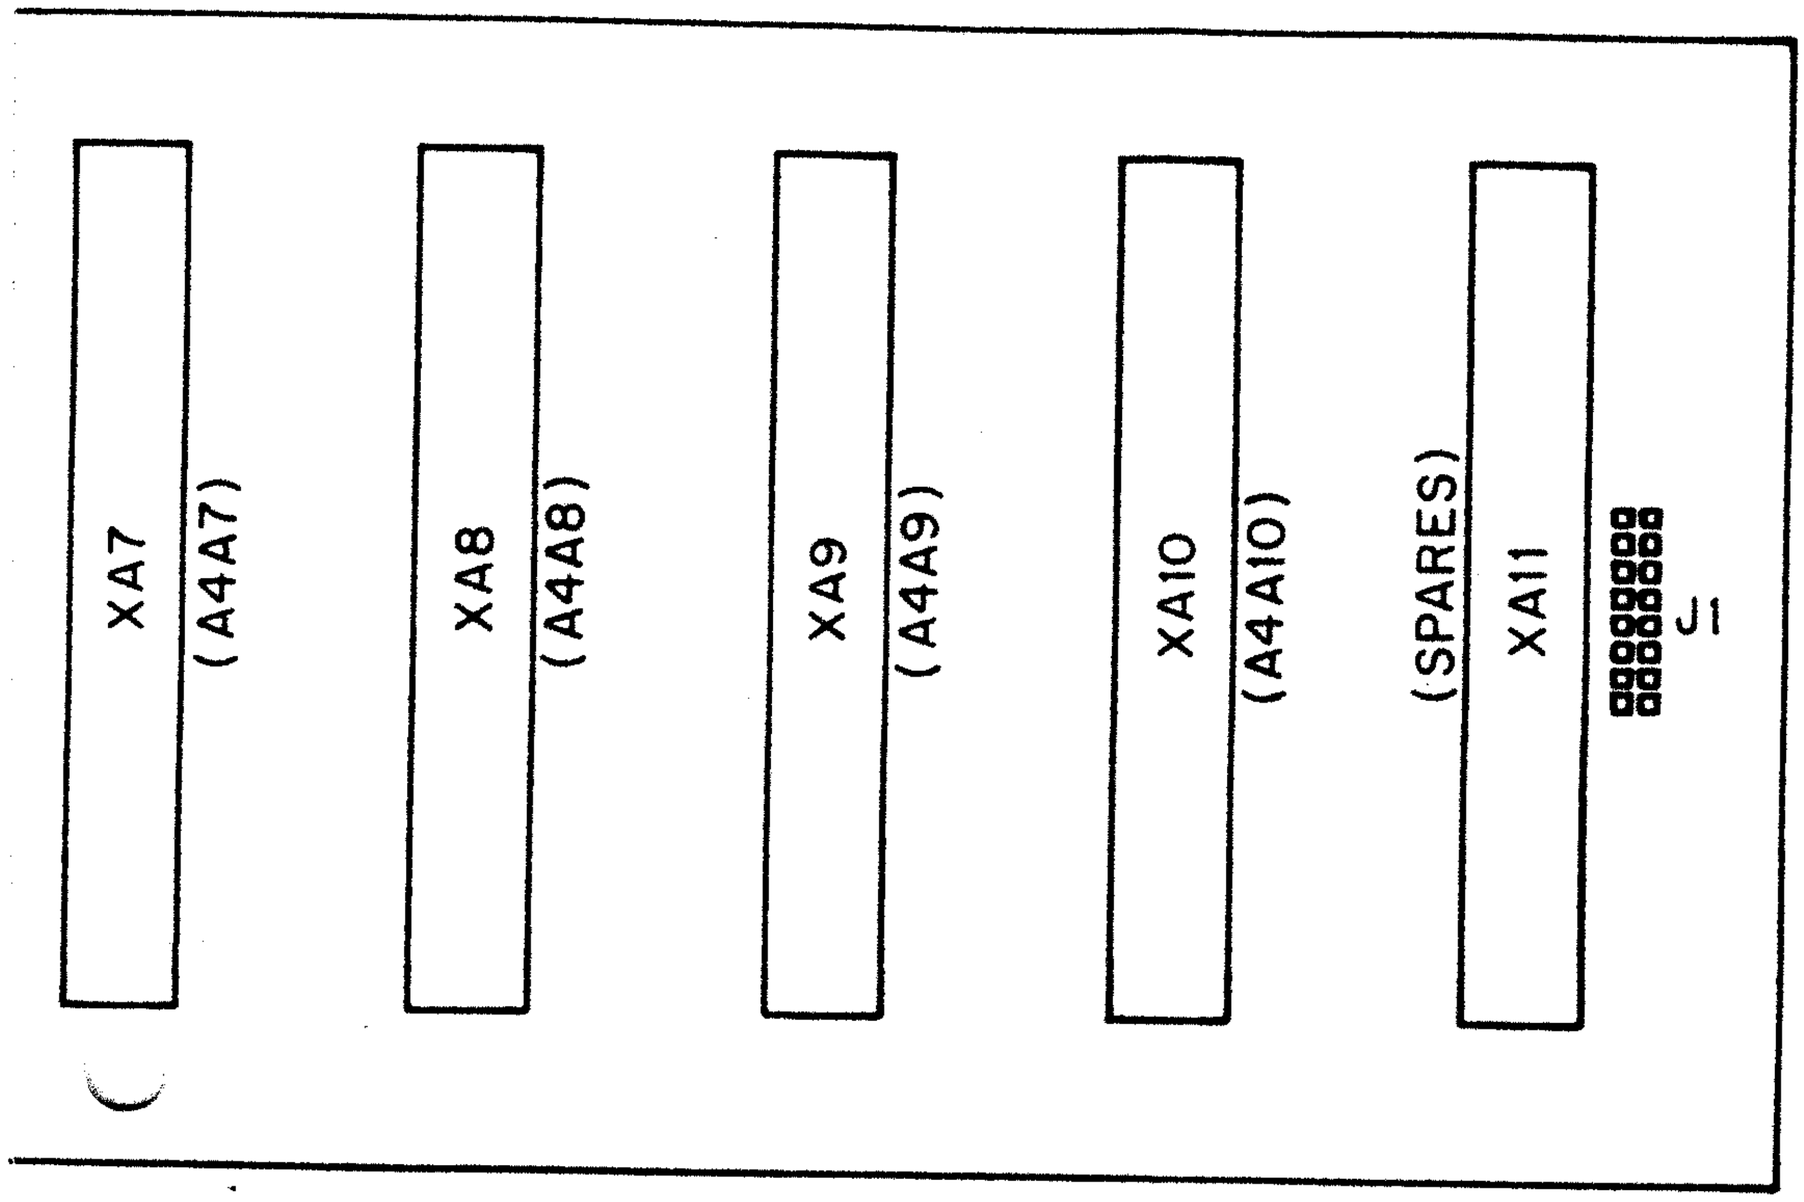

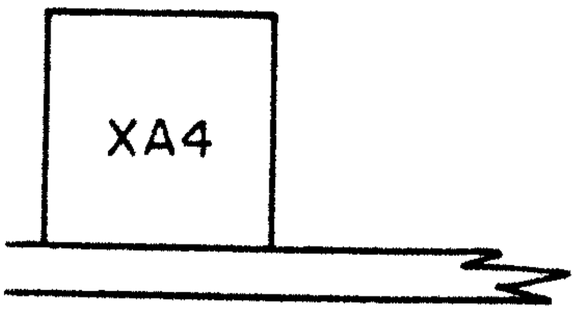
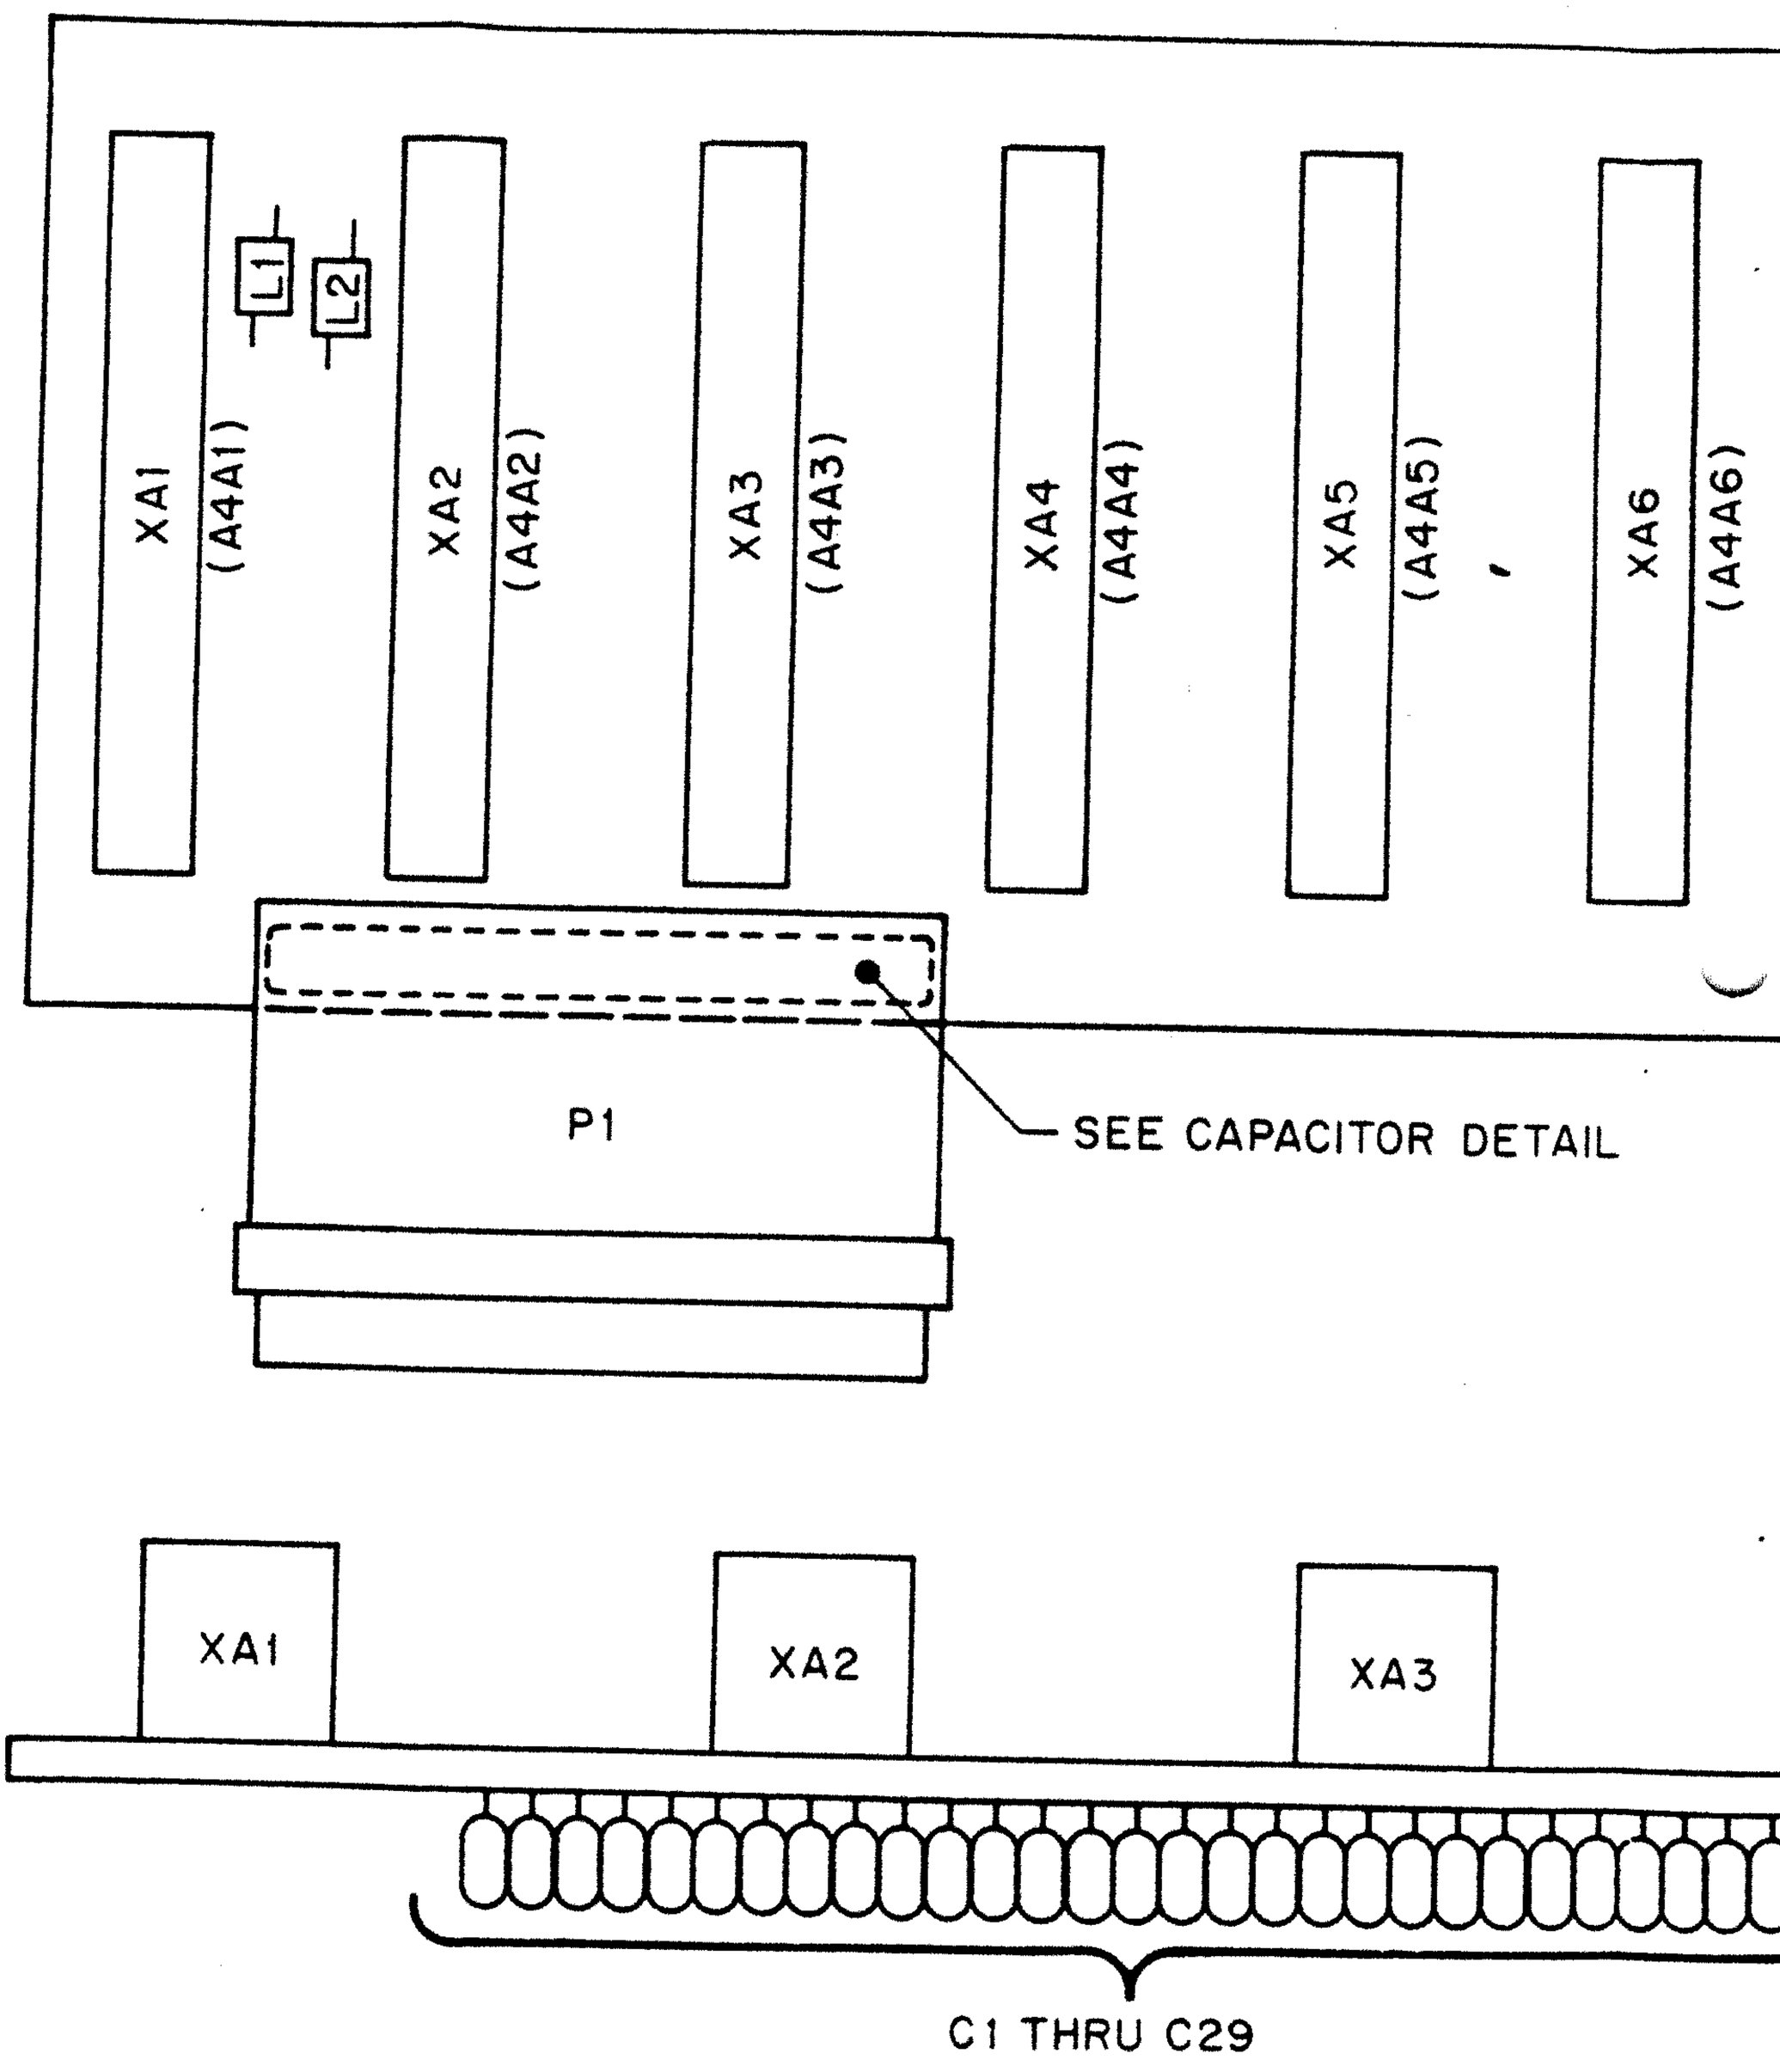




Figure 5-15. Type 791569-1 IF Motherboard (A4), Location of Components

FIGURE 5-15


XA1
(A4A1)
L1
L2
XA2
(A4A2)
XA3
(A4A3)
XA4
(A4A4)
XA5
(A4A5)
XA6
(A4A6)
P1
SEE CAPACITOR DETAIL
XA1
XA2
XA3
C1 THRU C29

5.6.4.1 **Type 791594-1 10.7 MHz Filter Switch** REF DESIG PREFIX **A4A1**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| C1 | Capacitor, Mica, Dipped: 91 pF, 2%, 500 V | 1 | CM05FD910G03 | 81349 | 72136 |
| C2 | Capacitor, Ceramic, Disc: 0.01 µF, 20%, 50 V | 18 | 34453-1 | 14632 | |
| C3 Thru C8 | Same as C2 | | | | |
| C9 | Capacitor, Ceramic, Disc: 0.1 µF, 20%, 50 V | 9 | 34475-1 | 14632 | |
| C10 | Same as C2 | | | | |
| C11 | Same as C9 | | | | |
| C12 | Same as C2 | | | | |
| C13 | Same as C9 | | | | |
| C14 | Same as C2 | | | | |
| C15 | Same as C9 | | | | |
| C16 | Same as C9 | | | | |
| C17 | Same as C9 | | | | |
| C18 Thru C23 | Same as C2 | | | | |
| C24 Thru C26 | Same as C9 | | | | |
| C27 | Capacitor, Electrolytic, Tantalum: 15 µF, 10%, 20 V | 2 | CS13BE156K | 81349 | 56289 |
| C28 | Same as C2 | | | | |
| C29 | Same as C2 | | | | |
| C30 | Capacitor, Mica, Dipped: 130 pF, 2%, 500 V | 1 | CM05FD131G03 | 81349 | 72136 |
| C31 | Same as C27 | | | | |
| C32 | Capacitor, Variable, Ceramic: 9-35 pF, 350 V | 1 | 538-011D9-35 | 72982 | |
| FL1 | Filter, Bandpass | 1 | 92126 | 14632 | |
| FL2 | Filter, Bandpass | 1 | 92125 | 14632 | |
| L1 | Coil, Fixed, Molded: 1.5 µH | 1 | 1537-16 | 99800 | |
| L2 Thru L4 | Not Used | | | | |
| L5 | Coil, Fixed, Molded: 1.8 µH | 1 | 1537-18 | 99800 | |
| Q1 | Transistor | 6 | 2N3904 | 80131 | 04713 |
| Q2 Thru Q6 | Same as Q1 | | | | |
| R1 | Resistor, Fixed, Composition: 13 kΩ, 5%, 1/4 W | 3 | CF1/4-13K/J | 09021 | |
| R2 | Resistor, Fixed, Composition: 3.0 kΩ, 5%, 1/4 W | 3 | CF1/4-3.0K/J | 09021 | |
| R3 | Same as R1 | | | | |
| R4 | Same as R2 | | | | |
| R5 | Same as R1 | | | | |
| R6 | Same as R2 | | | | |
| R7 | Resistor, Fixed, Composition: 680Ω, 5%, 1/4 W | 3 | CF1/4-680 OHMS/J | 09021 | |

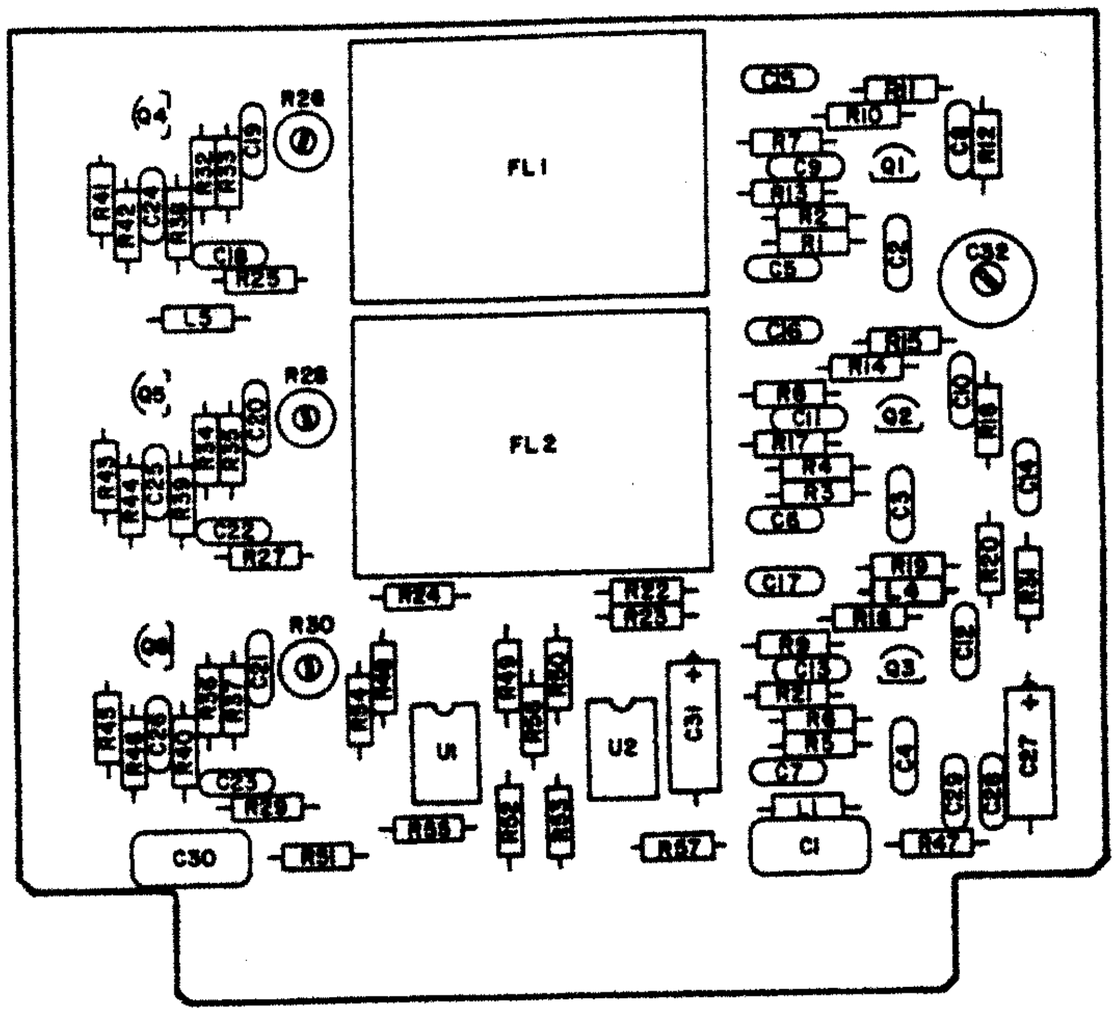



Figure 5-16. Type 791594-1 10.7 MHz Filter Switch (A4A1), Location of Components

REF DESIG PREFIX **A4A1**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| R8 | Same as R7 | | | | |
| R9 | Same as R7 | | | | |
| R10 | Resistor, Fixed, Composition: 10Ω, 5%, 1/4 W | 6 | CF1/4-10 OHMS/J | 09021 | |
| R11 | Resistor, Fixed, Composition: 220Ω, 5%, 1/4 W | 3 | CF1/4-220 OHMS/J | 09021 | |
| R12 | Resistor, Fixed, Composition: 22Ω, 5%, 1/4 W | 5 | CF1/4-22 OHMS/J | 09021 | |
| R13 | Resistor, Fixed, Composition: 33Ω, 5%, 1/4 W | 5 | CF1/4-33 OHMS/J | 09021 | |
| R14 | Same as R10 | | | | |
| R15 | Same as R11 | | | | |
| R16 | Same as R12 | | | | |
| R17 | Same as R13 | | | | |
| R18 | Same as R10 | | | | |
| R19 | Same as R11 | | | | |
| R20 | Same as R12 | | | | |
| R21 | Same as R13 | | | | |
| R22 | Same as R13 | | | | |
| R23 | Resistor, Fixed, Composition: 560Ω, 5%, 1/4 W | 4 | CF1/4-560 OHMS/J | 09021 | |
| R24 | Same as R13 | | | | |
| R25 | Resistor, Fixed, Composition: 100Ω, 5%, 1/4 W | 7 | CF1/4-100 OHMS/J | 09021 | |
| R26 | Resistor, Variable, Film: 200Ω, 10%, 1/2 W | 3 | 62PR200 | 73138 | |
| R27 | Same as R25 | | | | |
| R28 | Same as R26 | | | | |
| R29 | Same as R25 | | | | |
| R30 | Same as R26 | | | | |
| R31 | Same as R12 | | | | |
| R32 | Resistor, Fixed, Composition: 22 kΩ, 5%, 1/4 W | 3 | CF1/4-22K/J | 09021 | |
| R33 | Resistor, Fixed, Composition: 4.7 kΩ, 5%, 1/4 W | 3 | CF1/4-4.7K/J | 09021 | |
| R34 | Same as R32 | | | | |
| R35 | Same as R33 | | | | |
| R36 | Same as R32 | | | | |
| R37 | Same as R33 | | | | |
| R38 | Same as R23 | | | | |
| R39 | Same as R23 | | | | |
| R40 | Same as R23 | | | | |
| R41 | Same as R10 | | | | |
| R42 | Resistor, Fixed, Composition: 12Ω, 5%, 1/4 W | 3 | CF1/4-12 OHMS/J | 09021 | |
| R43 | Same as R10 | | | | |
| R44 | Same as R42 | | | | |
| R45 | Same as R10 | | | | |
| R46 | Same as R42 | | | | |
| R47 | Same as R12 | | | | |

REF DESIG PREFIX **A4A1**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| R48 | Same as R25 | | | | |
| R49 | Same as R25 | | | | |
| R50 | Same as R25 | | | | |
| R51 | Resistor, Fixed, Composition: 56Ω, 5%, 1/4 W | 1 | CF1/4-56 OHMS/J | 09021 | |
| R52 | Resistor, Fixed, Composition: 33 kΩ, 5%, 1/4 W | 1 | CF1/4-33K/J | 09021 | |
| R53 | Resistor, Fixed, Composition: 6.2 kΩ, 5%, 1/4 W | 1 | CF1/4-6.2K/J | 09021 | |
| R54 | Resistor, Fixed, Composition: 10 kΩ, 5%, 1/4 W | 3 | CF1/4-10K/J | 09021 | |
| R55 | Same as R54 | | | | |
| R56 | Same as R54 | | | | |
| R57 | Same as R25 | | | | |
| U1 | Integrated Circuit | 2 | MC1458N | 18324 | |
| U2 | Same as U1 | | | | |

5.6.4.2 **Type 71430-1 10.7 MHz/455 kHz Converter** REF DESIG PREFIX **A4A2**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| C1 | Capacitor, Ceramic, Disc: 0.01 µF, 20%, 50 V | 6 | 34453-1 | 14632 | |
| C2 Thru C6 | Same as C1 | | | | |
| C7 | Capacitor, Mica, Dipped: 68 pF, 2%, 500 V | 1 | CM05ED680G03 | 81349 | 72136 |
| C8 | Capacitor, Mica, Dipped: 360 pF, 2%, 500 V | 1 | CM05FD361G03 | 81349 | 72136 |
| C9 | Capacitor, Mica, Dipped: 3900 pF, 2%, 500 V | 2 | CM06FD392G03 | 81349 | 72136 |
| C10 | Same as C9 | | | | |
| C11 | Capacitor, Mica, Dipped: 1600 pF, 2%, 500 V | 1 | CM06FD162G03 | 81349 | 72136 |
| L1 | Coil, Fixed: 100 µH | 1 | 1537-76 | 99800 | |
| L2 | Coil, Fixed: 3.3 µH | 1 | 1537-24 | 99800 | |
| L3 | Coil, Fixed: 12 µH | 1 | 1537-38 | 99800 | |
| L4 | Coil, Fixed: 82 µH | 1 | 1537-72 | 99800 | |
| MP1 | Transipad | 1 | 7717-44DAP | 13103 | |
| Q1 | Transistor | 1 | 2N2708 | 80131 | 18714 |
| R1 | Resistor, Fixed, Composition: 56 Ω, 5%, 1/4 W | 2 | CF1/4-56 OHMS/J | 09021 | |
| R2 | Same as R1 | | | | |
| R3 | Resistor, Fixed, Composition: 1.0 kΩ, 5%, 1/4 W | 1 | CF1/4-1.0K/J | 09021 | |
| R4 | Resistor, Fixed, Composition: 12 kΩ, 5%, 1/4 W | 1 | CF1/4-12K/J | 09021 | |
| R5 | Resistor, Fixed, Composition: 4.7 kΩ, 5%, 1/4 W | 1 | CF1/4-4.7K/J | 09021 | |
| R6 | Resistor, Fixed, Composition: 39Ω, 5%, 1/4 W | 1 | CF1/4-39 OHMS/J | 09021 | |
| R7 | Resistor, Fixed, Composition: 560Ω, 5%, 1/4 W | 1 | CF1/4-560 OHMS/J | 09021 | |
| R8 | Resistor, Fixed, Composition: 300Ω, 5%, 1/4 W | 2 | CF1/4-300 OHMS/J | 09021 | |
| R9 | Resistor, Fixed, Composition: 18Ω, 5%, 1/4 W | 1 | CF1/4-18 OHMS/J | 09021 | |
| R10 | Same as R8 | | | | |
| U1 | Mixer, Balanced | 1 | M6A | 27956 | |

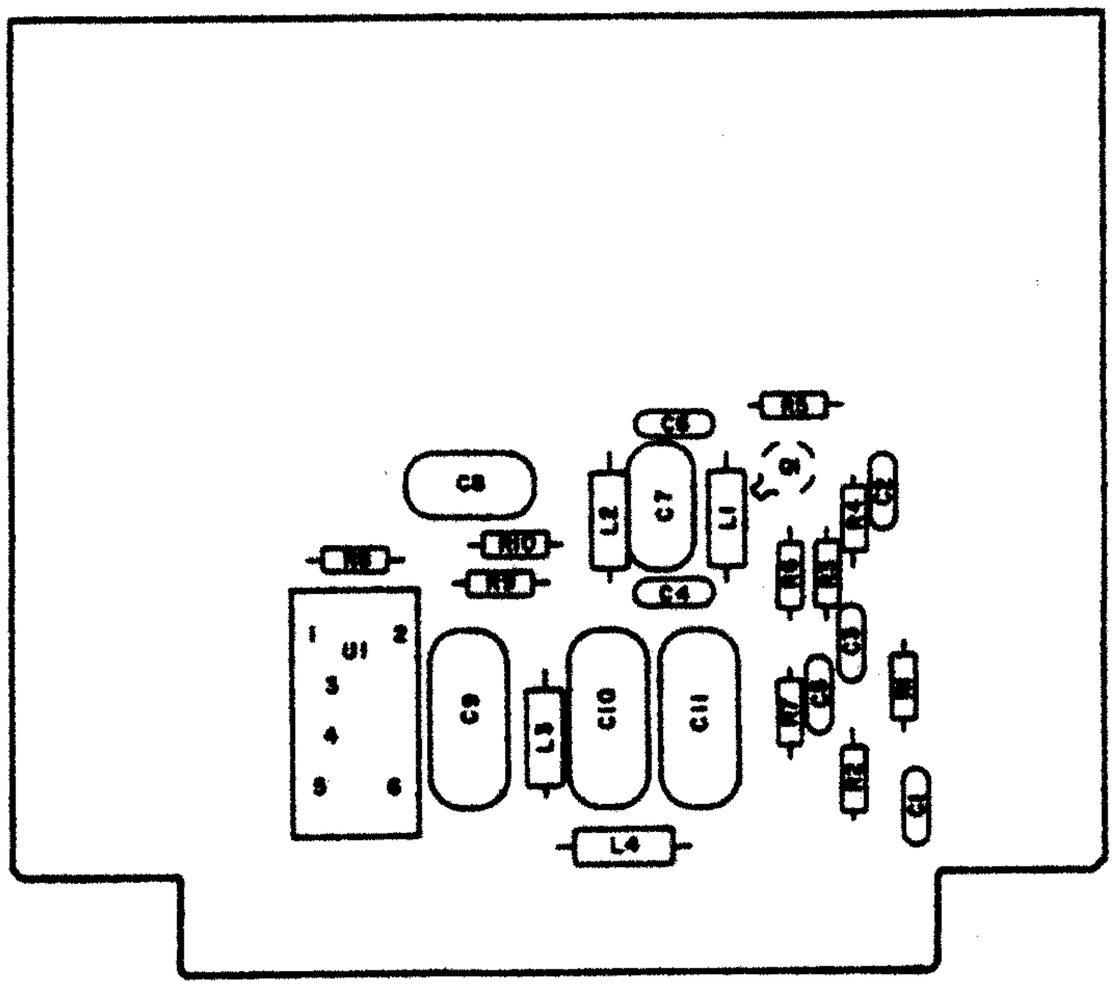



Figure 5-17. Type 71430-1 10.7 MHz/455 kHz Converter (A4A2), Location of Components

5.6.4.3 **Type 791595-1 455 kHz Filter Switch** REF DESIG PREFIX **A4A3**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| C1 | Capacitor, Ceramic, Disc: 0.47 µF, 20%, 50 V | 19 | 34452-1 | 14632 | |
| C2 Thru C7 | Same as C1 | | | | |
| C8 | Capacitor, Electrolytic, Tantalum: 15 µF, 10%, 20 V | 1 | CS13BE156K | 81349 | 56289 |
| C9 Thru C20 | Same as C1 | | | | |
| FL1 | Filter, Bandpass: 325 Hz BW | 1 | 92128 | 14632 | |
| FL2 | Filter, Bandpass: 1 kHz BW | 1 | 92127 | 14632 | |
| L1 | Coil, Fixed: 6.8 mH | 3 | 553-3635-47 | 71279 | |
| L2 | Same as L1 | | | | |
| L3 | Same as L1 | | | | |
| MP1 | Transipad | 6 | 7717-44DAP | 13103 | |
| Q1 | Transistor | 6 | 2N2222A | 80131 | 04713 |
| Q2 Thru Q6 | Same as Q1 | | | | |
| R1 | Resistor, Fixed, Composition: 22 kΩ, 5%, 1/4 W | 4 | CF1/4-22K/J | 09021 | |
| R2 | Resistor, Fixed, Composition: 3.9 kΩ, 5%, 1/4 W | 3 | CF1/4-3.9K/J | 09021 | |
| R3 | Resistor, Fixed, Composition: 270Ω, 5%, 1/4 W | 2 | CF1/4-270 OHMS/J | 09021 | |
| R4 | Resistor, Fixed, Composition: 1.2 kΩ, 5%, 1/4 W | 3 | CF1/4-1.2K/J | 09021 | |
| R5 | Resistor, Fixed, Composition: 22 Ω, 5%, 1/4 W | 3 | CF1/4-22 OHMS/J | 09021 | |
| R6 | Same as R5 | | | | |
| R7 | Resistor, Fixed, Composition: 12 kΩ, 5%, 1/4 W | 3 | CF1/4-12K/J | 09021 | |
| R8 | Resistor, Fixed, Composition: 1.5 kΩ, 5%, 1/4 W | 3 | CF1/4-1.5K/J | 09021 | |
| R9 | Resistor, Fixed, Composition: 150Ω, 5%, 1/4 W | 3 | CF1/4-150 OHMS/J | 09021 | |
| R10 | Resistor, Fixed, Composition: 220Ω, 5%, 1/4 W | 2 | CF1/4-220 OHMS/J | 09021 | |
| R11 | Same as R5 | | | | |
| R12 | Resistor, Fixed, Composition: 10 kΩ, 5%, 1/4 W | 5 | CF1/4-10K/J | 09021 | |
| R13 | Same as R1 | | | | |
| R14 | Resistor, Fixed, Composition: 100Ω, 5%, 1/4 W | 7 | CF1/4-100 OHMS/J | 09021 | |
| R15 | Same as R14 | | | | |
| R16 | Same as R12 | | | | |
| R17 | Same as R1 | | | | |
| R18 | Same as R2 | | | | |
| R19* | Resistor, Fixed, Composition: 240Ω, 5%, 1/4 W | 1 | CF1/4-240 OHMS/J | 09021 | |
| R20 | Same as R4 | | | | |
| R21 | Same as R7 | | | | |
| R22 | Same as R8 | | | | |
| * | Nominal value, final value factory selected. | | | | |

FIGURE 5-18

REF DESIG PREFIX A4A3

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| R23 | Same as R9 | | | | |
| R24 | Same as R14 | | | | |
| R25 | Same as R14 | | | | |
| R26 | Same as R12 | | | | |
| R27 | Same as R12 | | | | |
| R28 | Same as R1 | | | | |
| R29 | Same as R2 | | | | |
| R30 | Same as R4 | | | | |
| R31 | Same as R3 | | | | |
| R32 | Same as R10 | | | | |
| R33 | Same as R7 | | | | |
| R34 | Same as R8 | | | | |
| R35 | Same as R9 | | | | |
| R36 | Same as R14 | | | | |
| R37 | Same as R14 | | | | |
| R38 | Resistor, Fixed, Composition: 4.7 kΩ, 5%, 1/4 W | 1 | CF1/4-4.7K/J | 09021 | |
| R39 | Same as R12 | | | | |
| R40 | Same as R14 | | | | |
| U1 | Integrated Circuit | 1 | MC1458N | 18324 | |

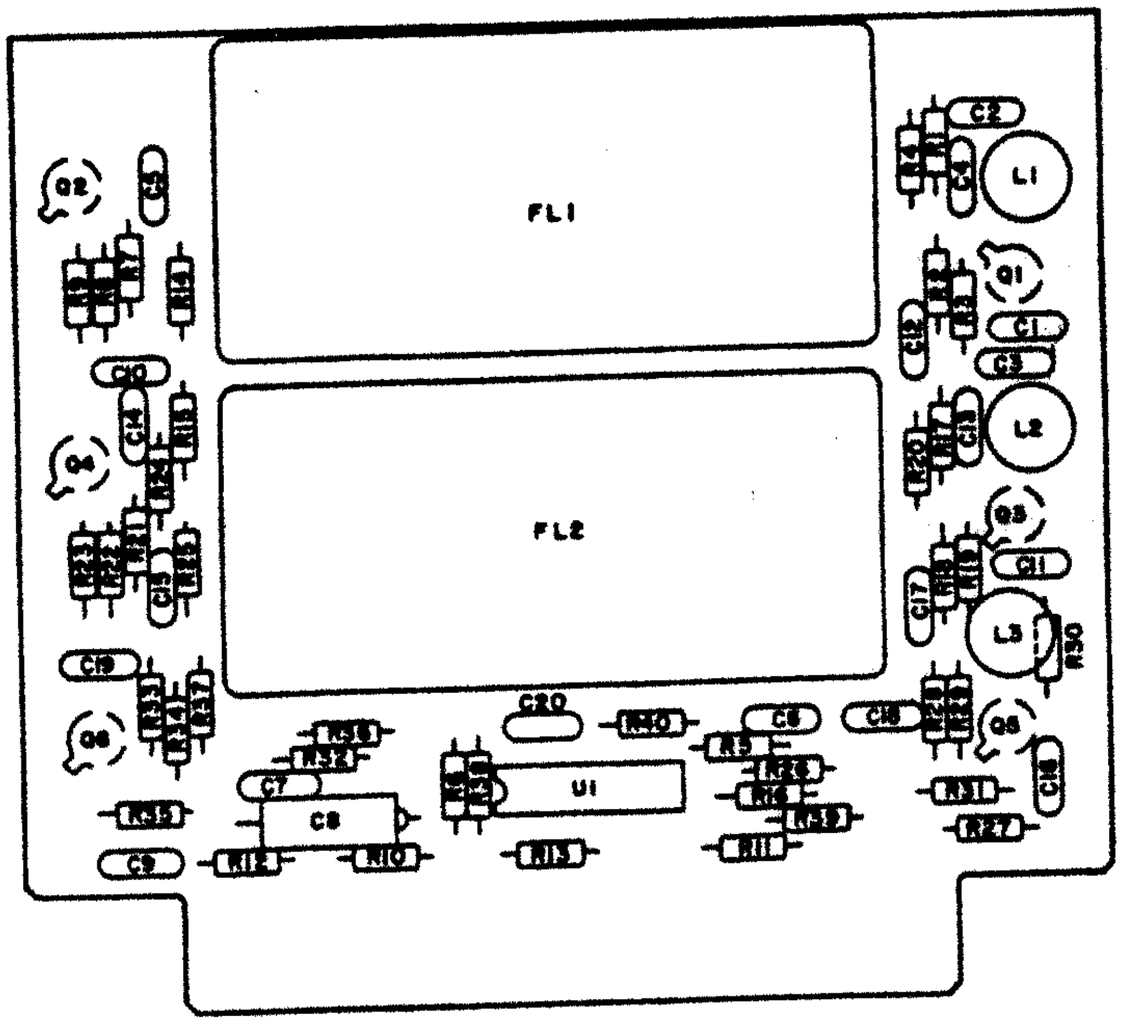



Figure 5-18. Type 791595-1 455 kHz Filter Switch (A4A3), Location of Components

5.6.4.4 **Type 791596-1 USB Filter Switch (Not Optional on WJ-8718A)**

REF DESIG PREFIX **A4A4**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDO |
|---|---|---|---|---|---|
| C1 | Capacitor, Ceramic, Disc: 0.47 µF, 20%, 50 V | 11 | 34452-1 | 14632 | |
| C2 Thru C4 | Same as C1 | | | | |
| C5 | Capacitor, Electrolytic, Tantalum: 15 µF, 10%, 20 V | 1 | CS13BE156K | 81349 | 5628 |
| C6 | Capacitor, Ceramic, Disc: 0.1 µF, 20%, 50 V | 1 | 34475-1 | 14632 | |
| C7 Thru C13 | Same as C1 | | | | |
| CR1 | Diode | 2 | 1N4449 | 80131 | 93332 |
| CR2 | Same as CR1 | | | | |
| FL1 | Filter, Bandpass | 1 | 92122 | 14632 | |
| L1 | Coil, Fixed, Molded: 100 µH | 1 | 2500-28 | 99800 | |
| L2 | Coil, Fixed: 6.8 mH | 1 | 553-3635-47 | 71279 | |
| MP1 | Transipad | 2 | 7717-44DAP | 13103 | |
| Q1 | Transistor | 2 | 2N2222A | 80131 | 04713 |
| R1 | Resistor, Fixed, Composition: 10 kΩ, 5%, 1/4 W | 4 | CF1/4-10K/J | 09021 | |
| R2 | Resistor, Fixed, Composition: 4.7 kΩ, 5%, 1/4 W | 2 | CF1/4-4.7K/J | 09021 | |
| R3 | Resistor, Fixed, Composition: 270Ω, 5%, 1/4 W | 1 | CF1/4-270 OHMS/J | 09021 | |
| R4 | Resistor, Fixed, Composition: 10Ω, 50%, 1/4 W | 2 | CF1/4-10 OHMS/J | 09021 | |
| R5 | Resistor, Fixed, Composition: 22Ω, 5%, 1/4 W | 3 | CF1/4-22 OHMS/J | 09021 | |
| R6 | Same as R5 | | | | |
| R7 | Resistor, Fixed, Composition: 1.2 kΩ, 5%, 1/4 W | 2 | CF1/4-1.2K/J | 09021 | |
| R8 | Same as R7 | | | | |
| R9 | Same as R4 | | | | |
| R10 | Resistor, Fixed, Composition: 100Ω, 5%, 1/4 W | 5 | CF1/4-100 OHMS/J | 09021 | |
| R11 | Same as R5 | | | | |
| R12 | Same as R1 | | | | |
| R13 | Resistor, Fixed, Composition: 22 kΩ, 5%, 1/4 W | 2 | CF1/4-22K/J | 09021 | |
| R14 | Same as R10 | | | | |
| R15 | Same as R1 | | | | |
| R16 | Same as R1 | | | | |
| R17 | Same as R2 | | | | |
| R18 | Resistor, Fixed, Composition: 39 kΩ, 5%, 1/4 W | 1 | CF1/4-39K/J | 09021 | |
| R19 | Same as R10 | | | | |
| R20 | Same as R10 | | | | |
| R21 | Same as R13 | | | | |
| R22 | Resistor, Fixed, Composition: 3.9 kΩ, 5%, 1/4 W | 1 | CF1/4-3.9K/J | 09021 | |
| R23 | Resistor, Variable, Film: 500Ω, 10%, 1/2 W | 1 | 62PR500 | 73138 | |
| R24 | Same as R10 | | | | |
| U1 | Integrated Circuit | 1 | MC1458N | 18324 | |

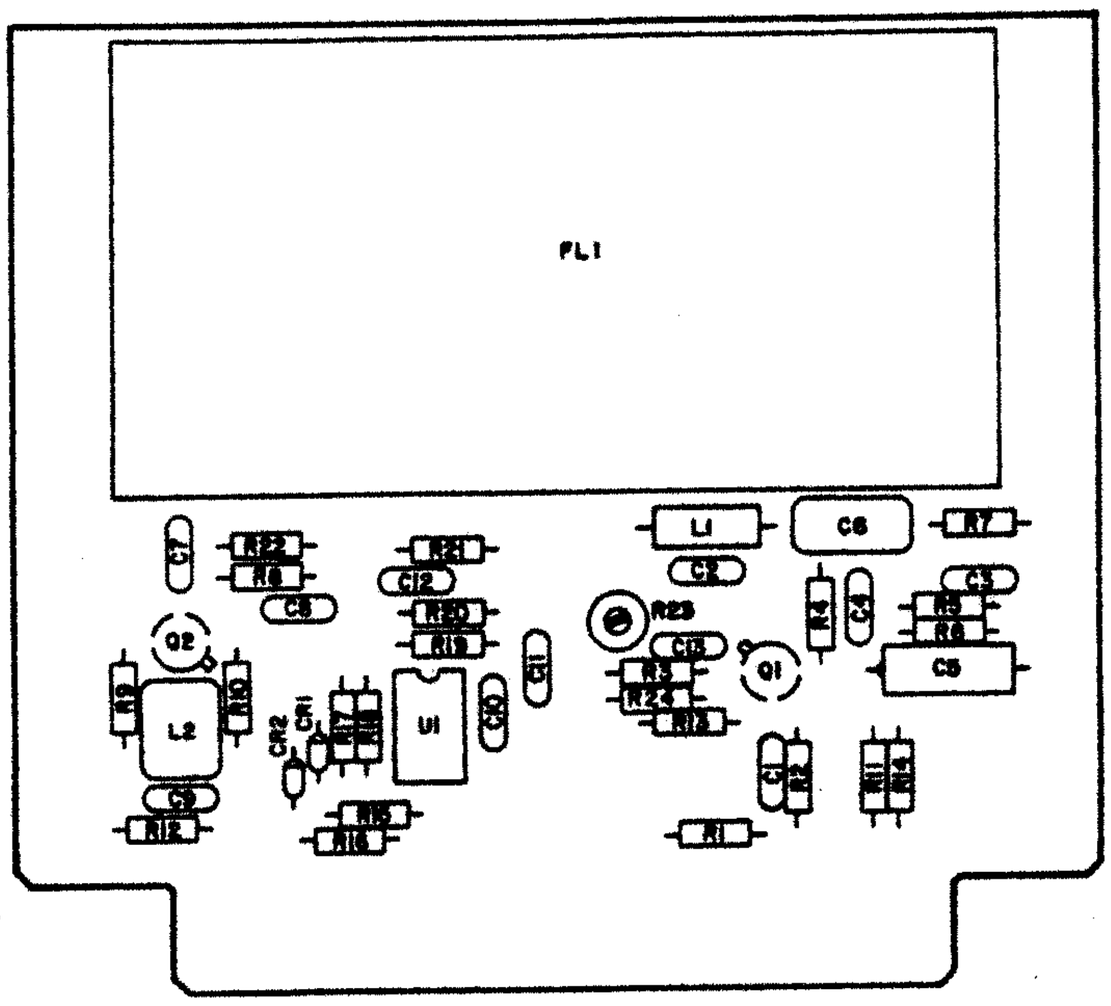



Figure 5-19. Type 791596-1 USB Filter Switch (A4A4), Location of Components

5.6.4.5 **Type 791597-1 ISB/LSB Filter Switch (Not Optional on WJ-8718A)**

REF DESIG PREFIX A4A5

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| C1 | Capacitor, Ceramic, Disc: 0.47 µF, 20%, 50 V | 15 | 34452-1 | 14632 | |
| C2 Thru C4 | Same as C1 | | | | |
| C5 | Capacitor, Electrolytic, Tantalum: 15 µF, 10%, 20 V | 1 | CS13BE156K | 81349 | 56289 |
| C6 | Capacitor, Ceramic, Disc: 0.1 µF, 20%, 50 V | 1 | 34475-1 | 14632 | |
| C7 Thru C17 | Same as C1 | | | | |
| CR1 | Diode | 3 | 1N4449 | 80131 | 93332 |
| CR2 | Same as CR1 | | | | |
| CR3 | Same as CR1 | | | | |
| FL1 | Filter, Bandpass | 1 | 92121 | 14632 | |
| L1 | Coil, Fixed, Molded: 1000 µH | 1 | 2500-28 | 99800 | |
| L2 | Coil, Fixed: 6.8 mH | 2 | 553-3635-47 | 71279 | |
| L3 | Same as L2 | | | | |
| MP1 | Transipad | 3 | 7717-89DAP | 13103 | |
| Q1 | Transistor | 3 | 2N2222A | 80131 | 04713 |
| Q2 | Same as Q1 | | | | |
| Q3 | Same as Q1 | | | | |
| R1 | Resistor, Fixed, Composition: 10 kΩ, 5%, 1/4 W | 6 | CF1/4-10K/J | 09021 | |
| R2 | Resistor, Fixed, Composition: 3.9 kΩ, 5%, 1/4 W | 1 | CF1/4-3.9K/J | 09021 | |
| R3 | Resistor, Fixed, Composition: 1.0 kΩ, 5%, 1/4 W | 1 | CF1/4-1.0K/J | 09021 | |
| R4 | Resistor, Fixed, Composition: 10Ω, 5%, 1/4 W | 3 | CF1/4-10 OHMS/J | 09021 | |
| R5 | Resistor, Fixed, Composition: 270Ω, 5%, 1/4 W | 1 | CF1/4-270 OHMS/J | 09021 | |
| R6 | Resistor, Fixed, Composition: 22Ω, 5%, 1/4 W | 4 | CF1/4-22 OHMS/J | 09021 | |
| R7 | Same as R6 | | | | |
| R8 | Resistor, Fixed, Composition: 1.2 kΩ, 5%, 1/4 W | 1 | CF1/4-1.2K/J | 09021 | |
| R9 | Resistor, Fixed, Composition: 2.4 kΩ, 5%, 1/4 W | 2 | CF1/4-2.4K/J | 09021 | |
| R10 | Resistor, Fixed, Composition: 4.7 kΩ, 5%, 1/4 W | 3 | CF1/4-4.7 K/J | 09021 | |
| R11 | Same as R4 | | | | |
| R12 | Resistor, Fixed, Composition: 100 Ω, 5%, 1/4 W | 6 | CF1/4-100 OHMS/J | 09021 | |
| R13 | Same as R6 | | | | |
| R14 | Same as R1 | | | | |
| R15 | Resistor, Fixed, Composition: 15 kΩ, 5%, 1/4 W | 1 | CF1/4-15K/J | 09021 | |
| R16 | Same as R1 | | | | |
| R17 | Same as R6 | | | | |
| R18 | Same as R12 | | | | |
| R19 | Same as R1 | | | | |
| R20 | Same as R12 | | | | |
| R21 | Resistor, Fixed, Composition: 22 kΩ, 5%, 1/4 W | 2 | CF1/4-22K/J | 09021 | |
| R22 | Same as R1 | | | | |

FIGURE 5-20

REF DESIG PREFIX A4A5

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| R23 | Same as R10 | | | | |
| R24 | Resistor, Fixed, Composition: 24 kΩ, 5%, 1/4 W | 1 | CF1/4-24K/J | 09021 | |
| R25 | Same as R12 | | | | |
| R26 | Same as R21 | | | | |
| R27 | Same as R9 | | | | |
| R28 | Same as R10 | | | | |
| R29 | Same as R12 | | | | |
| R30 | Same as R4 | | | | |
| R31 | Same as R1 | | | | |
| R32 | Resistor, Variable, Film: 500 Ω, 10%, 1/2 W | 1 | 62PR500 | 73138 | |
| R33 | Same as R12 | | | | |
| U1 | Integrated Circuit | 1 | MC1458N | 18324 | |

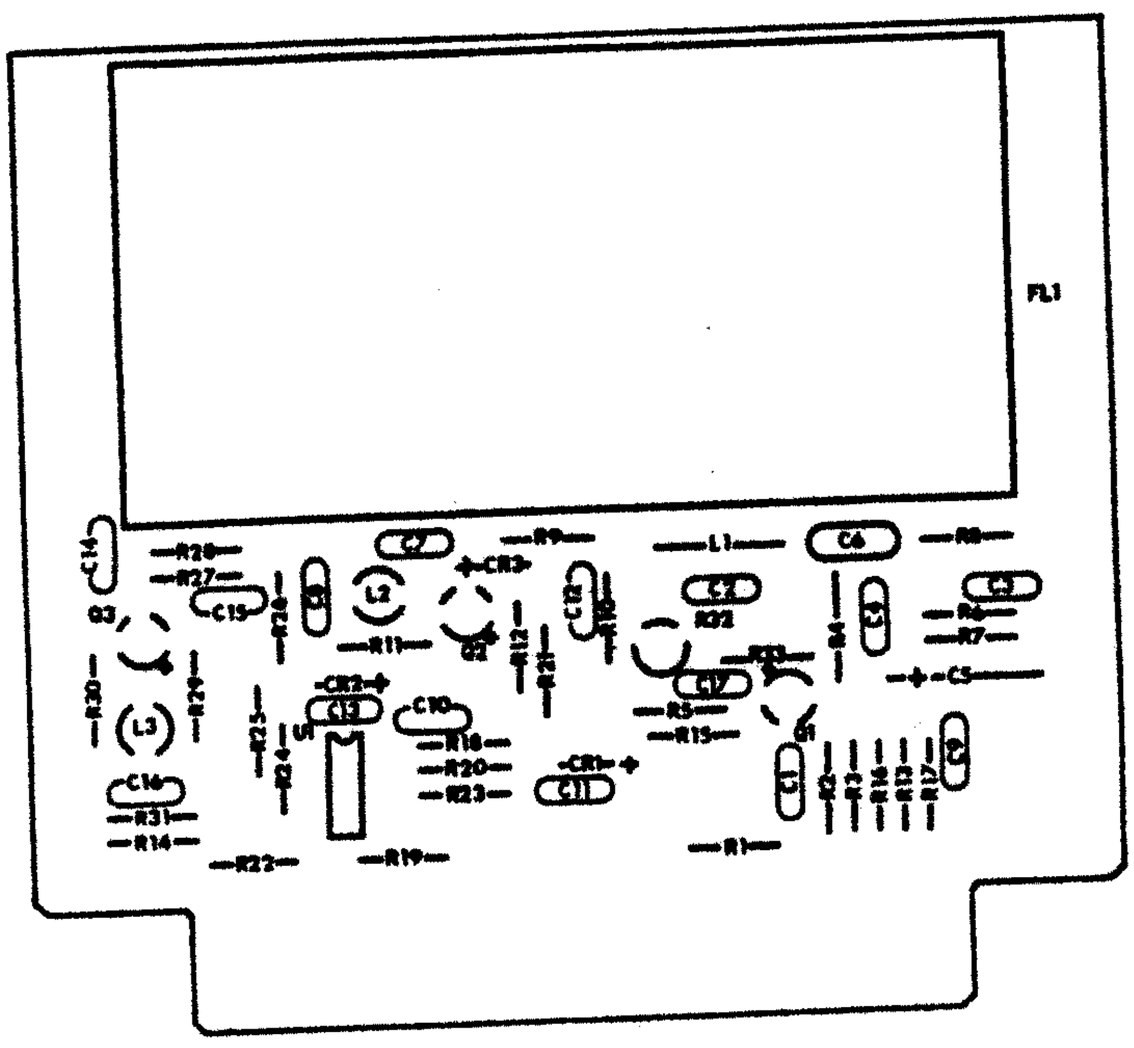



Figure 5-20. Type 791597-1 ISB, LSB Filter Switch (A4A5), Location of Components

5.6.4.6 Type 78112-1 AGC Amplifier REF DESIG PREFIX A4A6

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| C1 | Capacitor, Electrolytic, Tantalum: 47 µF, 10%, 20 V | 2 | CS13BE476K | 81349 | 56289 |
| C2 | Not Used | | | | |
| C3 | Capacitor, Ceramic, Disc: 0.47 µF, 20%, 50 V | 2 | 34452-1 | 14632 | |
| C4 | Capacitor, Electrolytic, Tantalum: 33 µF, 10%, 10 V | 1 | CS13BC336K | 81349 | 56289 |
| C5 | Same as C3 | | | | |
| C6 | Capacitor, Ceramic, Disc: 0.1 µF, 20%, 50 V | 1 | 34475-1 | 14632 | |
| C7 | Same as C1 | | | | |
| CR1 | Not Used | | | | |
| CR2 | Diode, Zener: 5.6 V | 1 | 1N752A | 80131 | 04713 |
| CR3 | Not Used | | | | |
| CR4 | Not Used | | | | |
| CR5 | Diode | 5 | 1N4449 | 80131 | 93332 |
| CR6 Thru CR9 | Same as CR5 | | | | |
| MP1 | Transipad | 7 | 7717-89DAP | 13103 | |
| Q1 | Transistor | 6 | 2N2222A | 80131 | 04713 |
| Q2 | Transistor | 1 | 2N2907/JAN | 81350 | |
| Q3 Thru Q7 | Same as Q1 | | | | |
| R1 | Resistor, Fixed, Composition: 100 kΩ, 5%, 1/4 W | 4 | CF1/4-100K/J | 09021 | |
| R2 | Resistor, Fixed, Composition: 47 kΩ, 5%, 1/4 W | 2 | CF1/4-47K/J | 09021 | |
| R3 | Resistor, Fixed, Composition: 470 kΩ, 5%, 1/4 W | 2 | CF1/4-470K/J | 09021 | |
| R4 | Resistor, Fixed, Composition: 100Ω, 5%, 1/4 W | 5 | CF1/4-100 OHMS/J | 09021 | |
| R5 | Same as R1 | | | | |
| R6 | Resistor, Fixed, Composition: 330 kΩ, 5%, 1/4 W | 1 | CF1/4-330K/J | 09021 | |
| R7 | Resistor, Fixed, Composition: 6.8 kΩ, 5%, 1/4 W | 4 | CF1/4-6.8K/J | 09021 | |
| R8 | Same as R4 | | | | |
| R9 | Resistor, Fixed, Composition: 15 kΩ, 5%, 1/4 W | 4 | CF1/4-15K/J | 09021 | |
| R10 | Resistor, Fixed, Composition: 150 kΩ, 5%, 1/4 W | 1 | CF1/4-150K/J | 09021 | |
| R11 | Resistor, Fixed, Composition: 10 kΩ, 5%, 1/4 W | 5 | CF1/4-10K/J | 09021 | |
| R12 | Resistor, Fixed, Composition: 82 kΩ, 5%, 1/4 W | 1 | CF1/4-82K/J | 09021 | |
| R13 | Resistor, Fixed, Composition: 1.0 kΩ, 5%, 1/4 W | 2 | CF1/4-1.0K/J | 09021 | |
| R14 | Resistor, Fixed, Composition: 1.2 kΩ, 5%, 1/4 W | 1 | CF1/4-1.2K/J | 09021 | |
| R15 | Same as R7 | | | | |
| R16 | Same as R7 | | | | |
| R17 | Resistor, Fixed, Composition: 22 kΩ, 5%, 1/4 W | 1 | CF1/4-22K/J | 09021 | |
| R18 | Resistor, Fixed, Composition: 270 kΩ, 5%, 1/4 W | 1 | CF1/4-270K/J | 09021 | |
| R19 | Resistor, Fixed, Composition: 680 kΩ, 5%, 1/4 W | 1 | CF1/4-680K/J | 09021 | |
| R20 | Same as R11 | | | | |
| R21 | Same as R9 | | | | |

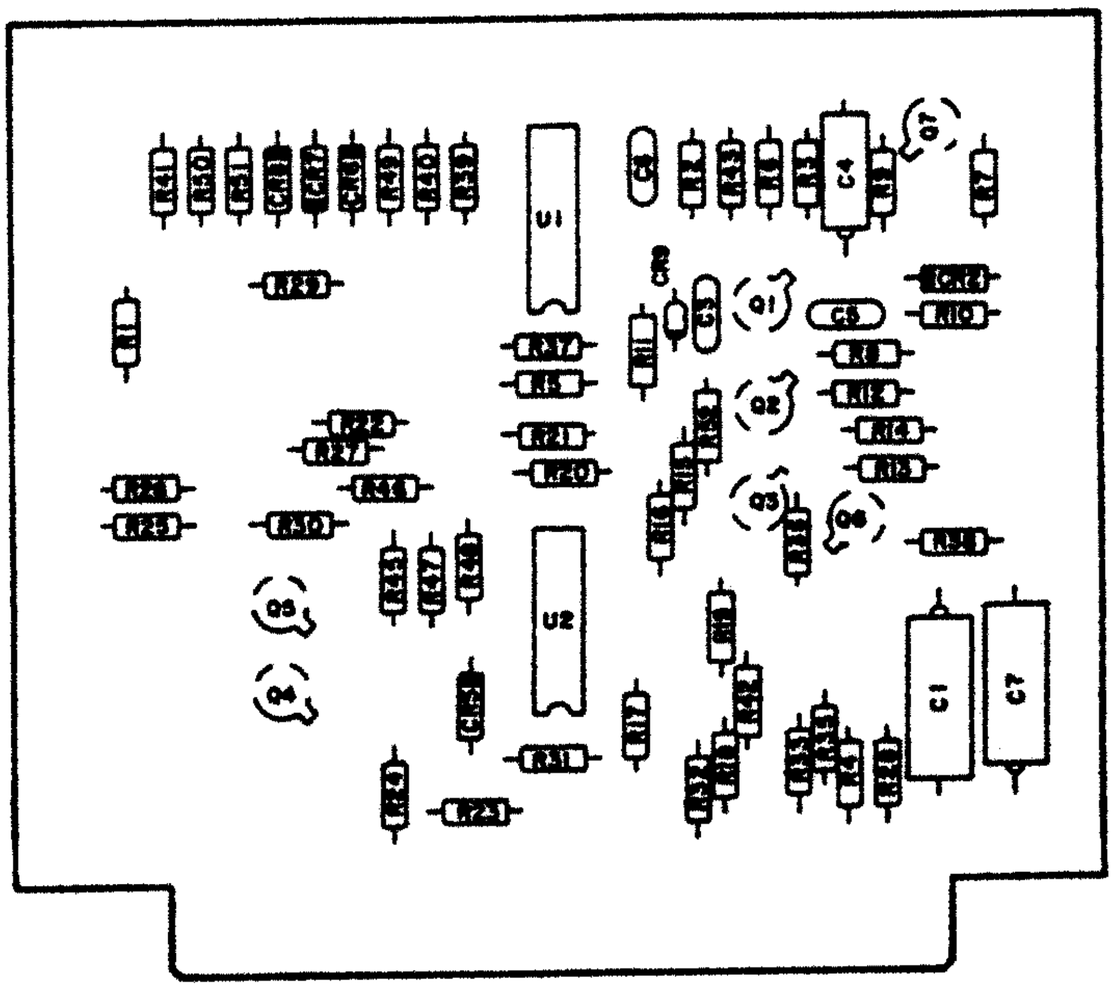



Figure 5-21. Type 78112-1 AGC Amplifier (A4A6), Location of Components

REF DESIG PREFIX A4A6

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| R22 | Same as R9 | | | | |
| R23 | Same as R3 | | | | |
| R24 | Same as R9 | | | | |
| R25 | Resistor, Fixed, Composition: 1.5 kΩ, 5%, 1/4 W | 1 | CF1/4-1.5K/J | 09021 | |
| R26 | Resistor, Fixed, Composition: 2.2 kΩ, 5%, 1/4 W | 1 | CF1/4-2.2K/J | 09021 | |
| R27 | Same as R11 | | | | |
| R28 | Same as R4 | | | | |
| R29 | Same as R4 | | | | |
| R30 | Same as R11 | | | | |
| R31 | Resistor, Fixed, Composition: 2.7 kΩ, 5%, 1/4 W | 1 | CF1/4-2.7K/J | 09021 | |
| R32 | Resistor, Fixed, Composition: 390Ω, 5%, 1/4 W | 1 | CF1/4-390 OHMS/J | 09021 | |
| R33 | Resistor, Fixed, Composition: 4.7 kΩ, 5%, 1/4 W | 2 | CF1/4-4.7K/J | 09021 | |
| R34 | Not Used | | | | |
| R35 | Same as R33 | | | | |
| R36 | Resistor, Fixed, Composition: 68 kΩ, 5%, 1/4 W | 3 | CF1/4-68K/J | 09021 | |
| R37 | Same as R1 | | | | |
| R38 | Same as R36 | | | | |
| R39 | Same as R36 | | | | |
| R40 | Same as R1 | | | | |
| R41 | Same as R7 | | | | |
| R42 | Same as R4 | | | | |
| R43 | Same as R2 | | | | |
| R44 | Not Used | | | | |
| R45 | Same as R11 | | | | |
| R46* | Resistor, Fixed, Composition: 39 kΩ, 5%, 1/4 W | 1 | CF1/4-39K/J | 09021 | |
| R47 | Resistor, Fixed, Composition: 820Ω, 5%, 1/4 W | 2 | CF1/4-820 OHMS/J | 09021 | |
| R48 | Resistor, Fixed, Composition: 68Ω, 5%, 1/4 W | 1 | CF1/4-68 OHMS/J | 09021 | |
| R49 | Resistor, Fixed, Composition: 3.3 kΩ, 5%, 1/4 W | 1 | CF1/4-3.3K/J | 09021 | |
| R50* | Resistor, Fixed, Composition: 3.9 kΩ, 5%, 1/4 W | 1 | CF1/4-3.9K/J | 09021 | |
| R51* | Same as R47 | | | | |
| R52 | Same as R13 | | | | |
| U1 | Integrated Circuit | 2 | MC3403P | 04713 | |
| U2 | Same as U1 | | | | |

* Nominal value, final value factory selected.

5.6.4.7 **Type 72488-1 455 kHz Amplifier/AM Detector** REF DESIG PREFIX **A4A7**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| C1 | Capacitor, Ceramic, Disc: 0.47 µF, 20%, 50 V | 20 | 34452-1 | 14632 | |
| C2 | Same as C1 | | | | |
| C3 | Capacitor, Ceramic, Disc: 0.01 µF, 20%, 50 V | 3 | 34453-1 | 14632 | |
| C4 | Not Used | | | | |
| C5 | Same as C1 | | | | |
| C6 | Same as C1 | | | | |
| C7 | Same as C3 | | | | |
| C8 | Same as C1 | | | | |
| C9 | Capacitor, Mica, Dipped: 3300 pF, 2%, 500 V | 2 | CM06FD332G03 | 81349 | 72136 |
| C10 | Capacitor, Mica, Dipped: 180 pF, 2%, 500 V | 2 | CM05FD181G03 | 81349 | 72136 |
| C11 | Same as C9 | | | | |
| C12 Thru C20 | Same as C1 | | | | |
| C21 | Not Used | | | | |
| C22 Thru C25 | Same as C1 | | | | |
| C26 | Same as C10 | | | | |
| C27 | Same as C1 | | | | |
| C28 | Same as C3 | | | | |
| C29 | Capacitor, Electrolytic, Tantalum: 15 µF, 10%, 20 V | 1 | CS13BE156K | 81349 | 56289 |
| C30 | Same as C1 | | | | |
| CR1 | Diode | 5 | 1N4449 | 80131 | 93332 |
| CR2 Thru CR5 | Same as CR1 | | | | |
| L1 | Coil, Fixed: 6.8 mH | 5 | 553-3635-47 | 71279 | |
| L2 | Coil, Variable | 2 | 558-7107-32 | 71279 | |
| L3 | Same as L2 | | | | |
| L4 Thru L7 | Same as L1 | | | | |
| MP1 | Transipad | 6 | 7717-44DAP | 13103 | |
| Q1 | Transistor | 2 | 841001-1 | 14632 | |
| Q2 | Same as Q1 | | | | |
| Q3 | Transistor | 4 | 2N2222A | 80131 | 04713 |
| Q4 Thru Q6 | Same as Q3 | | | | |
| R1 | Resistor, Fixed, Composition: 33 kΩ, 5%, 1/4 W | 1 | CF1/4-33K/J | 09021 | |
| R2 | Resistor, Fixed, Composition: 2.2 kΩ, 5%, 1/4 W | 2 | CF1/4-2.2K/J | 09021 | |
| R3 | Resistor, Fixed, Composition: 3.9 kΩ, 5%, 1/4 W | 2 | CF1/4-3.9K/J | 09021 | |
| R4 | Resistor, Fixed, Composition: 39 kΩ, 5%, 1/4 W | 2 | CF1/4-39K/J | 09021 | |

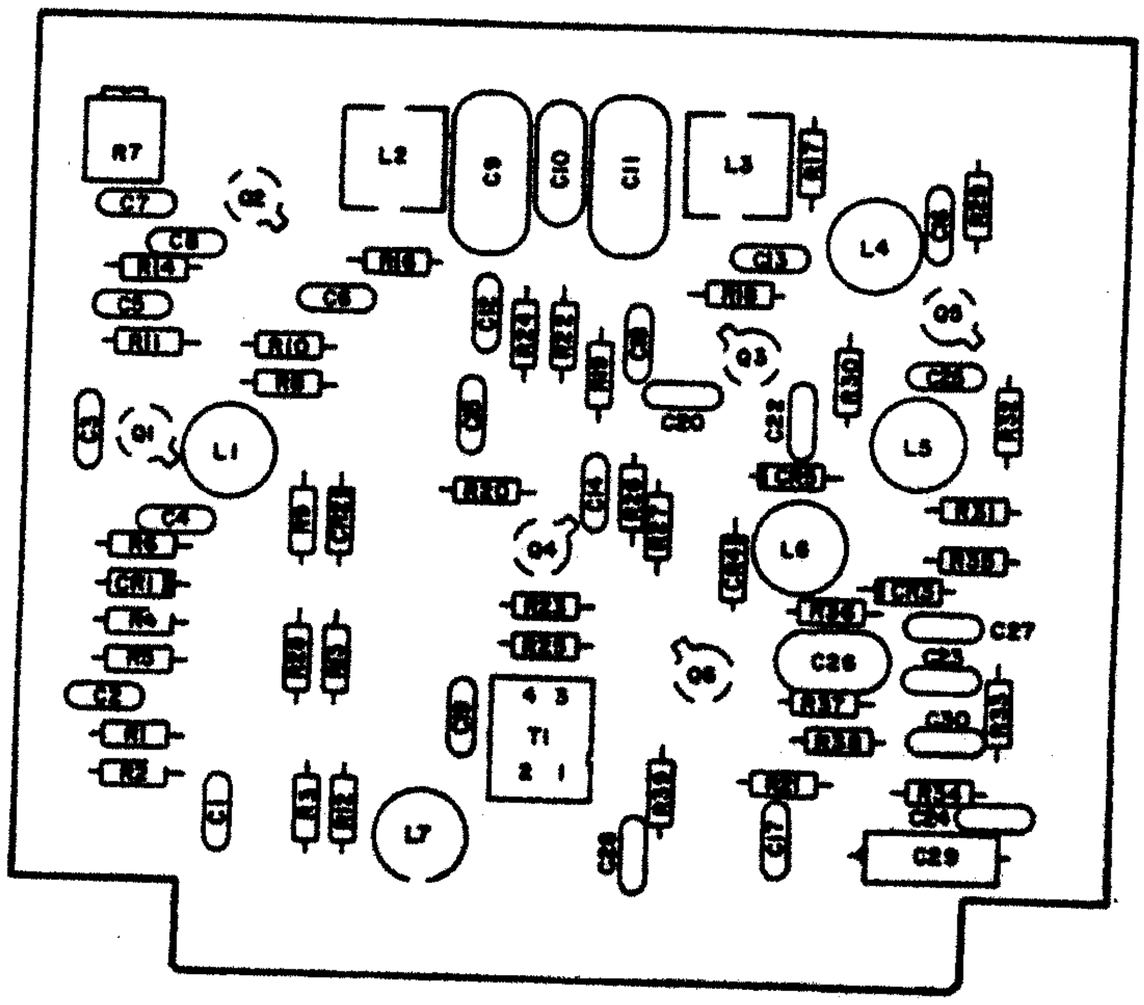



Figure 5-22. Type 72488-1 455 kHz Amplifier/AM Detector (A4A7), Location of Components

REF DESIG PREFIX **A4A7**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| R5 | Resistor, Fixed, Composition: 120 kΩ, 5%, 1/4 W | 2 | CF1/4-120K/J | 09021 | |
| R6 | Resistor, Fixed, Composition: 270Ω, 5%, 1/4 W | 2 | CF1/4-270 OHMS/J | 09021 | |
| R7 | Resistor, Variable, Film: 5 kΩ, 10%, 1/2 W | 1 | 62PAR5K | 73138 | |
| R8 | Resistor, Fixed, Composition: 220Ω, 5%, 1/4 W | 2 | CF1/4-220 OHMS/J | 09021 | |
| R9 | Resistor, Fixed, Composition: 100Ω, 5%, 1/4 W | 6 | CF1/4-100 OHMS/J | 09021 | |
| R10 | Resistor, Fixed, Composition: 680 kΩ, 5%, 1/4 W | 1 | CF1/4-680K/J | 09021 | |
| R11 | Resistor, Fixed, Composition: 47 kΩ, 5%, 1/4 W | 2 | CF1/4-47K/J | 09021 | |
| R12 | Same as R3 | | | | |
| R13 | Same as R4 | | | | |
| R14 | Same as R6 | | | | |
| R15 | Not Used | | | | |
| R16 | Resistor, Fixed, Composition: 47Ω, 5%, 1/4 W | 2 | CF1/4-47 OHMS/J | 09021 | |
| R17 | Resistor, Fixed, Composition: 8.2 kΩ, 5%, 1/4 W | 1 | CF1/4-8.2K/J | 09021 | |
| R18 | Same as R9 | | | | |
| R19 | Same as R9 | | | | |
| R20 | Resistor, Fixed, Composition: 3.3 kΩ, 5%, 1/4 W | 1 | CF1/4-3.3K/J | 09021 | |
| R21 | Same as R9 | | | | |
| R22 | Resistor, Fixed, Composition: 12 kΩ, 5%, 1/4 W | 1 | CF1/4-12K/J | 09021 | |
| R23 | Resistor, Fixed, Composition: 4.7 kΩ, 5%, 1/4 W | 1 | CF1/4-4.7K/J | 09021 | |
| R24 | Resistor, Fixed, Composition: 22Ω, 5%, 1/4 W | 1 | CF1/4-22 OHMS/J | 09021 | |
| R25 | Resistor, Fixed, Composition: 470Ω, 5%, 1/4 W | 1 | CF1/4-470 OHMS/J | 09021 | |
| R26 | Resistor, Fixed, Composition: 15Ω, 5%, 1/4 W | 1 | CF1/4-15 OHMS/J | 09021 | |
| R27 | Resistor, Fixed, Composition: 150Ω, 5%, 1/4 W | 1 | CF1/4-150 OHMS/J | 09021 | |
| R28 | Same as R5 | | | | |
| R29 | Resistor, Fixed, Composition: 1.5 kΩ, 5%, 1/4 W | 1 | CF1/4-1.5K/J | 09021 | |
| R30 | Same as R2 | | | | |
| R31 | Same as R9 | | | | |
| R32 | Same as R8 | | | | |
| R33 | Resistor, Fixed, Composition: 1.8 kΩ, 5%, 1/4 W | 1 | CF1/4-1.8K/J | 09021 | |
| R34 | Same as R9 | | | | |
| R35 | Resistor, Fixed, Composition: 5.6 kΩ, 5%, 1/4 W | 1 | CF1/4-5.6K/J | 09021 | |
| R36 | Same as R11 | | | | |
| R37 | Same as R16 | | | | |
| R38 | Resistor, Fixed, Composition: 6.8 kΩ, 5%, 1/4 W | 1 | CF1/4-6.8K/J | 09021 | |
| R39 | Resistor, Fixed, Composition: 560Ω, 5%, 1/4 W | 1 | CF1/4-560 OHMS/J | 09021 | |
| T1 | Transformer, Wideband | 1 | 70-130 | 06978 | |

5.6.4.8 **Type 791598-1 ISB Detector/Audio**
**(Optional on WJ-8718-9 only)**

REF DESIG PREFIX **A4A8**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| C1 | Capacitor, Ceramic, Disc: 0.47 µF, 20%, 50 V | 18 | 34452-1 | 14632 | |
| C2 | Same as C1 | | | | |
| C3 | Same as C1 | | | | |
| C4 | Not Used | | | | |
| C5 Thru C11 | Same as C1 | | | | |
| C12 | Capacitor, Electrolytic, Tantalum: 15 µF, 10%, 20 V | 2 | CS13BE156K | 81349 | 56289 |
| C13 | Same as C12 | | | | |
| C14 Thru C17 | Same as C1 | | | | |
| C18 | Capacitor, Ceramic, Disc: 3300 pF, 10%, 200 V | 1 | CK06BX332K | 81349 | 56289 |
| C19 | Capacitor, Electrolytic, Tantalum: 4.7 µF, 10%, 35 V | 1 | CS13BF475K | 81349 | 56289 |
| C20 Thru C22 | Same as C1 | | | | |
| C23 | Not Used | | | | |
| C24 | Not Used | | | | |
| C25 | Same as C1 | | | | |
| CR1 | Diode | 3 | 1N4449 | 80131 | 93332 |
| CR2 | Same as CR1 | | | | |
| CR3 | Not Used | | | | |
| CR4 | Same as CR1 | | | | |
| FB1 | Ferrite Bead | 2 | 56-590-65-4A | 02114 | |
| FB2 | Same as FB1 | | | | |
| L1 | Coil, Fixed: 6.8 mH | 2 | 553-3635-47 | 71279 | |
| L2 | Same as L1 | | | | |
| L3 | Coil, Fixed: 47 mH | 1 | 553-3635-57 | 71279 | |
| MP1 | Transipad | 5 | 7717-89DAP | 13103 | |
| MP2 | Shield ISB Detector | 1 | 34983 | 14632 | |
| Q1 | Transistor | 2 | 841001-1 | 14632 | |
| Q2 | Same as Q1 | | | | |
| Q3 | Transistor | 2 | 2N2907/JAN | 81350 | |
| Q4 | Transistor | 1 | 2N2222A | 80131 | 04713 |
| Q5 | Same as Q3 | | | | |
| R1 | Resistor, Fixed, Composition: 3.9 kΩ, 5%, 1/4 W | 4 | CF1/4-3.9K/J | 09021 | |
| R2 | Resistor, Fixed, Composition: 120 kΩ, 5%, 1/4 W | 2 | CF1/4-120K/J | 09021 | |
| R3 | Resistor, Fixed, Composition: 33 kΩ, 5%, 1/4 W | 2 | CF1/4-33K/J | 09021 | |
| R4 | Resistor, Fixed, Composition: 2.2 kΩ, 5%, 1/4 W | 3 | CF1/4-2.2K/J | 09021 | |
| R5 | Resistor, Fixed, Composition: 39 kΩ, 5%, 1/4 W | 2 | CF1/4-39K/J | 09021 | |
| R6 | Resistor, Fixed, Composition: 10Ω, 5%, 1/4 W | 2 | CF1/4-10 OHMS/J | 09021 | |

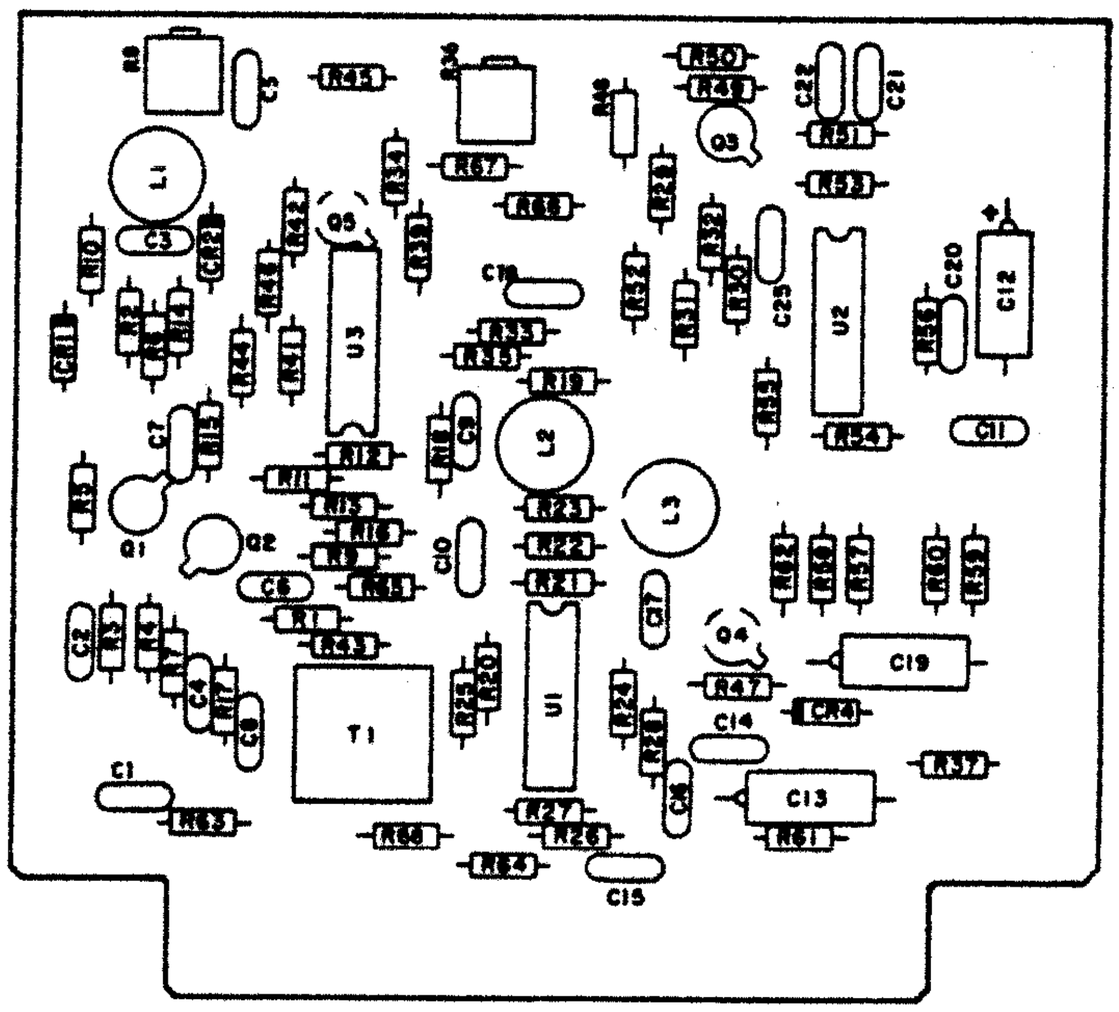



Figure 5-23. Type 791598-1 ISB Detector/Audio (A4A8), Location of Components

REF DESIG PREFIX A4A8

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| R7 | Resistor, Fixed, Composition: 270Ω, 5%, 1/4 W | 3 | CF1/4-270 OHMS/J | 09021 | |
| R8 | Resistor, Variable, Film: 5 kΩ, 10%, 1/2 W | 1 | 62PAR5K | 73138 | |
| R9 | Resistor, Fixed, Composition: 47Ω, 5%, 1/4 W | 1 | CF1/4-47 OHMS/J | 09021 | |
| R10 | Same as R7 | | | | |
| R11 | Same as R1 | | | | |
| R12 | Same as R2 | | | | |
| R13 | Resistor, Fixed, Composition: 680 kΩ, 5%, 1/4 W | 2 | CF1/4-680K/J | 09021 | |
| R14 | Resistor, Fixed, Composition: 47 kΩ, 5%, 1/4 W | 4 | CF1/4-47K/J | 09021 | |
| R15 | Same as R5 | | | | |
| R16 | Same as R6 | | | | |
| R16 | Same as R7 | | | | |
| R18* | Same as R4 | | | | |
| R19 | Resistor, Fixed, Composition: 22Ω, 5%, 1/4 W | 3 | CF1/4-22 OHMS/J | 09021 | |
| R20 | Resistor, Fixed, Composition: 6.8 kΩ, 5%, 1/4 W | 2 | CF1/4-6.8K/J | 09021 | |
| R21 | Resistor, Fixed, Composition: 10 kΩ, 5%, 1/4 W | 6 | CF1/4-10K/J | 09021 | |
| R22 | Same as R21 | | | | |
| R23 | Same as R20 | | | | |
| R24 | Resistor, Fixed, Composition: 1.0 kΩ, 5%, 1/4 W | 4 | CF1/4-1.0K/J | 09021 | |
| R25 | Same as R24 | | | | |
| R26 | Resistor, Fixed, Composition: 15 kΩ, 5%, 1/4 W | 3 | CF1/4-15K/J | 09021 | |
| R27 | Same as R1 | | | | |
| R28 | Same as R1 | | | | |
| R29 | Same as R14 | | | | |
| R30 | Same as R4 | | | | |
| R31 | Resistor, Fixed, Composition: 330 kΩ, 5%, 1/4 W | 1 | CF1/4-330K/J | 09021 | |
| R32 | Same as R14 | | | | |
| R33 | Resistor, Fixed, Composition: 12 kΩ, 5%, 1/4 W | 1 | CF1/4-12K/J | 09021 | |
| R34 | Resistor, Fixed, Composition: 1.0 MΩ, 5%, 1/4 W | 2 | CF1/4-1.0M/J | 09021 | |
| R35 | Same as R34 | | | | |
| R36 | Resistor, Variable, Film: 25 kΩ, 10%, .50 W | 1 | 62PAR25K | 73138 | |
| R37 | Same as R19 | | | | |
| R38 | Not Used | | | | |
| R39 | Same as R14 | | | | |
| R40 | Not Used | | | | |
| R41 | Same as R21 | | | | |
| R42 | Same as R26 | | | | |
| R43 | Resistor, Fixed, Composition: 100Ω, 5%, 1/4 W | 2 | CF1/4-100 OHMS/J | 09021 | |
| * | Nominal value, final value factory selected. | | | | |

REF DESIG PREFIX **A4A8**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| R44 | Same as R13 | | | | |
| R45 | Same as R26 | | | | |
| R46 | Resistor, Fixed, Composition: 22 kΩ, 5%, 1/4 W | 3 | CF1/4-22K/J | 09021 | |
| R47 | Resistor, Fixed, Composition: 4.7 kΩ, 5%, 1/4 W | 2 | CF1/4-4.7K/J | 09021 | |
| R48 | Resistor, Fixed, Composition: 82 kΩ, 5%, 1/4 W | 1 | CF1/4-82K/J | 09021 | |
| R49 | Same as R24 | | | | |
| R50 | Resistor, Fixed, Composition: 1.2 kΩ, 5%, 1/4 W | 1 | CF1/4-1.2K/J | 09021 | |
| R51 | Same as R21 | | | | |
| R52 | Resistor, Fixed, Composition: 3.3 MΩ, 5%, 1/4 W | 1 | CF1/4-3.3M/J | 09021 | |
| R53 | Same as R3 | | | | |
| R54 | Resistor, Fixed, Film: 18.2 kΩ, 1%, 1/10 W | 1 | RN55C1822F | 81349 | 75042 |
| R55 | Resistor, Fixed, Film: 82.5 kΩ, 1%, 1/10 W | 1 | RN55C8252F | 81349 | 75042 |
| R56 | Resistor, Fixed, Film: 100 kΩ, 1%, 1/10 W | 1 | RN55C1003F | 81349 | 75042 |
| R57 | Same as R21 | | | | |
| R58 | Resistor, Fixed, Composition: 150Ω, 5%, 1/4 W | 2 | CF1/4-150 OHMS/J | 09021 | |
| R59 | Same as R58 | | | | |
| R60 | Same as R21 | | | | |
| R61 | Same as R19 | | | | |
| R62 | Same as R24 | | | | |
| R63 | Resistor, Fixed, Composition: 220Ω, 5%, 1/4 W | 1 | CF1/4-220 OHMS/J | 09021 | |
| R64 | Same as R46 | | | | |
| R65 | Same as R43 | | | | |
| R66 | Resistor, Fixed, Composition: 68 kΩ, 5%, 1/4 W | 1 | CF1/4-68K/J | 09021 | |
| R67 | Same as R46 | | | | |
| R68 | Same as R47 | | | | |
| T1 | Transformer | 1 | LL010 | 07338 | |
| U1 | Integrated Circuit | 1 | MC1496P | 04713 | |
| U2 | Integrated Circuit | 2 | MC3403P | 04713 | |
| U3 | Same as U2 | | | | |

5.6.4.9 **Type 791599-1 FM, CW, and SSB Detector/Audio** REF DESIG PREFIX **A4A9**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| C1 | Capacitor, Ceramic, Disc: 0.47 µF, 20%, 50 V | 8 | 34452-1 | 14632 | |
| C2 Thru C5 | Same as C1 | | | | |
| C6 | Capacitor, Mica, Dipped: 470 pF, 2%, 500 V | 1 | DM15-471G | 72136 | |
| C7 | Capacitor, Mica, Dipped: 330 pF, 2%, 500 V | 2 | CM05FD331G03 | 81349 | 72136 |
| C8 | Capacitor, Mica, Dipped: 390 pF, 2%, 500 V | 1 | CM05FD391G03 | 81349 | 72136 |
| C9 | Capacitor, Ceramic, Disc: 150 pF, 5%, 50 V | 1 | 1U150RJ | 93958 | |
| C10 | Same as C7 | | | | |
| C11 | Capacitor, Plastic, Tubular: 0.015 µF, 5%, 100 V | 1 | 663UW153-5-1W | 84411 | |
| C12 | Same as C1 | | | | |
| C13 | Capacitor, Electrolytic, Tantalum: 18 µF, 10%, 20 V | 1 | 196D186X9020KE3 | 56289 | |
| C14 | Same as C1 | | | | |
| C15 | Same as C1 | | | | |
| C16 | Capacitor, Ceramic, Disc: 1 µF, 20%, 50 V | 1 | 8131-050-651-105M | 72982 | |
| C17 | Capacitor, Mica, Dipped: 2700 pF, 2%, 500 V | 1 | CM06FD272G03 | 81349 | 72136 |
| C18 | Capacitor, Electrolytic, Tantalum: 15 µF, 10%, 20 V | 1 | CS13BE156K | 81349 | 56289 |
| C19 | Capacitor, Electrolytic, Tantalum: 4.7 µF, 20%, 35 V | 1 | 196D475X0035JE3 | 56289 | |
| FB1 | Ferrite Bead | 2 | 56-590-65-4A | 02114 | |
| FB2 | Same as FB1 | | | | |
| L1 | Coil, Variable | 1 | 30312-258 | 14632 | |
| L2 | Not used | | | | |
| L3 | Coil, Fixed: 47 mH | 1 | 553-3635-57 | 71279 | |
| MP1 | Transipad | 4 | 7177-115DAP | 13103 | |
| Q1 | Transistor | 2 | 2N2907/JAN | 81350 | |
| Q2 | Transistor | 2 | 2N2222A | 80131 | 04713 |
| Q3 | Same as Q1 | | | | |
| Q4 | Same as Q2 | | | | |
| R1 | Resistor, Fixed, Composition: 10 kΩ, 5%, 1/4 W | 4 | CF1/4-10K/J | 09021 | |
| R2 | Resistor, Fixed, Composition: 1.0 kΩ, 5%, 1/4 W | 3 | CF1/4-10.K/J | 09021 | |
| R3 | Resistor, Fixed, Composition: 220Ω, 5%, 1/4 W | 1 | CF1/4-220 OHMS/J | 09021 | |
| R4 | Resistor, Fixed, Composition: 47Ω, 5%, 1/4 W | 3 | CF1/4-47 OHMS/J | 09021 | |
| R5 | Resistor, Fixed, Composition: 68 kΩ, 5%, 1/4 W | 3 | CF1/4-68K/J | 09021 | |
| R6 | Resistor, Fixed, Composition: 47 kΩ, 5%, 1/4 W | 3 | CF1/4-47K/J | 09021 | |
| R7 | Resistor, Fixed, Composition: 56 kΩ, 5%, 1/4 W | 1 | CF1/4-56K/J | 09021 | |
| R8 | Resistor, Fixed, Composition: 4.7 kΩ, 5%, 1/4 W | 2 | CF1/4-4.7K/J | 09021 | |
| R9 | Resistor, Fixed, Composition: 22 kΩ, 5%, 1/4 W | 1 | CF1/4-2.2K/J | 09021 | |
| R10 | Resistor, Fixed, Composition: 560 kΩ, 5%, 1/4 W | 1 | CF1/4-560K/J | 09021 | |
| R11 | Resistor, Fixed, Composition: 470 kΩ, 5%, 1/4 W | 1 | CF1/4-470K/J | 09021 | |
| R12 | Resistor, Fixed, Composition: 15 kΩ, 5%, 1/4 W | 3 | CF1/4-15K/J | 09021 | |
| R13 | Same as R12 | | | | |

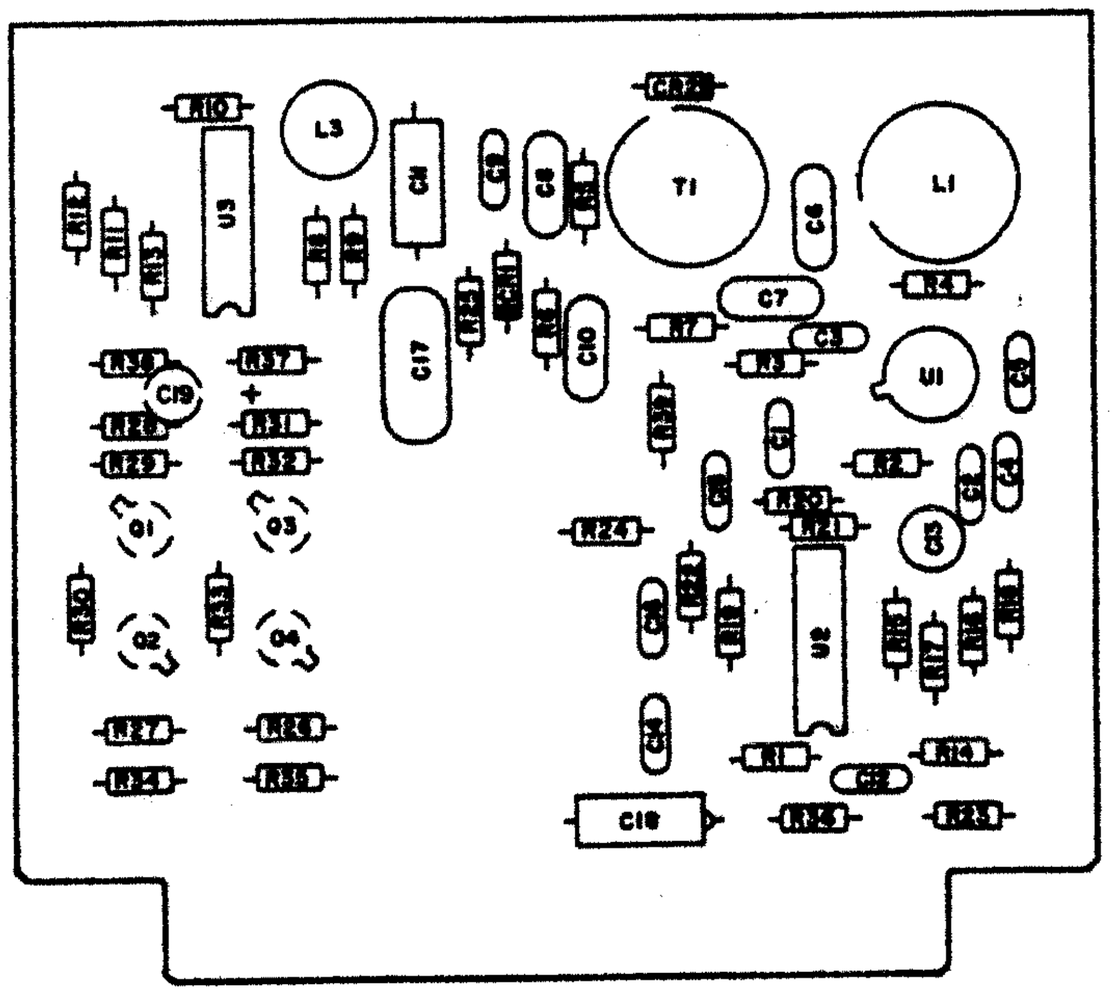



Figure 5-24. Type 791599-1 FM, CW and SSB Detector (A4A9), Location of Components

REF DESIG PREFIX A4A9

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| R14 | Resistor, Fixed, Composition: 6.8 kΩ, 5%, 1/4 W | 4 | CF1/4-6.8K/J | 09021 | |
| R15 | Same as R1 | | | | |
| R16 | Same as R1 | | | | |
| R17 | Same as R14 | | | | |
| R18 | Same as R2 | | | | |
| R19 | Same as R2 | | | | |
| R20 | Same as R12 | | | | |
| R21 | Resistor, Fixed, Composition: 3.9 kΩ, 5%, 1/4 W | 2 | CF1/4-3.9K/J | 09021 | |
| R22 | Same as R21 | | | | |
| R23 | Resistor, Fixed, Composition: 100Ω, 5%, 1/4 W | 2 | CF1/4-100 OHMS/J | 09021 | |
| R24 | Resistor, Fixed, Composition: 150Ω, 5%, 1/4 W | 1 | CF1/4-150 OHMS/J | 09021 | |
| R25 | Resistor, Fixed, Composition: 5.6 kΩ, 5%, 1/4 W | 1 | CF1/4-5.6K/J | 09021 | |
| R26 | Same as R5 | | | | |
| R27 | Same as R6 | | | | |
| R28 | Same as R4 | | | | |
| R29 | Resistor, Fixed, Composition: 82 kΩ, 5%, 1/4 W | 2 | CF1/4-82K/J | 09021 | |
| R30 | Same as R14 | | | | |
| R31 | Same as R4 | | | | |
| R32 | Same as R29 | | | | |
| R33 | Same as R14 | | | | |
| R34 | Same as R6 | | | | |
| R35 | Same as R5 | | | | |
| R36 | Same as R23 | | | | |
| R37 | Same as R8 | | | | |
| R38 | Same as R1 | | | | |
| R39 | Resistor, Fixed, Composition: 470Ω, 5%, 1/4 W | 1 | CF1/4-470 OHMS/J | 09021 | |
| T1 | Transformer | 1 | 30312-257 | 14632 | |
| U1 | Integrated Circuit | 1 | CA3012 | 02735 | |
| U2 | Integrated Circuit | 1 | MC1496P | 04713 | |
| U3 | Integrated Circuit | 1 | MC3403P | 04713 | |

5.6.4.10 **Type 746001-1 Audio Amplifier**

REF DESIG PREFIX **A4A10**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| C1 | Capacitor, Ceramic, Disc: 0.47 µF, 20%, 50 V | 6 | 34452-1 | 14632 | |
| C2 | Capacitor, Ceramic, Disc: 0.1 µF, 20%, 50 V | 1 | 34475-1 | 14632 | |
| C3 | Same as C1 | | | | |
| C4 | Capacitor, Electrolytic, Tantalum: 4.7 µF, 10%, 35 V | 2 | CS13BF475K | 81349 | 56289 |
| C5 | Not Used | | | | |
| C6 | Same as C1 | | | | |
| C7 | Capacitor, Ceramic, Disc: 1 µF, 20%, 50 V | 1 | 8131-050-651-105M | 72982 | |
| C8 | Same as C1 | | | | |
| C9 | Same as C1 | | | | |
| C10 | Same as C4 | | | | |
| C11 | Not Used | | | | |
| C12 | Capacitor, Electrolytic, Tantalum: 15 µF, 10%, 20 V | 2 | CS13BE156K | 81349 | 56289 |
| C13 | Same as C12 | | | | |
| C14 | Same as C1 | | | | |
| C15 | Not Used | | | | |
| C16 | Not Used | | | | |
| C17 | Capacitor, Ceramic, Disc: 5000 pF, 20%, 500 V | 1 | B-GP5000PFM | 91418 | |
| C18 | Capacitor, Electrolytic, Tantalum: 47 µF, 10%, 35 V | 2 | CS13BF476K | 81349 | 56289 |
| C19 | Same as C18 | | | | |
| C20 | Not Used | | | | |
| C21 | Capacitor, Mica, Dipped: 24 pF, 5%, 500 V | 1 | CM05ED240J03 | 81349 | 72136 |
| CR1 | Diode | 1 | 1N4449 | 80131 | 93332 |
| CR2 | Diode | 2 | 1N198A | 80131 | 93332 |
| CR3 | Same as CR2 | | | | |
| Q1 | Transistor | 1 | U1899E | 15818 | |
| R1 | Resistor, Fixed, Composition: 22 kΩ, 5%, 1/4 W | 3 | CF1/4-22K/J | 09021 | |
| R2 | Resistor, Fixed, Composition: 330 kΩ, 5%, 1/4 W | 1 | CF1/4-330K/J | 09021 | |
| R3 | Resistor, Fixed, Composition: 47 kΩ, 5%, 1/4 W | 2 | CF1/4-47K/J | 09021 | |
| R4 | Same as R3 | | | | |
| R5 | Resistor, Fixed, Composition: 2.2 MΩ, 5%, 1/4 W | 1 | CF1/4-2.2M/J | 09021 | |
| R6 | Resistor, Fixed, Composition: 20 kΩ, 5%, 1/4 W | 1 | CF1/4-20K/J | 09021 | |
| R7 | Resistor, Fixed, Composition: 100 kΩ, 5%, 1/4 W | 5 | CF1/4-100K/J | 09021 | |
| R8 Thru R10 | Same as R7 | | | | |
| R11 | Same as R1 | | | | |
| R12 | Resistor, Fixed, Composition: 12 kΩ, 5%, 1/4 W | 1 | CF1/4-12K/J | 09021 | |
| R13 | Resistor, Fixed, Composition: 27 kΩ, 5%, 1/4 W | 1 | CF1/4-27K/J | 09021 | |
| R14 | Resistor, Fixed, Composition: 6.8 kΩ, 5%, 1/4 W | 2 | CF1/4-6.8K/J | 09021 | |
| R15 | Not Used | | | | |
| R16 | Not Used | | | | |

REF DESIG PREFIX **A4A10**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| R17 | Resistor, Fixed, Composition: 18 kΩ, 5%, 1/4 W | 1 | CF1/4-18K/J | 09021 | |
| R18 | Same as R7 | | | | |
| R19 | Resistor, Fixed, Film: 2.0 kΩ, 1%, 1/10 W | 1 | RN55C2001F | 81349 | 75042 |
| R20 | Resistor, Fixed, Film: 100 kΩ, 1%, 1/10 W | 2 | RN55C1003F | 81349 | 75042 |
| R21 | Same as R20 | | | | |
| R22 | Resistor, Fixed, Composition: 100 Ω, 5%, 1/4 W | 2 | CF1/4-100 OHMS/J | 09021 | |
| R23 | Same as R1 | | | | |
| R24 | Same as R14 | | | | |
| R25 | Not Used | | | | |
| R26 | Not Used | | | | |
| R27 | Same as R22 | | | | |
| RA1 | Heatsink | | | | |
| T1 | Transformer | 1 | 24566-1 | 14632 | |
| U1 | Integrated Circuit | 1 | LL010 | 07388 | |
| U2 | Integrated Circuit | 1 | MC3403P | 04713 | |
| | | 1 | LM378N | 27014 | |

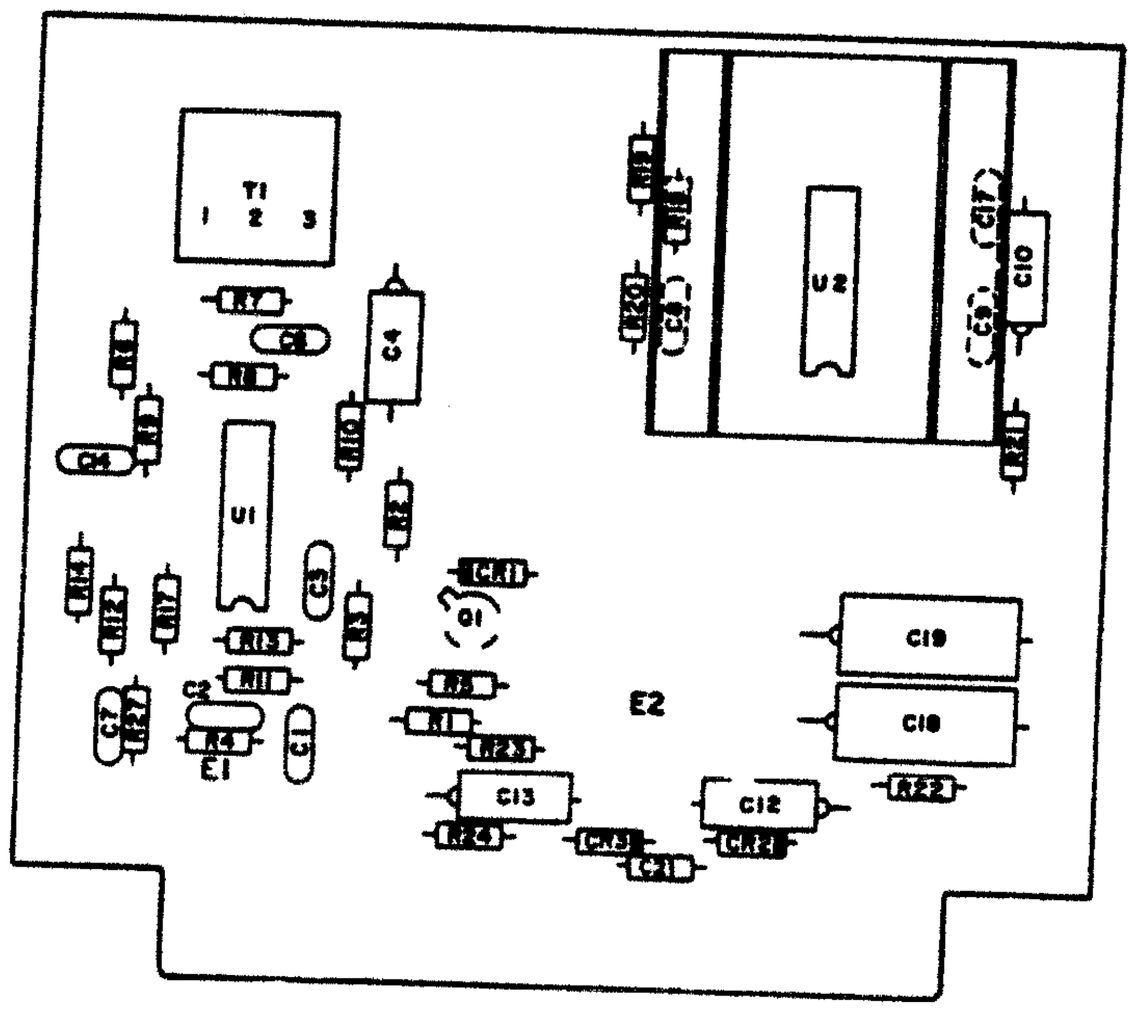



Figure 5-25. Type 746001-1 Audio Amplifier (A4A10), Location of Components

5.6.5 **TYPE 791570-1 SYNTHESIZER MOTHERBOARD** REF DESIG PREFIX A5

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| A1 | 1st and 3rd LO, Timebase | 1 | 791630 | 14632 | |
| A2 | 2nd LO Synthesizer | 1 | 791601 | 14632 | |
| A3 | BFO Synthesizer | 1 | 791576 | 14632 | |
| C1 | Capacitor, Ceramic, Disc: 0.01 µF, 20%, 50 V | 58 | 34453-1 | 14632 | |
| C2 Thru C58 | Same as C1 | | | | |
| C59 | Capacitor, Ceramic, Disc: 0.47 µF, 20%, 50 V | 4 | 34452-1 | 14632 | |
| C60 Thru C62 | Same as C59 | | | | |
| J1 | Faston Tab | 3 | 62073-1 | 00779 | |
| J2 | Same as J1 | | | | |
| J3 | Same as J1 | | | | |
| L1 | Ferrite Choke | 4 | VK200-10-3B | 02114 | |
| L2 Thru L4 | Same as L1 | | | | |
| MP1 | Not Used | | | | |
| MP2 | Insulator | 2 | 60-11-5791-1674 | 18565 | |
| -- | Cable Assembly | 1 | 34832-1 | 14632 | |
| P1 | Plug Assembly | 1 | 88523-1 | 00779 | |
| -- | Cable Assembly | 1 | 34832-2 | 14632 | |
| P2 | Plug Assembly | 1 | 88524-1 | 00779 | |
| RA1 | Heatsink | 1 | 270921 | 14632 | |
| U1 | Voltage Regulator | 2 | 7805UC | 07263 | |
| U2 | Same as U1 | | | | |

PACITORS SHOWN ON SIDE VIEW


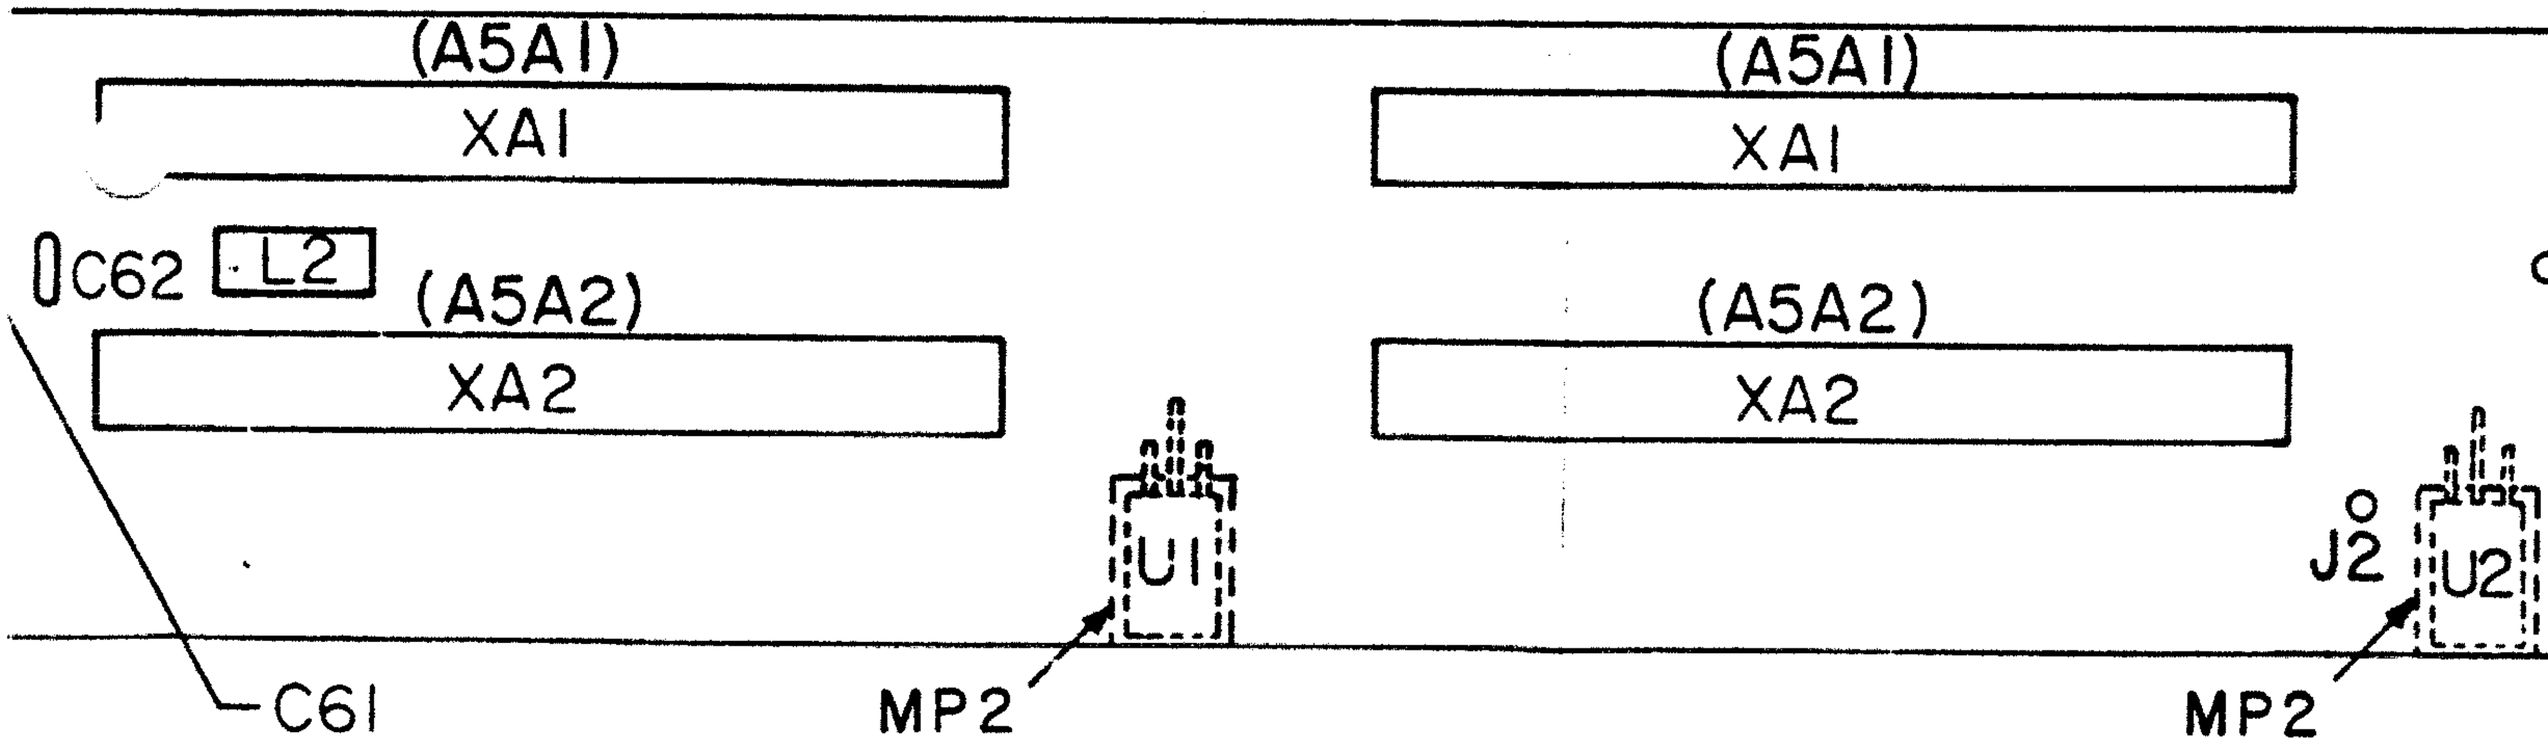



Figure 5-26. Type 791570-1 Synthesizer Motherb
Location of Components

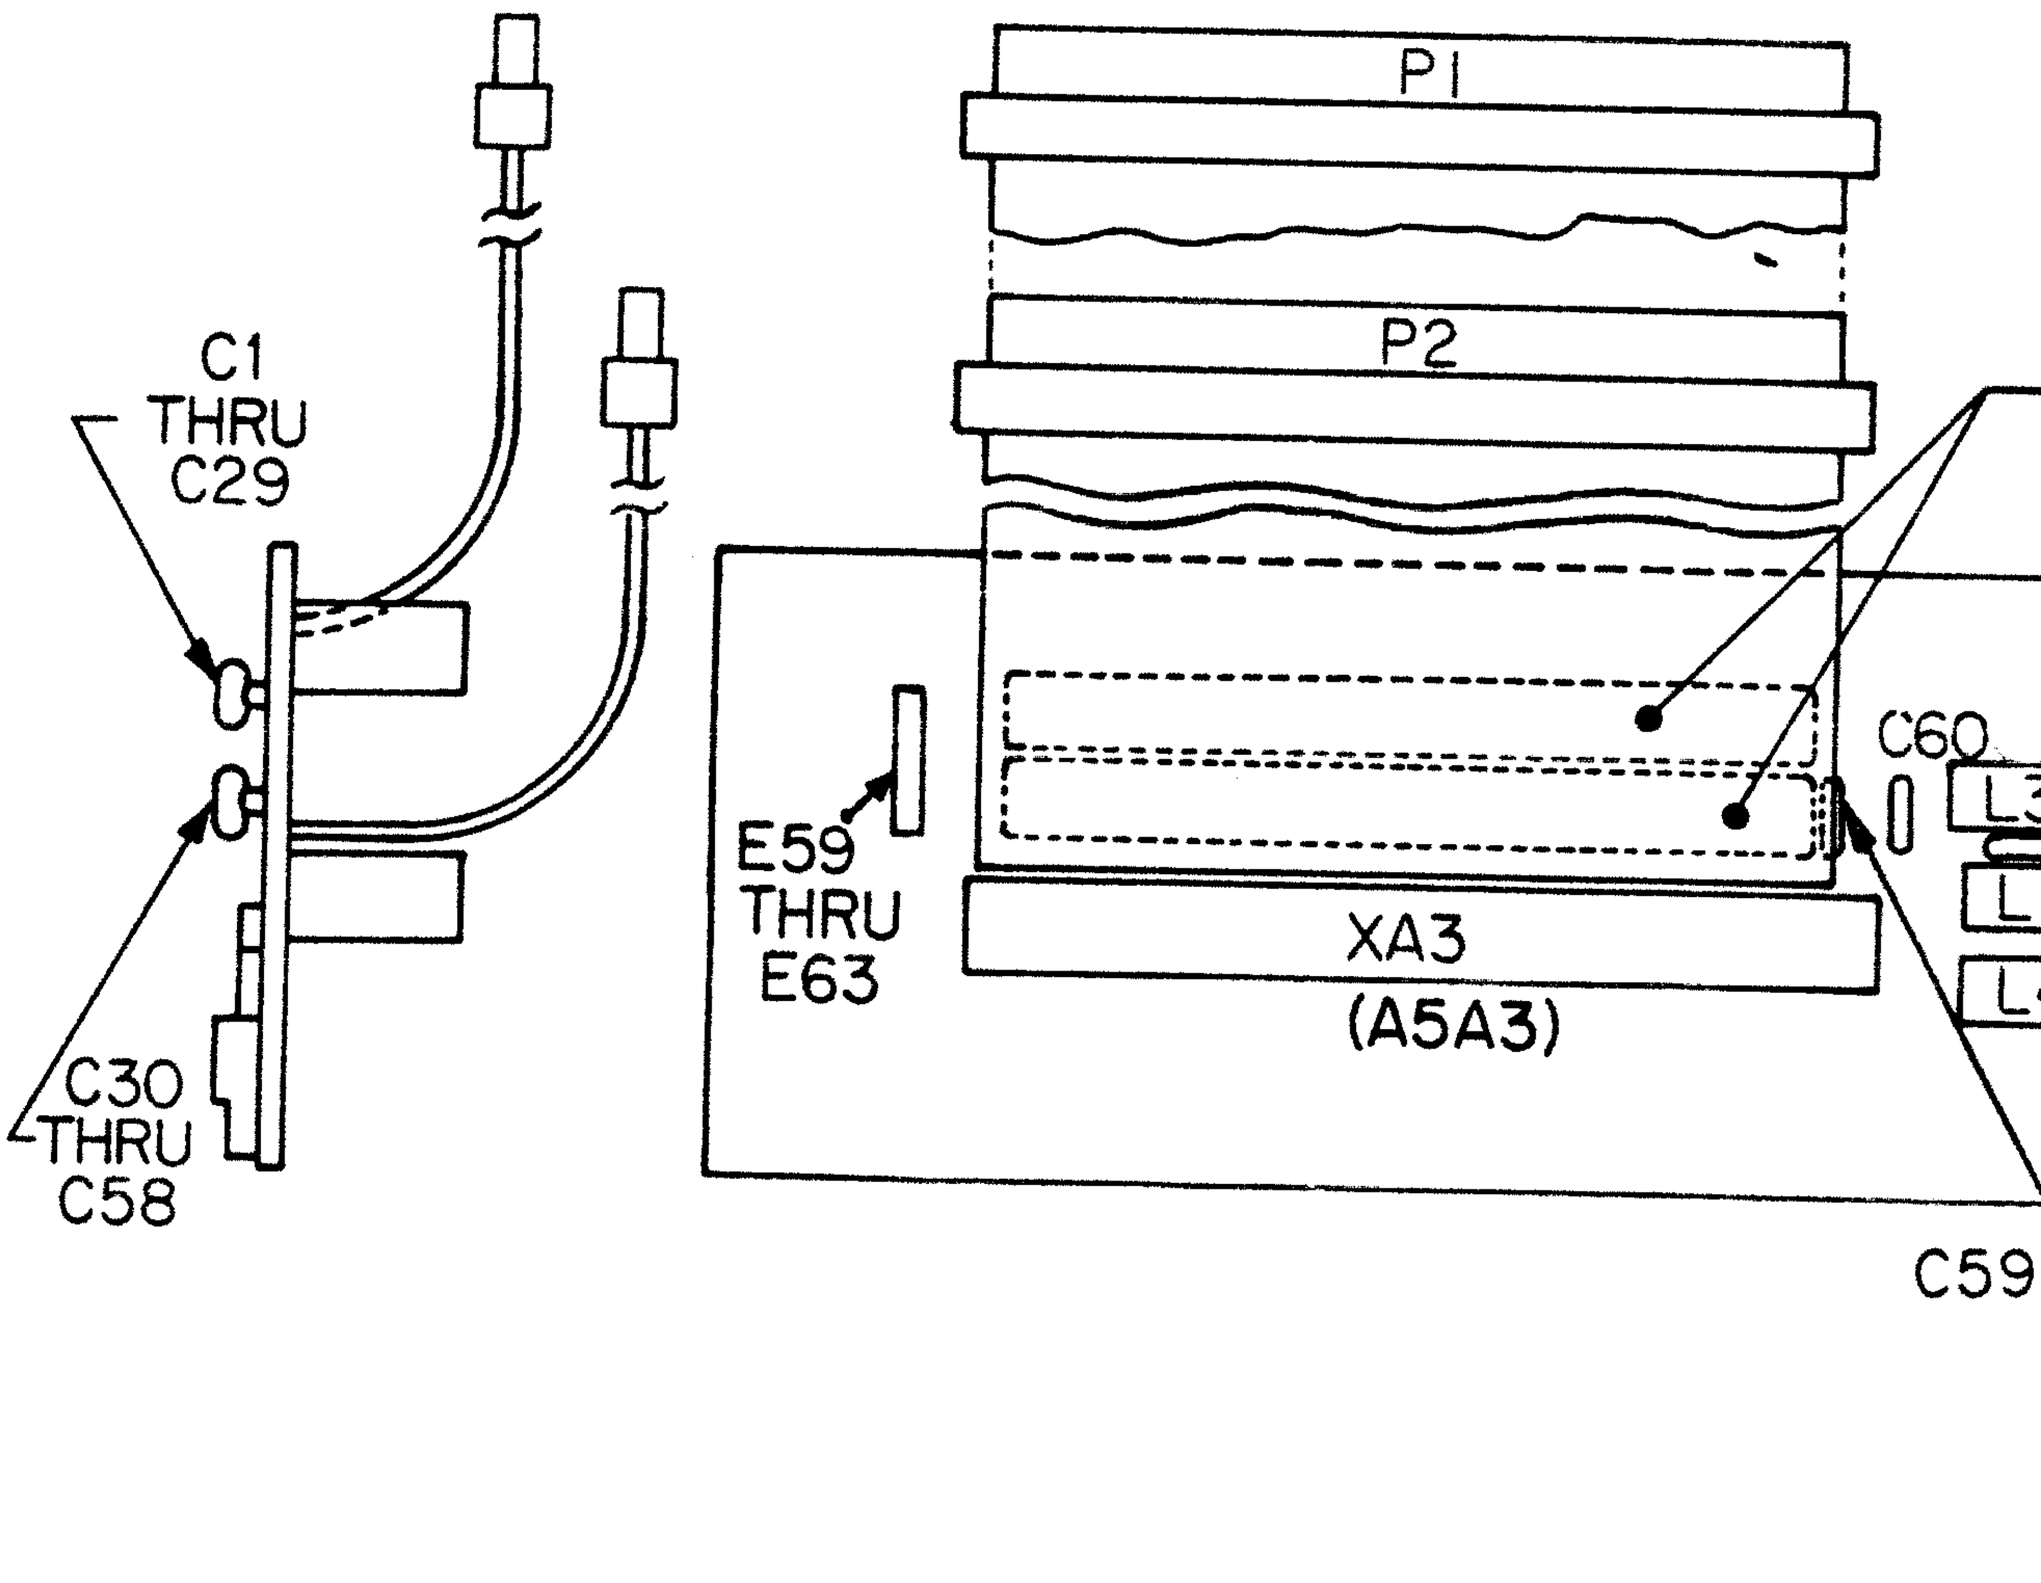
FIGURE 5-26



5.6.5.1 **Type 791630-1 1st and 3rd LO Synthesizer**

REF DESIG PREFIX **A5A1**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| A1 | 1st LO VCO Assembly | 1 | 791629 | 14632 | |
| A2 | 1st and 3rd LO Synthesizer | 1 | 791600 | 14632 | |
| C1 | Capacitor, Mica, Dipped: 1600 pF, 2%, 500 V | 2 | CM06FD162G03 | 81349 | 72136 |
| C2 | Capacitor, Ceramic, Disc: 0.47 µF, 20%, 100 V | 2 | 8131M100-651-474M | 72982 | |
| C3 | Same as C1 | | | | |
| C4 | Capacitor, Ceramic, Disc: 0.05 µF, 20%, 100 V | 2 | C023B101R503M | 56289 | |
| C5 | Capacitor, Electrolytic, Tantalum: 47 µF, 20%, 20 V | 2 | 196D476X0020PE4 | 56289 | |
| C6 | Same as C2 | | | | |
| C7 | Same as C5 | | | | |
| C8 | Same as C4 | | | | |
| C9 | Capacitor, Electrolytic, Tantalum: 2.2 µF, 20%, 35 V | 1 | 196D225X0035JE3 | 56289 | |
| FB1 | Ferrite Bead | 17 | 56-590-65-4A | 02114 | |
| FB2 Thru FB17 | Same as FB1 | | | | |
| L1 | Coil, Fixed: 10 mH | 2 | 553-3635-49 | 71279 | |
| L2 | Coil, Fixed: 0.82 µH | 1 | 1537-10 | 99800 | |
| L3 | Same as L1 | | | | |
| L4 | Coil, Fixed: 4.7 mH | 1 | 553-3635-45 | 99800 | |
| MP1 | Terminal | 20 | S0S1 | 04013 | |
| MP2 | Insulator | 1 | 60-11-5791-1674 | 18565 | |
| R1 | Resistor, Fixed, Composition: 100Ω, 5%, 1/4 W | 1 | CF1/4-100 OHMS/J | 09021 | |
| R2 | Resistor, Fixed, Film: 10 kΩ, 1%, 1/10 W | 1 | RN55C1002F | 81349 | 75042 |
| R3 | Resistor, Fixed, Film: 1.0 kΩ, 1%, 1/10 W | 1 | RN55C1001F | 81349 | 75042 |
| R4 | Resistor, Fixed, Composition: 1.0 kΩ, 5%, 1/4 W | 1 | CF1/4-1.0K/J | 09021 | |
| R5 | Resistor, Fixed, Film: 1.82 kΩ, 1%, 1/10 W | 1 | RN55C1821F | 81349 | 75042 |
| VR1 | Voltage Regulator | 1 | MC7912CP | 04713 | |

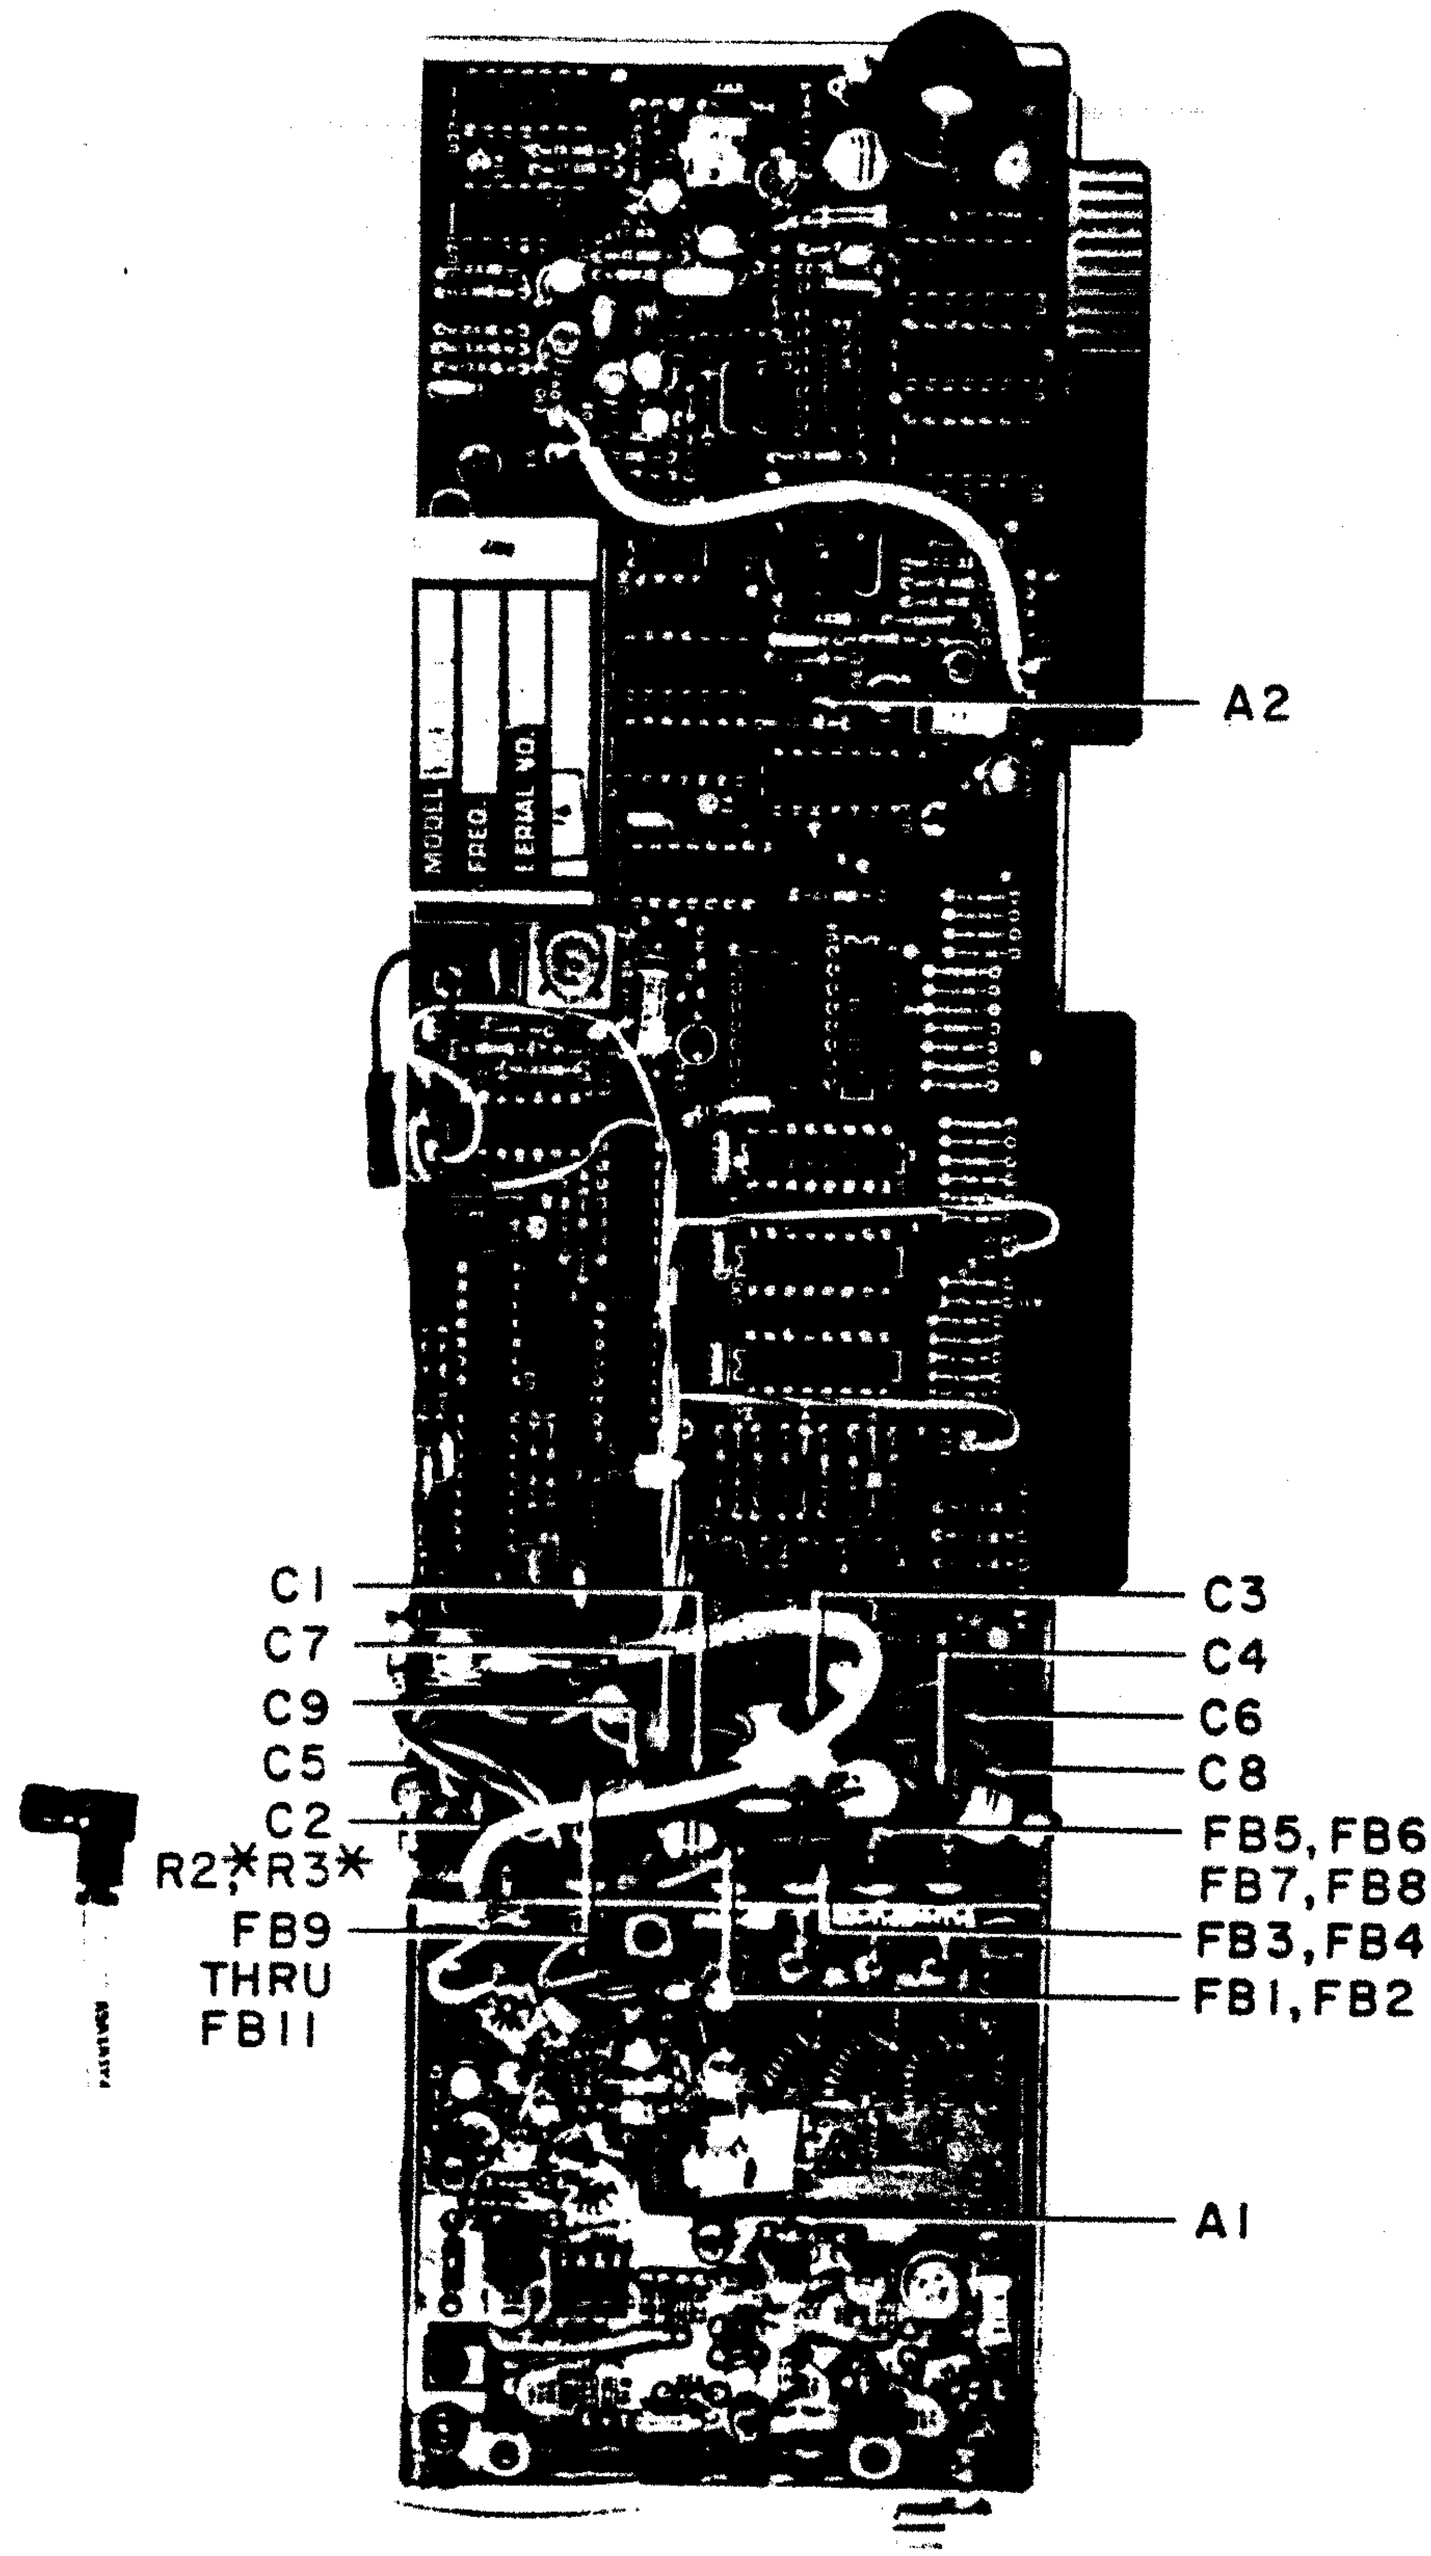


* DENOTES HIDDEN PART

Figure 5-27. Type 791630-1 1st and 3rd LO Synthesizer/Timebase (A5A1), Location of Components (Sheet 1 of 2)

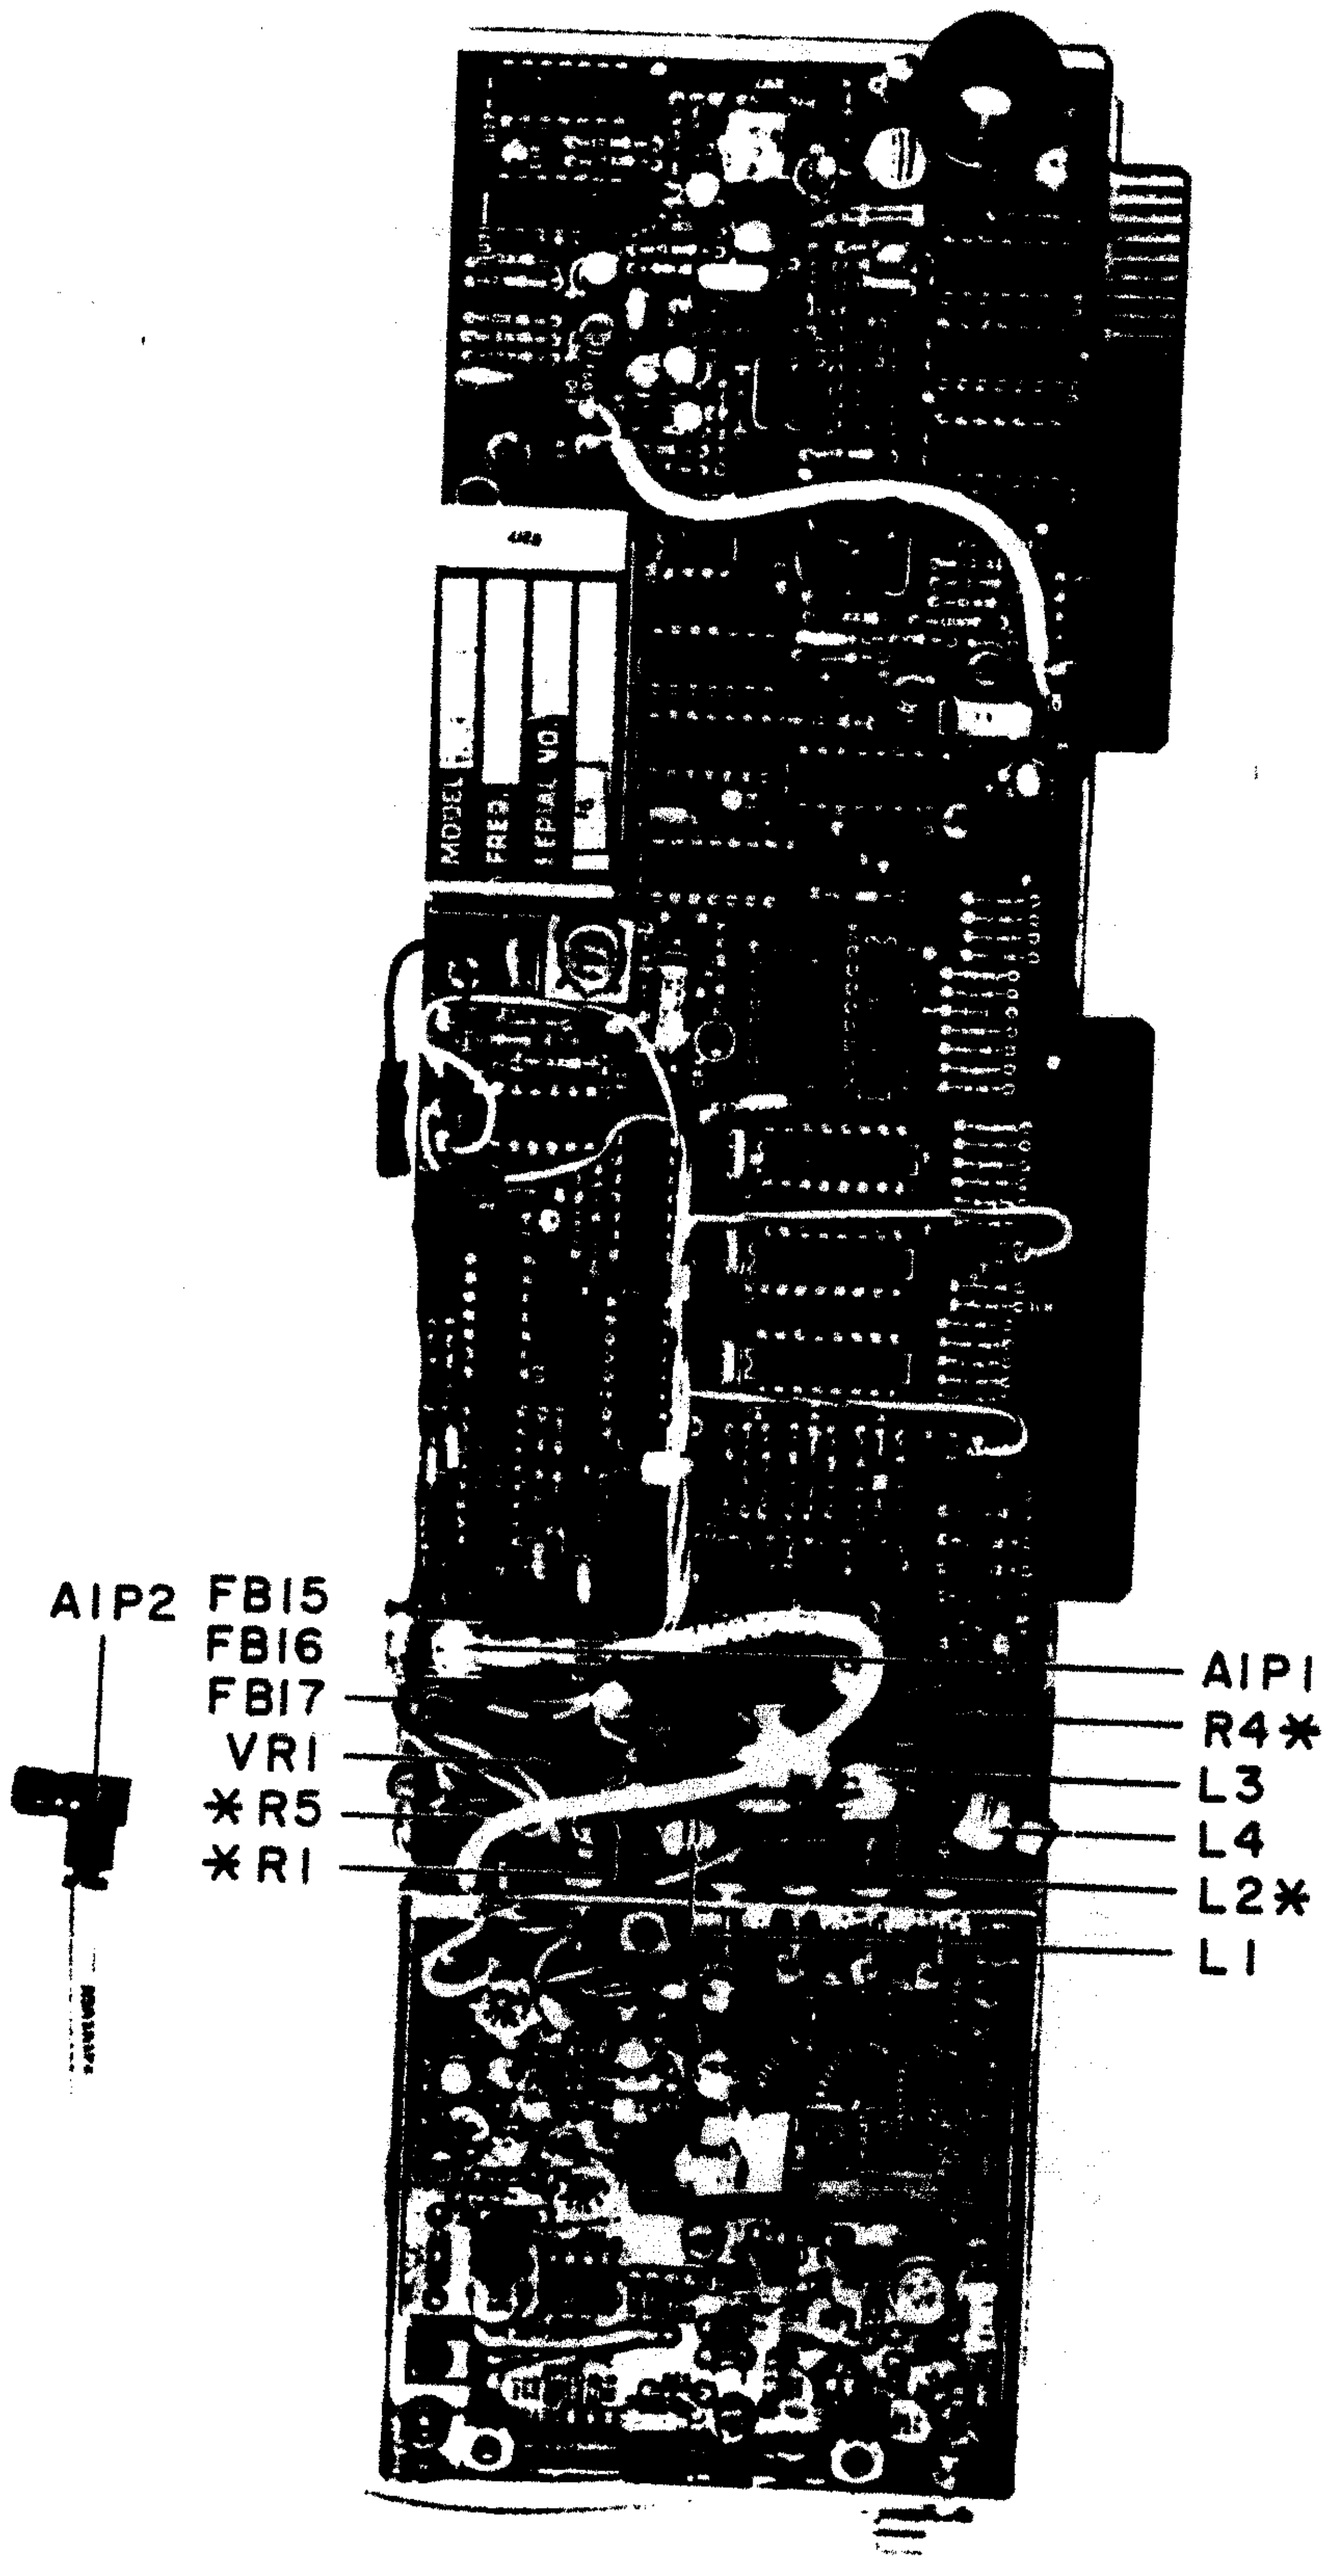



**Figure 5-27.** Type 791630-1 1st and 3rd LO Synthesizer/Timebase (A5A1), Location of Components (Sheet 2 of 2)

5.6.5.1.1 **Type 791629 1st LO VCO Assembly** REF DESIG PREFIX **A5A1A1**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| A1 | 1st LO Voltage Controlled Oscillator | 1 | 34750 | 14632 | |
| C1 | Capacitor, Ceramic, Feedthru: 1000 pF, GMV, 500 V | 5 | 54-794-009-102W | 33095 | |
| C2 Thru C4 | Same as C1 | | | | |
| C5 | Capacitor, Electrolytic, Tantalum: 68 µF, 20%, 15 V | 1 | 183DR686X0015F | 56289 | |
| C6 | Same as C1 | | | | |
| C7 | Capacitor, Ceramic, Disc: 0.47 µF, 20%, 50 V | 1 | 34452-1 | 14632 | |
| C8 | Capacitor, Ceramic, Disc: 6.8 pF, ±0.25 pF, 100 V | 1 | 8101-100-C0H0-689C | 72982 | |
| E1 | Connector, Termination | 1 | 144/188 | 19505 | |
| MP1 | Cover Assembly | 1 | 24085-1 | 14632 | |
| P1 | Connector, Plug: SMC Series | 1 | UG1465/U | 80058 | 19505 |
| P2 | Connector, Plug: SMC Series | 1 | UG1466/U | 80058 | 19505 |
| R1 | Resistor, Fixed, Composition: 1.2 kΩ, 5%, 1/8 W | 3 | CF1/8-1.2K/J | 09021 | |
| R2 | Same as R1 | | | | |
| R3 | Same as R1 | | | | |
| R4 | Resistor, Fixed, Composition: 47Ω, 5%, 1/8 W | 1 | CF1/8-47 OHMS/J | 09021 | |

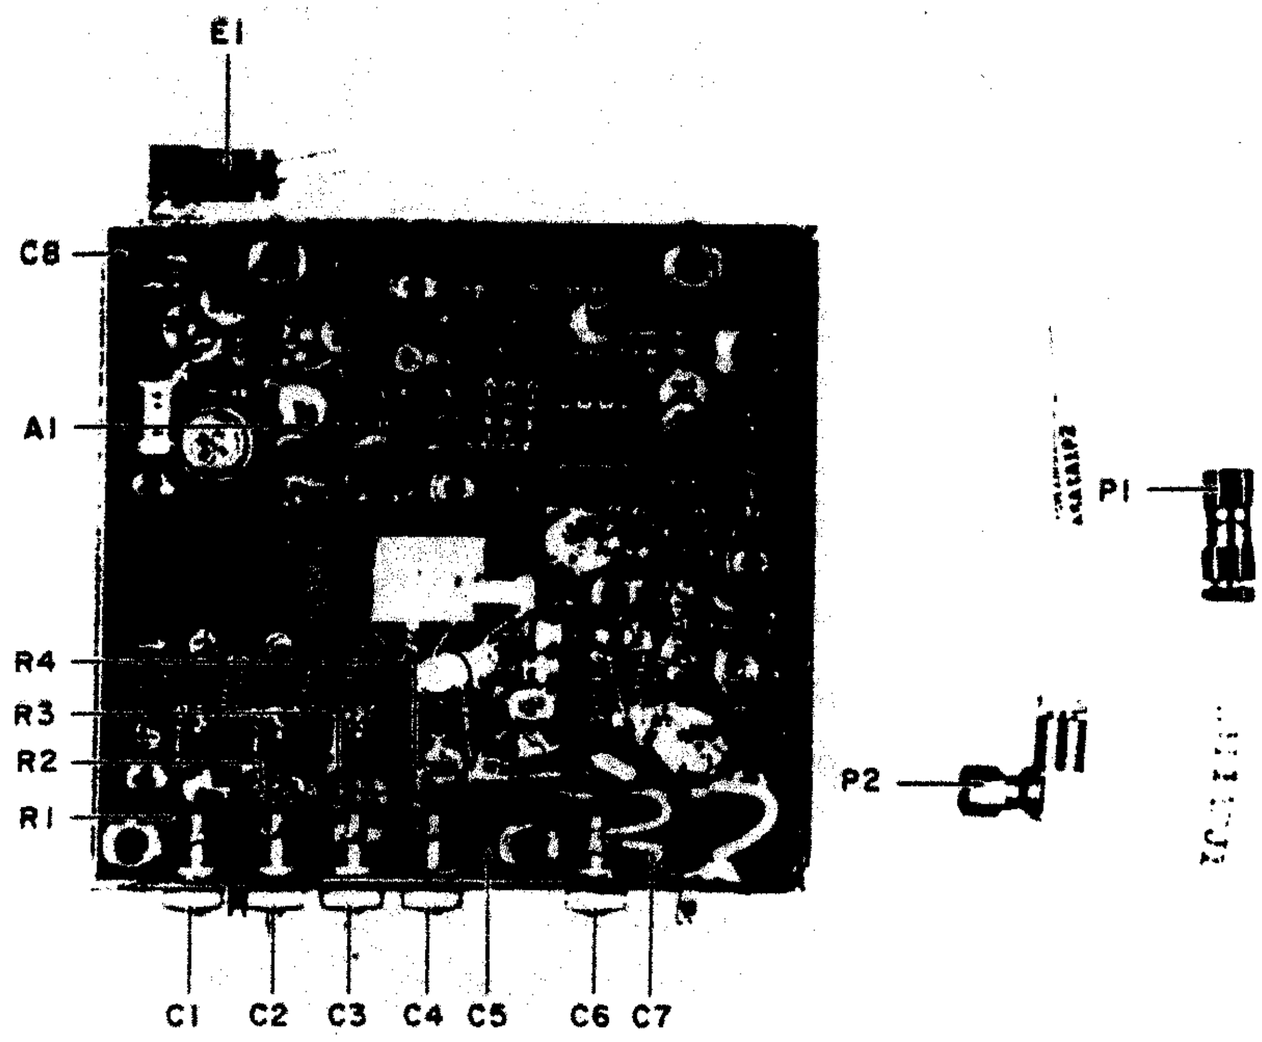



Figure 5-28. Type 791629 1st LO VCO Assembly (A5A1A1), Location of Components

5.6.5.1.1.1 **Part 34750 1st LO Voltage Controlled Oscillator** REF DESIG PREFIX A5A1A1A1

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| C1 | Capacitor, Ceramic, Chip: 200 pF, 50%, 500 V | 10 | 32-257578-40 | 91984 | |
| C2 Thru C4 | Same as C1 | | | | |
| C5 | Capacitor, Ceramic, Chip: 3 pF, ±0.25 pF, 500 V | 1 | 603C0G3R0C | 91984 | |
| C6* | Capacitor, Ceramic, Tubular: 5.1 pF, ±0.5 pF, 500 V | 2 | 301-000C0H0-519D | 72982 | |
| C7 | Capacitor, Composition, Tubular: 2.7 pF, 10%, 500 V | 1 | QC2.7PFK | 95121 | |
| C8 | Same as C1 | | | | |
| C9 | Capacitor, Composition, Tubular: 1.0 pF, 10%, 500 V | 1 | QC1.0PFK | 95121 | |
| C10 | Same as C1 | | | | |
| C11 | Capacitor, Ceramic, Disc: 0.1 µF, 20%, 50 V | 1 | 34475-1 | 14632 | |
| C12 | Same as C1 | | | | |
| C13 | Same as C1 | | | | |
| C14 | Capacitor, Ceramic, Disc: 470 pF, 20%, 1000 V | 7 | BHD470-20PCT | 91418 | |
| C15 | Capacitor, Mica, Dipped: 100 pF, 2%, 500 V | 1 | CM04FD101G03 | 81349 | 72136 |
| C16 | Same as C1 | | | | |
| C17 | Same as C1 | | | | |
| C18 | Capacitor, Electrolytic, Tantalum: 2.2 µF, 10%, 20 V | 1 | CS13BE225K | 81349 | 56289 |
| C19 Thru C21 | Same as C14 | | | | |
| C22 | Not Used | | | | |
| C23 | Same as C14 | | | | |
| C24 | Not Used | | | | |
| C25 | Same as C14 | | | | |
| C26 | Capacitor, Ceramic, Disc: 5000 pF, 20%, 100 V | 2 | C023B101E502M | 56289 | |
| C27 | Same as C26 | | | | |
| C28 | Same as C6 | | | | |
| C29 | Same as C14 | | | | |
| CR1 | Diode, Pin Switching | 3 | MPN3401 | 04713 | |
| CR2 | Same as CR1 | | | | |
| CR3 | Same as CR1 | | | | |
| CR4 | Diode, Tuning VHF and UHF | 1 | U11-3102 | 52673 | |
| FB1 | Ferrite Bead | 1 | 56-590-65-4A | 02114 | |
| L1 | Coil, Air | 1 | 24592-1 | 14632 | |
| L2 | Coil, Air | 2 | 24593-1 | 14632 | |
| L3 | Same as L2 | | | | |
| L4 | Coil, Air | 1 | 24593-2 | 14632 | |
| L5 | Coil, Fixed: 0.56 µH | 1 | 202-11 | 99848 | |
| * | Nominal value, final value factory selected. | | | | |

REF DESIG PREFIX **A5A1A1A1**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| MP1 | Transipad | 4 | 7717-46DAP | 13103 | |
| MP2 | Transipad | 1 | 7717-22DAP | 13103 | |
| Q1 | Transistor | 1 | U310 | 17856 | |
| Q2 | Transistor | 2 | 2N2857/JAN | 81350 | |
| Q3 | Same as Q2 | | | | |
| Q4 | Transistor | 1 | 2N4918 | 80131 | 04713 |
| Q5 | Transistor | 1 | 2N3251 | 80131 | 04713 |
| Q6 | Not used | | | | |
| Q7 | Transistor | 1 | 2N5109 | 80131 | 02735 |
| R1 | Resistor, Fixed, Composition: 33 kΩ, 5%, 1/8 W | 2 | CF1/8-33K/J | 09021 | |
| R2 | Resistor, Fixed, Composition: 12 kΩ, 5%, 1/8 W | 1 | CF1/8-12K/J | 09021 | |
| R3 | Resistor, Fixed, Composition: 22 kΩ, 5%, 1/8 W | 1 | CF1/8-22K/J | 09021 | |
| R4 | Resistor, Fixed, Composition: 470 Ω, 5%, 1/8 W | 4 | CF1/8-470 OHMS/J | 09021 | |
| R5 | Resistor, Fixed, Composition: 100 kΩ, 5%, 1/8 W | 1 | CF1/8-100K/J | 09021 | |
| R6 | Resistor, Fixed, Composition: 8.2 kΩ, 5%, 1/8 W | 2 | CF1/8-8.2K/J | 09021 | |
| R7 | Resistor, Fixed, Composition: 5.6 kΩ, 5%, 1/8 W | 2 | CF1/8-5.6K/J | 09021 | |
| R8 | Resistor, Fixed, Composition: 300 Ω, 5%, 1/8 W | 2 | CF1/8-300 OHMS/J | 09021 | |
| R9 | Resistor, Fixed, Composition: 220Ω, 5%, 1/8 W | 1 | CF1/8-220 OHMS/J | 09021 | |
| R10 | Resistor, Fixed, Composition: 68Ω, 5%, 1/8 W | 2 | CF1/8-68 OHMS/J | 09021 | |
| R11 | Resistor, Fixed, Composition: 180Ω, 5%, 1/8 W | 1 | CF1/8-180 OHMS/J | 09021 | |
| R12 | Same as R10 | | | | |
| R13 | Same as R6 | | | | |
| R14 | Same as R7 | | | | |
| R15 | Resistor, Fixed, Composition: 47Ω, 5%, 1/8 W | 4 | CF1/8-47 OHMS/J | 09021 | |
| R16 | Same as R8 | | | | |
| R17 | Resistor, Fixed, Composition: 150Ω, 5%, 1/8 W | 1 | CF1/8-150 OHMS/J | 09021 | |
| R18 | Resistor, Fixed, Composition: 1.0 kΩ, 5%, 1/8 W | 2 | CF1/8-1.0K/J | 09021 | |
| R19 | Resistor, Fixed, Composition: 390Ω, 5%, 1/8 W | 1 | CF1/8-390 OHMS/J | 09021 | |
| R20 | Resistor, Fixed, Composition: 10Ω, 5%, 1/4 W | 1 | CF1/4-10 OHMS/J | 09021 | |
| R21 | Same as R4 | | | | |
| R22 | Same as R4 | | | | |
| R23 | Resistor, Fixed, Composition: 10Ω, 5%, 1/8 W | 1 | CF1/8-10 OHMS/J | 09021 | |
| R24 | Resistor, Fixed, Composition: 33Ω, 5%, 1/8 W | 1 | CF1/8-33 OHMS/J | 09021 | |
| R25 | Resistor, Fixed, Composition: 270Ω, 5%, 1/8 W | 1 | CF1/8-270 OHMS/J | 09021 | |
| R26 | Same as R15 | | | | |
| R27 | Same as R1 | | | | |
| R28 | Same as R15 | | | | |
| R29 | Resistor, Fixed, Composition: 22Ω, 5%, 1/8 W | 1 | CF1/8-22 OHMS/J | 09021 | |
| R30 | Same as R15 | | | | |
| R31 Thru R33 | Not Used | | | | |

FIGURE 5-29

REF DESIG PREFIX A5A1A1A1

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| R34 | Resistor, Fixed, Composition: 15Ω, 5%, 1/8 W | 1 | CF1/8-15 OHMS/J | 09021 | |
| R35 | Resistor, Fixed, Composition: 560Ω, 5%, 1/8 W | 1 | CF1/8-560 OHMS/J | 09021 | |
| R36 | Same as R18 | | | | |
| R37 | Same as R4 | | | | |
| R38 | Not Used | | | | |
| R39 | Not Used | | | | |
| R40 | Resistor, Fixed, Composition: 51Ω, 5%, 1/4 W | 1 | CF1/4-51 OHMS/J | 09021 | |
| T1 | Part of P.C. Board | | | | |
| T2 | Transformer, Toroidal | 2 | 21278-23 | 14632 | |
| T3 | Same as T2 | | | | |
| T4 | Transformer, Toroidal | 2 | 21278-27 | 14632 | |
| T5 | Not Used | | | | |
| T6 | Same as T4 | | | | |
| U1 | Integrated Circuit | 1 | MC1697L | 04713 | |

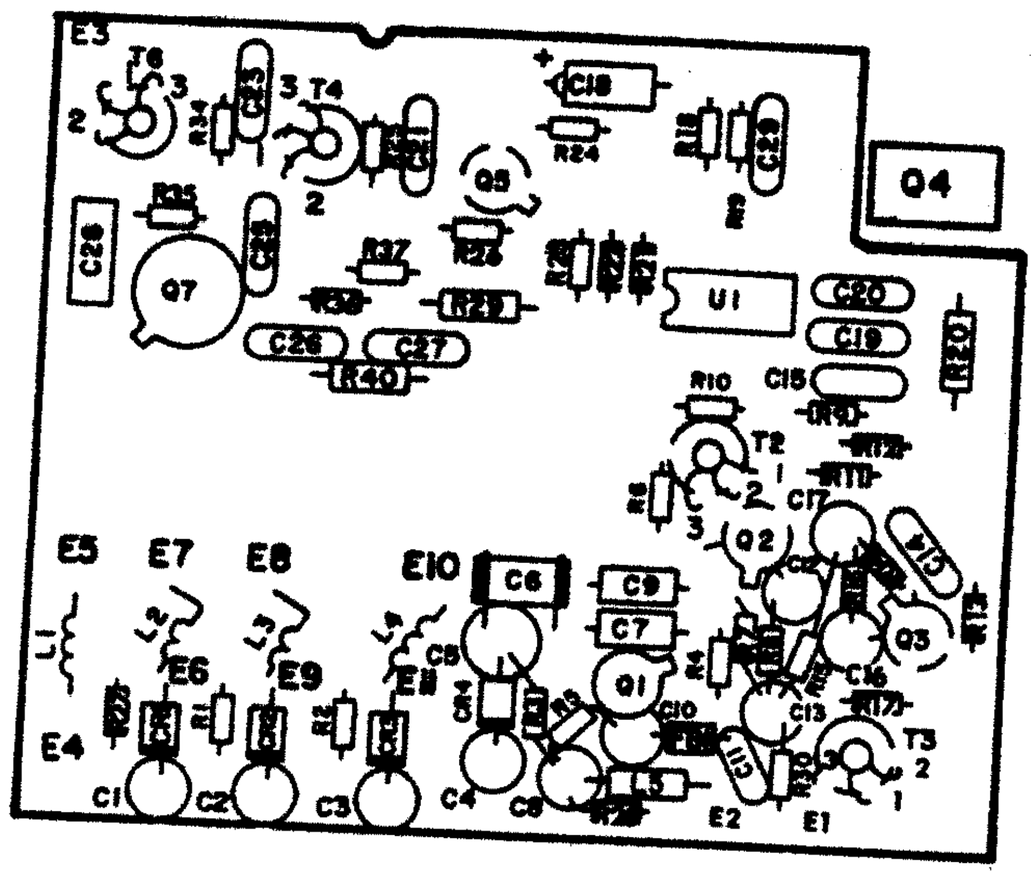



Figure 5-29. Part 34750 1st LO Voltage Controlled Oscillator (A5A1A1A1), Location of Components

5.6.5.1.2 **Type 791600-1 1st and 3rd LO Synthesizer** REF DESIG PREFIX **A5A1A2**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| C1 | Capacitor, Mica, Dipped: 47 pF, 2%, 500 V | 2 | CM04ED470G03 | 81349 | 72136 |
| C2 | Same as C1 | | | | |
| C3 | Capacitor, Ceramic, Disc: 470 pF, 2%, 1000 V | 2 | BHD470-20PCT | 91418 | |
| C4 Thru C6 | Not Used | | | | |
| C7 | Capacitor, Ceramic, Disc: 0.01 µF, 20%, 50 V | 13 | 34453-1 | 14632 | |
| C8 Thru C15 | Same as C7 | | | | |
| C16 | Capacitor, Electrolytic, Tantalum: 22 µF, 20%, 15 V | 5 | 196D226X0015KE3 | 56289 | |
| C17 | Same as C3 | | | | |
| C18 | Capacitor, Fixed, Plastic: 4700 pF, 10%, 100 V | 1 | WMF1D47 | 14655 | |
| C19 | Not Used | | | | |
| C20 | Capacitor, Ceramic, Disc: 0.1 µF, 20%, 100 V | 2 | 8131M100-651-104M | 72982 | |
| C21 | Same as C7 | | | | |
| C22 | Capacitor, Ceramic, Disc: 1000 pF, GMV, 500 V | 1 | B-GP1000PFP | 91418 | |
| C23 | Capacitor, Mica, Dipped: 820 pF, 5%, 300 V | 1 | DM15-821J | 72136 | |
| C24 | Not Used | | | | |
| C25 | Same as C16 | | | | |
| C26 | Capacitor, Electrolytic, Tantalum: 22 µF, 20%, 35 V | 2 | 196D226X0035PE4 | 56289 | |
| C27 | Not Used | | | | |
| C28 | Capacitor, Ceramic, Tubular: 47 pF, 5%, 500 V | 1 | 308-000C0G0-470J | 72982 | |
| C29 | Capacitor, Electrolytic, Tantalum: 100 µF, 20%, 10 V | 1 | 196D107X0010PE4 | 56289 | |
| C30 | Capacitor, Electrolytic, Tantalum: 2.2 µF, 20%, 35 V | 1 | 196D225X0035JE3 | 56289 | |
| C31 | Same as C16 | | | | |
| C32 | Same as C20 | | | | |
| C33 | Capacitor, Variable, Ceramic: 2-8 pF, 350 V | 1 | 538-006A2-8 | 72982 | |
| C34 | Capacitor, Mica, Dipped: 220 pF, 2%, 500 V | 2 | CM05FD221G03 | 81349 | 72136 |
| C35 | Same as C34 | | | | |
| C36 | Same as C7 | | | | |
| C37 | Same as C7 | | | | |
| C38 | Same as C16 | | | | |
| C39 | Same as C26 | | | | |
| C40 | Not used | | | | |
| C41 | Same as C7 | | | | |
| C42 | Same as C16 | | | | |
| C43* | Capacitor, Mica, Dipped: 15 pF, 5%, 500 V | 1 | CM04CD150J03 | 81349 | 72136 |
| * | Nominal value, final value factory selected. | | | | |

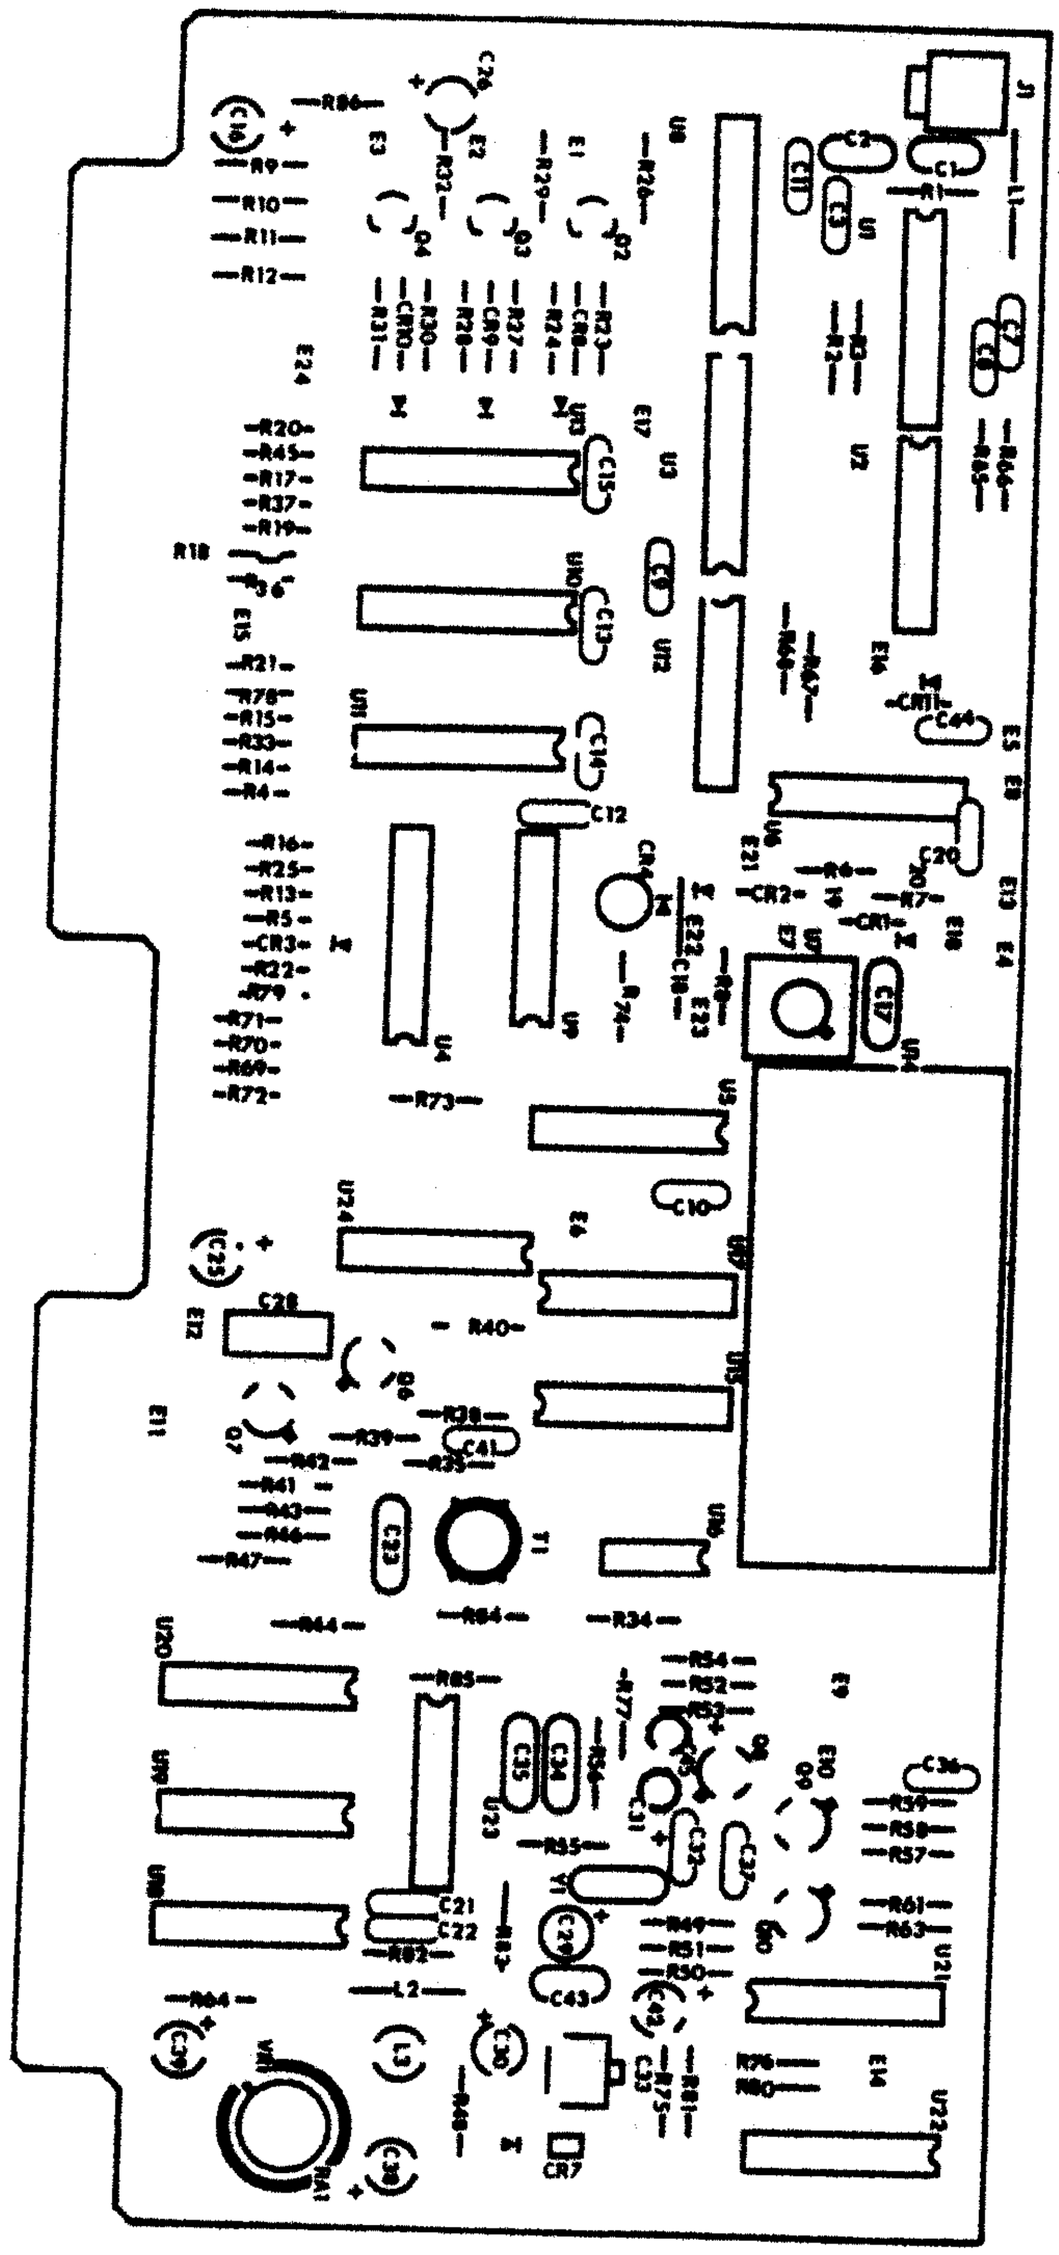


Figure 5-30. Type 791600-1 1st and 3rd LO Synthesizer (A5A1A2), Location of Components

REF DESIG PREFIX **A5A1A2**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| C44 | Capacitor, Mica, Dipped: 330 pF, 2%, 500 V | 1 | CM05FD331G03 | 81349 | 72136 |
| C45 | Capacitor, Electrolytic, Tantalum: 22 µF, 20%, 10 V | 1 | 196D226X0010JE3 | 56289 | |
| CR1 | Diode | 4 | 5082-2800 | 28480 | |
| CR2 | Same as CR1 | | | | |
| CR3 | Same as CR1 | | | | |
| CR4 | Diode: LED | 1 | HLMP-1301 | 28480 | |
| CR5 | Not Used | | | | |
| CR6 | Not Used | | | | |
| CR7 | Diode, Tuning VHF and UHF | 1 | U11-3102 | 52673 | |
| CR8 | Diode, Zener: 15 V | 3 | 1N965B | 80131 | 04713 |
| CR9 | Same as CR8 | | | | |
| CR10 | Same as CR8 | | | | |
| CR11 | Same as CR1 | | | | |
| J1 | Connector, Receptacle: SMC Series | 1 | 50-053-0000 | 98291 | |
| L1 | Coil, Fixed: 0.24 µH | 1 | 200-11 | 99848 | |
| L2 | Coil, Fixed: 8.2 µH | 1 | 1537-34 | 99800 | |
| L3 | Coil, Fixed: 100 µH | 1 | 553-3635-25 | 71279 | |
| MP1 | Transipad | 5 | 7717-89DAP | 13103 | |
| MP2 | Insulator | 1 | RCT05145-8 | 19080 | |
| MP3 | Transipad | 1 | 7717-44DAP | 13103 | |
| Q1 | Not Used | | | | |
| Q2 | Transistor | 3 | 2N4401 | 80131 | 04713 |
| Q3 | Same as Q2 | | | | |
| Q4 | Same as Q2 | | | | |
| Q5 | Not Used | | | | |
| Q6 | Transistor | 3 | 2N706 | 80131 | 04713 |
| Q7 | Same as Q6 | | | | |
| Q8 | Transistor | 2 | 2N2222A | 80131 | 04713 |
| Q9 | Same as Q8 | | | | |
| Q10 | Same as Q6 | | | | |
| R1 | Resistor, Fixed, Composition: 100Ω, 5%, 1/4 W | 6 | CF1/4-100 OHMS/J | 09021 | |
| R2 | Resistor, Fixed, Composition: 470Ω, 5%, 1/4 W | 4 | CF1/4-470 OHMS/J | 09021 | |
| R3 | Same as R2 | | | | |
| R4 | Resistor, Fixed, Composition: 82 kΩ, 5%, 1/8 W | 4 | CF1/8-82K/J | 09021 | |
| R5 | Same as R4 | | | | |
| R6* | Resistor, Fixed, Composition: 6.8 kΩ, 5%, 1/4 W | 2 | CF1/4-6.8K/J | 09021 | |
| R7* | Same as R6 | | | | |
| R8* | Resistor, Fixed, Composition: 100 kΩ, 5%, 1/4 W | 1 | CF1/4-100K/J | 09021 | |
| * | Nominal value, final value factory selected. | | | | |

REF DESIG PREFIX **A5A1A2**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| R9 Thru R12 | Same as R1 | | | | |
| R13 | Resistor, Fixed, Composition: 100Ω, 5%, 1/8 W | 10 | CF1/8-100 OHMS/J | 09021 | |
| R14 Thru R22 | Same as R13 | | | | |
| R23 | Resistor, Fixed, Composition: 2.2 kΩ, 5%, 1/4 W | 6 | CF1/4-2.2K/J | 09021 | |
| R24 | Resistor, Fixed, Composition: 10 kΩ, 5%, 1/4 W | 7 | CF1/4-10K/J | 09021 | |
| R25 | Same as R4 | | | | |
| R26 | Resistor, Fixed, Composition: 20 kΩ, 5%, 1/4 W | 3 | CF1/4-20K/J | 09021 | |
| R27 | Same as R23 | | | | |
| R28 | Same as R24 | | | | |
| R29 | Same as R26 | | | | |
| R30 | Same as R23 | | | | |
| R31 | Same as R24 | | | | |
| R32 | Same as R26 | | | | |
| R33 | Same as R4 | | | | |
| R34 | Resistor, Fixed, Composition: 5.6 kΩ, 5%, 1/4 W | 2 | CF1/4-5.6K/J | 09021 | |
| R35 | Same as R34 | | | | |
| R36 | Resistor, Fixed, Composition: 27 kΩ, 5%, 1/8 W | 3 | CF1/8-27K/J | 09021 | |
| R37 | Same as R36 | | | | |
| R38 | Resistor, Fixed, Composition: 1.2 kΩ, 5%, 1/4 | 1 | CF1/4-1.2K/J | 09021 | |
| R39 | Same as R23 | | | | |
| R40 | Resistor, Fixed, Composition: 270Ω, 5%, 1/4 W | 5 | CF1/4-270 OHMS/J | 09021 | |
| R41 | Same as R23 | | | | |
| R42 | Same as R23 | | | | |
| R43 | Resistor, Fixed, Composition: 1.0 kΩ, 5%, 1/4 W | 14 | CF1/4-1.0K/J | 09021 | |
| R44 | Same as R2 | | | | |
| R45 | Same as R36 | | | | |
| R46 | Same as R40 | | | | |
| R47 | Same as R40 | | | | |
| R48 | Same as R43 | | | | |
| R49 | Resistor, Fixed, Composition: 330Ω, 5%, 1/4 W | 1 | CF1/4-330 OHMS/J | 09021 | |
| R50 | Same as R24 | | | | |
| R51 | Same as R43 | | | | |
| R52 | Same as R43 | | | | |
| R53 | Same as R24 | | | | |
| R54 | Resistor, Fixed, Composition: 22Ω, 5%, 1/4 W | 3 | CF1/4-22 OHMS/J | 09021 | |
| R55 | Resistor, Fixed, Composition: 27Ω, 5%, 1/4 W | 1 | CF1/4-27 OHMS/J | 09021 | |
| R56 | Same as R40 | | | | |

REF DESIG PREFIX A5A1A2

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| R57 | Same as R54 | | | | |
| R58 | Resistor, Fixed, Composition: 150Ω, 5%, 1/4 W | 2 | CF1/4-150 OHMS/J | 09021 | |
| R59 | Same as R58 | | | | |
| R60 | Not Used | | | | |
| R61 | Same as R24 | | | | |
| R62 | Not Used | | | | |
| R63 | Resistor, Fixed, Composition: 220Ω, 5%, 1/4 W | 1 | CF1/4-220 OHMS/J | 09021 | |
| R64 | Resistor, Fixed, Composition: 3.3Ω, 5%, 1/4 W | 1 | CF1/4-3.3 OHMS/J | 09021 | |
| R65 Thru R68 | Same as R43 | | | | |
| R69 | Resistor, Fixed, Composition: 1.0 kΩ, 5%, 1/8 W | 4 | CF1/8-1.0K/J | 09021 | |
| R70 Thru R72 | Same as R69 | | | | |
| R73 | Same as R24 | | | | |
| R74 | Same as R2 | | | | |
| R75 | Same as R43 | | | | |
| R76 | Same as R43 | | | | |
| R77 | Same as R54 | | | | |
| R78 | Resistor, Fixed, Composition: 47 kΩ, 5%, 1/8 W | 2 | CF1/8-47K/J | 09021 | |
| R79 | Same as R78 | | | | |
| R80 | Same as R43 | | | | |
| R81 | Same as R43 | | | | |
| R82 | Resistor, Fixed, Composition: 47Ω, 5%, 1/4 W | 1 | CF1/4-47 OHMS/J | 09021 | |
| R83 | Same as R1 | | | | |
| R84 | Same as R43 | | | | |
| R85 | Same as R43 | | | | |
| R86 | Same as R40 | | | | |
| RA1 | Heatsink | 1 | 2225B | 13103 | |
| T1 | Transformer Assembly | 1 | 22295-69 | 14632 | |
| U1 | Integrated Circuit | 1 | MC12013L | 04713 | |
| U2 | Integrated Circuit | 1 | SN74S196J | 01295 | |
| U3 | Integrated Circuit | 1 | MC12014L | 04713 | |
| U4 | Integrated Circuit | 1 | 841013 | 14632 | |
| U5 | Integrated Circuit | 2 | MC4044P | 04713 | |
| U6 | Integrated Circuit | 1 | 867400 | 14632 | |
| U7 | Integrated Circuit | 1 | CA6741T | 02735 | |
| U8 | Integrated Circuit | 3 | SN74LS190N | 01295 | |
| U9 | Integrated Circuit | 6 | SN74LS196N | 01295 | |
| U10 | Same as U8 | | | | |
| U11 | Same as U8 | | | | |

REF DESIG PREFIX A5A1A2

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| U12 | Integrated Circuit | 1 | SN7S74N | 01295 | |
| U13 | Integrated Circuit | 1 | SN74184N | 01295 | |
| U14 | Integrated Circuit | 1 | 841043 | 14632 | |
| U15 | Same as U9 | | | | |
| U16 | Integrated Circuit | 1 | SN75140N | 01295 | |
| U17 Thru U20 | Same as U9 | | | | |
| U21 | Integrated Circuit | 1 | SN74LS74N | 01295 | |
| U22 | Same as U5 | | | | |
| U23 | Integrated Circuit | 1 | SN74125N | 01295 | |
| U24 | Integrated Circuit | 1 | SN74LS02N | 01295 | |
| VR1 | Voltage Regulator | 1 | 78M05HC | 07263 | |
| Y1 | Crystal, Quartz: 11.155 MHz | 1 | CR64U/11.155MHz | 80058 | |

5.6.5.2 **Type 791601 2nd LO Synthesizer** REF DESIG PREFIX **A5A2**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| C1 | Capacitor, Ceramic, Disc: 0.47 µF, 20%, 50 V | 3 | 34452-1 | 14632 | |
| C2 | Same as C1 | | | | |
| C3 | Capacitor, Electrolytic, Tantalum: 47 µF, 20%, 20 V | 3 | 196D476X0020PE4 | 56289 | |
| C4 | Capacitor, Electrolytic, Tantalum: 22 µF, 20%, 10 V | 7 | 196D226X0010JE3 | 56289 | |
| C5 | Capacitor, Electrolytic, Tantalum: 1 µF, 20%, 35 V | 2 | 196D105X0035HE3 | 56289 | |
| C6 | Capacitor, Ceramic, Disc: 2200 pF, 10%, 200 V | 1 | CK06BX222K | 81349 | 72136 |
| C7 | Same as C4 | | | | |
| C8 | Same as C3 | | | | |
| C9 | Capacitor, Mica, Dipped: 12 pF, 5%, 500 V | 1 | CM05CD120J03 | 81349 | 72136 |
| C10 | Capacitor, Ceramic, Disc: 0.1 µF, 20%, 50 V | 2 | 34475-1 | 14632 | |
| C11 | Capacitor, Ceramic, Disc: 0.01 µF, 20%, 50 V | 17 | 34453-1 | 14632 | |
| C12 | Same as C11 | | | | |
| C13 | Same as C10 | | | | |
| C14 | Capacitor, Electrolytic, Tantalum: 22 µF, 20%, 35 V | 2 | 196D226X0035PE4 | 56289 | |
| C15 | Same as C4 | | | | |
| C16 | Capacitor, Ceramic, Disc: 470 pF, 20%, 1000 V | 3 | BHD470-20PCT | 91418 | |
| C17 | Capacitor, Electrolytic, Tantalum: 150 µF, 20%, 6 V | 1 | 196D157X0006PE4 | 56289 | |
| C18 | Same as C5 | | | | |
| C19 Thru C21 | Same as C11 | | | | |
| C22 | Capacitor, Ceramic, Tubular: 10 pF, ±0.5 pF, 500 V | 1 | 301-000C0H0-100D | 72982 | |
| C23 | Capacitor, Mica, Dipped: 220 pF, 2%, 500 V | 1 | CM05FD221G03 | 81349 | 72136 |
| C24 | Same as C11 | | | | |
| C25 | Same as C3 | | | | |
| C26 Thru C28 | Same as C4 | | | | |
| C29 | Capacitor, Plastic, Tubular: 0.022 µF, 5%, 100 V | 1 | 663UW223-5-1W | 84411 | |
| C30 | Capacitor, Fixed, Plastic: 4700 pF, 10%, 100 V | 1 | WMF1D47 | 14655 | |
| C31 | Not Used | | | | |
| C32 | Same as C4 | | | | |
| C33 | Same as C16 | | | | |
| C34 | Same as C16 | | | | |
| C35 | Same as C11 | | | | |
| C36 | Capacitor, Ceramic, Disc: 1000 pF, GMV, 500 V | 7 | B-GP1000PFP | 91418 | |
| C37 | Same as C14 | | | | |
| C38 | Same as C36 | | | | |
| C39 | Same as C36 | | | | |
| C40 | Same as C11 | | | | |
| C41 | Same as C36 | | | | |

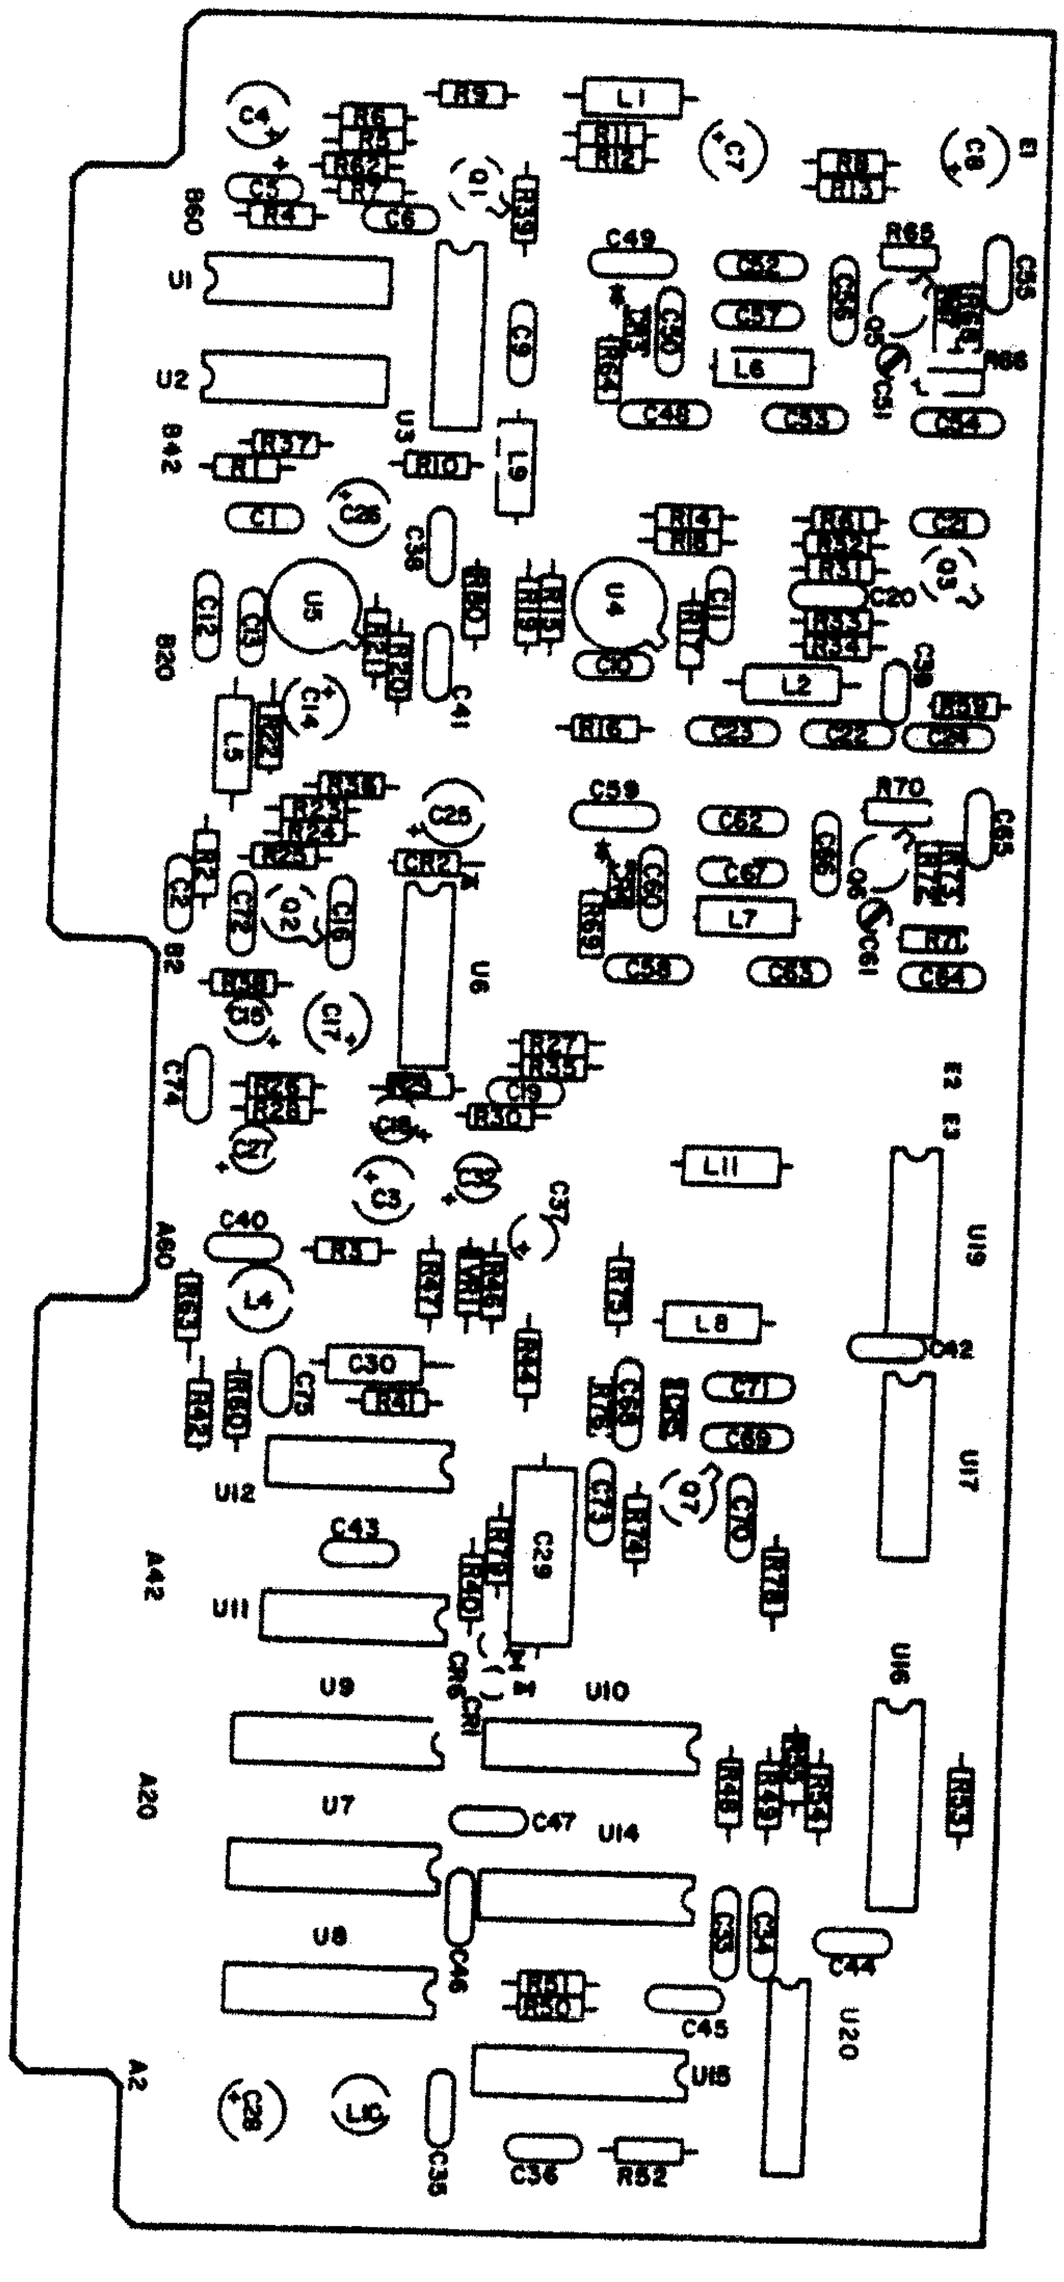



Figure 5-31. Type 791601 2nd LO Synthesizer (A5A2), Location of Components

REF DESIG PREFIX **A5A2**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| C42 Thru C49 | Same as C11 | | | | |
| C50 | Capacitor, Ceramic, Tubular: 27 pF, 5%, 500 V | 1 | 308-000C0G0-270J | 72982 | |
| C51 | Capacitor, Variable, Air: .4-2.5pF, 500 V | 2 | 7283 | 91293 | |
| C52 | Capacitor, Ceramic, Tubular: 6.8 pF, ±0.25 pF, 500 V | 2 | 301-000C0H0-689C | 72982 | |
| C53 | Capacitor, Ceramic, Tubular: 47 pF, 5%, 500 V | 5 | 308-000C0G0-470J | 72982 | |
| C54 | Same as C53 | | | | |
| C55 | Same as C36 | | | | |
| C56 | Capacitor, Ceramic, Tubular: 8.2 pF, ±0.5 pF, 500 V | 1 | 301-000C0H0-829D | 72982 | |
| C57* | Capacitor, Ceramic, Tubular: 5.6 pF, ±0.5 pF, 500 V | 1 | 301-000T2J0-569D | 72982 | |
| C58 | Same as C11 | | | | |
| C59 | Capacitor, Ceramic, Tubular: 33 pF, 5%, 500 V | 1 | 308-000C0G0-330J | 72982 | |
| C60 | Same as C53 | | | | |
| C61 | Same as C51 | | | | |
| C62 | Same as C52 | | | | |
| C63 | Same as C53 | | | | |
| C64 | Same as C53 | | | | |
| C65 | Same as C36 | | | | |
| C66* | Capacitor, Ceramic, Tubular: 2.7 pF, ±0.25 pF, 500 V | 1 | 301-000C0J0-279C | 72982 | |
| C67 | Capacitor, Ceramic, Tubular: 5.6 pF, ±0.5 pF, 500 V | 1 | 301-000U2J0-569D | 72982 | |
| C68 | Capacitor, Mica, Dipped: 150 pF, 2%, 500 V | 1 | CM05FD151G03 | 81349 | 72136 |
| C69 | Capacitor, Ceramic, Tubular: 4.7 pF, ±0.1 pF, 500 V | 1 | 301-000C0H0-479B | 72982 | |
| C70 | Capacitor, Ceramic, Tubular: 2.2 pF, ±0.25 pF, 500 V | 1 | 301-000C0J0-229C | 72982 | |
| C71 | Capacitor, Ceramic, Tubular: 15 pF, 5%, 500 V | 1 | 301-000C0G0-150J | 72982 | |
| C72 | Capacitor, Mica, Dipped: 1000 pF, 5%, 100 V | 1 | DM15-102J | 72136 | |
| C73 | Same as C36 | | | | |
| C74 | Same as C1 | | | | |
| C75 | Capacitor, Mica, Dipped: 100 pF, 2%, 500 V | 1 | CM04FD101G03 | 81349 | 72136 |
| CR1 | Diode, LED | 2 | HLMP-1301 | 28480 | |
| CR2 | Diode | 1 | 1N4446 | 80131 | 93332 |
| CR3 | Diode, Varicap | 3 | BB109-YELLOW | 25088 | |
| CR4 | Same as CR3 | | | | |
| CR5 | Same as CR3 | | | | |
| CR6 | Same as CR1 | | | | |
| L1 | Coil, Fixed, Molded: 0.47 µH | 1 | 1537-06 | 99800 | |
| L2 | Coil, Fixed, Molded: 1.5 µH | 1 | 1537-16 | 99800 | |
| L3 | Not Used | | | | |
| * | Nominal value, final value factory selected. | | | | |

REF DESIG PREFIX **A5A2**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| L4 | Coil, Fixed: 22 mH | 1 | 553-3635-53 | 71279 | |
| L5 | Coil, Fixed, Molded: 680 µH | 1 | 2500-20 | 99800 | |
| L6 | Coil, Fixed: 0.82 µH | 2 | 1537-10 | 99800 | |
| L7 | Same as L6 | | | | |
| L8 | Inductor | 1 | 21210-183 | 14632 | |
| L9 | Coil, Fixed: 2.2 µH | 1 | 1025-28 | 99800 | |
| L10 | Coil, Fixed: 10 µH | 1 | 553-3635-13 | 71279 | |
| L11 | Coil, Fixed: 100 µH | 1 | 1537-76 | 99800 | |
| MP1 | Transipad | 3 | 7717-44DAP | 13103 | |
| MP2 | Transipad | 3 | 7717-46DAP | 13103 | |
| MP3 | Cover Assembly | 1 | 24469-1 | 14632 | |
| MP4 | Cover Assembly | 1 | 24469-2 | 14632 | |
| MP5 | Cover Assembly | 1 | 24469-3 | 14632 | |
| MP6 | 2nd LO Shield Assembly | 1 | 34844-1 | 14632 | |
| Q1 | Transistor | 3 | 2N2857/JAN | 81350 | |
| Q2 | Transistor | 1 | 2N2222A | 80131 | 04713 |
| Q3 | Transistor | 1 | 841001-1 | 14632 | |
| Q4 | Not used | | | | |
| Q5 | Same as Q1 | | | | |
| Q6 | Same as Q1 | | | | |
| Q7 | Transistor | 1 | U310 | 17856 | |
| R1 | Resistor, Fixed, Composition: 22Ω, 5%, 1/4 W | 4 | CF1/4-22 OHMS/J | 09021 | |
| R2 | Same as R1 | | | | |
| R3 | Same as R1 | | | | |
| R4 | Resistor, Fixed, Composition: 1.8 kΩ, 5%, 1/4 W | 1 | CF1/4-1.8K/J | 09021 | |
| R5 | Resistor, Fixed, Composition: 10Ω, 5%, 1/4 W | 7 | CF1/4-10 OHMS/J | 09021 | |
| R6 | Resistor, Fixed, Composition: 1.0 kΩ, 5%, 1/4 W | 13 | CF1/1-1.0K/J | 09021 | |
| R7 | Resistor, Fixed, Composition: 1.2 kΩ, 5%, 1/4 W | 1 | CF1/4-1.2K/J | 09021 | |
| R8 | Same as R5 | | | | |
| R9 | Same as R6 | | | | |
| R10 | Resistor, Fixed, Composition: 5.6Ω, 5%, 1/4 W | 1 | CF1/4-5.6 OHMS/J | 09021 | |
| R11 | Resistor, Fixed, Composition: 5.1 kΩ, 5%, 1/4 W | 1 | CF1/4-5.1K/J | 09021 | |
| R12 | Same as R6 | | | | |
| R13 | Same as R5 | | | | |
| R14 | Same as R6 | | | | |
| R15 | Resistor, Fixed, Composition: 47Ω, 5%, 1/4 W | 8 | CF1/4-47 OHMS/J | 09021 | |
| R16 Thru R18 | Same as R15 | | | | |
| R19 | Resistor, Fixed, Composition: 820Ω, 5%, 1/4 W | 1 | CF1/4-820 OHMS/J | 09021 | |
| R20 | Resistor, Fixed, Composition: 2.2 kΩ, 5%, 1/4 W | 2 | CF1/4-2.2K/J | 09021 | |

REF DESIG PREFIX **A5A2**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| R21 | Same as R20 | | | | |
| R22 | Resistor, Fixed, Composition: 100Ω, 5%, 1/4 W | 1 | CF1/4-100 OHMS/J | 09021 | |
| R23 | Resistor, Fixed, Composition: 18 kΩ, 5%, 1/4 W | 1 | CF1/4-18K/J | 09021 | |
| R24 | Same as R6 | | | | |
| R25 | Same as R6 | | | | |
| R26 | Same as R5 | | | | |
| R27 | Resistor, Fixed, Composition: 2.7 kΩ, 5%, 1/4 W | 2 | CF1/4-2.7K/J | 09021 | |
| R28 | Same as R5 | | | | |
| R29 | Same as R6 | | | | |
| R30 | Resistor, Fixed, Composition: 270Ω, 5%, 1/4 W | 1 | CF1/4-270 OHMS/J | 09021 | |
| R31 | Resistor, Fixed, Composition: 1.0 MΩ, 5%, 1/4 W | 1 | CF1/4-1.0M/J | 09021 | |
| R32 | Resistor, Fixed, Composition: 820 kΩ, 5%, 1/4 W | 1 | CF1/4-820K/J | 09021 | |
| R33 | Resistor, Fixed, Composition: 100 kΩ, 5%, 1/4 W | 1 | CF1/4-100K/J | 09021 | |
| R34 | Resistor, Fixed, Composition: 360Ω, 5%, 1/4 W | 1 | CF1/4-360 OHMS/J | 09021 | |
| R35 | Same as R27 | | | | |
| R36 | Same as R5 | | | | |
| R37 | Resistor, Fixed, Composition: 4.7Ω, 5%, 1/4 W | 1 | CF1/4-4.7 OHMS/J | 09021 | |
| R38 | Same as R5 | | | | |
| R39 | Resistor, Fixed, Composition: 56Ω, 5%, 1/4 W | 1 | CF1/4-56 OHMS/J | 09021 | |
| R40 | Resistor, Fixed, Composition: 470Ω, 5%, 1/4 W | 5 | CF1/4-470 OHMS/J | 09021 | |
| R41 | Same as R6 | | | | |
| R42 | Resistor, Fixed, Composition: 10 kΩ, 5%, 1/4 W | 4 | CF1/4-10K/J | 09021 | |
| R43 | Not Used | | | | |
| R44 | Resistor, Fixed, Composition: 47 kΩ, 5%, 1/4 W | 1 | CF1/4-47K/J | 09021 | |
| R45 | Not Used | | | | |
| R46 | Resistor, Fixed, Composition: 1.5 kΩ, 5%, 1/4 W | 1 | CF1/4-1.5K/J | 09021 | |
| R47 | Resistor, Fixed, Composition: 750Ω, 5%, 1/4 W | 1 | CF1/4-750 OHMS/J | 09021 | |
| R48 | Same as R15 | | | | |
| R49 | Same as R15 | | | | |
| R50 | Same as R40 | | | | |
| R51 | Same as R40 | | | | |
| R52 | Same as R6 | | | | |
| R53 | Same as R6 | | | | |
| R54 | Same as R40 | | | | |
| R55 | Same as R40 | | | | |
| R56 | Not Used | | | | |
| R57 | Not Used | | | | |
| R58 | Not Used | | | | |
| R59 | Same as R15 | | | | |
| R60 | Same as R6 | | | | |

REF DESIG PREFIX A5A2

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| R61 | Same as R6 | | | | |
| R62 | Same as R42 | | | | |
| R63 | Same as R42 | | | | |
| R64 | Resistor, Fixed, Composition: 10 kΩ, 5%, 1/8 W | 3 | CF1/8-10K/J | 09021 | |
| R65 | Resistor, Fixed, Film: 18.2 kΩ, 1%, 1/10 W | 4 | RN55C1822F | 81349 | 75042 |
| R66 | Same as R65 | | | | |
| R67 | Resistor, Fixed, Composition: 22Ω, 5%, 1/8 W | 2 | CF1/8-22 OHMS/J | 09021 | |
| R68 | Resistor, Fixed, Film: 3.92 kΩ, 1%, 1/10 W | 2 | RN55C3922F | 81349 | 75042 |
| R69 | Same as R64 | | | | |
| R70 | Same as R65 | | | | |
| R71 | Same as R65 | | | | |
| R72 | Same as R67 | | | | |
| R73 | Same as R68 | | | | |
| R74 | Resistor, Fixed, Composition: 220Ω, 5%, 1/4 W | 1 | CF1/4-220 OHMS/J | 09021 | |
| R75 | Same as R1 | | | | |
| R76 | Same as R64 | | | | |
| R77 | Not Used | | | | |
| R78 | Same as R15 | | | | |
| R79 | Same as R42 | | | | |
| R80 | Same as R6 | | | | |
| U1 | Integrated Circuit | 3 | MC4044P | 04713 | |
| U2 | Integrated Circuit | 1 | SN74177N | 01295 | |
| U3 | Integrated Circuit | 1 | SN74S74N | 01295 | |
| U4 | Integrated Circuit | 1 | 796HC | 07263 | |
| U5 | Integrated Circuit | 1 | N5733K | 18324 | |
| U6 | Same as U1 | | | | |
| U7 | Integrated Circuit | 1 | SN74LS190N | 01295 | |
| U8 | Integrated Circuit | 3 | SN74LS191N | 01295 | |
| U9 | Same as U8 | | | | |
| U10 | Same as U8 | | | | |
| U11 | Integrated Circuit | 2 | SN74LS00N | 01295 | |
| U12 | Same as U11 | | | | |
| U13 | Not Used | | | | |
| U14 | Integrated Circuit | 1 | SN74LS168N | 01295 | |
| U15 | Integrated Circuit | 2 | MC12013P | 04713 | |
| U16 | Same as U15 | | | | |
| U17 | Integrated Circuit | 2 | SN74LS196N | 01295 | |
| U18 | Not Used | | | | |
| U19 | Same as U17 | | | | |
| U20 | Same as U11 | | | | |
| VR1 | Diode, Zener: 8.2 V | 1 | 1N756A | 80131 | 04713 |

5.6.5.3 **Type 791576-1 BFO Synthesizer** REF DESIG PREFIX **A5A3**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| C1 | Capacitor, Electrolytic, Tantalum: 3.3 µF, 20%, 35 V | 1 | 196D335X0035JE3 | 56289 | |
| C2 | Capacitor, Ceramic, Disc: 0.1 µF, 20%, 50 V | 1 | 34475-1 | 14632 | |
| C3 | Capacitor, Electrolytic, Tantalum: 47 µF, 20%, 20 V | 3 | 196D476X0020PE4 | 56289 | |
| C4 | Capacitor, Ceramic, Disc: 0.47 µF, 20%, 50 V | 1 | 34452-1 | 14632 | |
| C5 | Capacitor, Ceramic, Disc: 0.01 µF, 20%, 50 V | 9 | 34453-1 | 14632 | |
| C6 | Capacitor, Ceramic, Tubular: 33 pF, 5%, 500 V | 1 | 308-000C0G0-330J | 72982 | |
| C7 | Capacitor, Ceramic, Tubular: 47 pF, 5%, 500 V | 1 | 308-000C0G0-470J | 72982 | |
| C8 | Capacitor, Variable, Ceramic: 2-8 pF, 350 V | 1 | 538-006A2-8 | 72982 | |
| C9 | Same as C5 | | | | |
| C10 | Capacitor, Mica, Dipped: 10 pF, ±0.5 pF, 500 V | 2 | CM04CD100D03 | 81349 | 72136 |
| C11 | Capacitor, Ceramic, Disc: 1000 pF, GMV, 500 V | 2 | B-GP1000PFP | 91418 | |
| C12 | Same as C11 | | | | |
| C13 | Same as C5 | | | | |
| C14 | Same as C10 | | | | |
| C15 | Not Used | | | | |
| C16 | Same as C3 | | | | |
| C17 Thru C21 | Same as C5 | | | | |
| C22 | Same as C3 | | | | |
| C23 | Same as C5 | | | | |
| CR1 | Diode, Varicap: | 1 | BB109-YELLOW | 25088 | |
| L1 | Coil, Fixed: 27 µH | 1 | 1537-48 | 99800 | |
| L2 | Coil, Fixed, Molded: 330 µH | 1 | 2500-04 | 99800 | |
| L3 | Coil, Fixed: 0.82 µH | 1 | 1537-10 | 99800 | |
| MP1 | Transipad | 4 | 7717-89DAP | 13103 | |
| MP2 | Shield, BFO | 1 | 34982-1 | 14632 | |
| Q1 | Transistor | 1 | 2N2857/JAN | 81350 | |
| Q2 | Transistor | 1 | 841001-2 | 14632 | |
| Q3 | Transistor | 1 | 2N706 | 80131 | 04713 |
| Q4 | Transistor | 1 | 3N128 | 80131 | 02735 |
| R1 | Resistor, Variable, Film: 500Ω, 10%, 1/2 W | 1 | 62PAR500 | 73138 | |
| R2 | Resistor, Fixed, Composition: 1.0 kΩ, 5%, 1/4 W | 15 | CF1/4-1.0K/J | 09021 | |
| R3 | Resistor, Fixed, Composition: 10 kΩ, 5%, 1/4 W | 3 | CF1/4-10K/J | 09021 | |
| R4 | Same as R2 | | | | |
| R5 | Resistor, Fixed, Composition: 10Ω, 5%, 1/4 W | 3 | CF1/4-10 OHMS/J | 09021 | |
| R6 | Same as R2 | | | | |
| R7 | Same as R3 | | | | |
| R8 | Resistor, Variable, Film: 4.22 kΩ, 1%, 1/10 W | 1 | RN55C4221F | 81349 | 75042 |
| R9 | Resistor, Variable, Film: 17.8 kΩ, 1%, 1/10 W | 2 | RN55C1782F | 81349 | 75042 |
| R10 | Same as R9 | | | | |

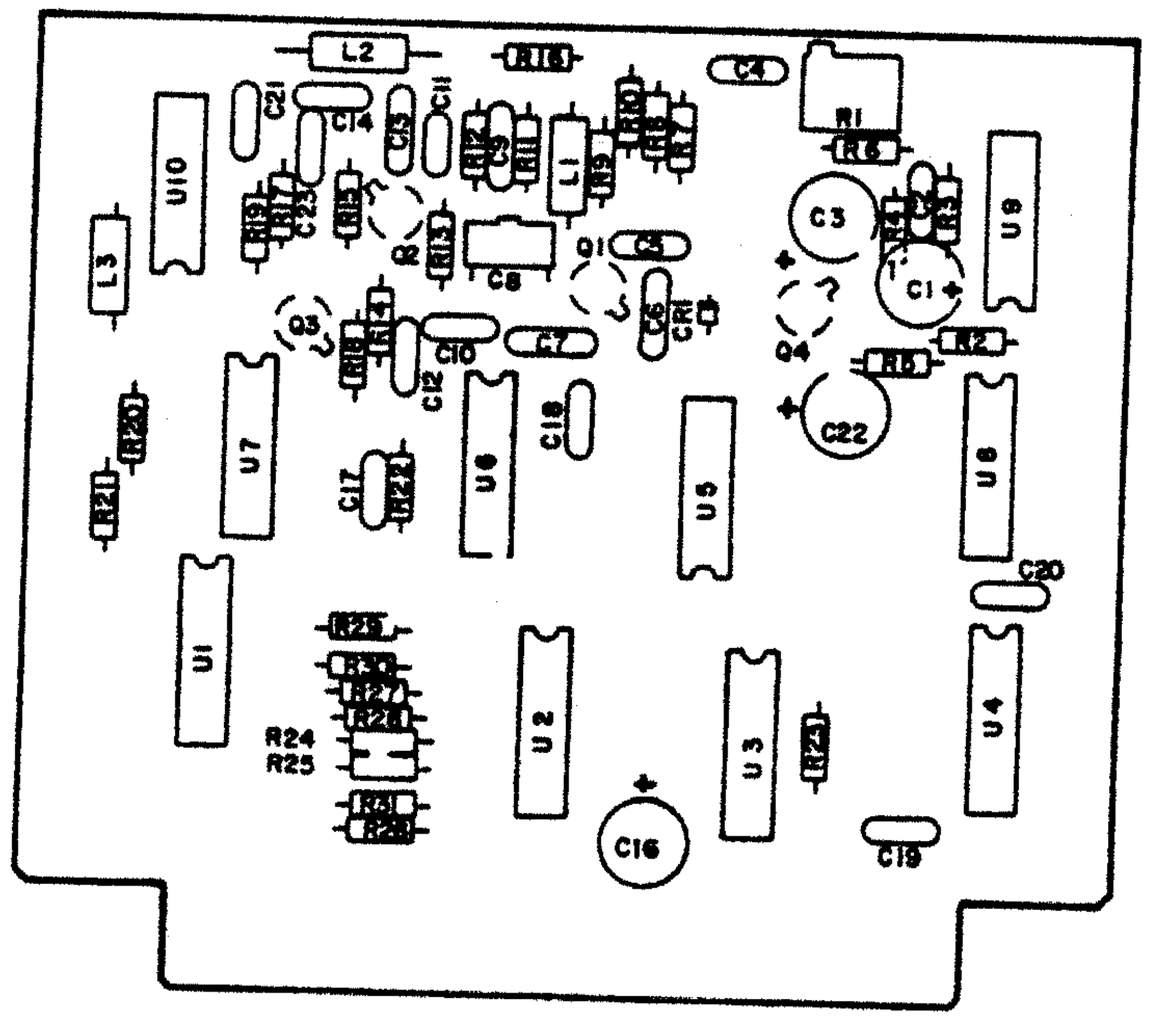
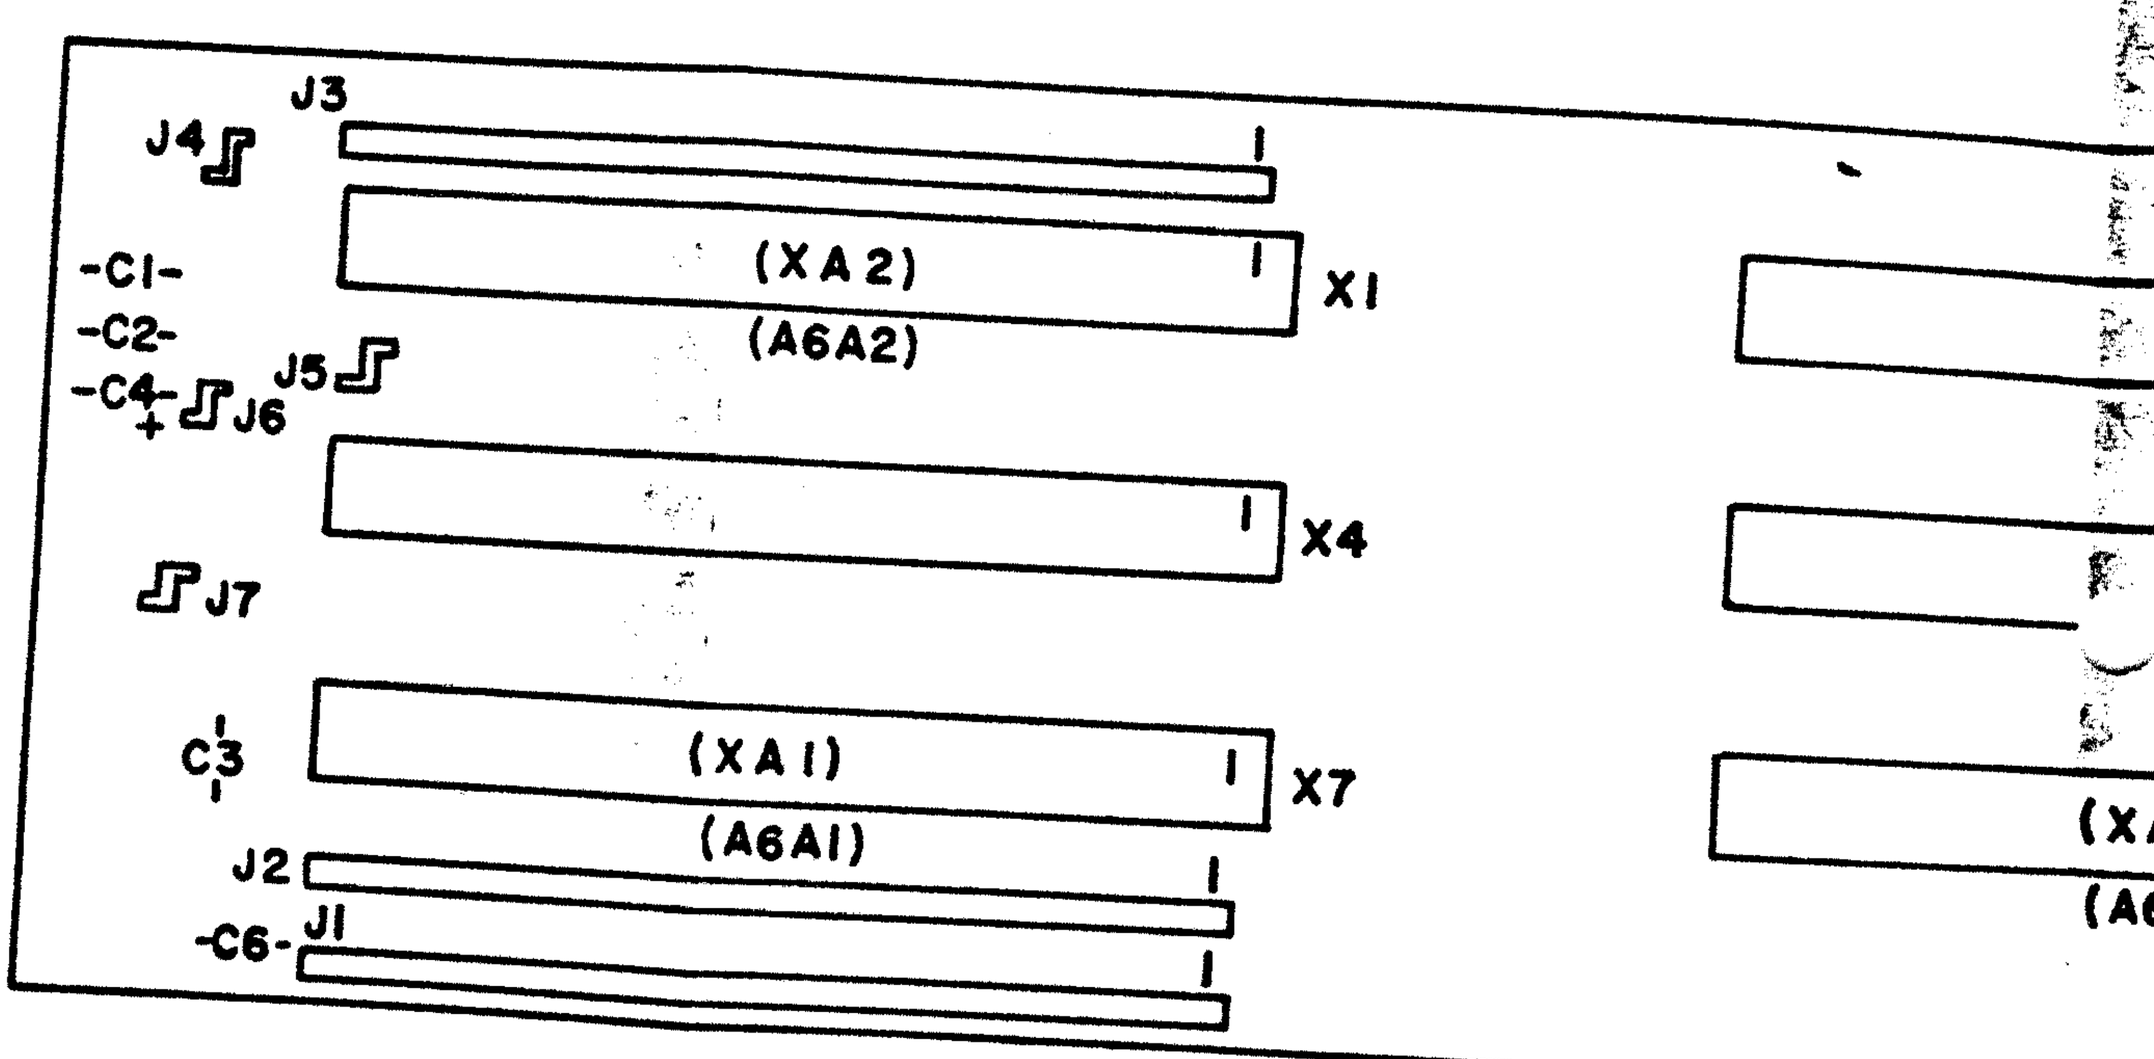



Figure 5-32. Type 791576-1 BFO Synthesizer (A5A3), Location of Components

REF DESIG PREFIX A5A3

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| R11 | Same as R5 | | | | |
| R12 | Resistor, Fixed, Composition: 560Ω, 5%, 1/4 W | 1 | CF1/4-560 OHMS/J | 09021 | |
| R13 | Resistor, Fixed, Composition: 100 kΩ, 5%, 1/4 W | 1 | CF1/4-100K/J | 09021 | |
| R14 | Resistor, Fixed, Composition: 1.0 MΩ, 5%, 1/4 W | 1 | CF1/4-1.0M/J | 09021 | |
| R15 | Resistor, Fixed, Composition: 820 kΩ, 5%, 1/4 W | 1 | CF1/4-820K/J | 09021 | |
| R16 | Same as R5 | | | | |
| R17 | Same as R3 | | | | |
| R18 | Same as R2 | | | | |
| R19 | Same as R2 | | | | |
| R20 | Resistor, Fixed, Composition: 220Ω, 5%, 1/4 W | 1 | CF1/4-220 OHMS/J | 09021 | |
| R21 | Resistor, Fixed, Composition: 62Ω, 5%, 1/4 W | 1 | CF1/4-62 OHMS/J | 09021 | |
| R22 Thru R31 | Same as R2 | | | | |
| U1 | Integrated Circuit | 4 | SN74LS190N | 01295 | |
| U2 Thru U4 | Same as U1 | | | | |
| U5 | Integrated Circuit | 2 | SN7425N | 01295 | |
| U6 | Integrated Circuit | 1 | SN74LS11N | 01295 | |
| U7 | Same as U5 | | | | |
| U8 | Integrated Circuit | 1 | 867474 | 14632 | |
| U9 | Integrated Circuit | 1 | MC4044P | 04713 | |
| U10 | Integrated Circuit | 1 | SN74LS90N | 01295 | |

FIGURE 5-33


J3
J4
1
(XA2)
1
X1
(A6A2)
-C1-
-C2-
-C4-
+
J5
J6
1
X4
J7
C3
1
(XA1)
1
X7
(A6A1)
J2
1
-C6-
J1
1

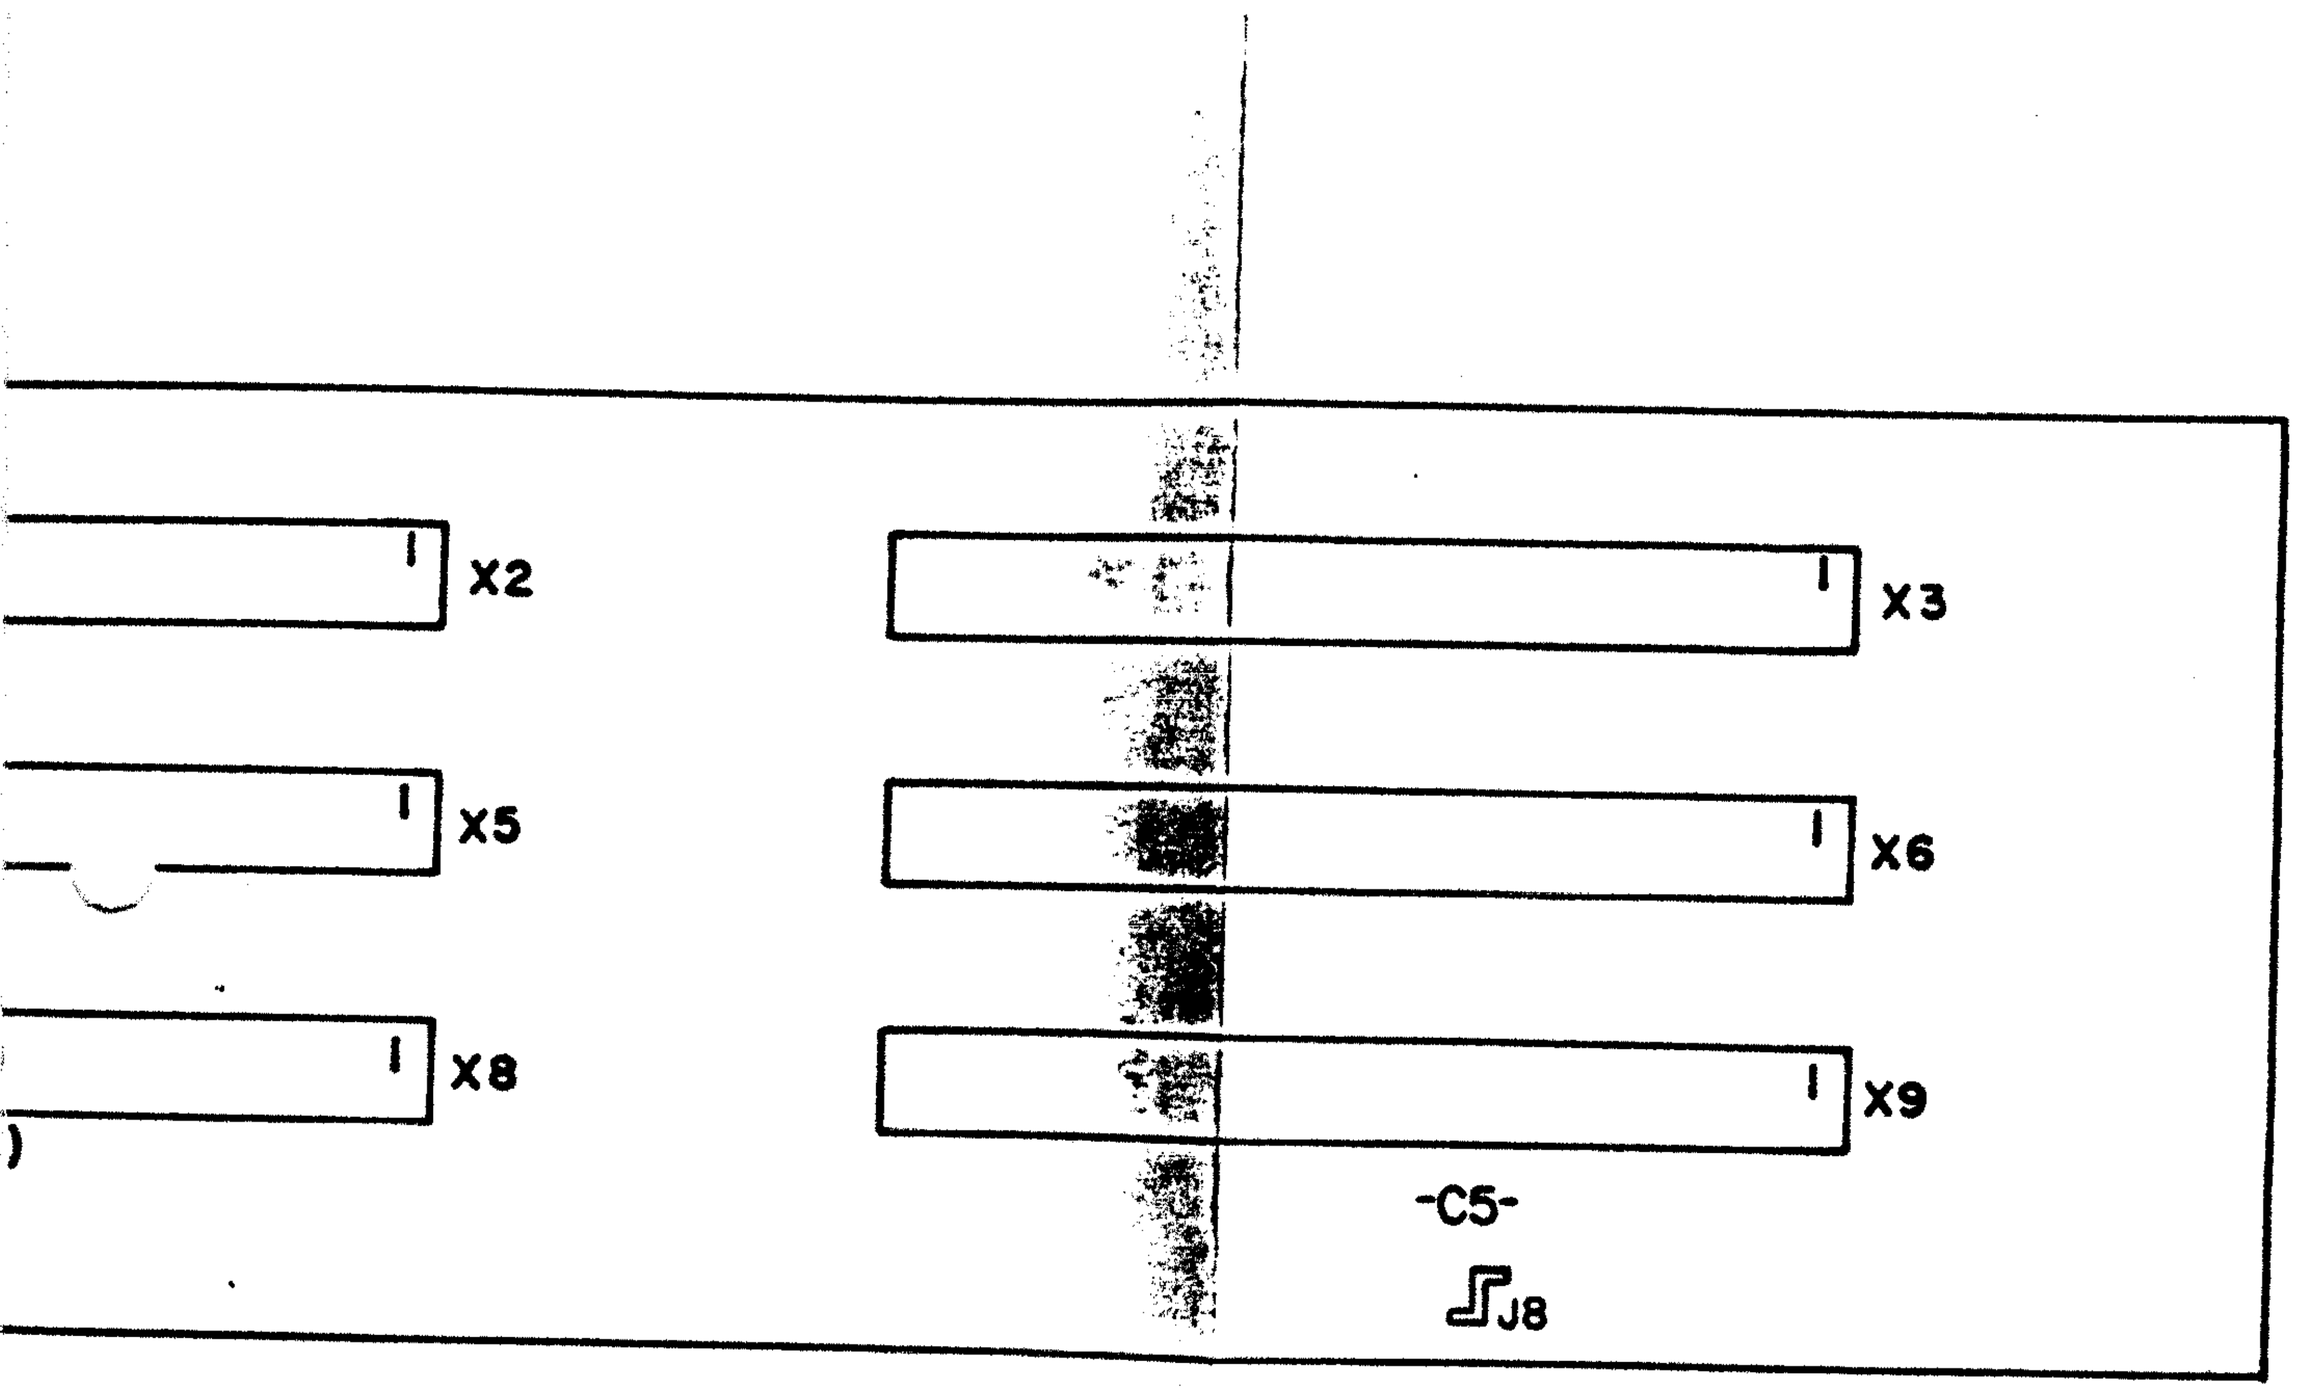



Figure 5-33. Type 791580 I/O Motherboard (A6), Location of Components

5.6.6 **TYPE 791580 I/O MOTHERBOARD**

REF DESIG PREFIX **A6**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| A1* | Manual Tuning Up/Down Counter (Not optional on WJ-8718A) | 1 | 791575-3 | 14632 | |
| A2 | Front Panel Interconnect | 1 | 791828 | 14632 | |
| C1 | Capacitor, Ceramic, Disc: 0.47 µF, 20%, 50 V | 5 | 34452-1 | 14632 | |
| C2 | Same as C1 | | | | |
| C3 | Same as C1 | | | | |
| C4 | Capacitor, Electrolytic, Tantalum: 100 µF, 20%, 20 V | 1 | 196D107X0020TE4 | 56289 | |
| C5 | Same as C1 | | | | |
| C6 | Same as C1 | | | | |
| J1 | Post, Feedthru | 3 | PE7-14045 | 00779 | |
| J2 | Same as J1 | | | | |
| J3 | Same as J1 | | | | |
| J4 | Faston Tab | 5 | 62073-1 | 00779 | |
| J5 Thru J8 | Same as J4 | | | | |
| X1 | Connector, P.C. Board | 9 | MK30C-14-195-4381 | 81312 | |
| X2 Thru X9 | Same as X1 | | | | |

* Part of MCM-2 Option.

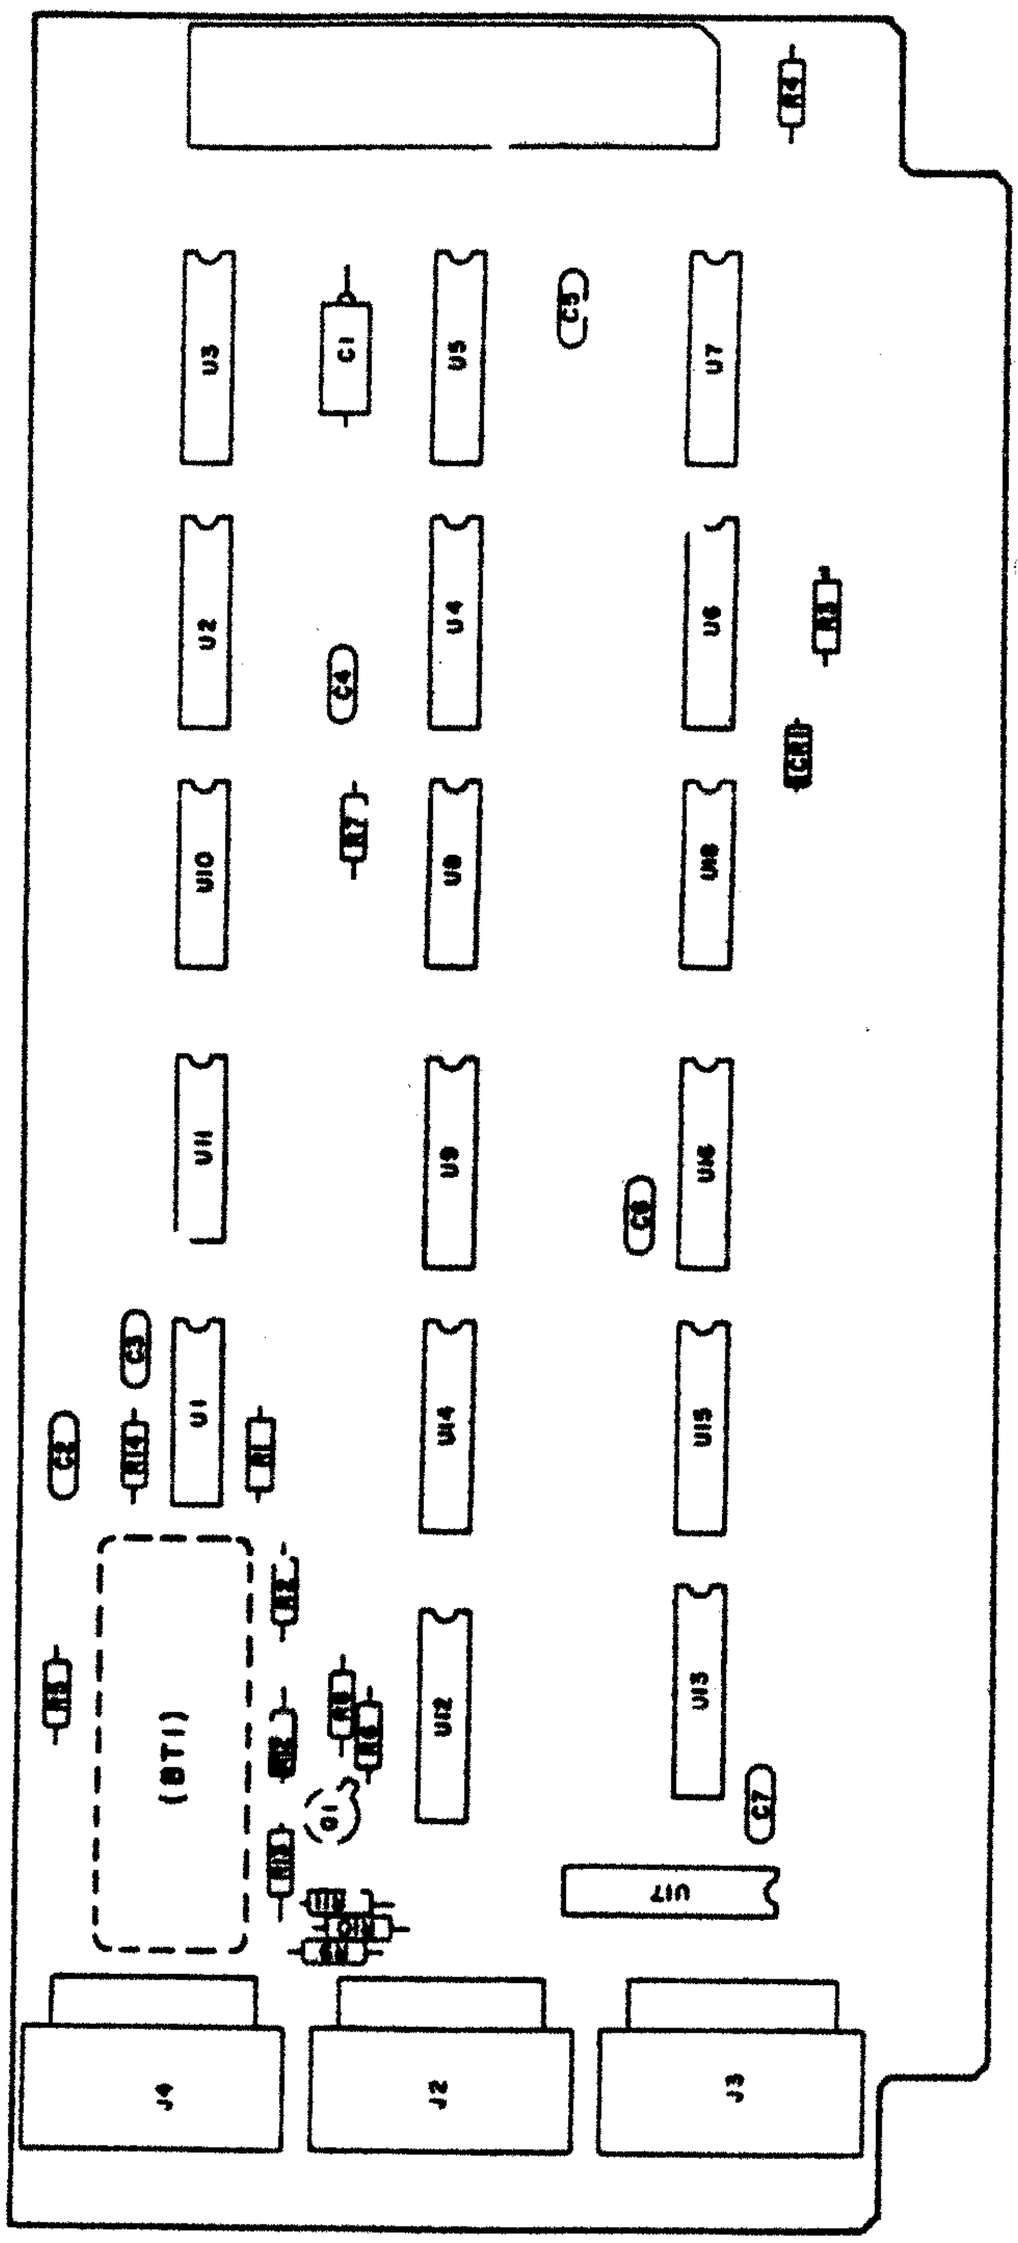



Figure 5-34. Type 791575-3 Manual Tuning Up/Down Counter (A6A1), Location of Components

5.6.6.1 **Type 791575-3* Manual Tuning Up/Down Counter** REF DESIG PEFIX **A6A1**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| C1 | Capacitor, Electrolytic, Tantalum: 22 µF, 10%, 15 V | 1 | CS13BD226K | 81349 | 56289 |
| C2 | Capacitor, Ceramic, Disc: 470 pF, 20%, 1000 V | 1 | BHD470-20PCT | 91418 | |
| C3 | Capacitor, Ceramic, Disc: 0.01 µF, 20%, 50 V | 5 | 34453-1 | 14632 | |
| C4 Thru C7 | Same as C3 | | | | |
| CR1 | Diode | 1 | 5082-2900 | 28480 | |
| J1 | Not Used | | | | |
| J2 | Connector, Receptacle | 3 | 87567-4 | 00779 | |
| J3 | Same as J2 | | | | |
| J4 | Same as J2 | | | | |
| MP1 | Socket, Battery (791575-2 only) | 4 | 09-9017-1-06 | 18310 | |
| MP1 | Not Used (791575-3 only) | | | | |
| MP2 | Transipad | | | | |
| Q1 | Transistor | 1 | 7717-44DAP | 13103 | |
| R1 | Resistor, Fixed, Composition: 10 kΩ, 5%, 1/4 W | 1 | 2N2222A | 80131 | 04713 |
| R2 | Same as R1 | 8 | CF1/4-10K/J | 09021 | |
| R3 | Resistor, Fixed, Composition: 4.7Ω, 5%, 1/4 W | 1 | CF1/4-4.7 OHMS/J | 09021 | |
| R4 Thru R8 | Same as R1 | | | | |
| R9 | Resistor, Fixed, Composition: 820Ω, 5%, 1/4 W | 1 | CF1/4-820 OHMS/J | 09021 | |
| R10 | Same as R1 | | | | |
| R11 | Resistor, Fixed, Composition: 1.0 kΩ, 5%, 1/4 W | 2 | CF1/4-1.0K/J | 09021 | |
| R12 | Resistor, Fixed, Composition: 100Ω, 5%, 1/4 W | 1 | CF1/4-100 OHMS/J | 09021 | |
| R13 | Same as R11 | | | | |
| R14 | Resistor, Fixed, Composition: 470 kΩ, 5%, 1/4 W | 1 | CF1/4-470K/J | 09021 | |
| U1 | Integrated Circuit | 1 | MM74C14N | 27014 | |
| U2 | Integrated Circuit | 6 | MC14510BCP | 04713 | |
| U3 Thru U7 | Same as U2 | | | | |
| U8 | Integrated Circuit | 3 | MC14081BCP | 04713 | |
| U9 | Integrated Circuit | 1 | MC14027BCP | 04713 | |
| U10 | Integrated Circuit | 1 | MC14070BCP | 04713 | |
| U11 | Same as U8 | | | | |
| U12 | Integrated Circuit | 4 | MC14512CP | 04713 | |
| U13 Thru U15 | Same as U12 | | | | |
| U16 | Integrated Circuit | 1 | MC14520BCP | 04713 | |
| U17 | Integrated Circuit | 1 | MC14050BCP | 04713 | |
| U18 | Same as U8 | | | | |

*Part of MCM-2 Option.

5.6.6.2 **Type 791828-1 Front Panel Interconnect**

REF DESIG PREFIX **A6A2**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| C1 | Capacitor, Ceramic, Disc: 0.47 µF, 20%, 50 V | 1 | 34452-1 | 14632 | |
| CR1 | Diode | 10 | 1N995 | 80131 | 04713 |
| CR2 Thru CR10 | Same as CR1 | | | | |
| J1 | Connector, Receptacle | 1 | 1-87567-6 | 00779 | |
| MP1 | Transipad | 1 | 7717-22DAP | 13103 | |
| Q1 | Transistor | 1 | 2N4037 | 80131 | 02735 |
| R1 | Resistor, Fixed, Composition: 620Ω, 5%, 1/4 W | 1 | CF1/4-620 OHMS/J | 09021 | |
| R2 | Resistor, Fixed, Composition: 100Ω, 5%, 1/4 W | 1 | CF1/4-100 OHMS/J | 09021 | |
| R3 | Resistor, Fixed, Composition: 2.7 kΩ, 5%, 1/4 W | 1 | CF1/4-2.7K/J | 09021 | |
| R4 | Resistor, Fixed, Composition: 100 kΩ, 5%, 1/4 W | 1 | CF1/4-100K/J | 09021 | |
| R5 | Resistor, Fixed, Composition: 22Ω, 5%, 1/2 W | 1 | RCR20G220JS | 81349 | 01121 |
| R6 | Resistor, Fixed, Composition: 10 kΩ, 5%, 1/4 W | 4 | CF1/4-10K/J | 09021 | |
| R7 Thru R9 | Same as R6 | | | | |
| U1 | Integrated Circuit | 2 | MC14053BCP | | |
| U2 | Same as U1 | | | | |

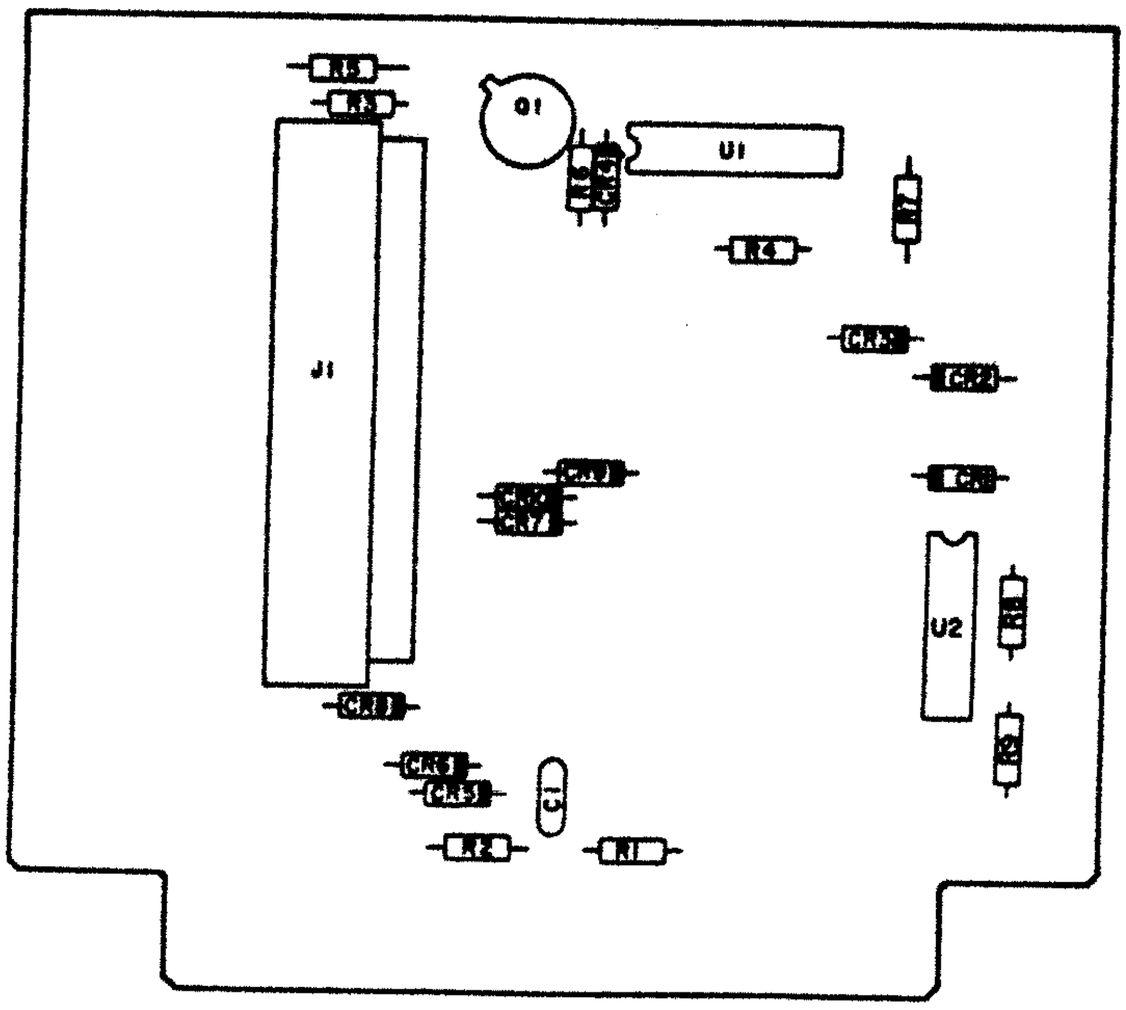



Figure 5-35. Type 791828-1 Front Panel Interconnect (A6A2), Location of Components

FIGURE 5-36

## 5.6.7 TYPE 791874-1 MANUAL TUNING MODULE*

REF DESIG PREFIX A7

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| A1 | Tuning Resolution | 1 | 791589 | 14632 | |
| MP1 | Knob Assembly | 1 | 280064-1 | 14632 | |
| MP2 | Button: Black Shell with Green Indicator | 5 | FA101-BLK W/GRN | 31918 | |
| U1 | Encoder Assembly | 1 | 34836-1 | 14632 | |
| * | Part of MCM-2 Option. | | | | |

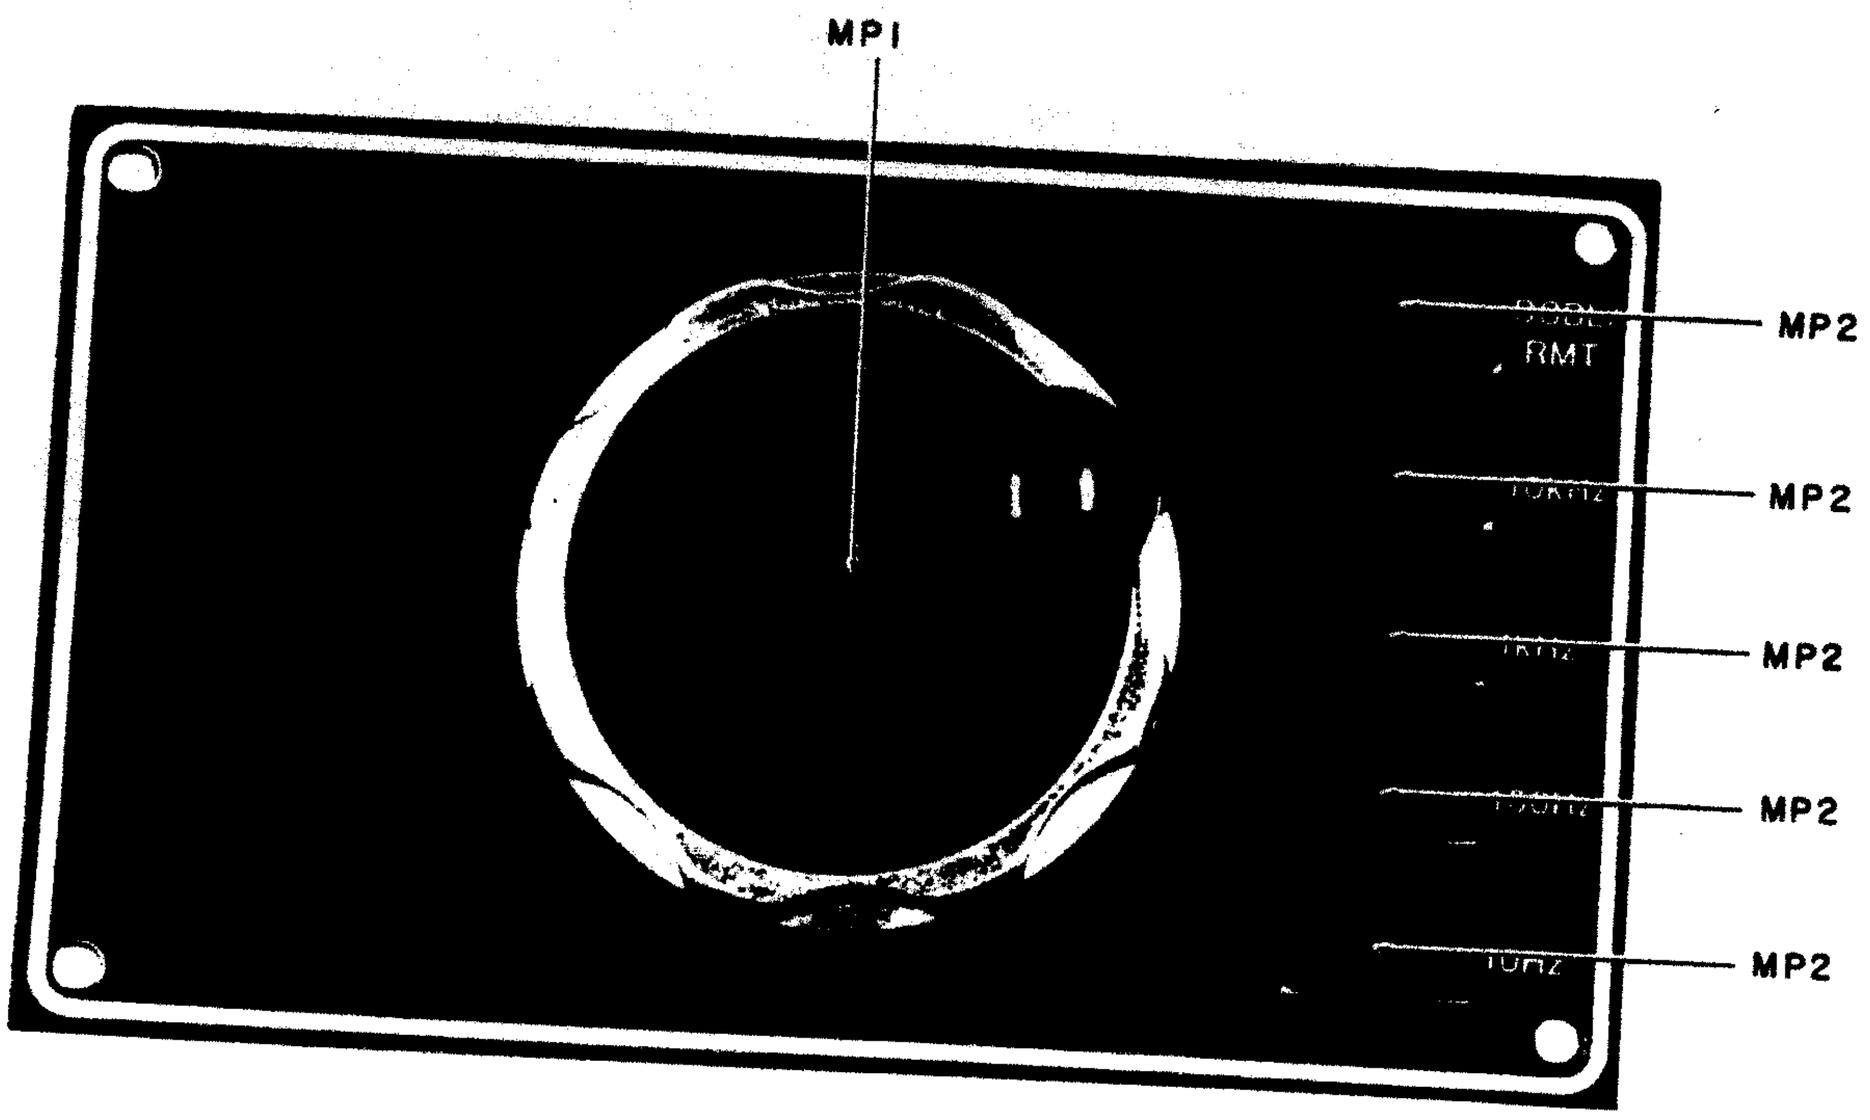



Figure 5-36. Type 791874-1 Manual Tuning Module (A7), Location of Components

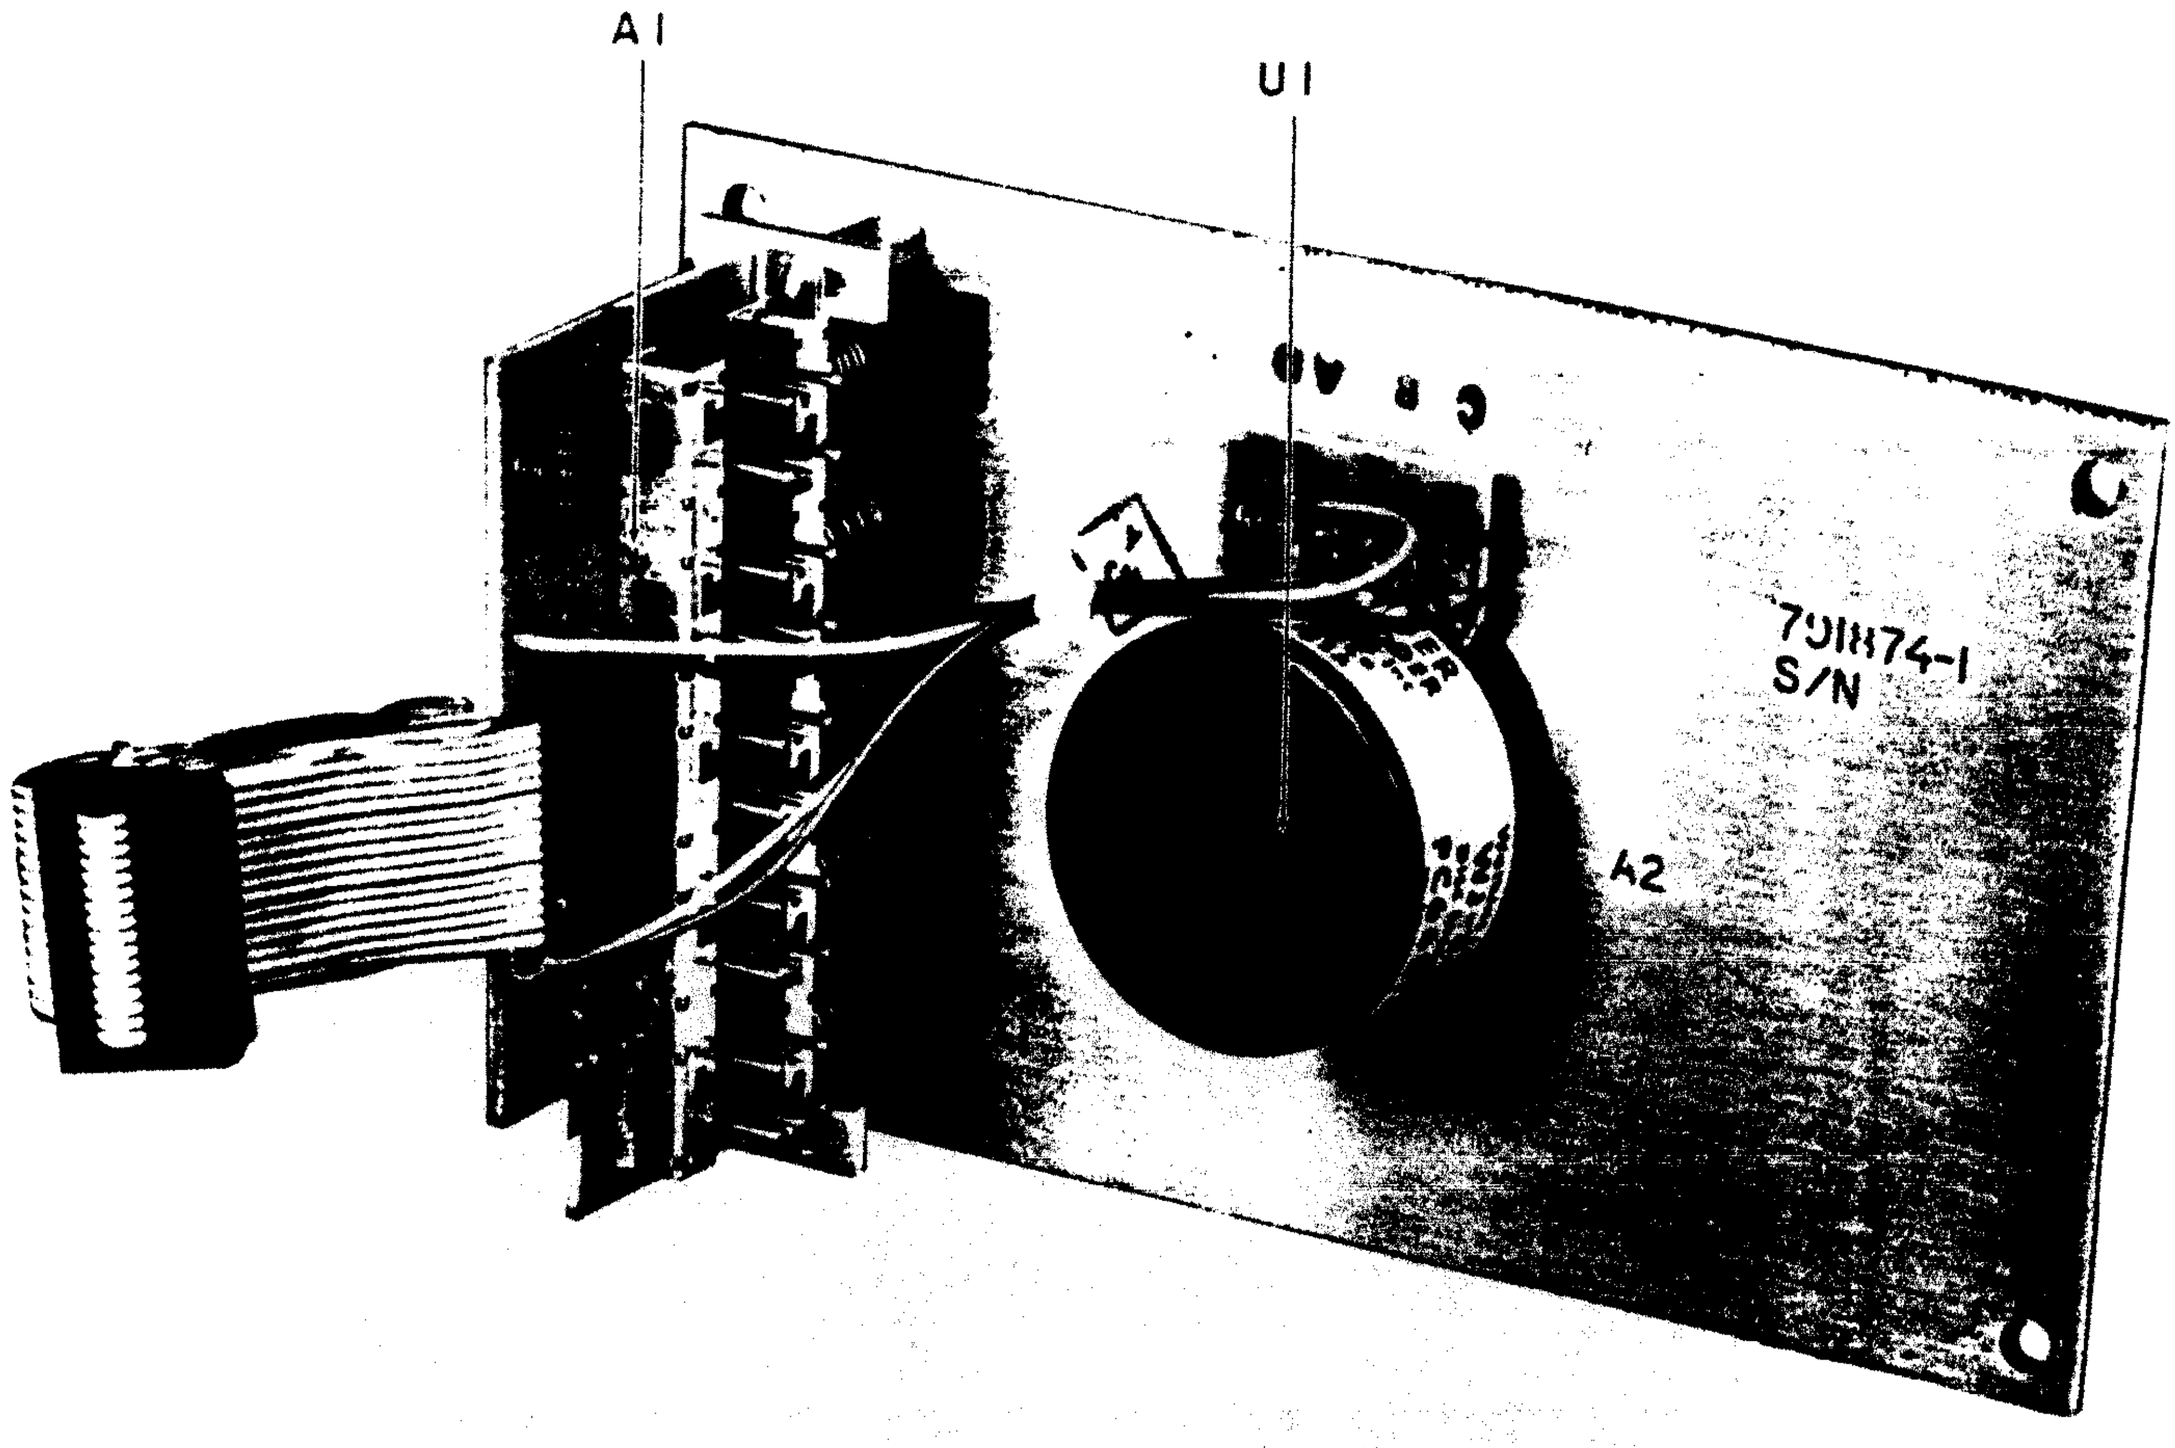



Figure 5-37. Type 791874-1 Manual Tuning Module (A7), Rear View, Location of Components

5.6.7.1 **Type 791589 Tuning Resolution**

REF DESIG PREFIX A7A1

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| S1 | Switch, Pushbutton | 1 | 18488 | 14632 | |
| -- | Cable Assembly | 1 | 380140-1 | 14632 | |

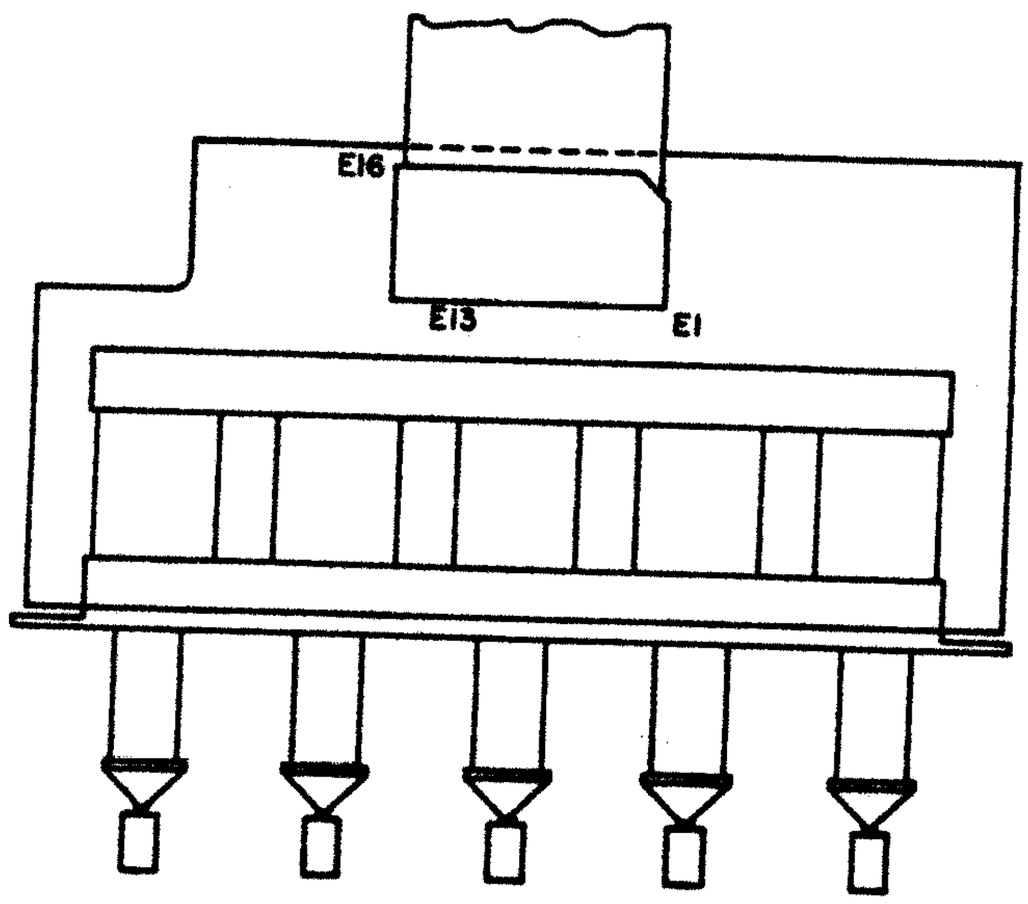



Figure 5-38. Type 791589 Tuning Resolution (A7A1), Location of Components

5.6.8 **TYPE 791578-1 FREQUENCY DISPLAY** REF DESIG PREFIX **A8**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| C1 | Capacitor, Ceramic, Disc: 0.01 µF, 20%, 50 V | 2 | 34453-1 | 14632 | |
| C2 | Same as C1 | | | | |
| CR1 | Diode: LED | 1 | 5082-4150 | 28480 | |
| MP1 | Insulator | 1 | 60-11-5791-1674 | 18565 | |
| Q1 | Transistor | 1 | TIP29 | 01295 | |
| R1 | Resistor, Fixed, Composition: 150Ω, 5%, 1/4 W | 1 | CF1/4-150 OHMS/J | 09021 | |
| R2 | Resistor, Variable, Film: 100Ω, 10%, 3/4 W | 1 | 89PR100 | 73138 | |
| R3 | Resistor, Fixed, Composition: 820Ω, 5%, 1/4 W | 1 | CF1/4-820 OHMS/J | 09021 | |
| R4 | Resistor, Fixed, Composition: 200Ω, 5%, 1/4 W | 1 | CF1/4-200 OHMS/J | 09021 | |
| U1 | Display, LED | 7 | 5082-7663 | 28480 | |
| U2 Thru U7 | Same as U1 | | | | |
| U8 | Integrated Circuit | 1 | DS8857N | 27014 | |
| U9 | Integrated Circuit | 1 | CD4028AE | 02735 | |
| U10 | Integrated Circuit | 1 | DS8863N | 27014 | |
| -- | Cable Assembly | 1 | 380140-2 | 14632 | |

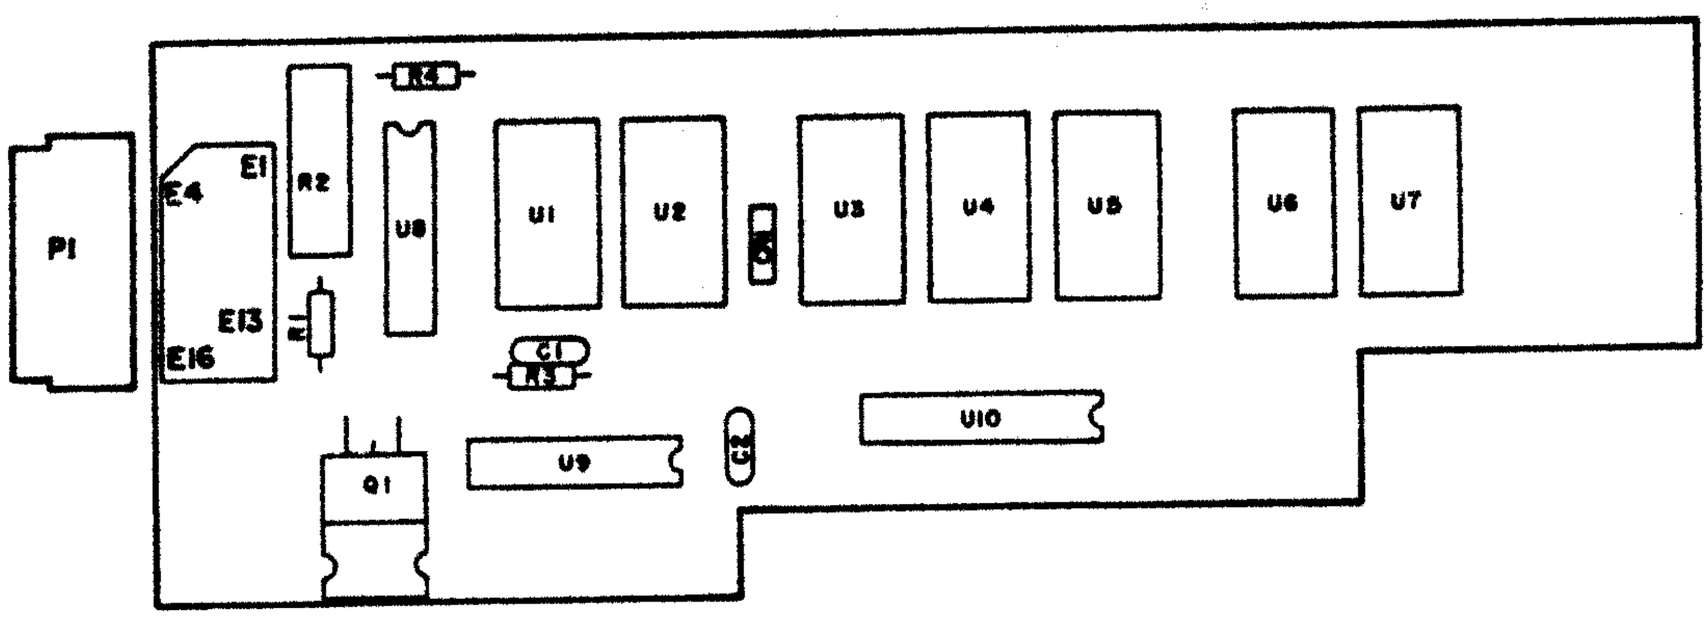



Figure 5-39. Type 791578-1 Frequency Display (A8), Location of Components

5.6.9 **TYPE 791827 BFO SWITCH** REF DESIG PREFIX **A9**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| -- | Cable Assembly | 1 | 34524-1 | 14632 | |
| P1 | Part of Cable Assembly | -- | | | |
| P2 | Plug Assembly | 1 | 34477-19 | 14632 | |
| S1 | Switch, Thumbwheel | 1 | 339910490-00226 | 09353 | |

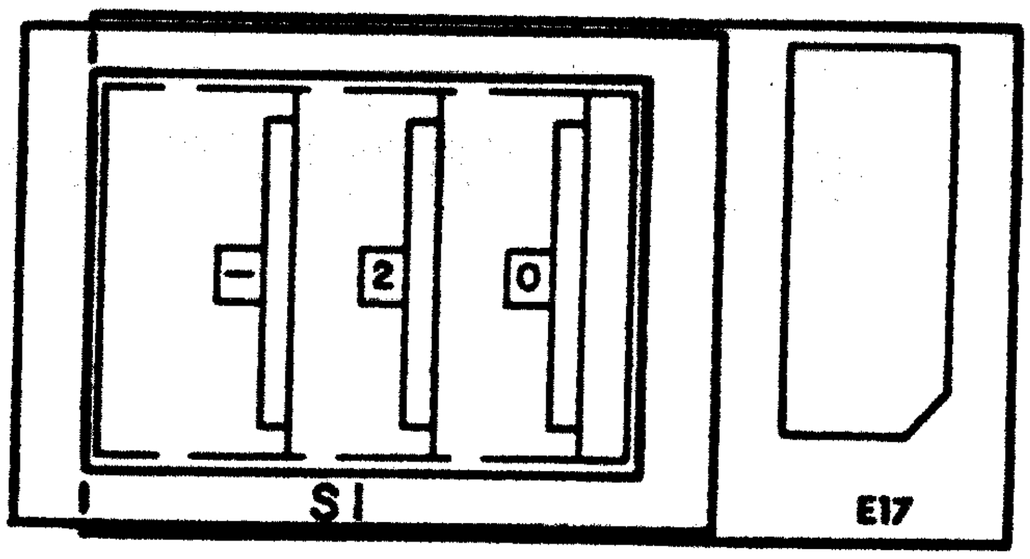



Figure 5-40. Type 791827 BFO Switch (A9), Location of Components

5.6.10 **TYPES 791684-2(1) and 796053(2) FRONT PANEL CONTROL**

REF DESIG PREFIX A10

| REF DESIG | DESCRIPTION | | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|---|
| A1 | Upper Panel Control | | 1 | 791583 | 14632 | |
| A2 | Lower Panel Control | (791684-2 only) | 1 | 791826 | 14632 | |
| A2 | Lower Panel Control | (796053 only) | 1 | 796054 | 14632 | |
| -- | Cable Assembly | | 1 | 34528 | 14632 | |
| | (1) WJ-8718 | | | | | |
| | (2) WJ-8718-9 & WJ-8718A | | | | | |

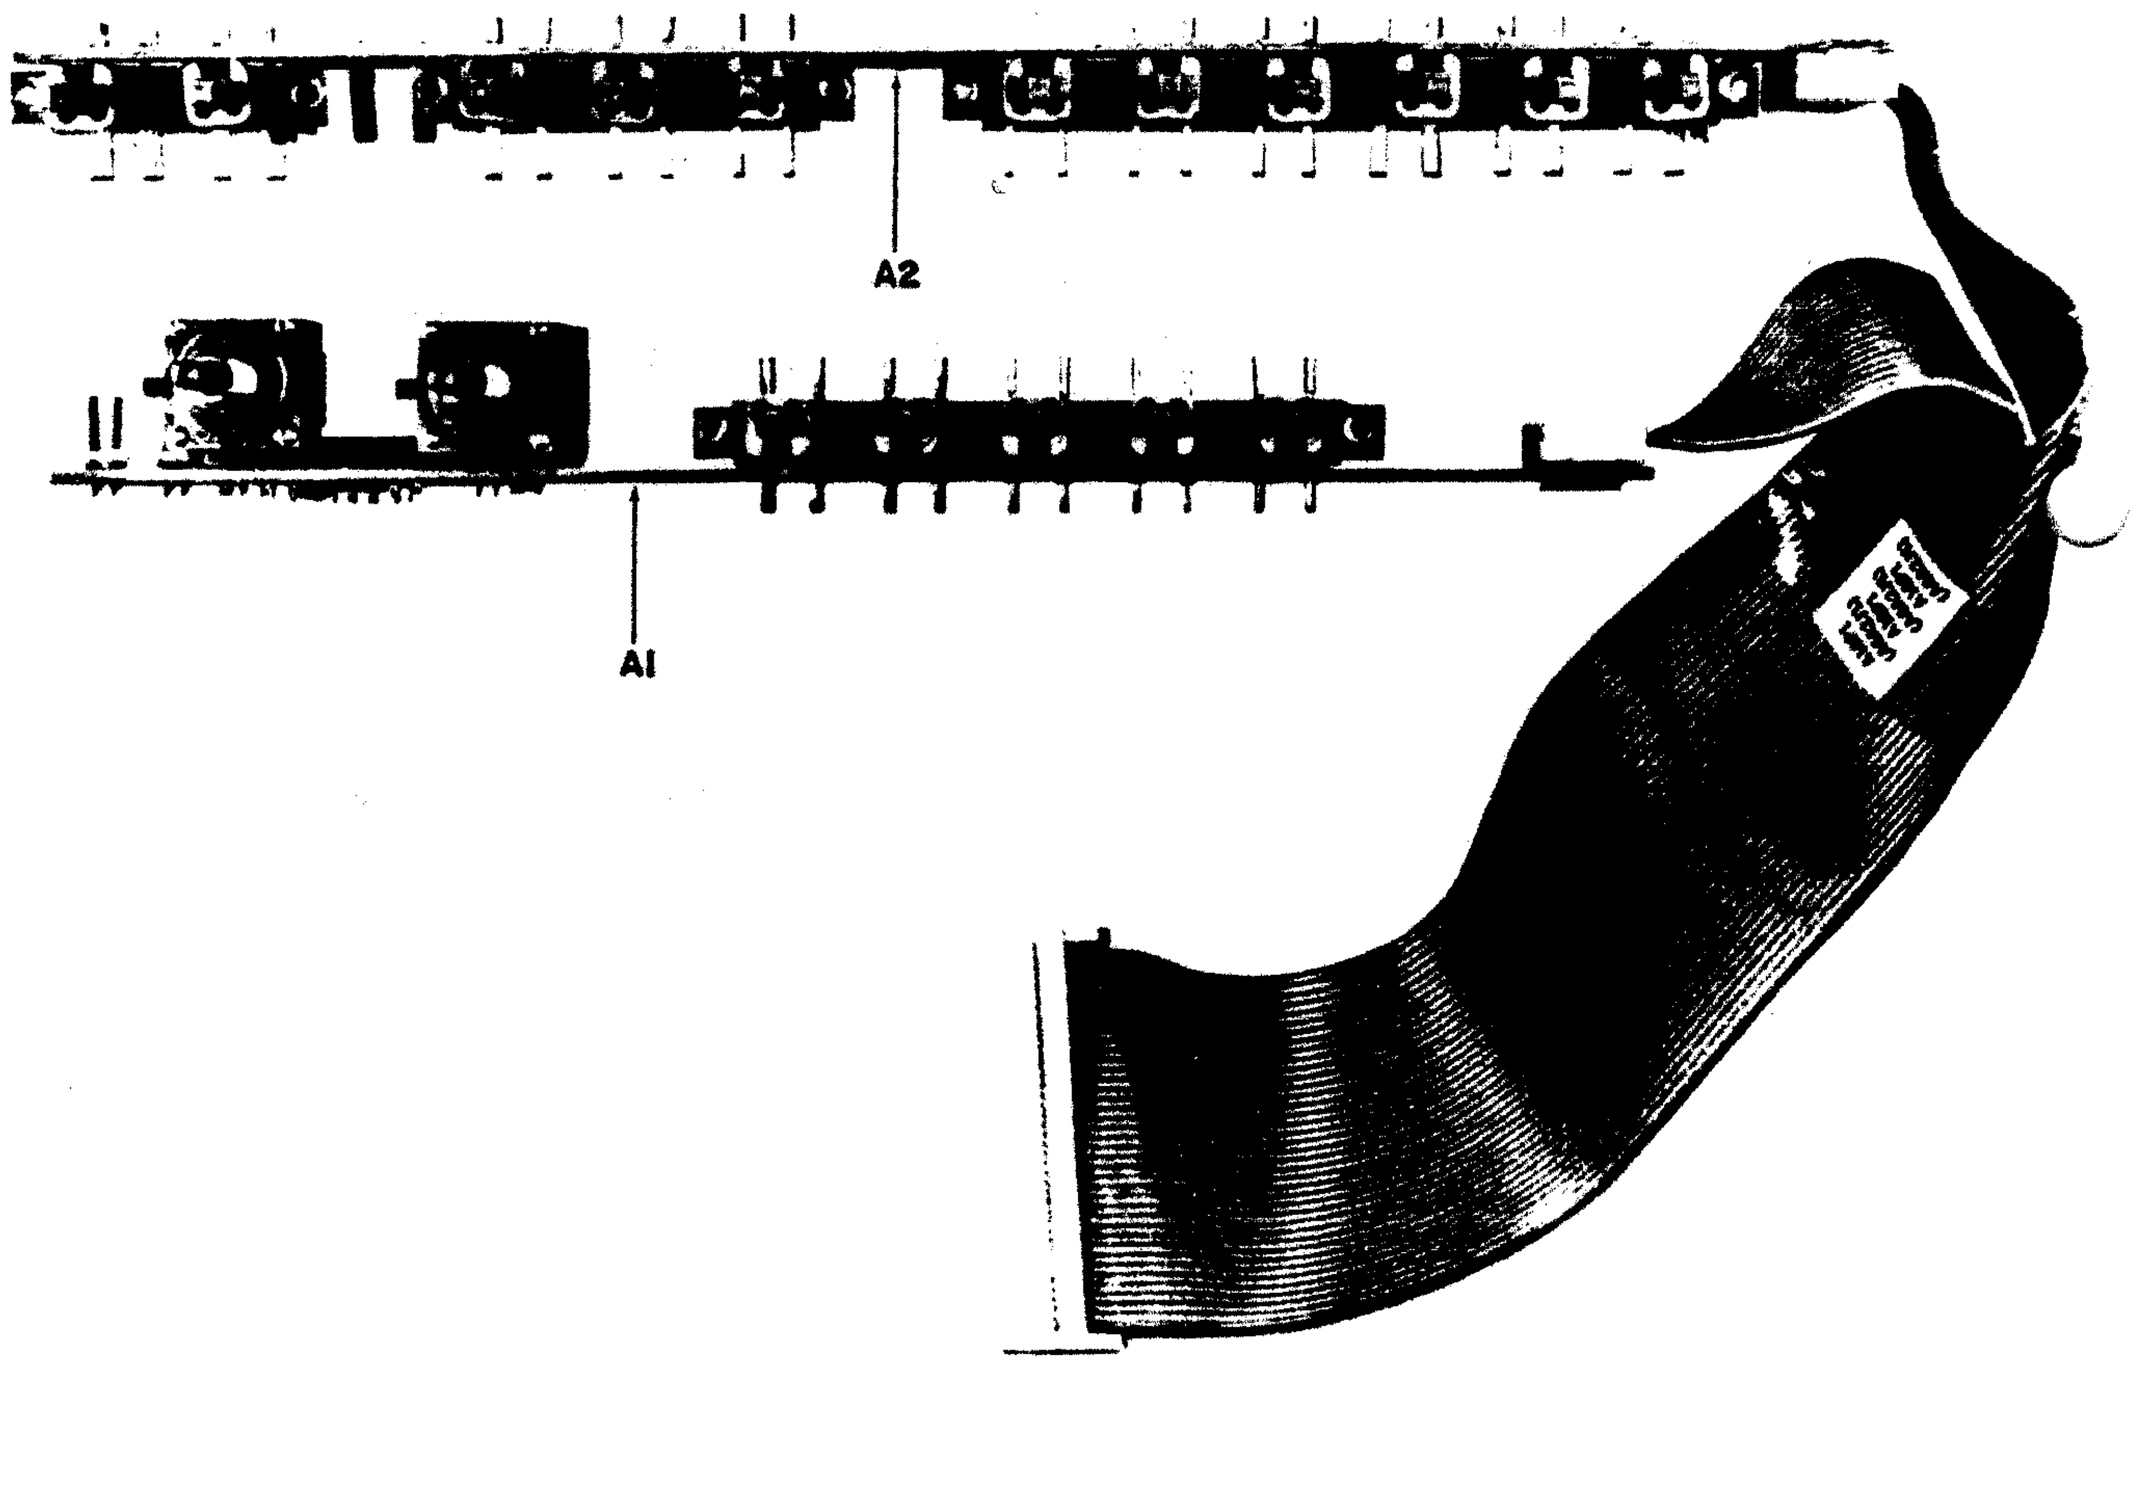



Figure 5-41. Type 791684-2 Front Panel Control (A10), Location of Components (WJ-8718 only)

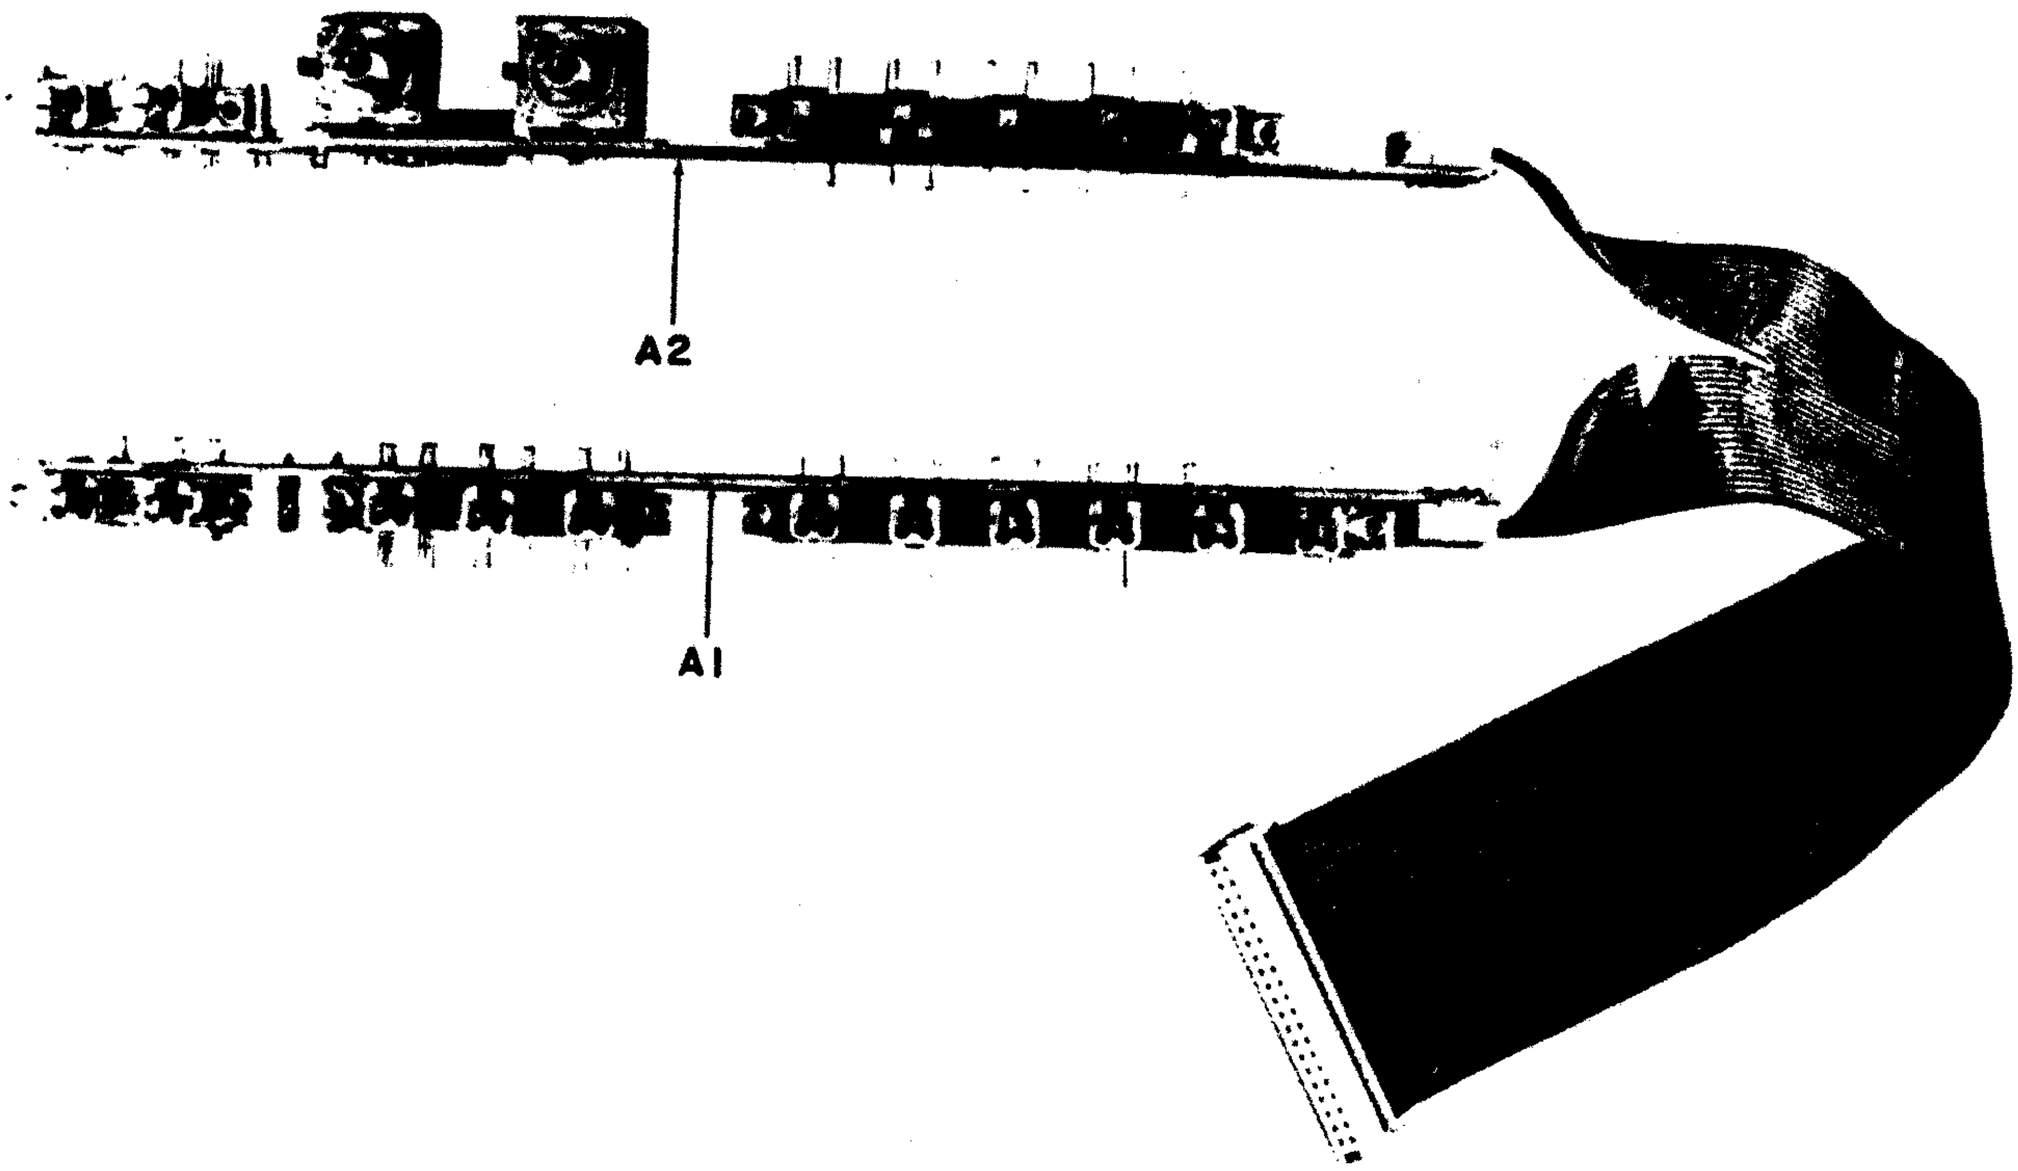



Figure 5-42. Type 796053 Front Panel Control (A10), Location of Components (WJ-8718-9 & WJ-8718A)

5.6.10.1 **Type 791583 Upper Panel Control**

REF DESIG PREFIX **A10A1**

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| J1 | Faston Tab | 1 | 62073-1 | 00779 | |
| S1 | Switch, Pushbutton | 1 | 18485 | 14632 | |
| S2 | Switch, Pushbutton | 1 | 18486 | 14632 | |
| S3 | Switch, Pushbutton | 1 | 18487 | 14632 | |

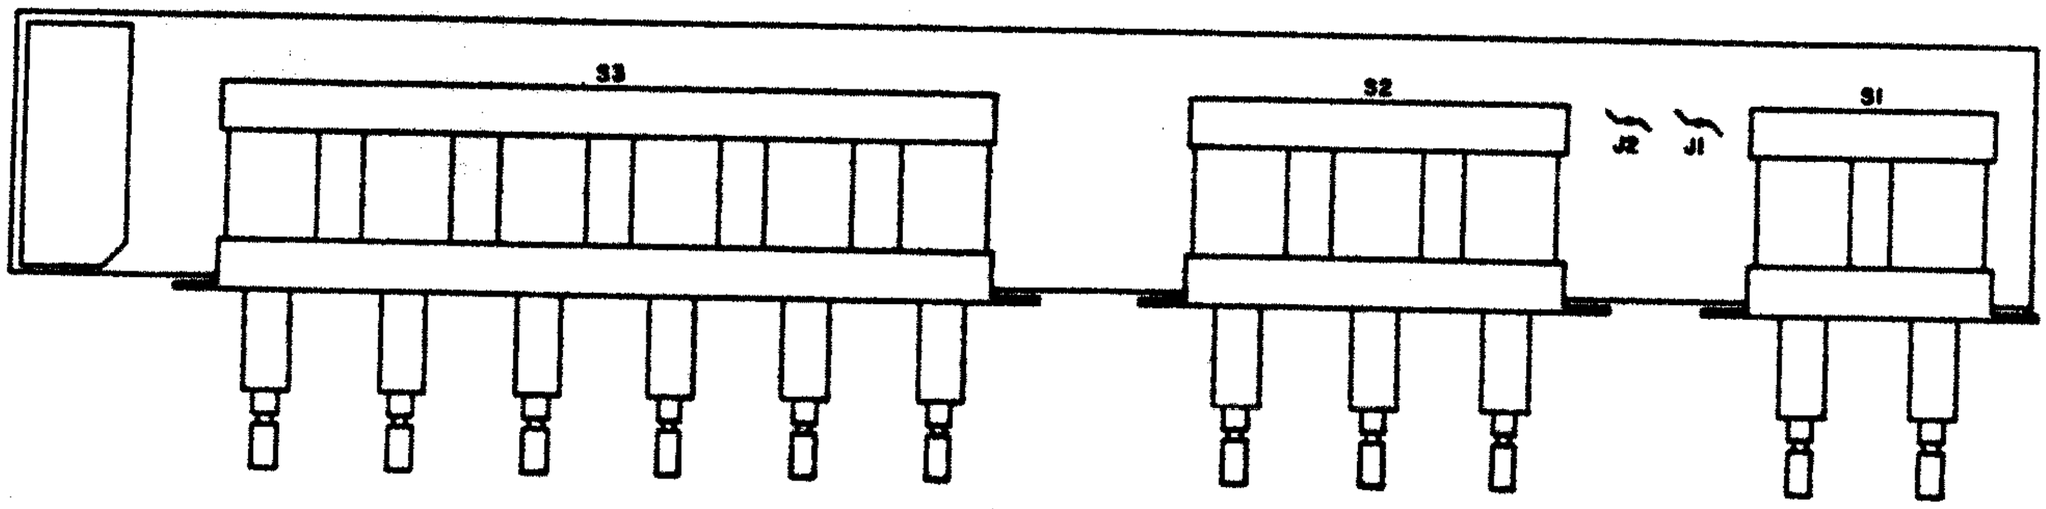



Figure 5-43. Type 791583 Upper Panel Control (A10A1), Location of Components

5.6.10.2 Types 791826(1) and 796054(2)
Lower Panel Control

FIGURE 5-44

REF DESIG PREFIX A10A2

| REF DESIG | DESCRIPTION | QTY PER ASSY | MANUFACTURER'S PART NO. | MFR. CODE | RECM VENDOR |
|---|---|---|---|---|---|
| C1 | Capacitor, Ceramic, Disc: 0.01 µF, 20%, 50 V | 1 | 34453-1 | 14632 | |
| J1 | Faston Tab | 4 | 62073-1 | 00779 | |
| J2 Thru J4 | Same as J1 | | | | |
| R1 | Resistor, Variable, Composition: 25 kΩ, 10%, 1 W | 1 | 70M3N056L253U | 01121 | |
| R2 | Resistor, Variable, Composition: 25 kΩ/25 kΩ, 10%, 1 W | 1 | 70P3N056L253A | 01121 | |
| R3 | Resistor, Fixed, Composition: 220Ω, 5%, 1/4 W | 2 | CF1/4-220 OHMS/J | 09021 | |
| R4 | Same as R3 | | | | |
| R5 | Resistor, Fixed, Composition: 100 kΩ, 5%, 1/4 W | 2 | CF1/4-100K/J | 09021 | |
| R6 | Resistor, Fixed, Composition: 1.0 kΩ, 5%, 1/4 W | 2 | CF1/4-1.0K/J | 09021 | |
| R7 | Same as R5 | | | | |
| R8 | Same as R6 | | | | |
| S1 | Switch, Pushbutton | 1 | 18488 | 14632 | |
| S2 | Switch, Pushbutton (796054 only) | 1 | 18485 | 14632 | |
| U1 | Integrated Circuit | 1 | MC3403P | 04713 | |

(1) WJ-8718
(2) WJ-8718-9 and WJ-8718A

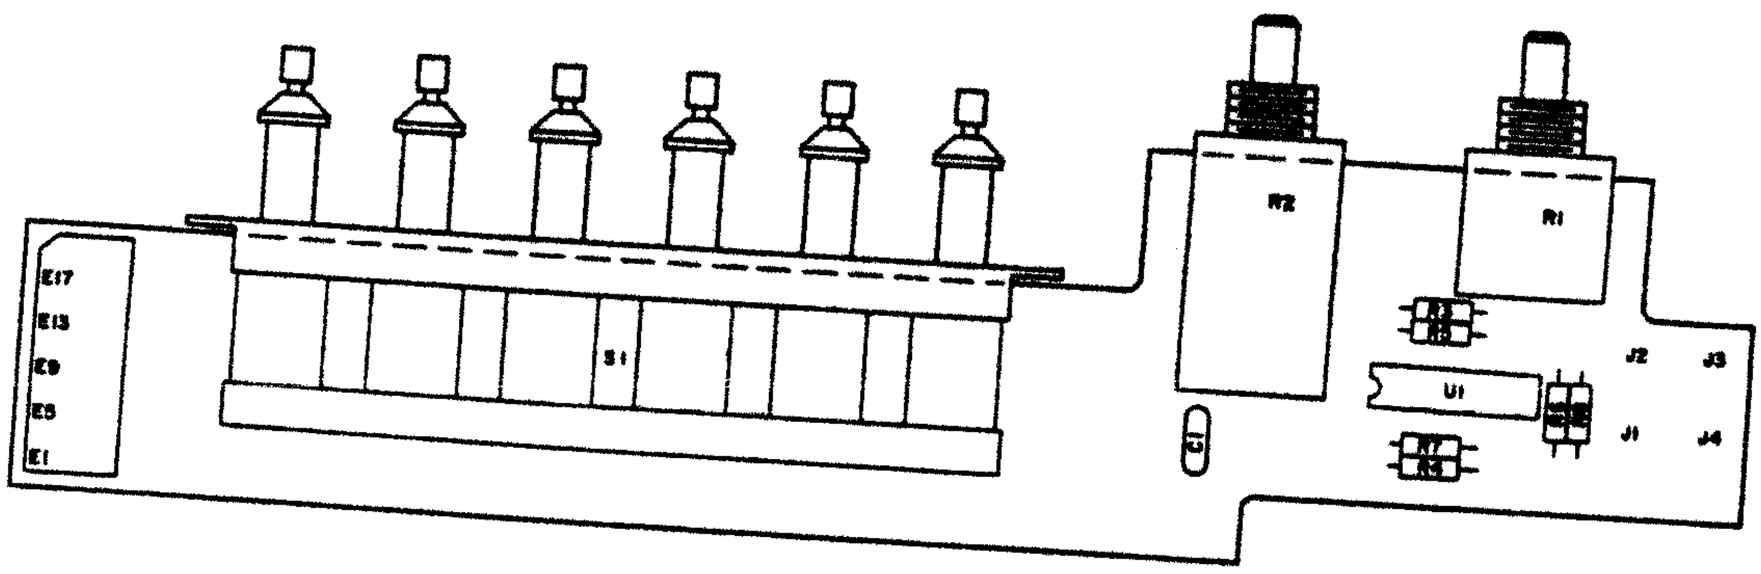



Figure 5-44. Type 791826 Lower Panel Control (A10A2), Location of Components (WJ-8718 only)


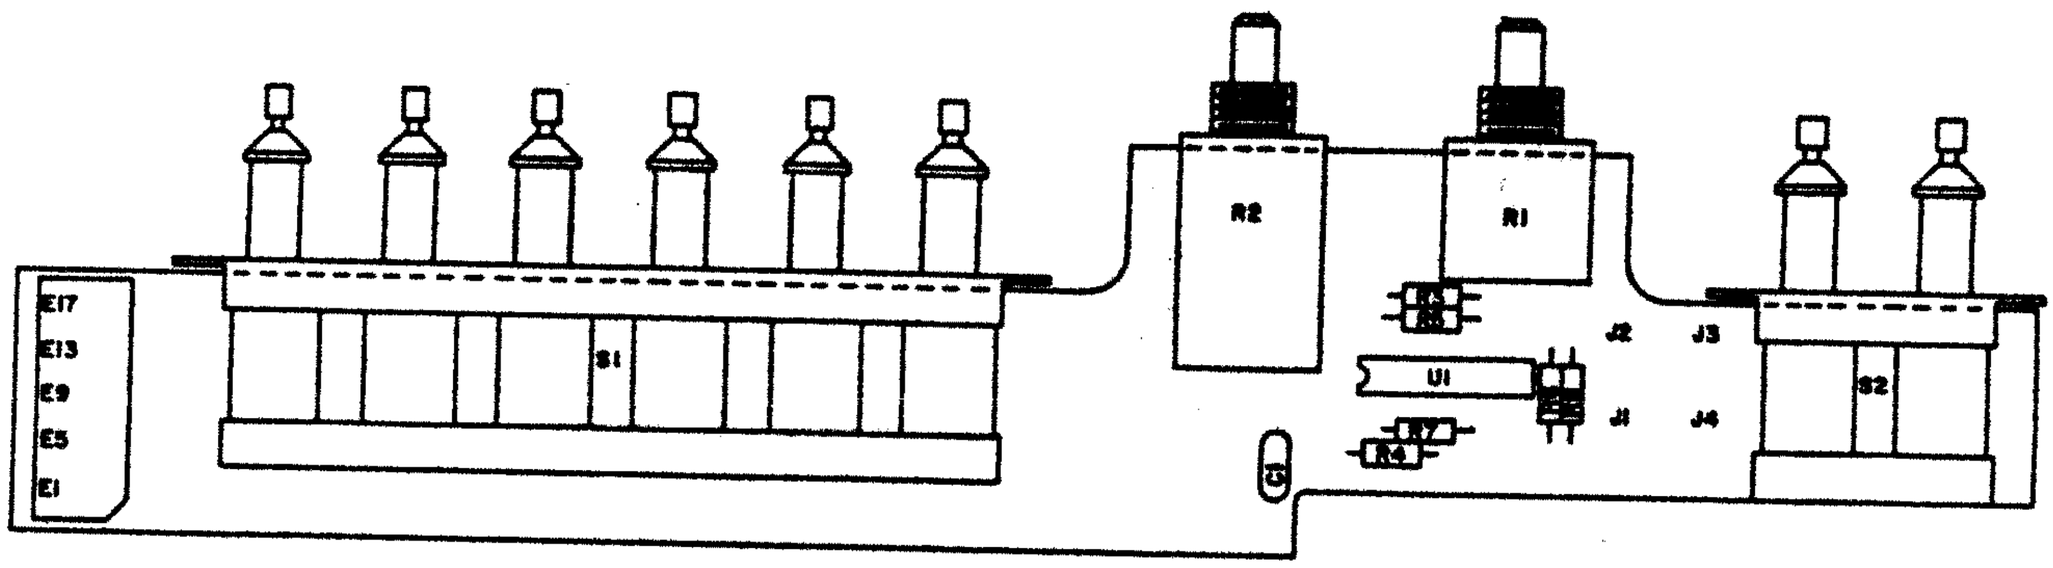



Figure 5-45. Type 796054 Lower Panel Control (A10A2), Location of Components (WJ-8718-9 & WJ-8718A)

# SECTION VI
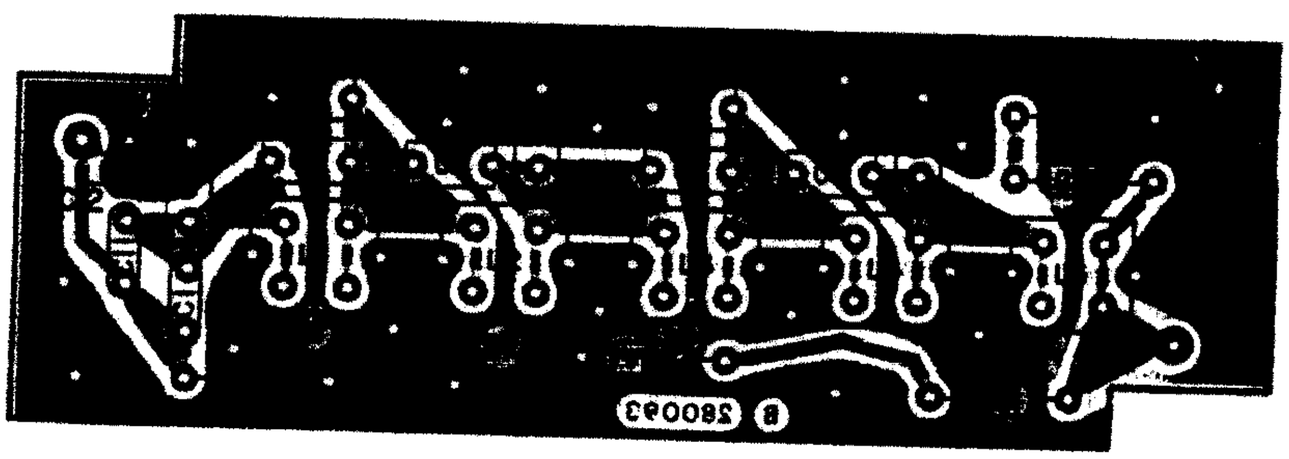
# SCHEMATIC DIAGRAMS




6-3

NOTES:

1. UNLESS OTHERWISE SPECIFIED:
   a.) RESISTANCE IS IN OHMS ±5%, 1/4W
   b.) CAPACITANCE IS IN pF

△2

| DASH NO. | R1 | R2 | R3 |
|---|---|---|---|
| -1 | 8.2 1/8 W | 560 1/8W | 560 1/8W |
| -2 | NOT USED (JUMPER) | NOT USED | NOT USED |

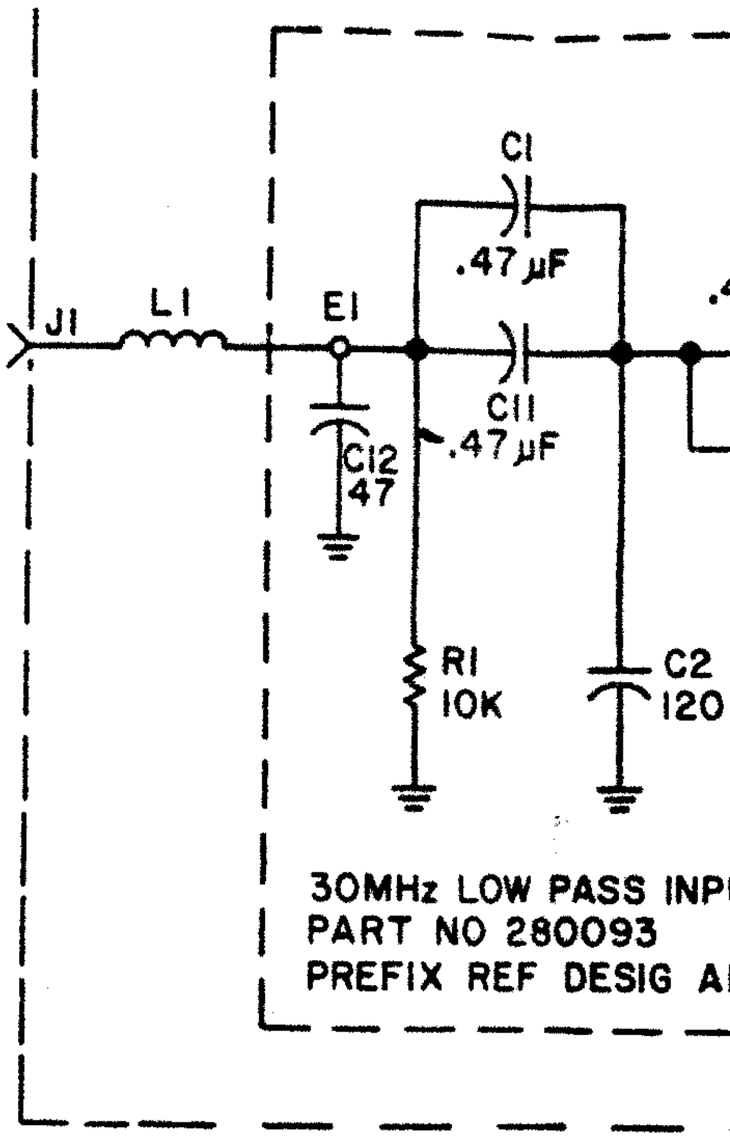

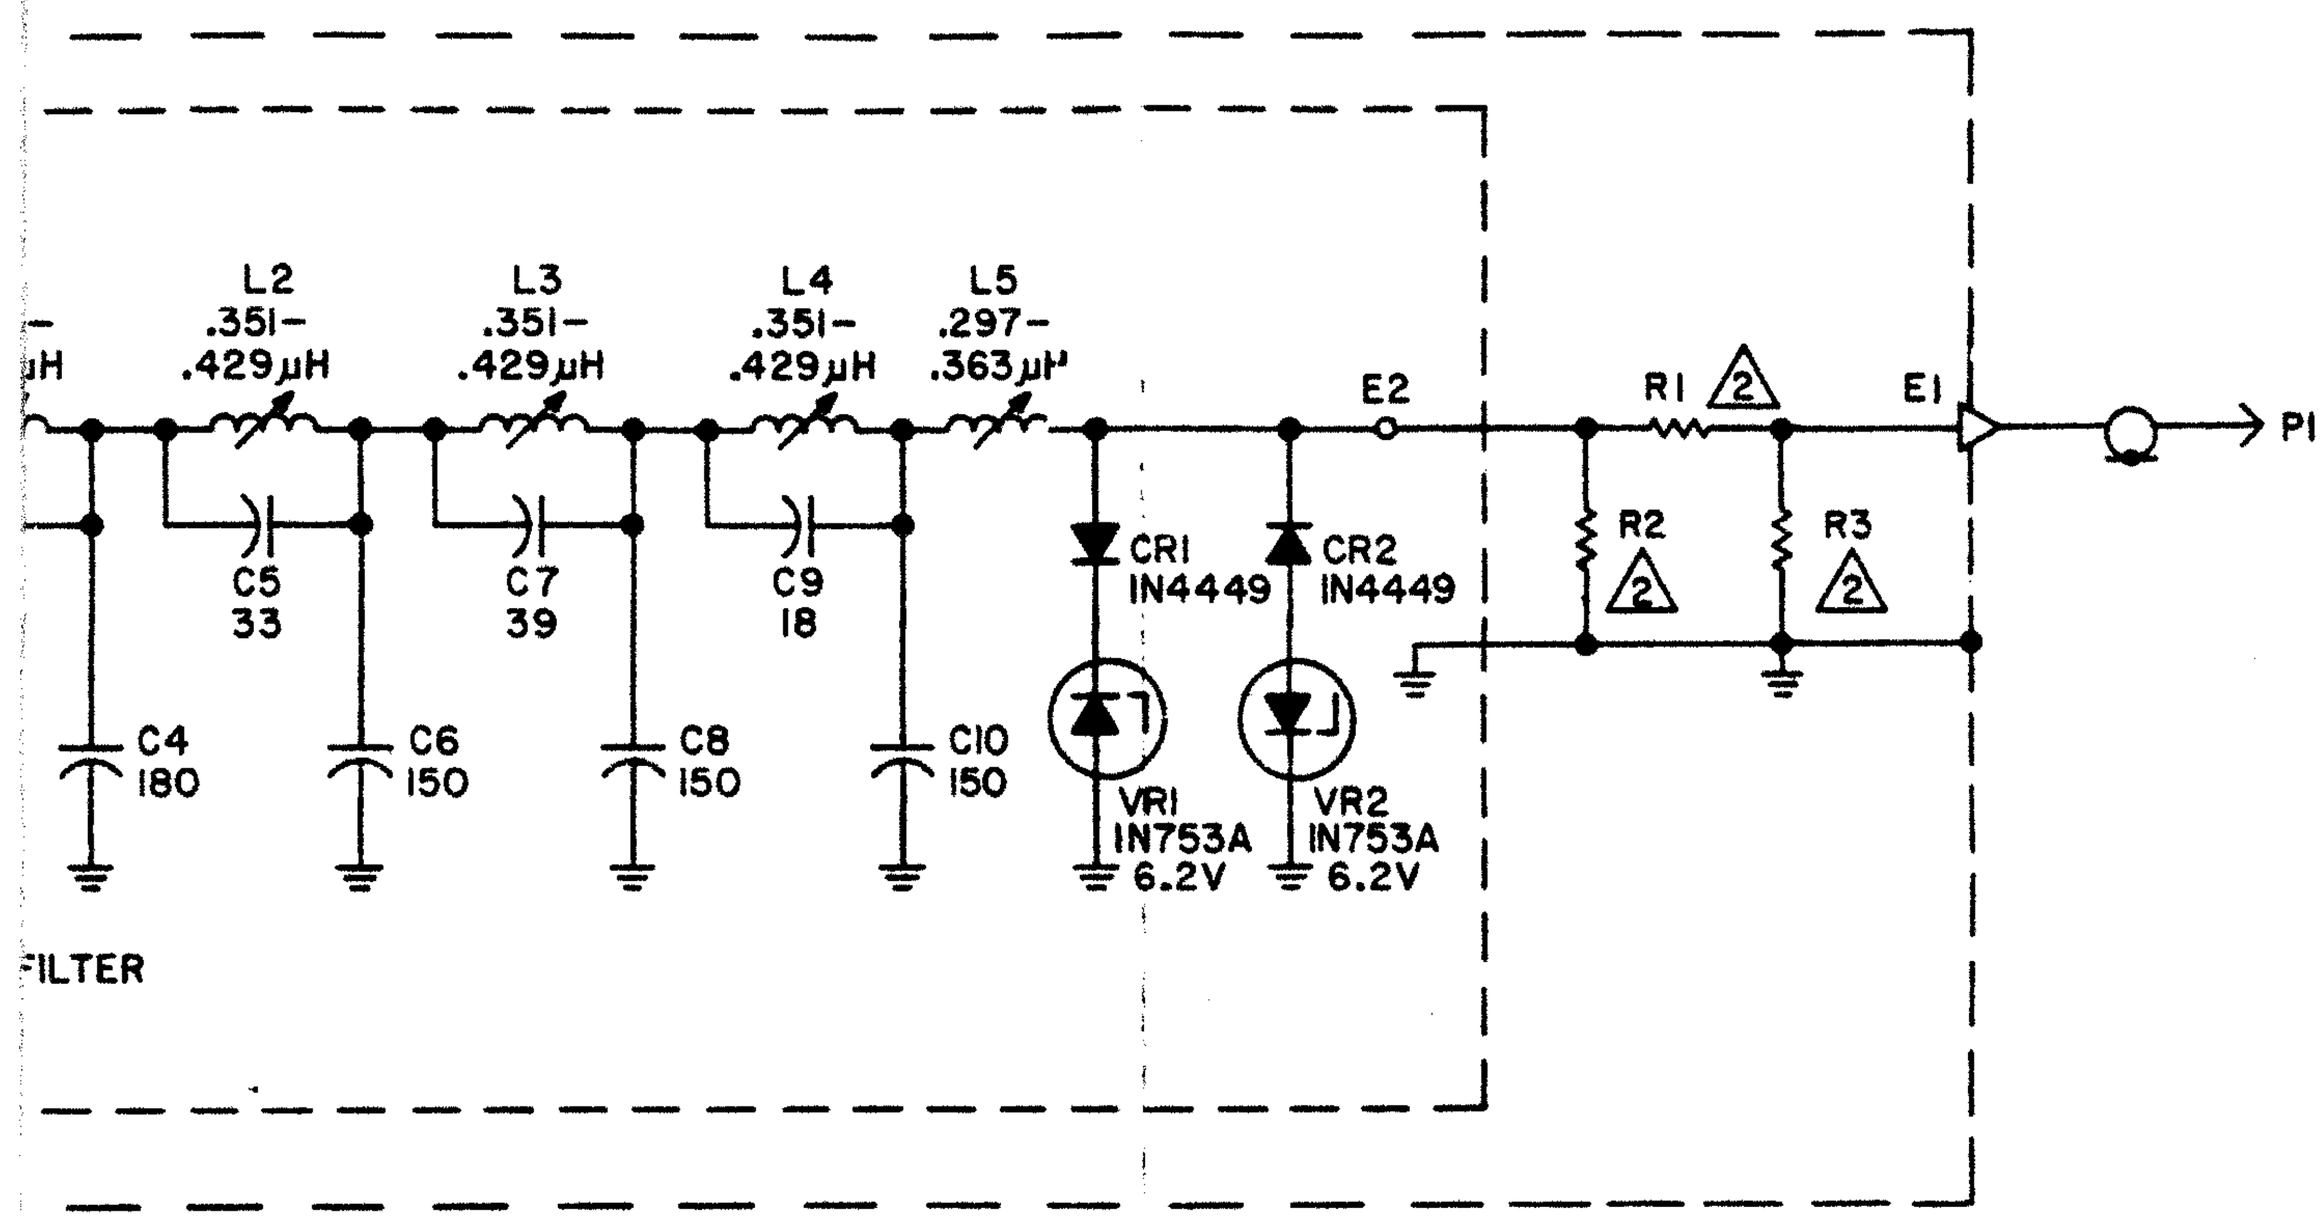




Figure 6-1. Type 791616-1 Input Filter (A2)
Schematic Diagram 380082

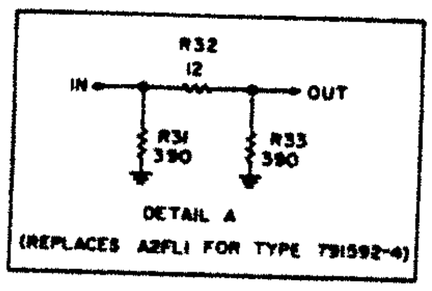
NOTES:

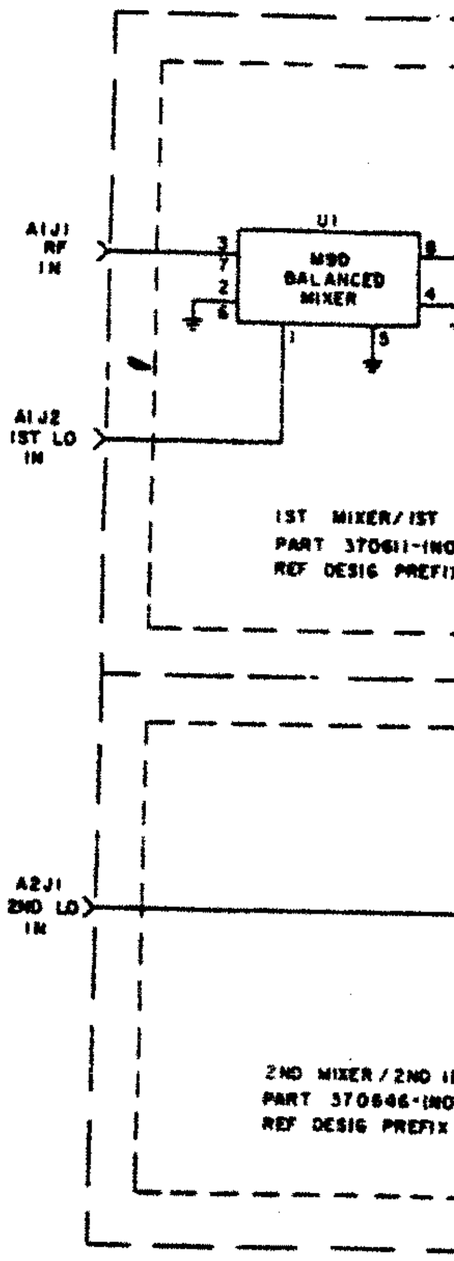
1. UNLESS OTHERWISE SPECIFIED
   a) RESISTANCE IS IN OHMS, ±5%, 1/4 W
   b) CAPACITANCE IS IN pF
2. NOMINAL VALUE, FINAL VALUE FACTORY SELECTED.
3. DIFFERENCE BETWEEN TYPES ARE SHOWN IN TABLE A.

TABLE A

| TYPE | A1 | A2 | A1FL1 | | A2FL1 | | A2R12 | C R1 | R1 | A2R13 | A2R50 |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | PART | BW | PART | BW | | | | | |
| 791592-1 | 370611-1 | 370646-1 | 92123 | 28 kHz | 92124 | 16 kHz | 4.7 | NOT USED | NOT USED | 68 | 10 |
| 791592-2 | 370611-1 | 370646-1 | 92123 | 28 kHz | 92124 | 16 kHz | 4.7 | 9062-3039 | 1K | 68 | 10 |
| 791592-3 | 370611-2 | 370646-2 | 92193 | 64 kHz | 92196 | 40 kHz | 12.0 | NOT USED | NOT USED | 68 | 10 |
| 791592-4 | 370611-4 | 370646-3 | 92221 | 100 kHz | SEE DETAIL A | | 4.7 | NOT USED | NOT USED | 68 | 10 |
| 791592-5 | 370611-5 | 370646-4 | 92212 | 40 kHz | 92211 | 30 kHz | 13 | NOT USED | NOT USED | 22 | 22 |
| 791592-6 | 370611-6 | 370646-5 | 92248 | 150 kHz | 92247 | 100 kHz | 4.7 | NOT USED | NOT USED | 68 | 10 |
| 791592-7 | 370611-6 | 370646-6 | 92248 | 150 kHz | 92268 | 58 kHz | 4.7 | NOT USED | NOT USED | 68 | 10 |




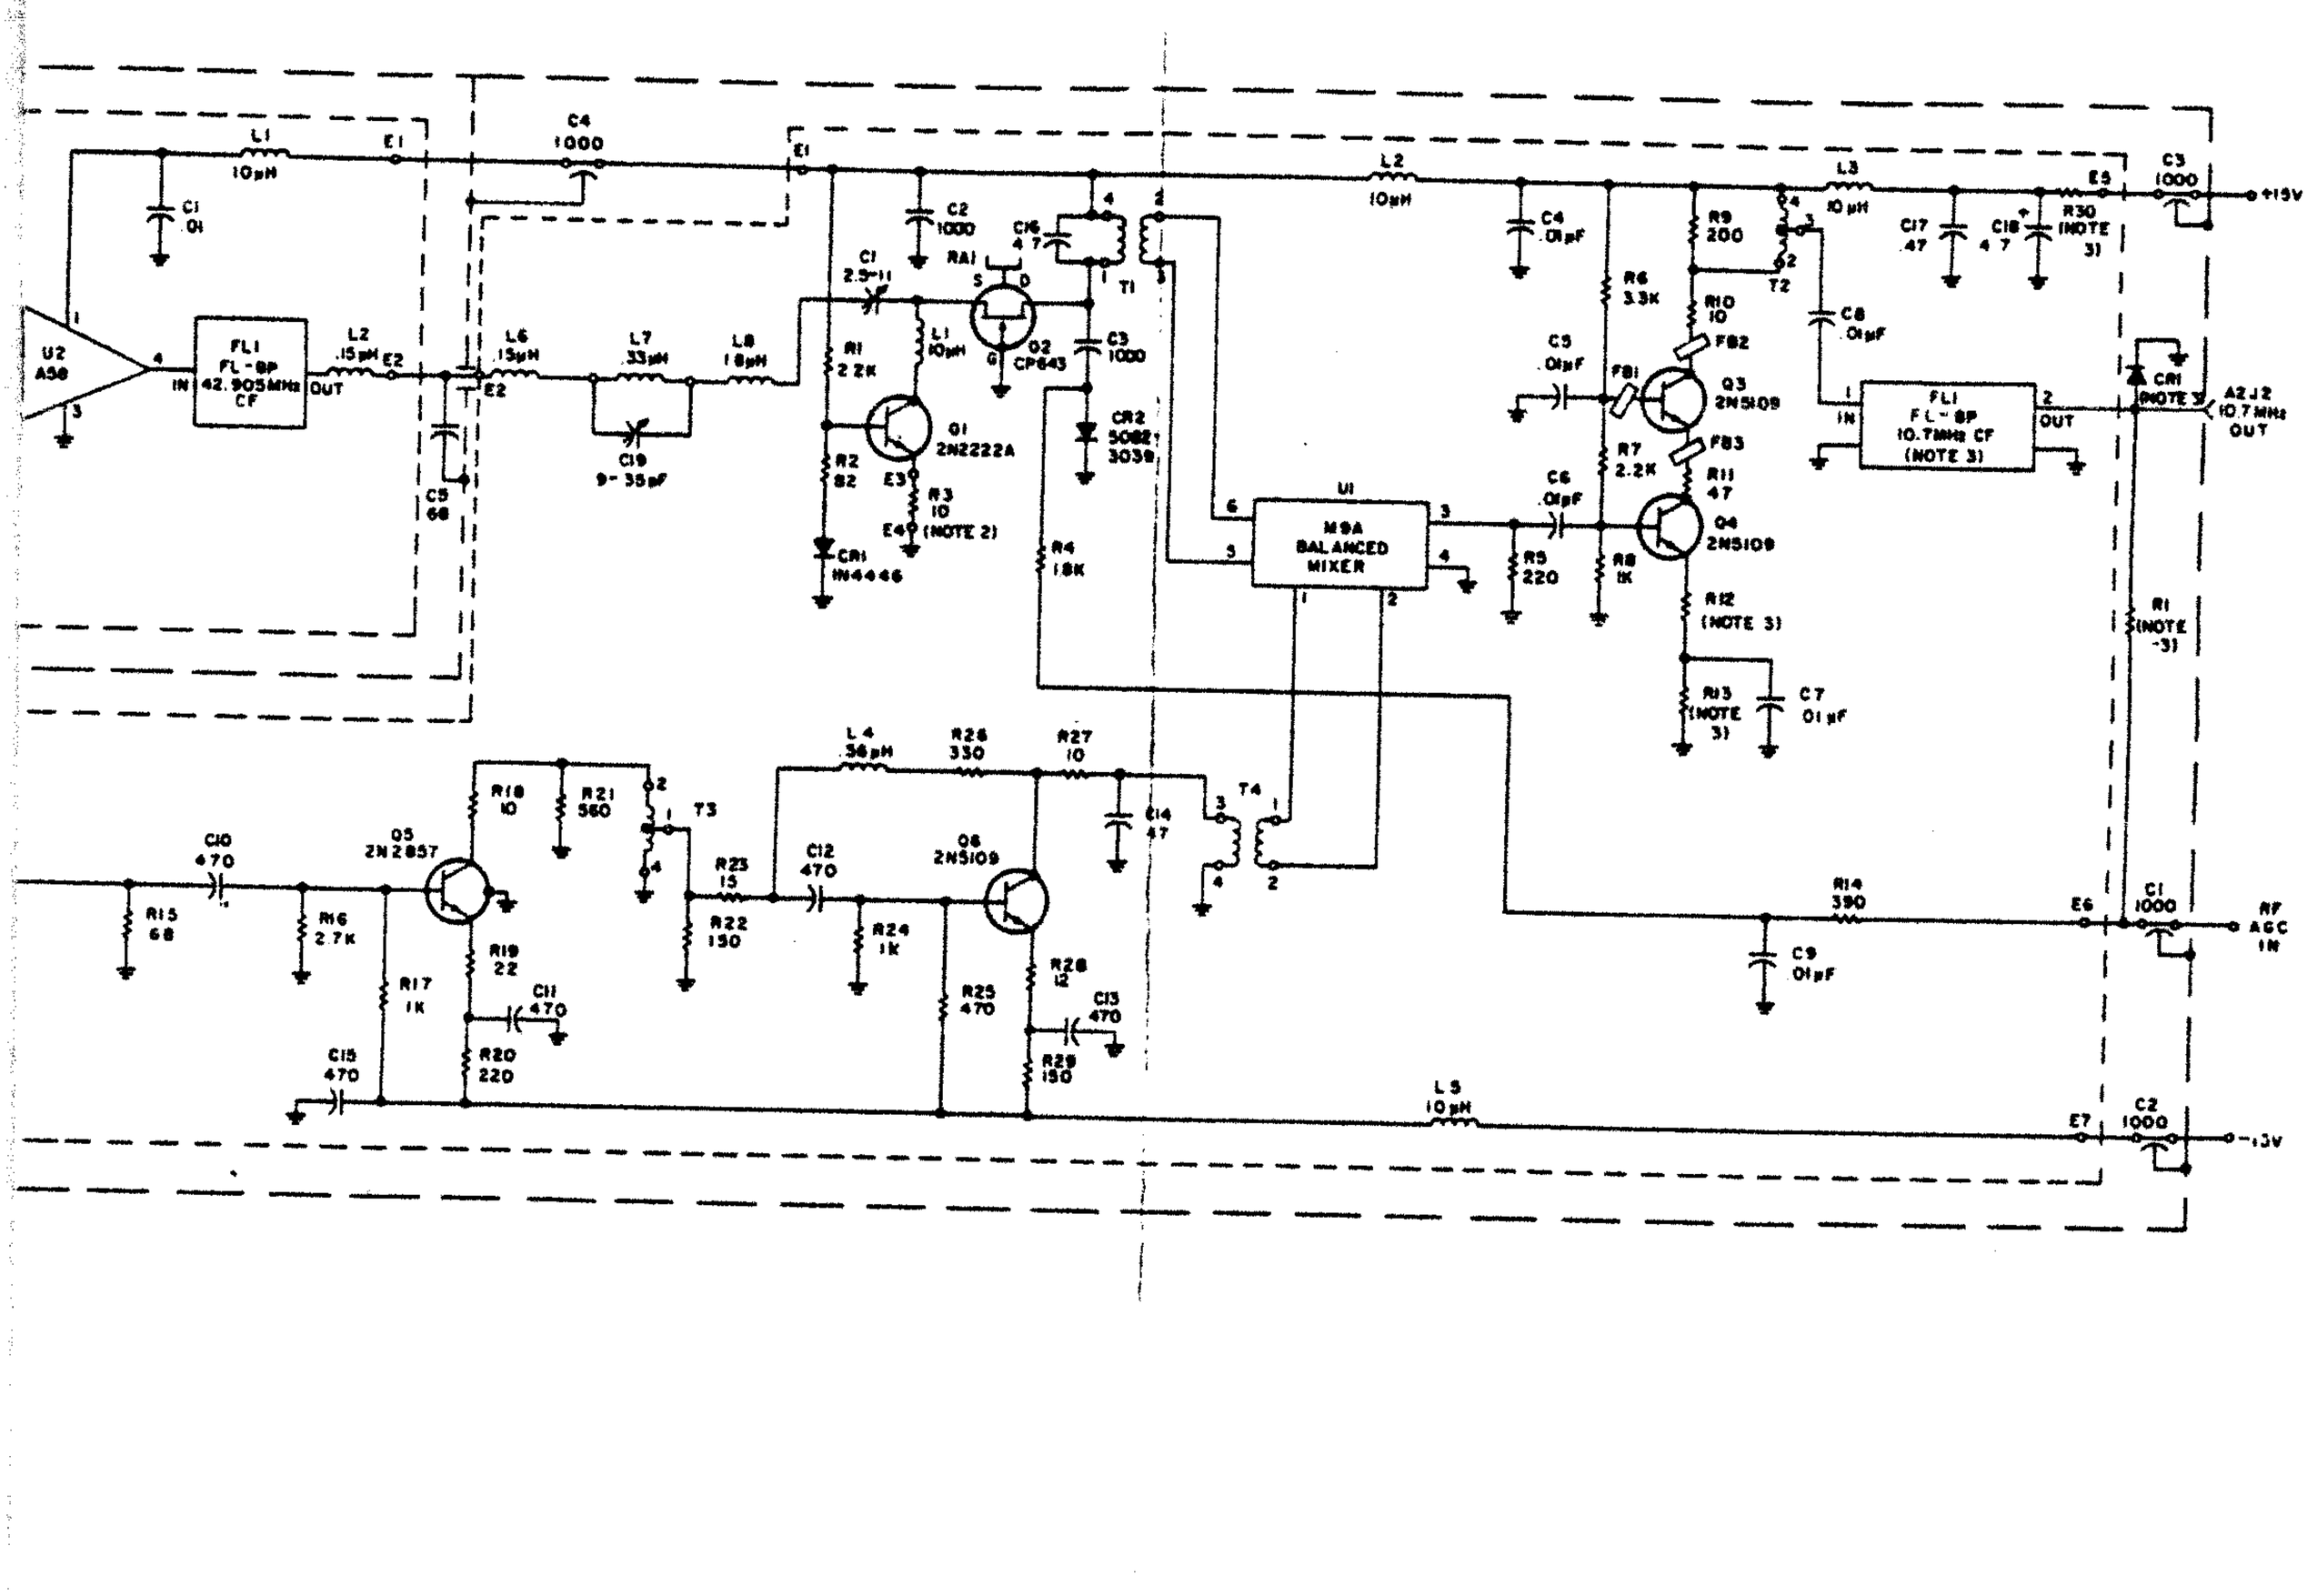



Figure 6-2. Type 791592-1 Input Converter (A3) Schematic Diagram 570202

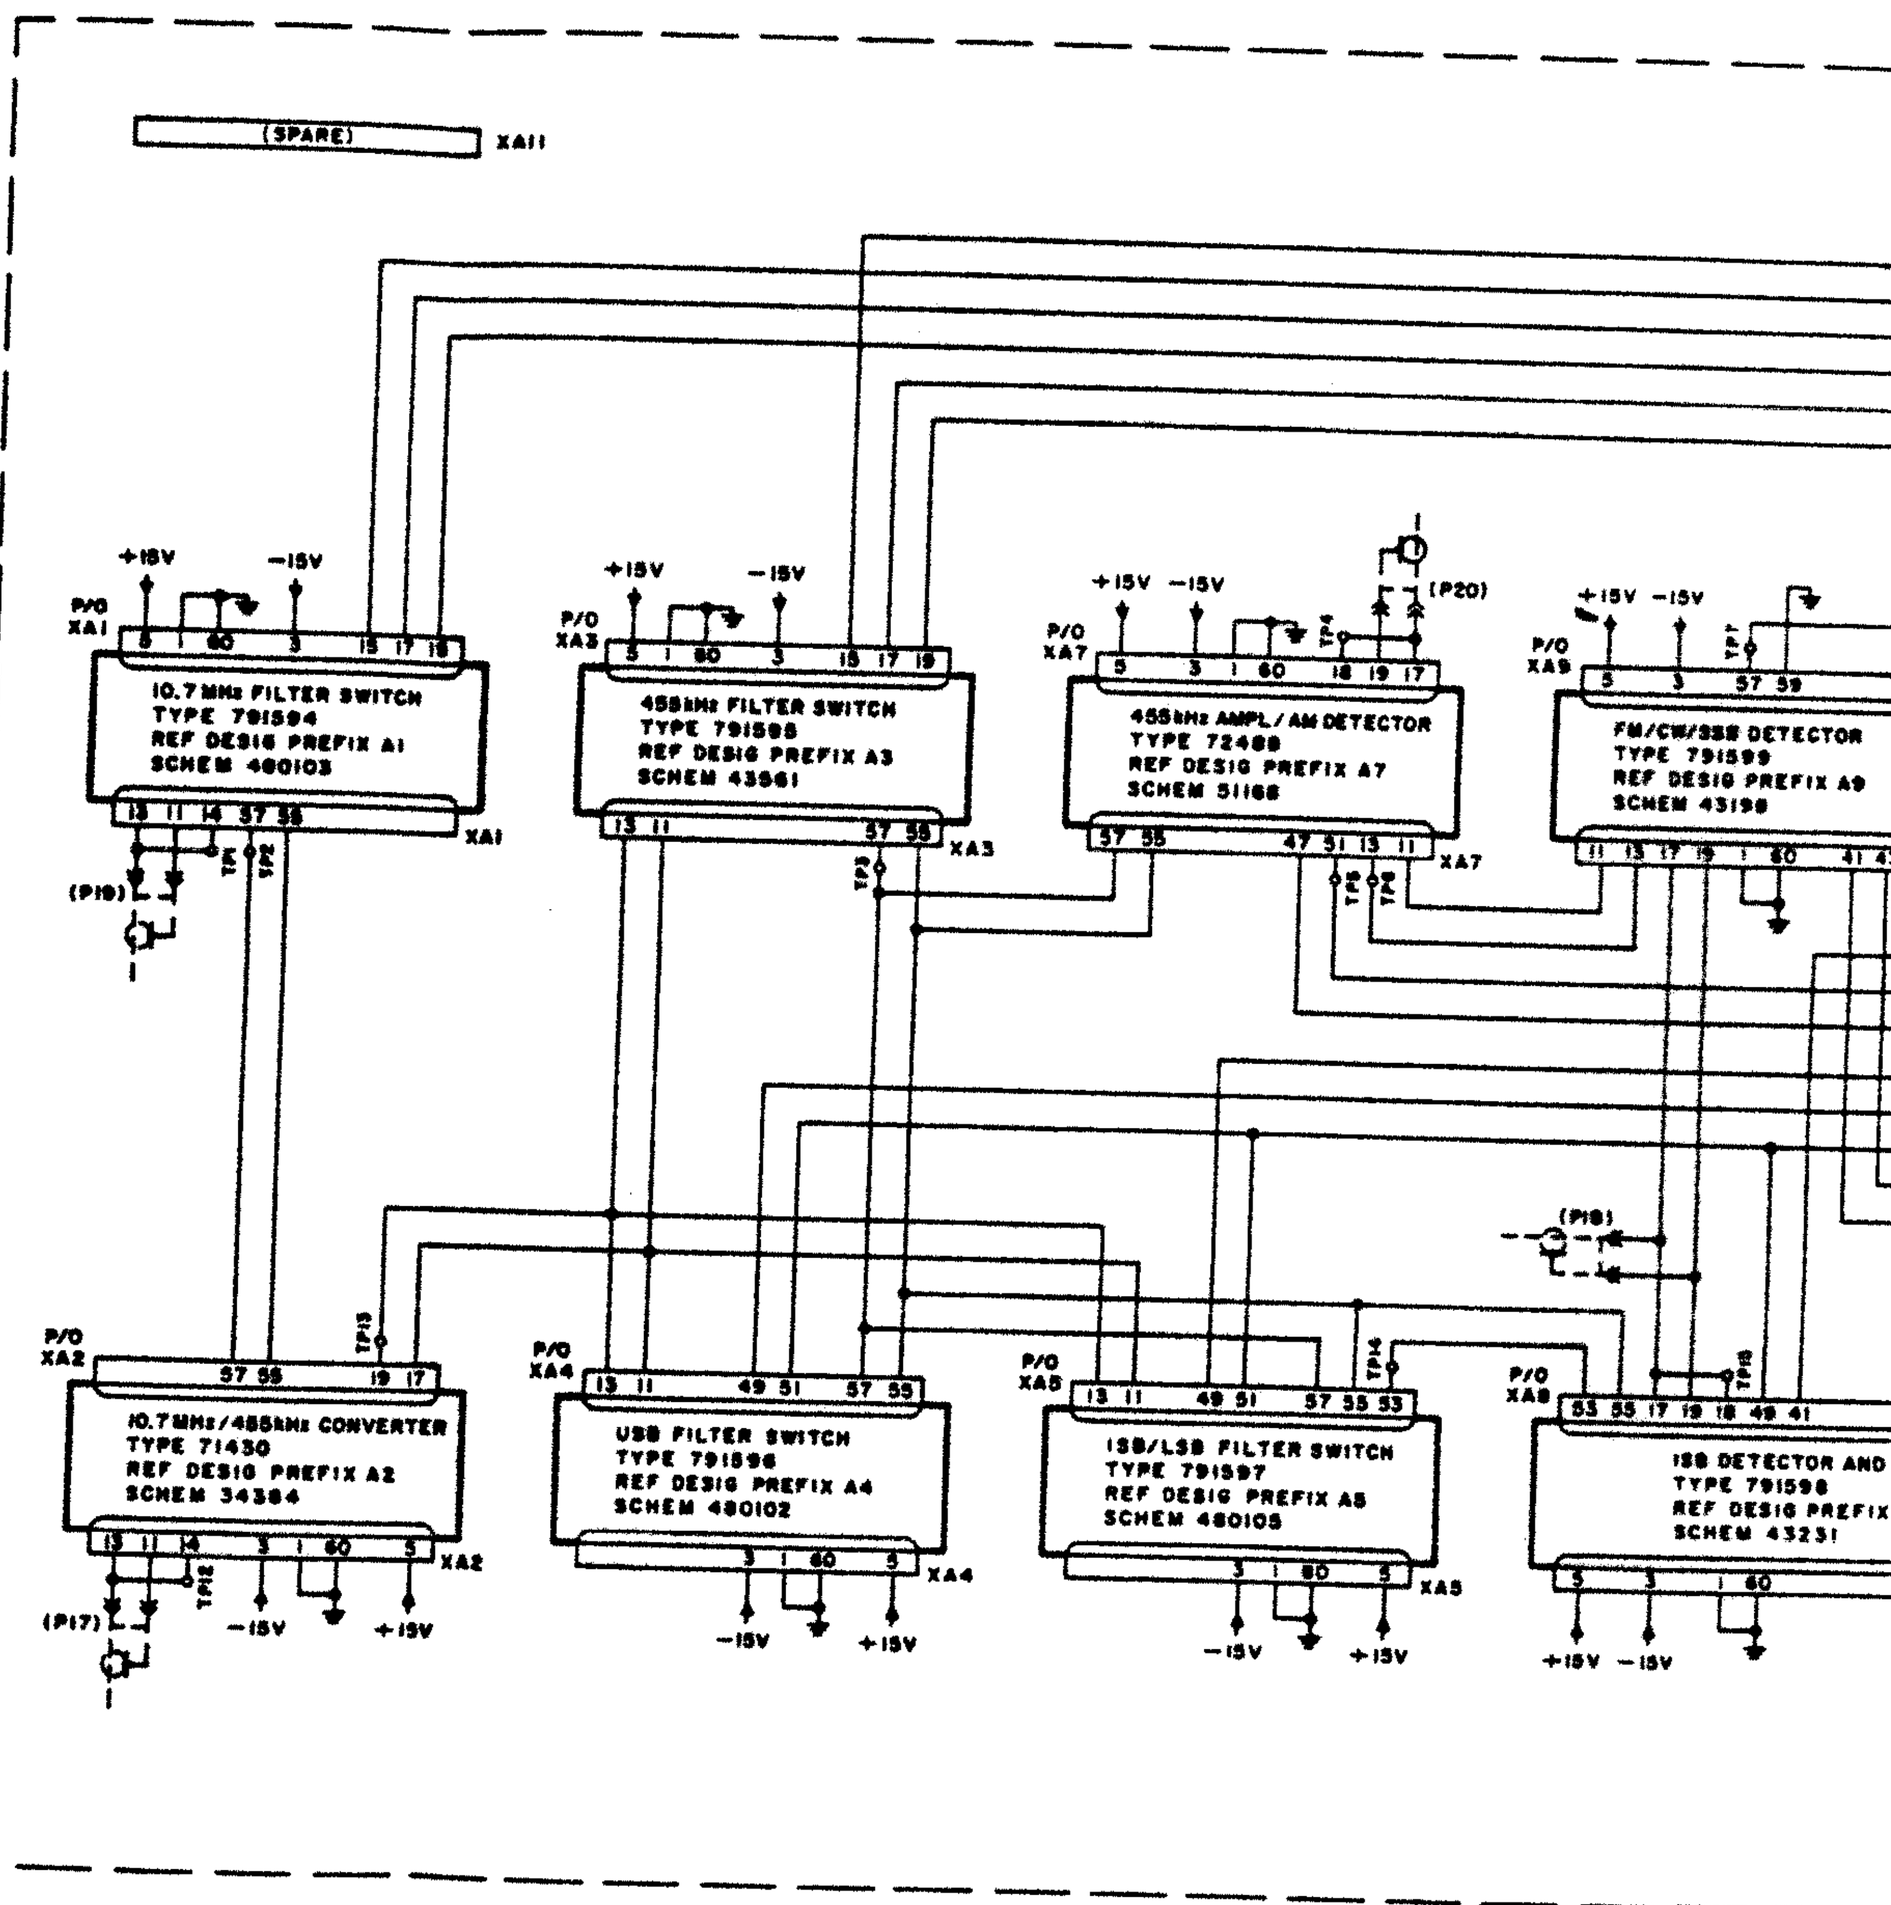


NOTES:

1. CAPACITANCE IS IN μF.
2. SPARE "E" NO.S AND CAPACITORS ARE NOT SHOWN. EACH CAPACITOR REFERENCE NUMBER IS IDENTICAL TO EACH "E" NO.; C3 ON E3, C26 ON E26, ETC.
3. MOST MODULE PINS ARE NOT SHOWN DUE TO UNNECESSARY LINE DUPLICATIONS AND COMPLEXITY. SEE EACH MODULE'S DWG FOR CLARITY.
4. PLUGS SHOWN IN DASH LINES ARE PART OF NEXT ASSEMBLY AND NOT OF THIS MODULE.

TEST POINTS DESCRIPTIONS:

TP1 10.7MHz INPUT
TP2 10.7MHz FILTER SW OUTPUT
TP3 455kHz FILTER SW IF OUTPUT
TP4 455kHz AMPLIFIER IF OUTPUT
TP5 DETECTED AM
TP6 IF INPUT TO FM/CW/SSB DETECTOR
TP7 FM/CW AUDIO
TP8, TP9 LINE AUDIO
TP10 PHONE AUDIO
TP11 LINE LEVEL AUDIO
TP12 3RD LO INPUT TO 10.7MHz/455kHz CONVERTER
TP13 10.7MHz/455kHz CONVERTER IF OUTPUT
TP14 ISB IF INPUT
TP15 BFO INPUT
TP16, TP17, TP18 ISB AUDIO
TP19 IF AGC
TP20 N/U
TP21 ISB AGC
TP22 RF AGC


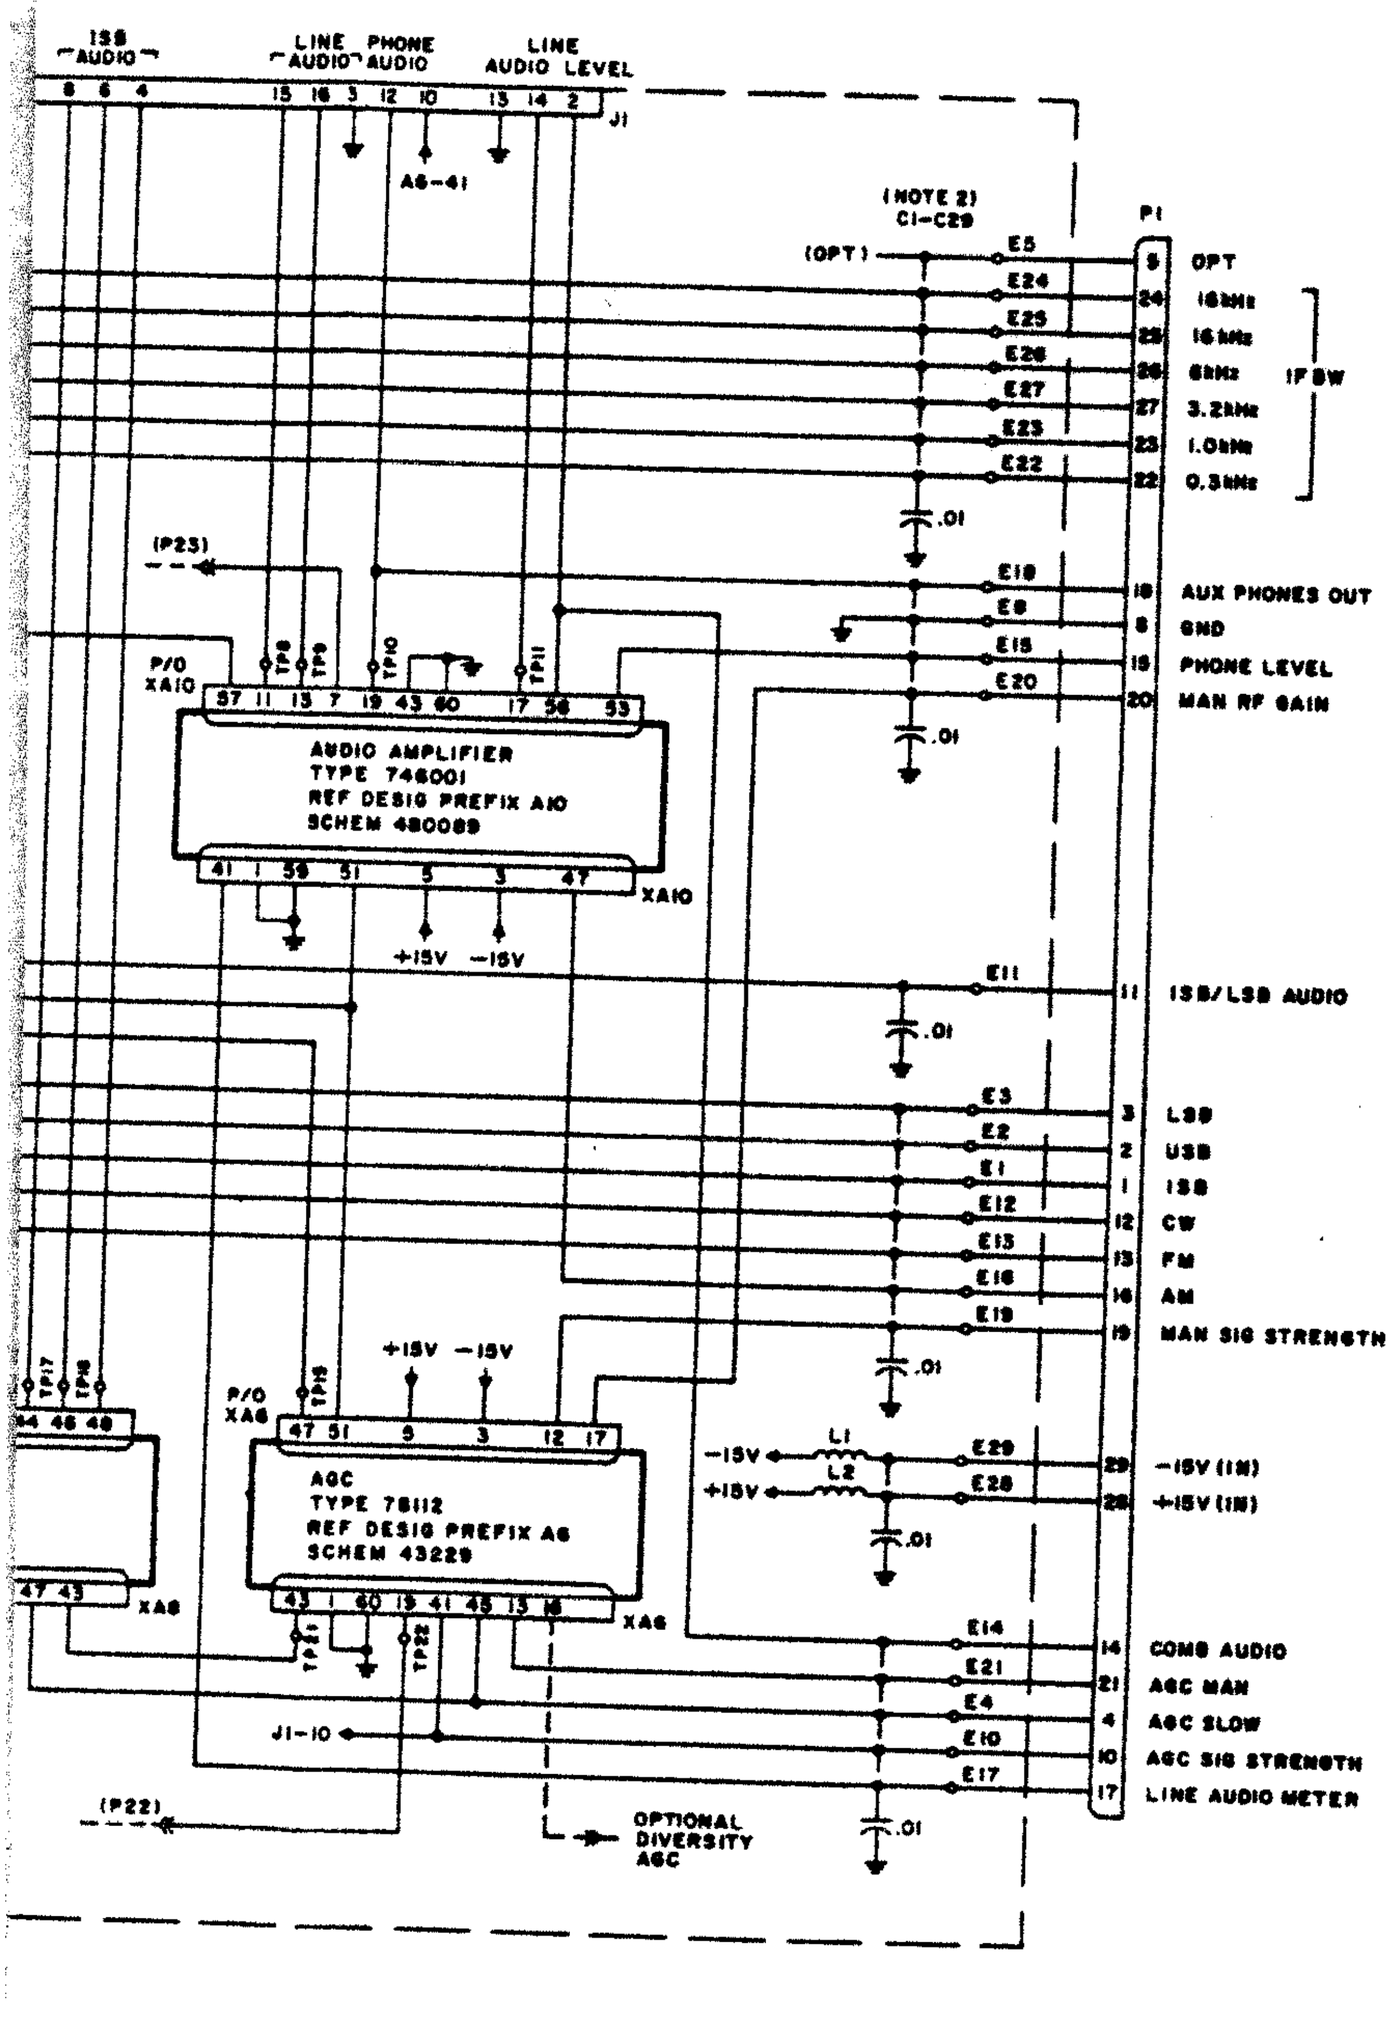
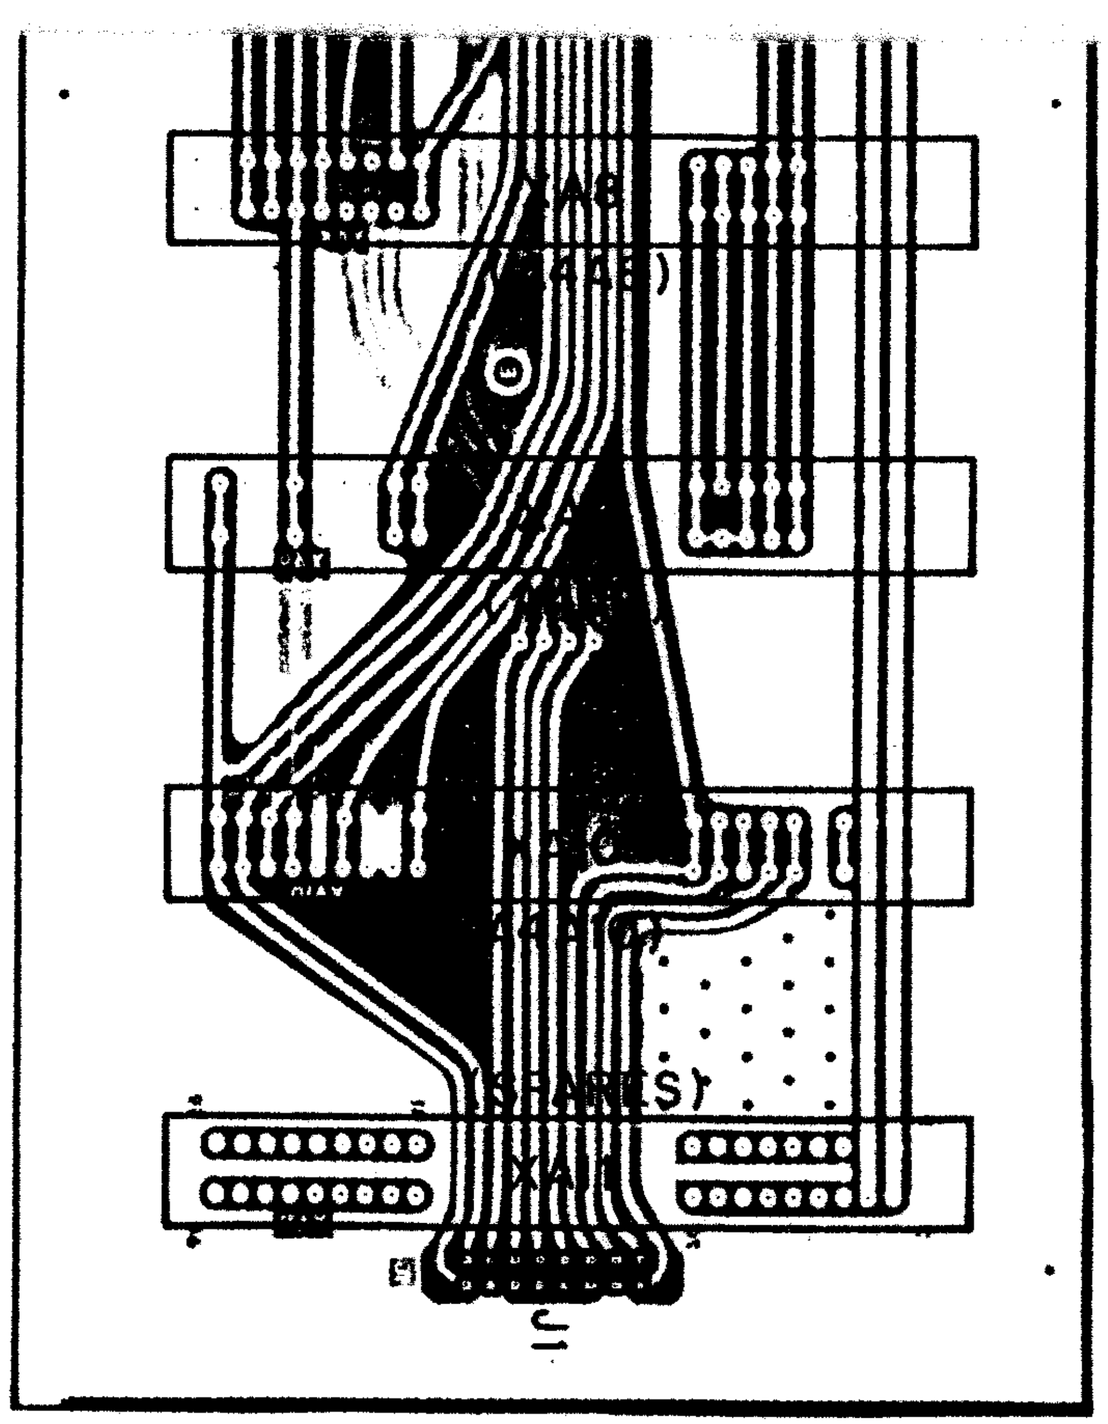



Figure 6-3. Type 791569 IF Motherboard (A4)
Schematic Diagram 570191

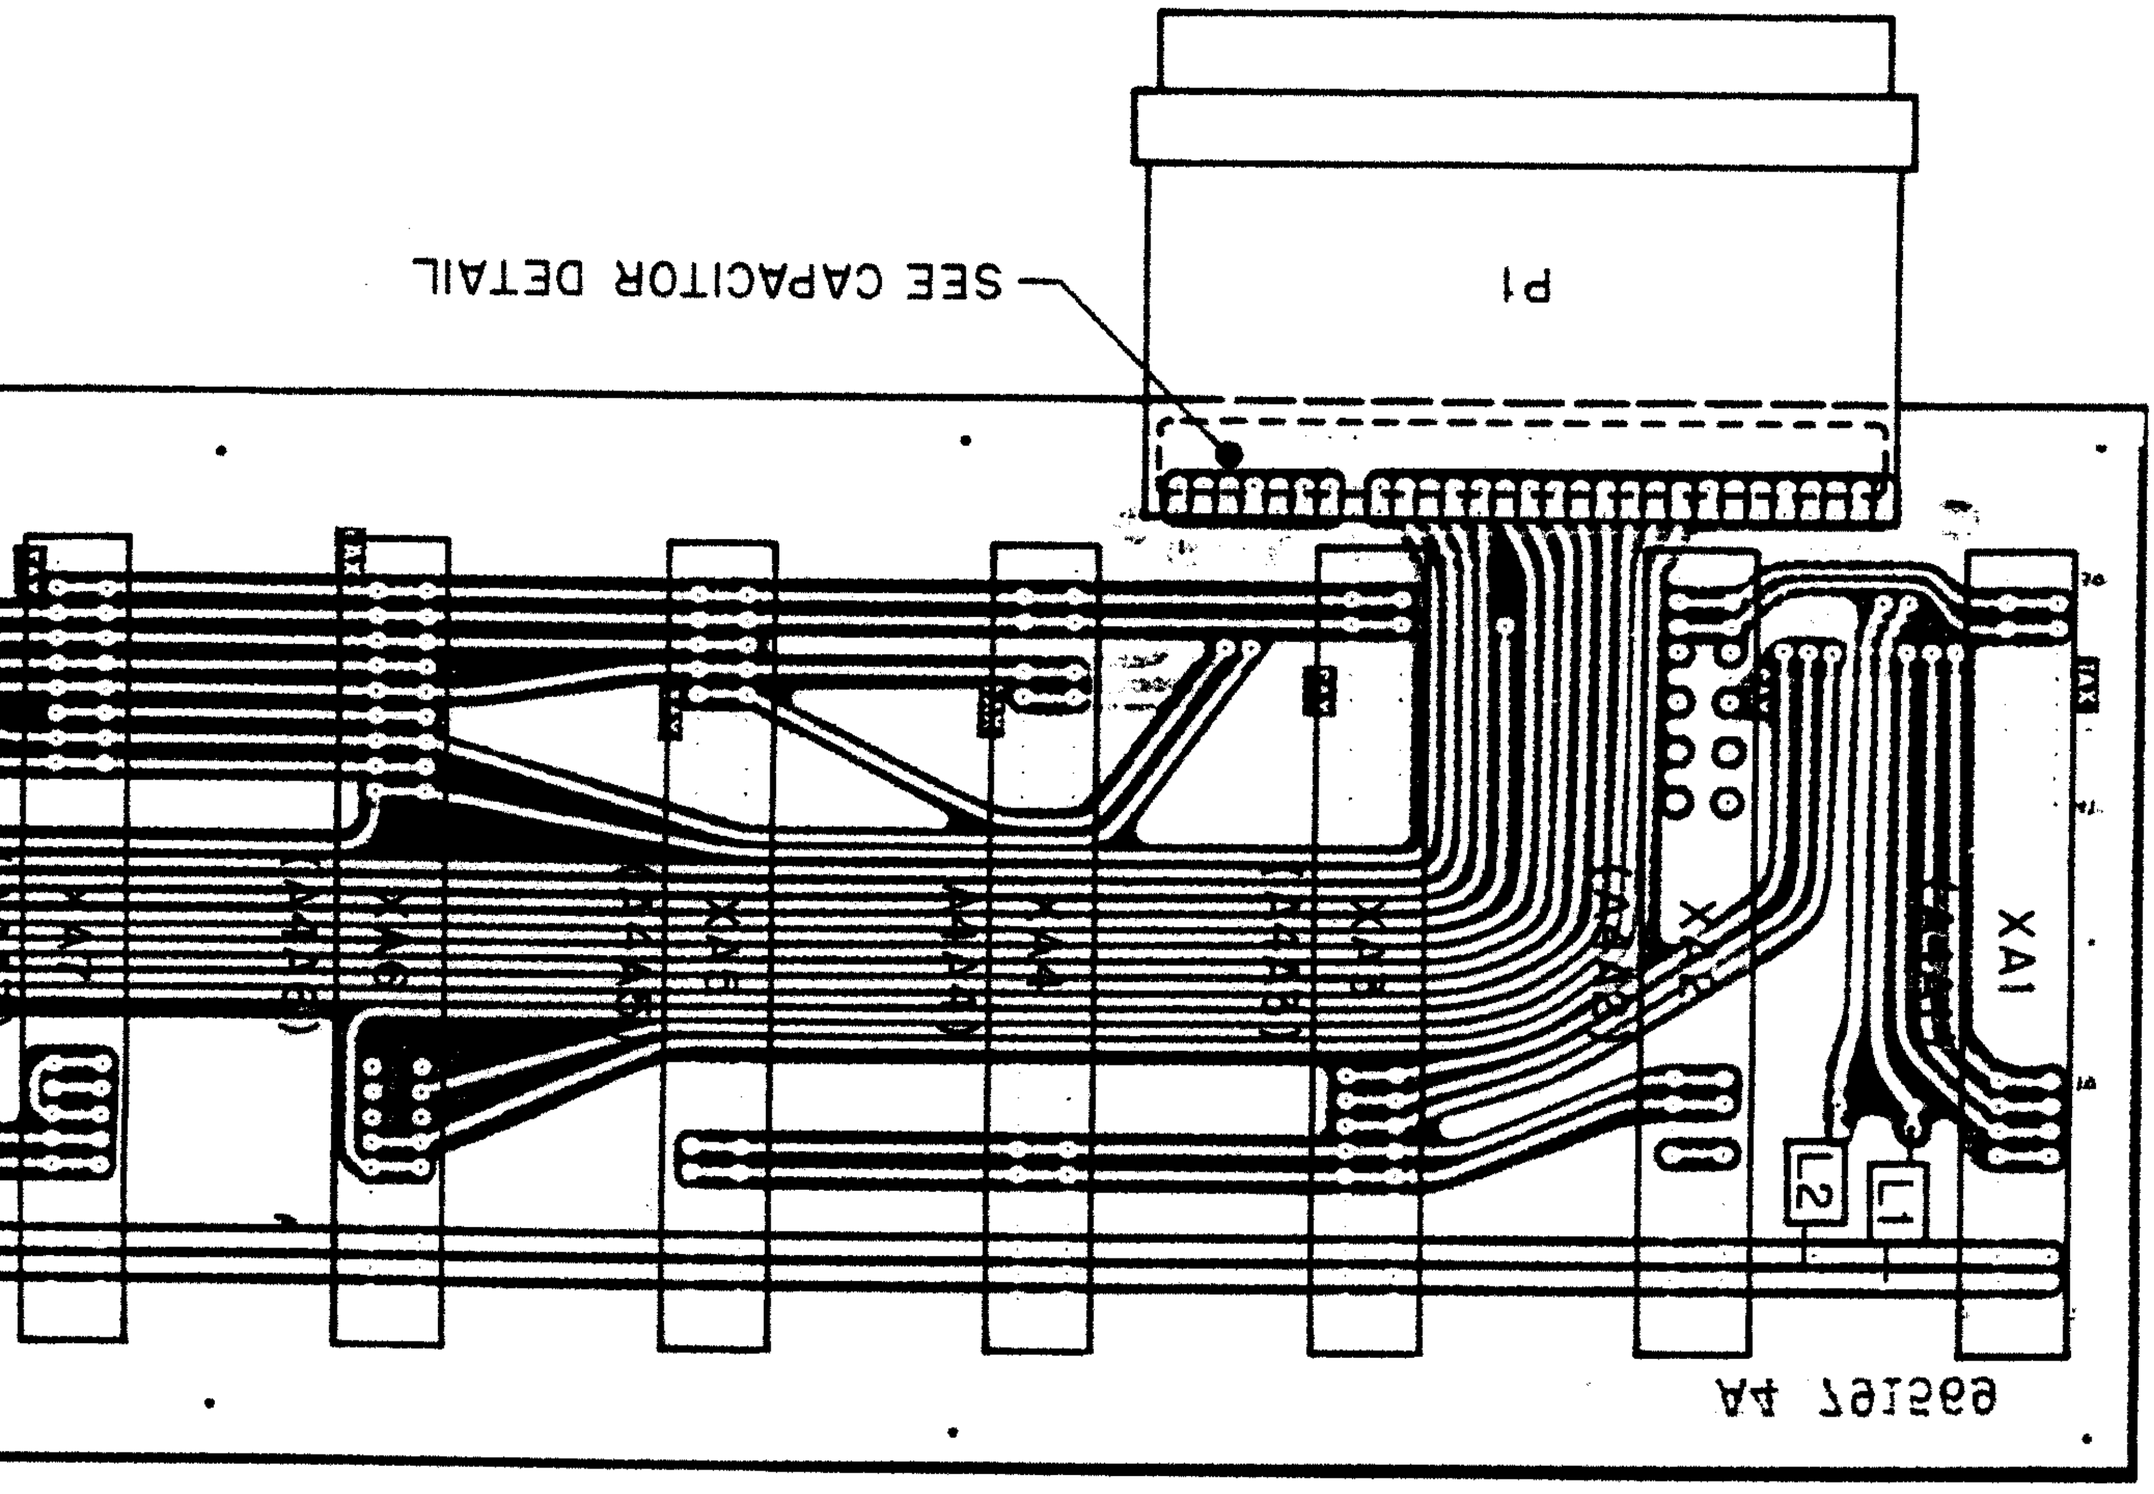



SEE CAPACITOR DETAIL
P1
XA1
L2
L1
6321ET AA

NOTES.

1. UNLESS OTHERWISE SPECIFIED:
   a) RESISTANCE IS IN OHMS, ± 5%, 1/4W.
   b) CAPACITANCE IS IN μF.
2. PIN CONFIGURATION SHOWN IN DETAIL A.
3. DIFFERENCE BETWEEN TYPES IS SHOWN IN TABLE I.


DETAIL A




MC1458

TABLE I

| TYPE | R19 | R46 | C17 | FL1 | | FL2 | | FL3 | L4 | R22 | R23 | R24 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | PART | BW | PART | BW | | | | | |
| 791594-1 | 220 | 12 | 0.1 | 92126 | 3.2 kHz | 92125 | 6.0 kHz | NOT USED | NOT USED | 33 | 560 | 33 |
| 791594-2 | 220 | 12 | 0.1 | 92229 | 4.0 kHz | 92125 | 6.0 kHz | NOT USED | NOT USED | 33 | 560 | 33 |
| 791594-3 | 1.2K | 47 | 27 pF | 92220 | 8.0 kHz | 92219 | 40 kHz | SFE10.7MA-5RED | 10 μH | NOT USED | 510 | 510 |
| 791594-4 MECH ONLY | 220 | 12 | 0.1 | 92126 | 3.2 kHz | 92125 | 6.0 kHz | NOT USED | NOT USED | 33 | 560 | 33 |

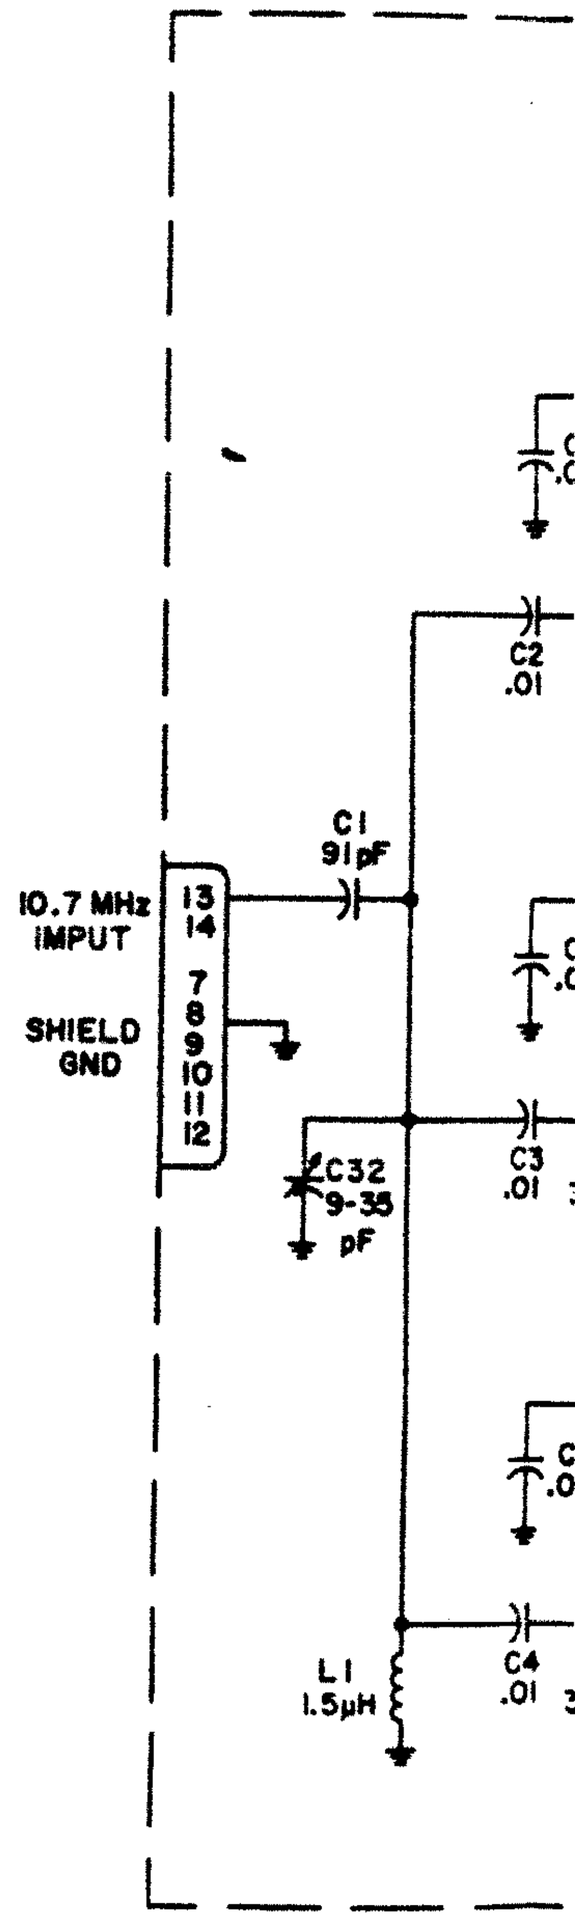


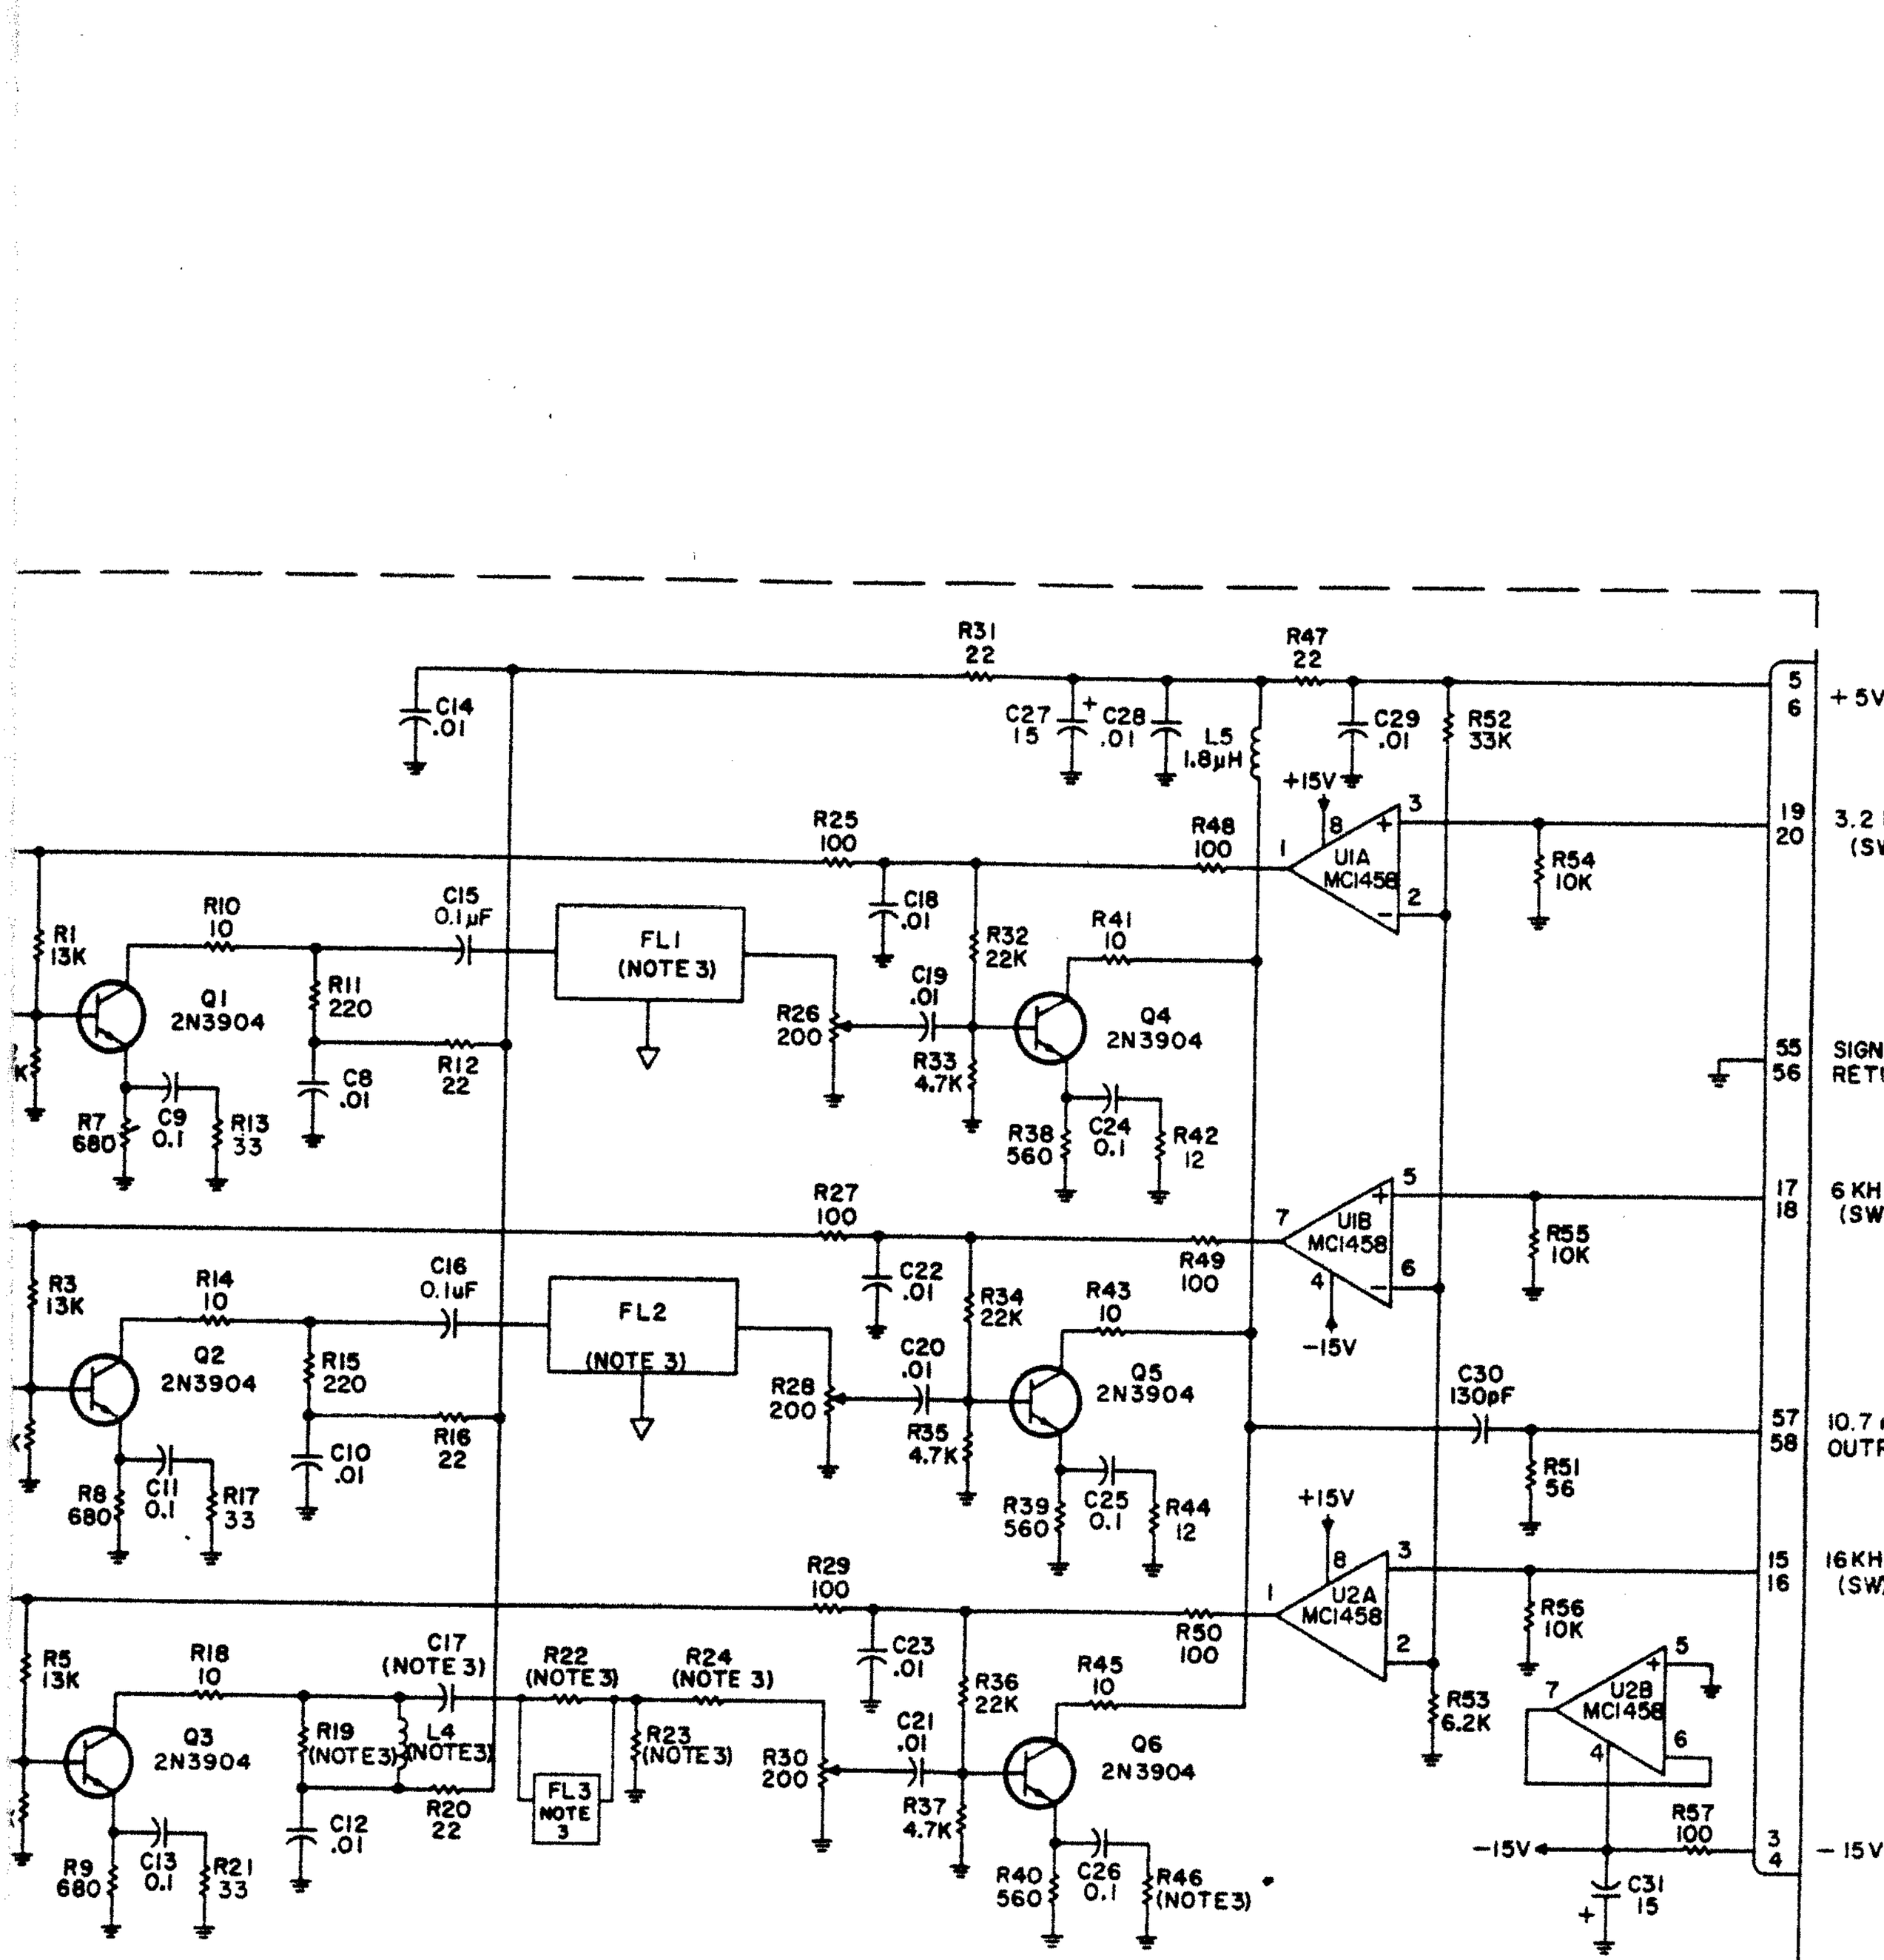



Figure 6-4. Type 791594 10.7 MHz Filter Switch (A4A1) Schematic Diagram 480103

NOTES:

1. UNLESS OTHERWISE SPECIFIED:
   a) RESISTANCE IS IN OHMS, ±5%, 1/4W.
   b) CAPACITANCE IS IN pF.
2. ENCIRCLED NUMBERS ARE MODULE PINS.
3. DIFFERENCE BETWEEN TYPES IS MECHANICAL ONLY.

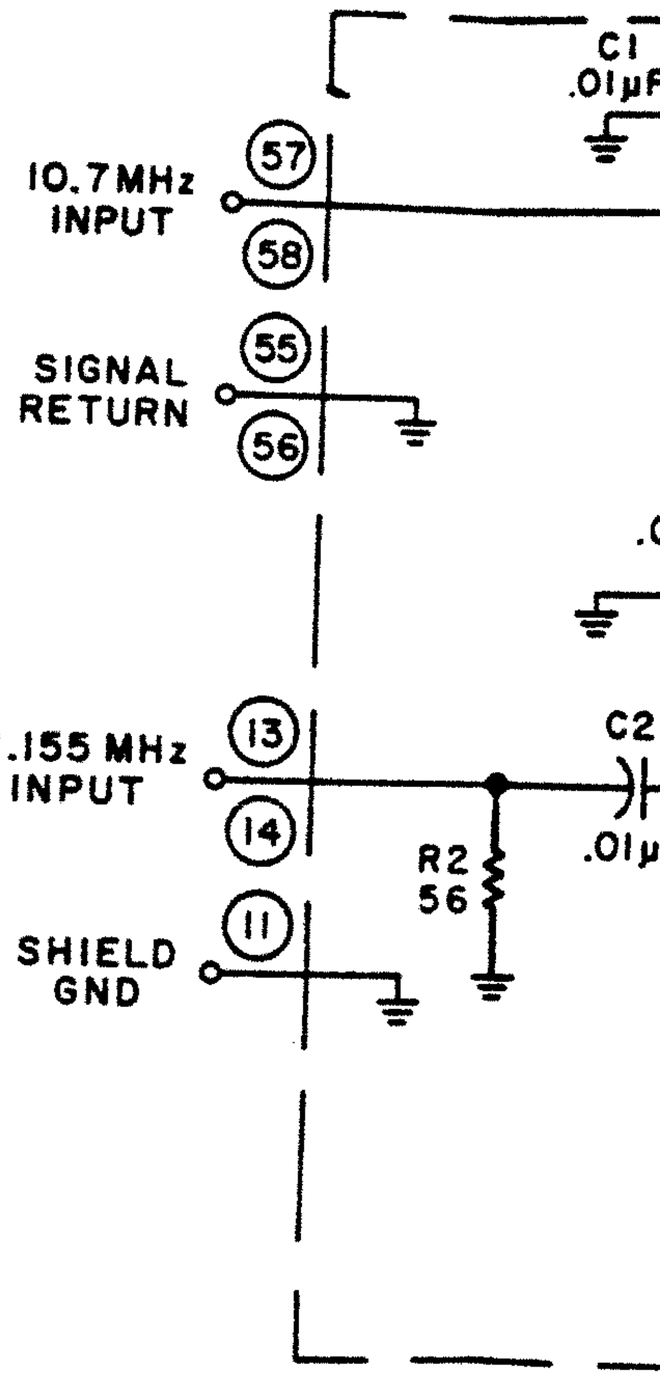


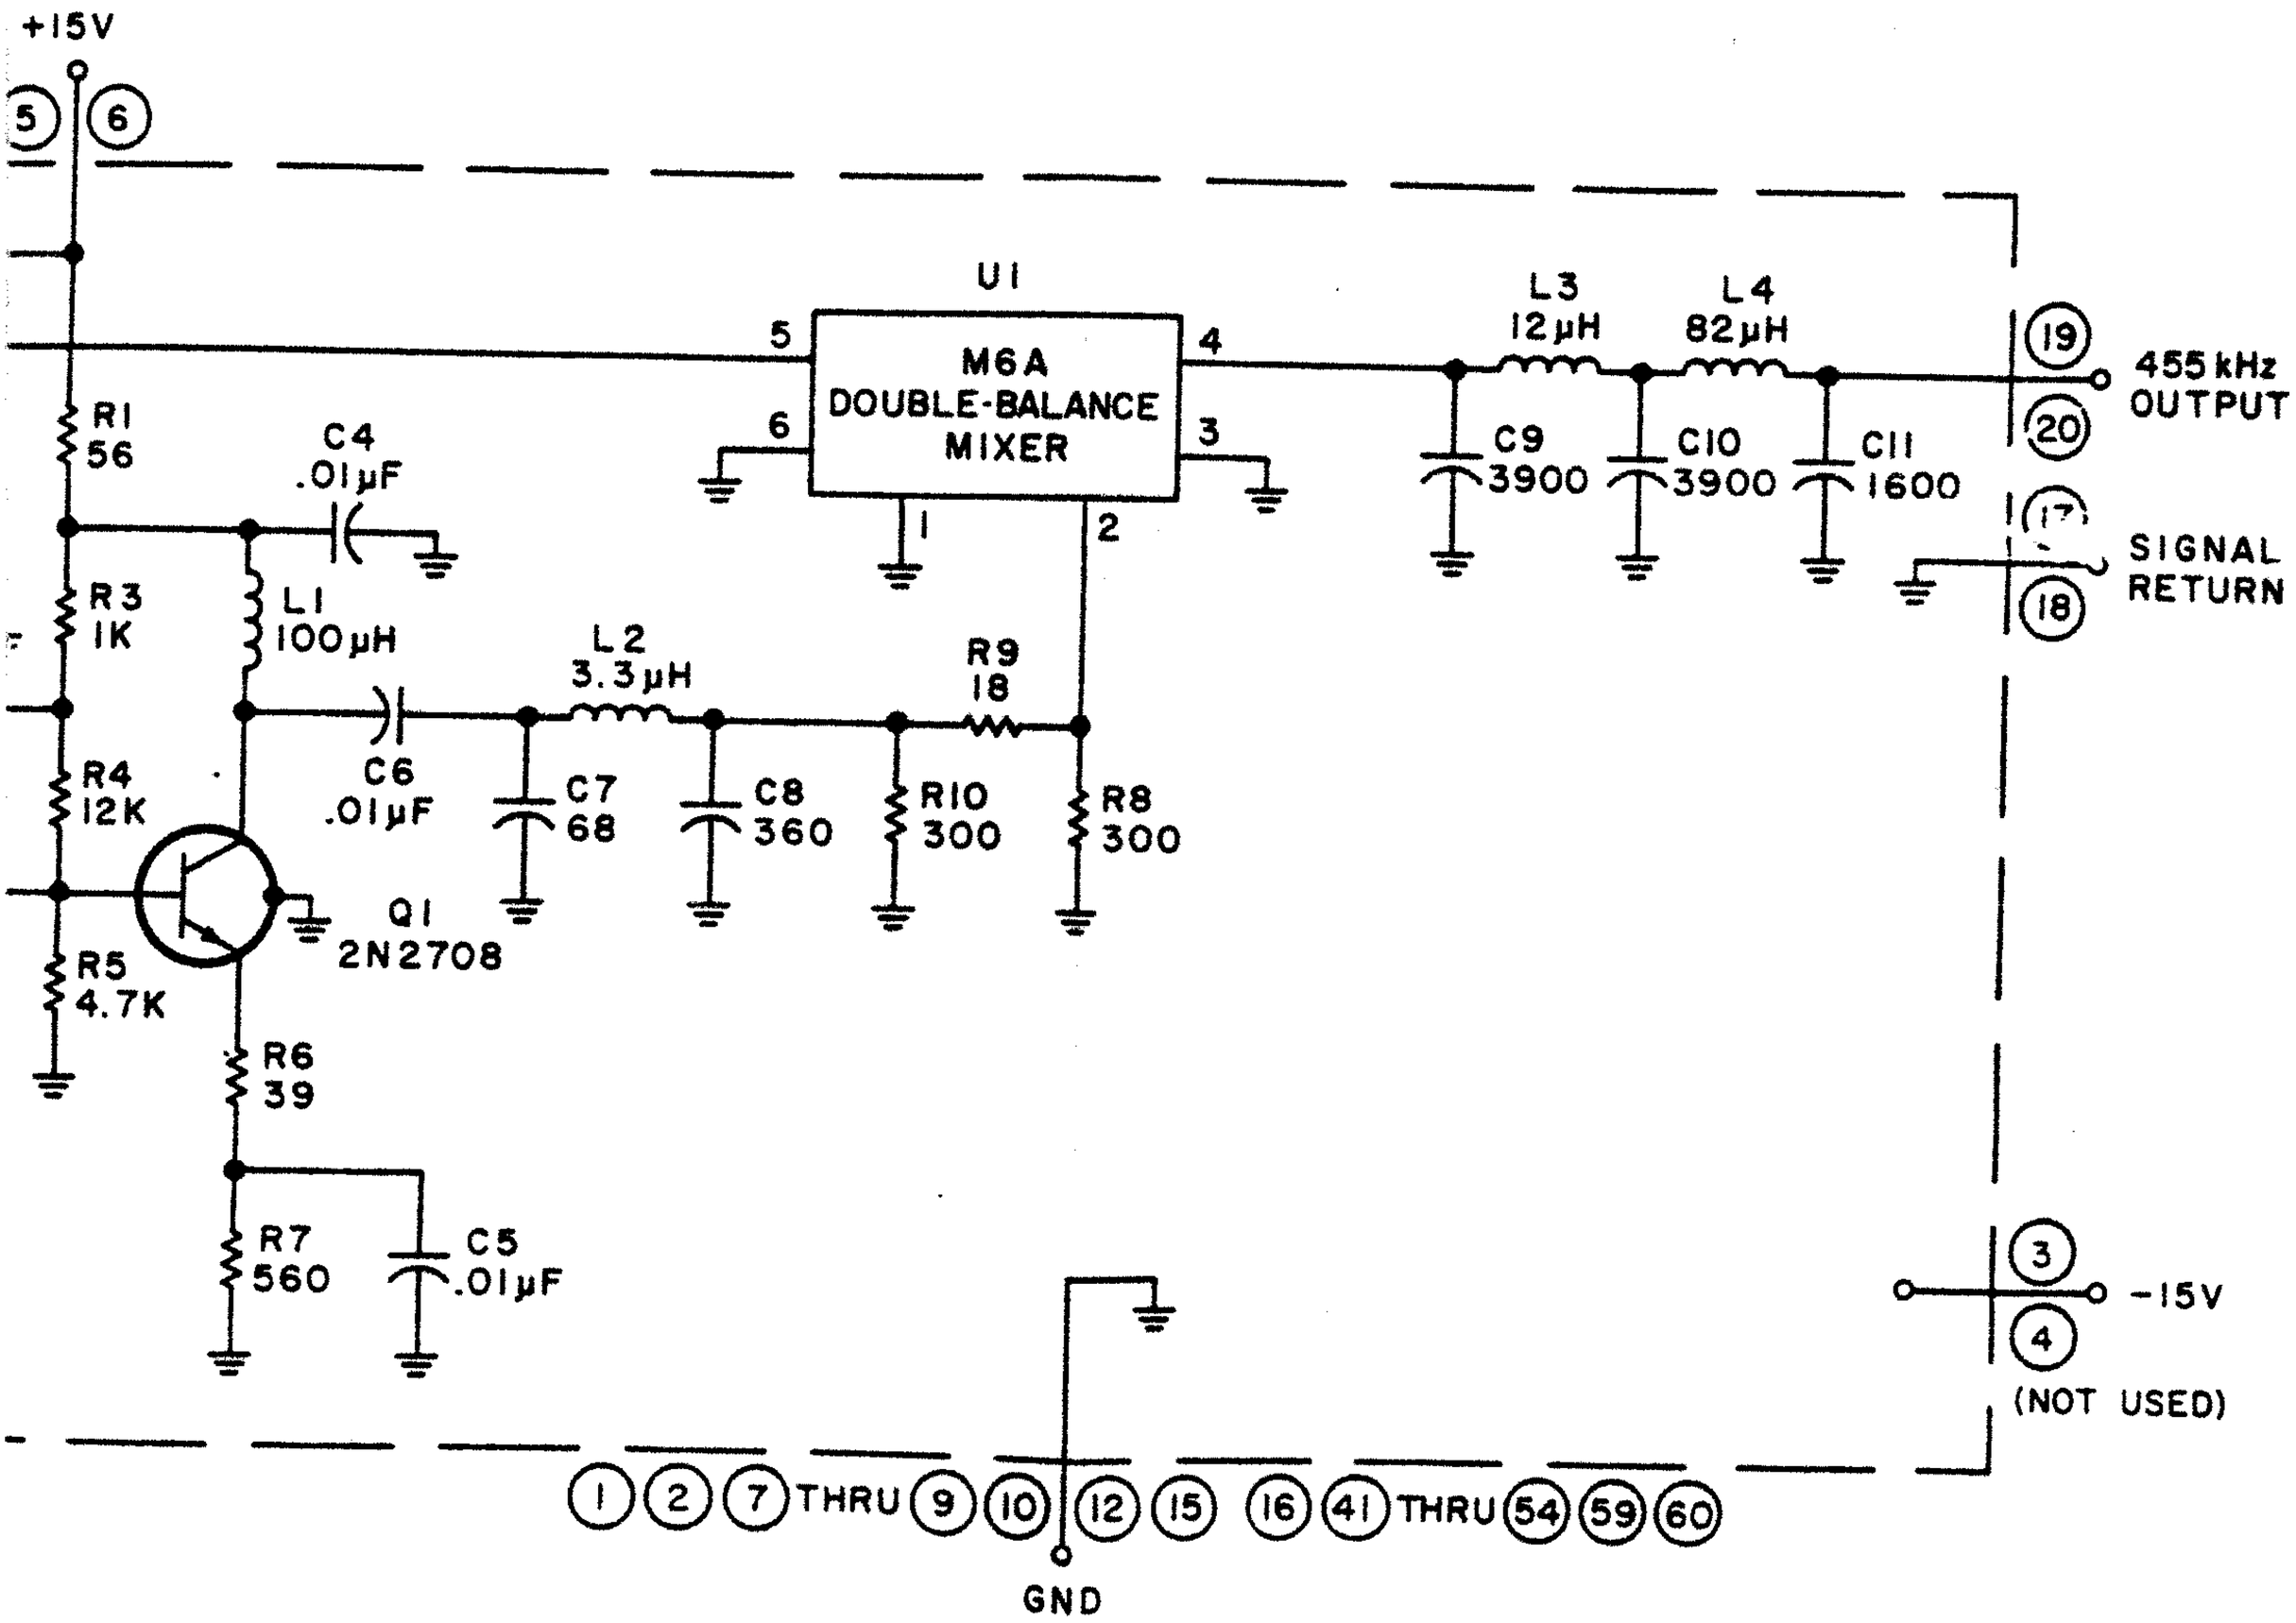



Figure 6-5. Type 71430 10.7 MHz/455 kHz Converter (A4A2) Schematic Diagram 34384

NOTES:

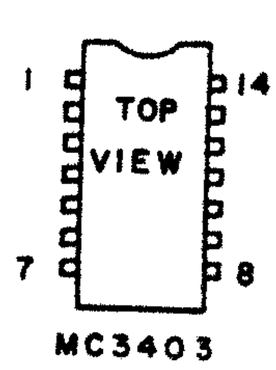
1. UNLESS OTHERWISE SPECIFIED:
   a) RESISTANCE IS IN OHMS ±5%, 1/4 W.
   b) CAPACITANCE IS IN μF.
2. ENCIRCLED NUMBERS ARE MODULE PINS.
3. DIFFERENCE BETWEEN TYPES IS SHOWN IN TABLE I.
4. IF DIFFICULTY OF PROCUREMENT EXISTS FOR PART MC3403P PART LM348N MAY BE USED AS ALTERNATE IN THIS APPLICATION.
5. NOMINAL VALUE, FINAL VALUE FACTORY SELECTED.




MC3403

TABLE I

| TYPE | FL1 | | FL2 | | R32 |
|---|---|---|---|---|---|
| | PART | BW | PART | BW | |
| 791595-1 | 92128 | 325 Hz | 92127 | 1 kHz | 220 |
| 791595-2 | 20611 | 100 Hz | 92127 | 1 kHz | 220 |
| 791595-3 | 92210 | 300 Hz | 92209 | 1 kHz | 220 |
| 791595-4 | 92128 | 325 Hz | 92127 | 1 kHz | NOTE 5 |
| 791595-5 | 92127 | 1kHz | 92249 | 3.2kHz | NOTE 5 |
| 791595-6 MECH ONLY | 92128 | 325Hz | 92127 | 1kHz | 220 |

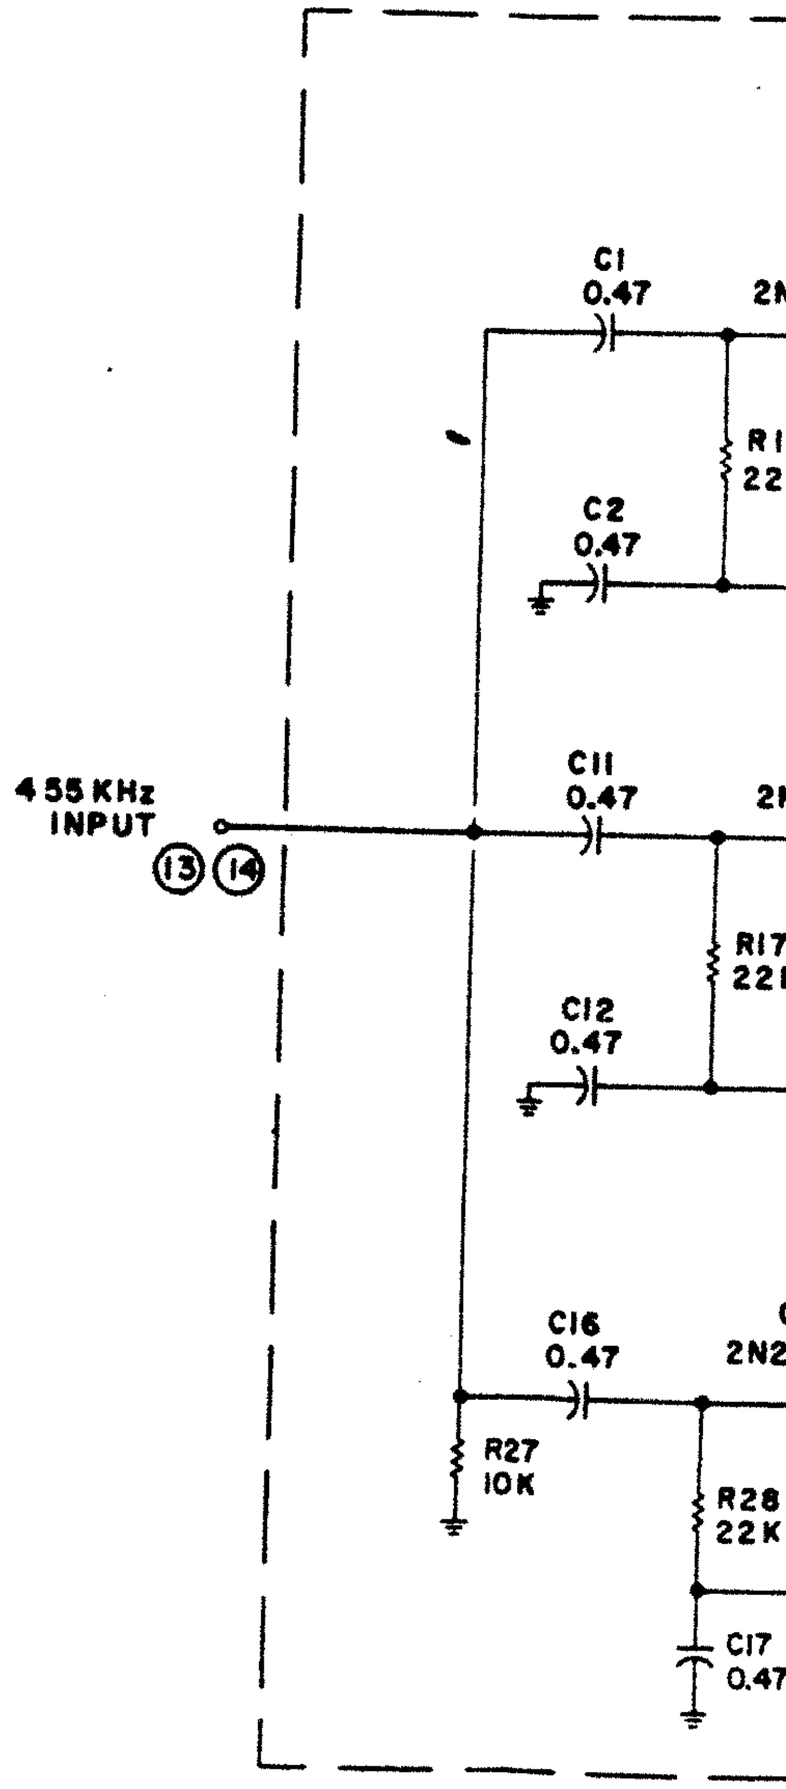


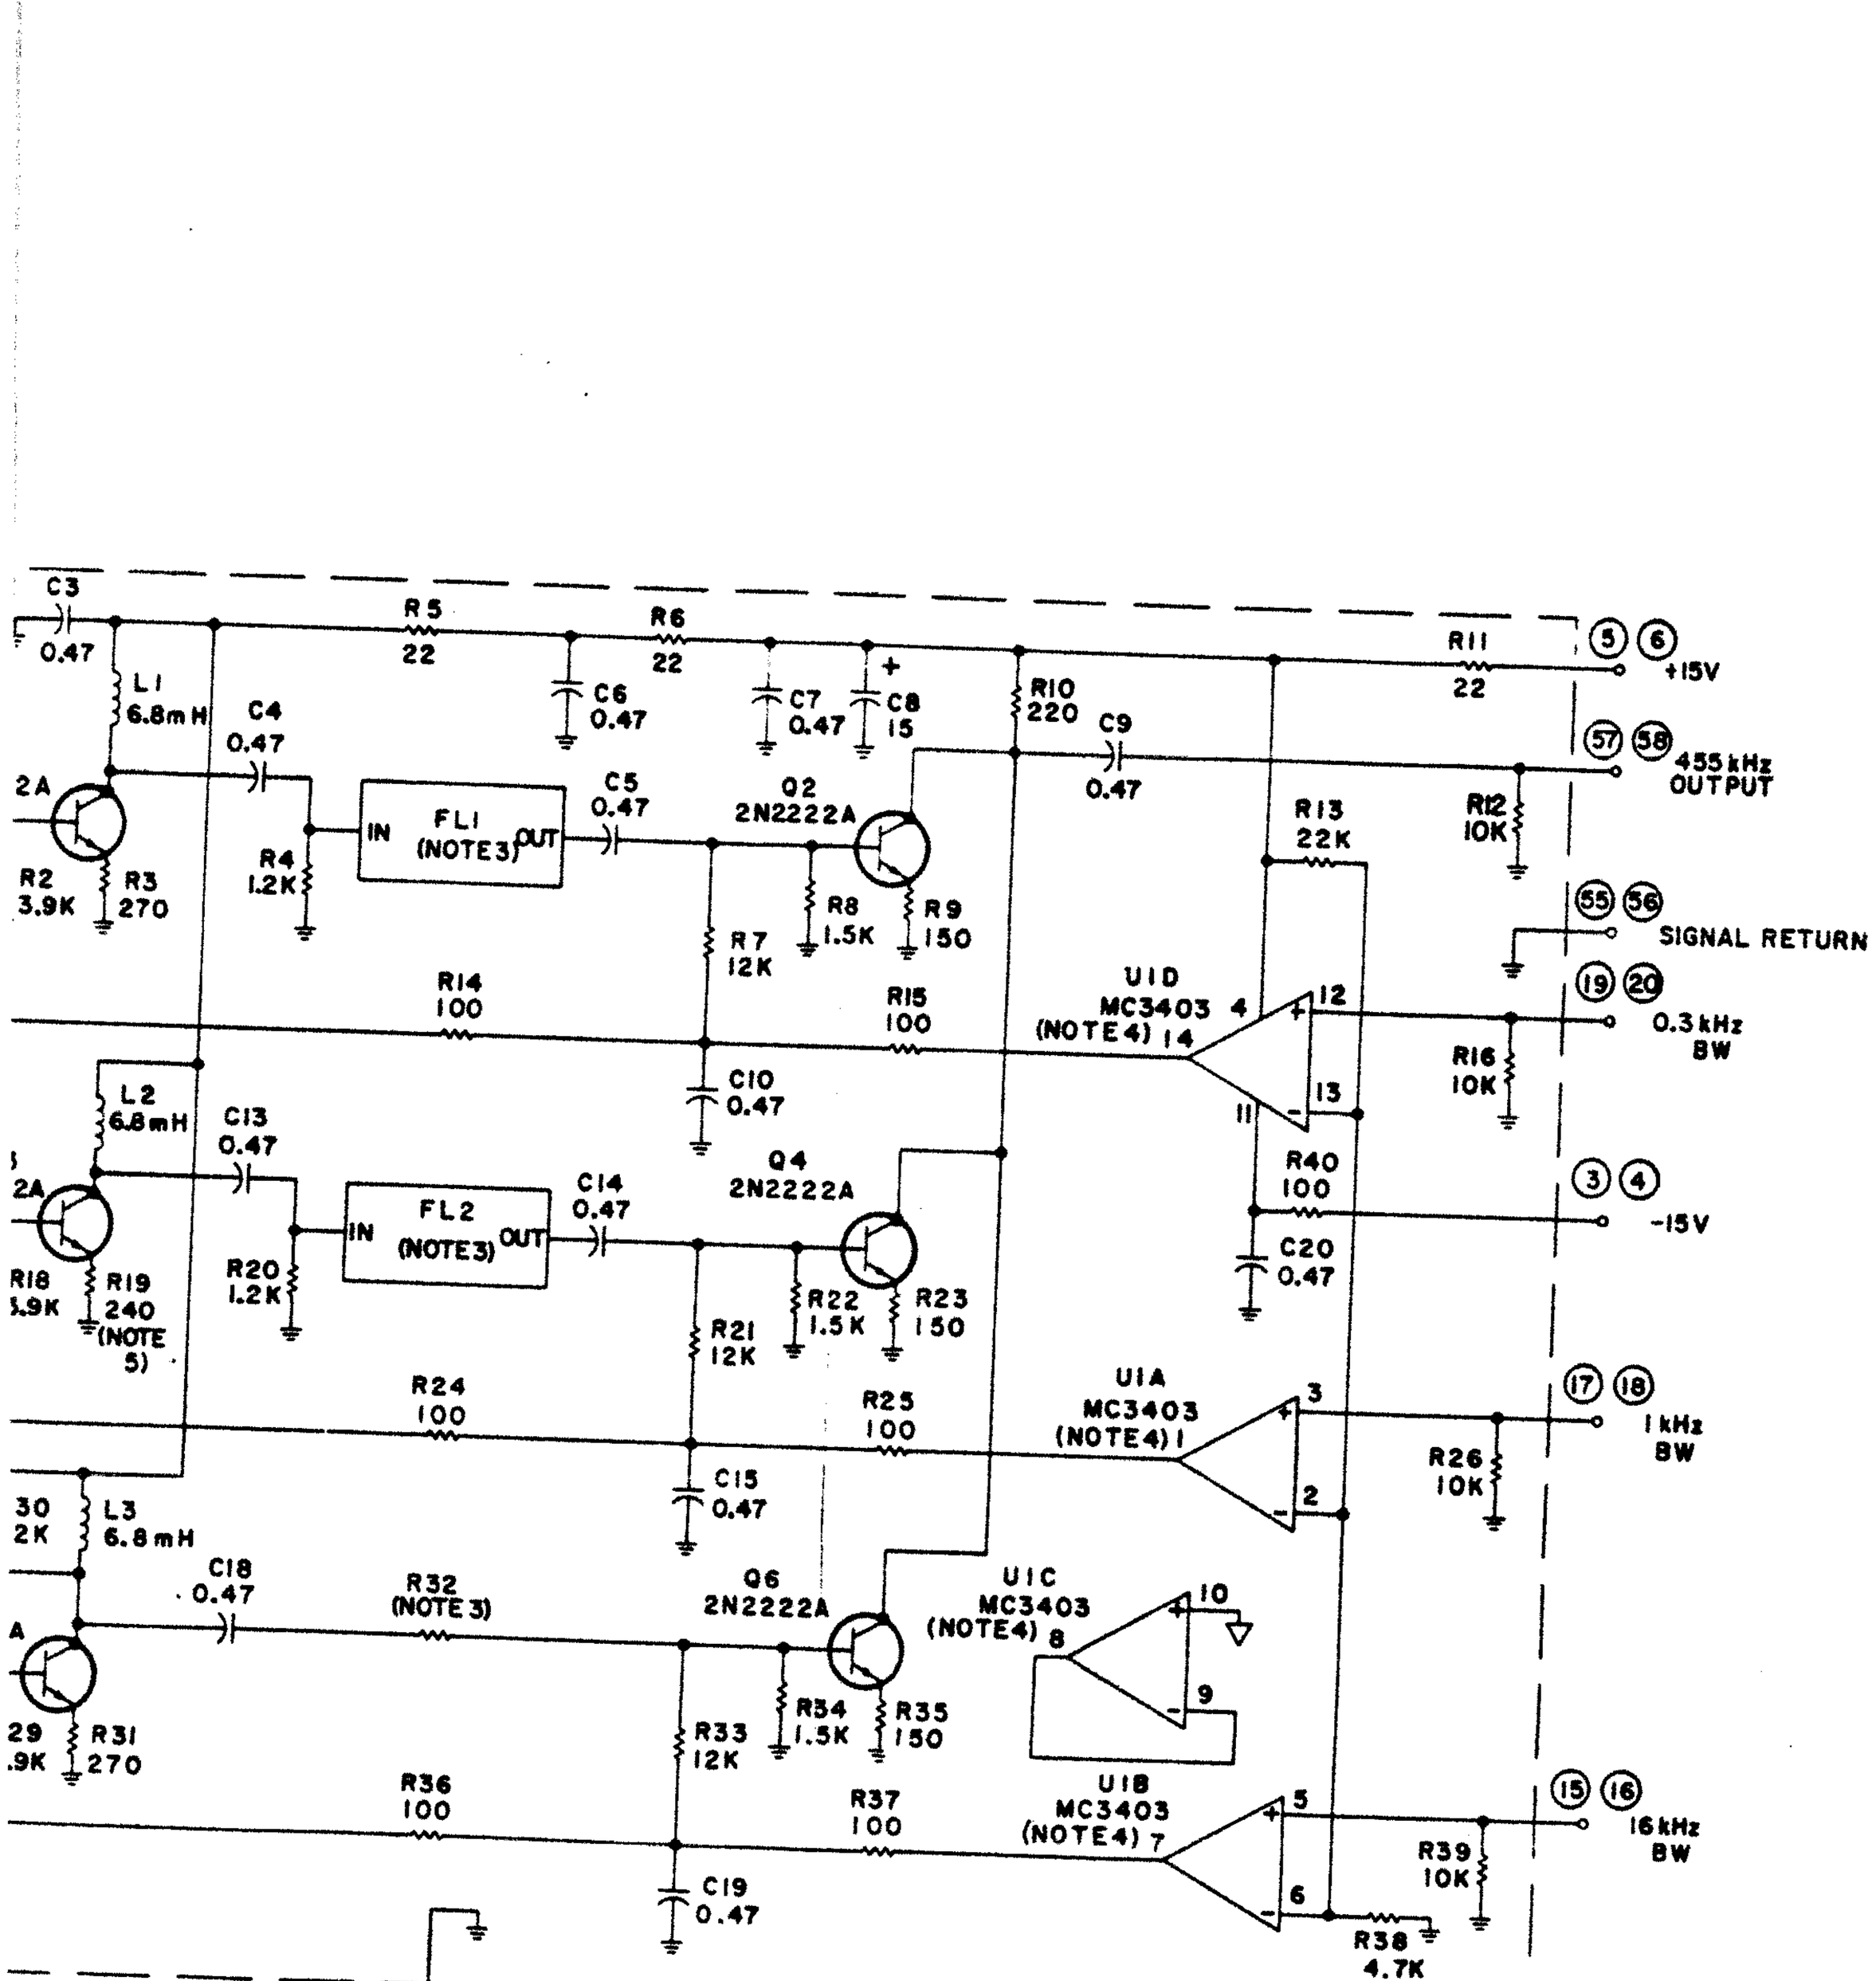



Figure 6-6. Type 791595 455 kHz Filter Switch (A4A3) Schematic Diagram 43561

NOTES:

1. UNLESS OTHERWISE SPECIFIED:
   a) RESISTANCE IS IN OHMS, ±5%, 1/4W.
   b) CAPACITANCE IS IN μF.
2. PIN CONFIGURATION IS SHOWN IN DETAIL A
3. DIFFERENCE BETWEEN TYPES IS SHOWN IN TABLE A


DETAIL A




MC1458

TABLE A

| TYPE | FLI |
|---|---|
| 791596-1 | 92122 |
| 791596-2 | 92194 |
| 791596-3 (MECH ONLY) | 92122 |

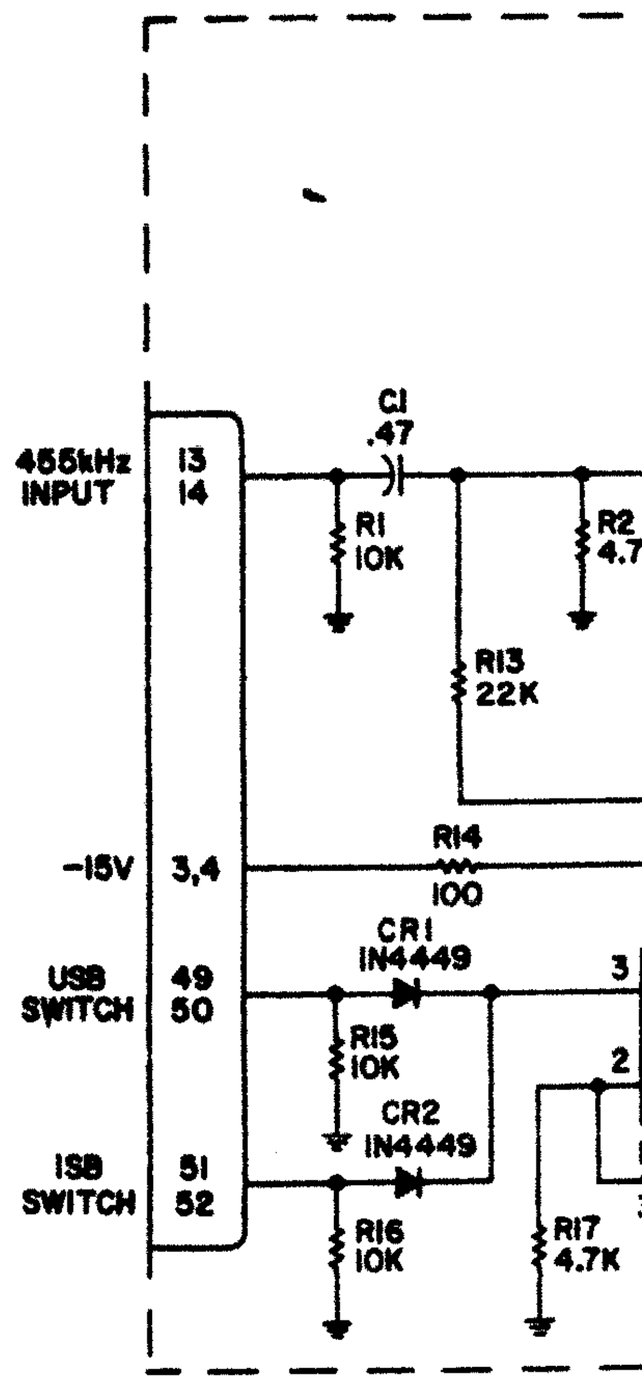

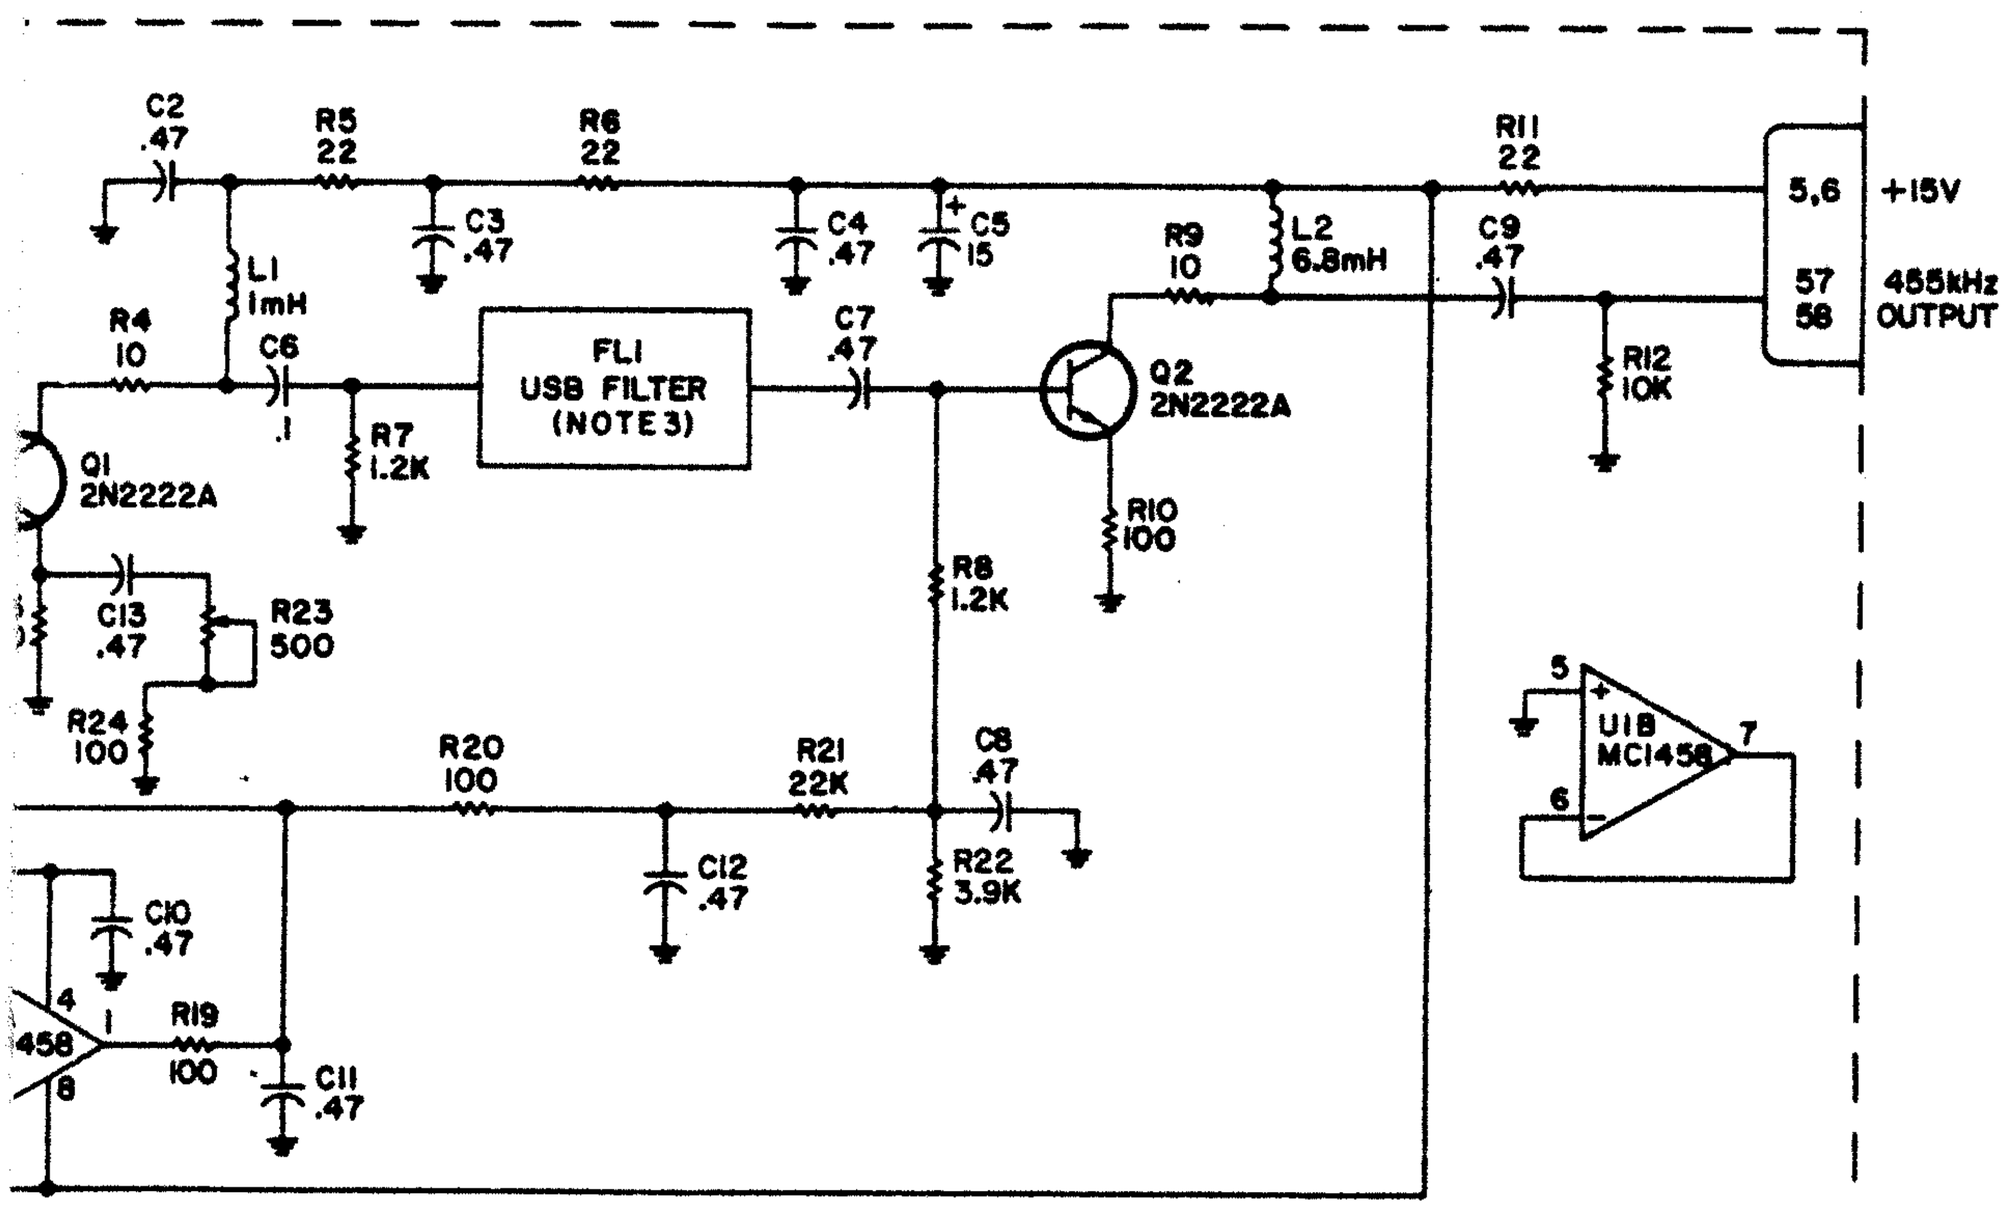



Figure 6-7. Type 791596 USB Filter Switch (A4A4)
Schematic Diagram 480102

NOTES:

1. UNLESS OTHERWISE SPECIFIED
   a) RESISTANCE IS IN OHMS, ±5%, 1/4W
   b) CAPACITANCE IS IN µF,
2. PIN CONFIGURATION IS SHOWN IN DETAIL A.
3. DIFFERENCE BETWEEN TYPES IS SHOWN IN TABLE A

DETAIL A






TABLE A

| TYPE | FLI |
|---|---|
| 791597-1 | 92121 |
| 791597-2 | 92193 |
| 791597-3 (MECH ONLY) | 92121 |

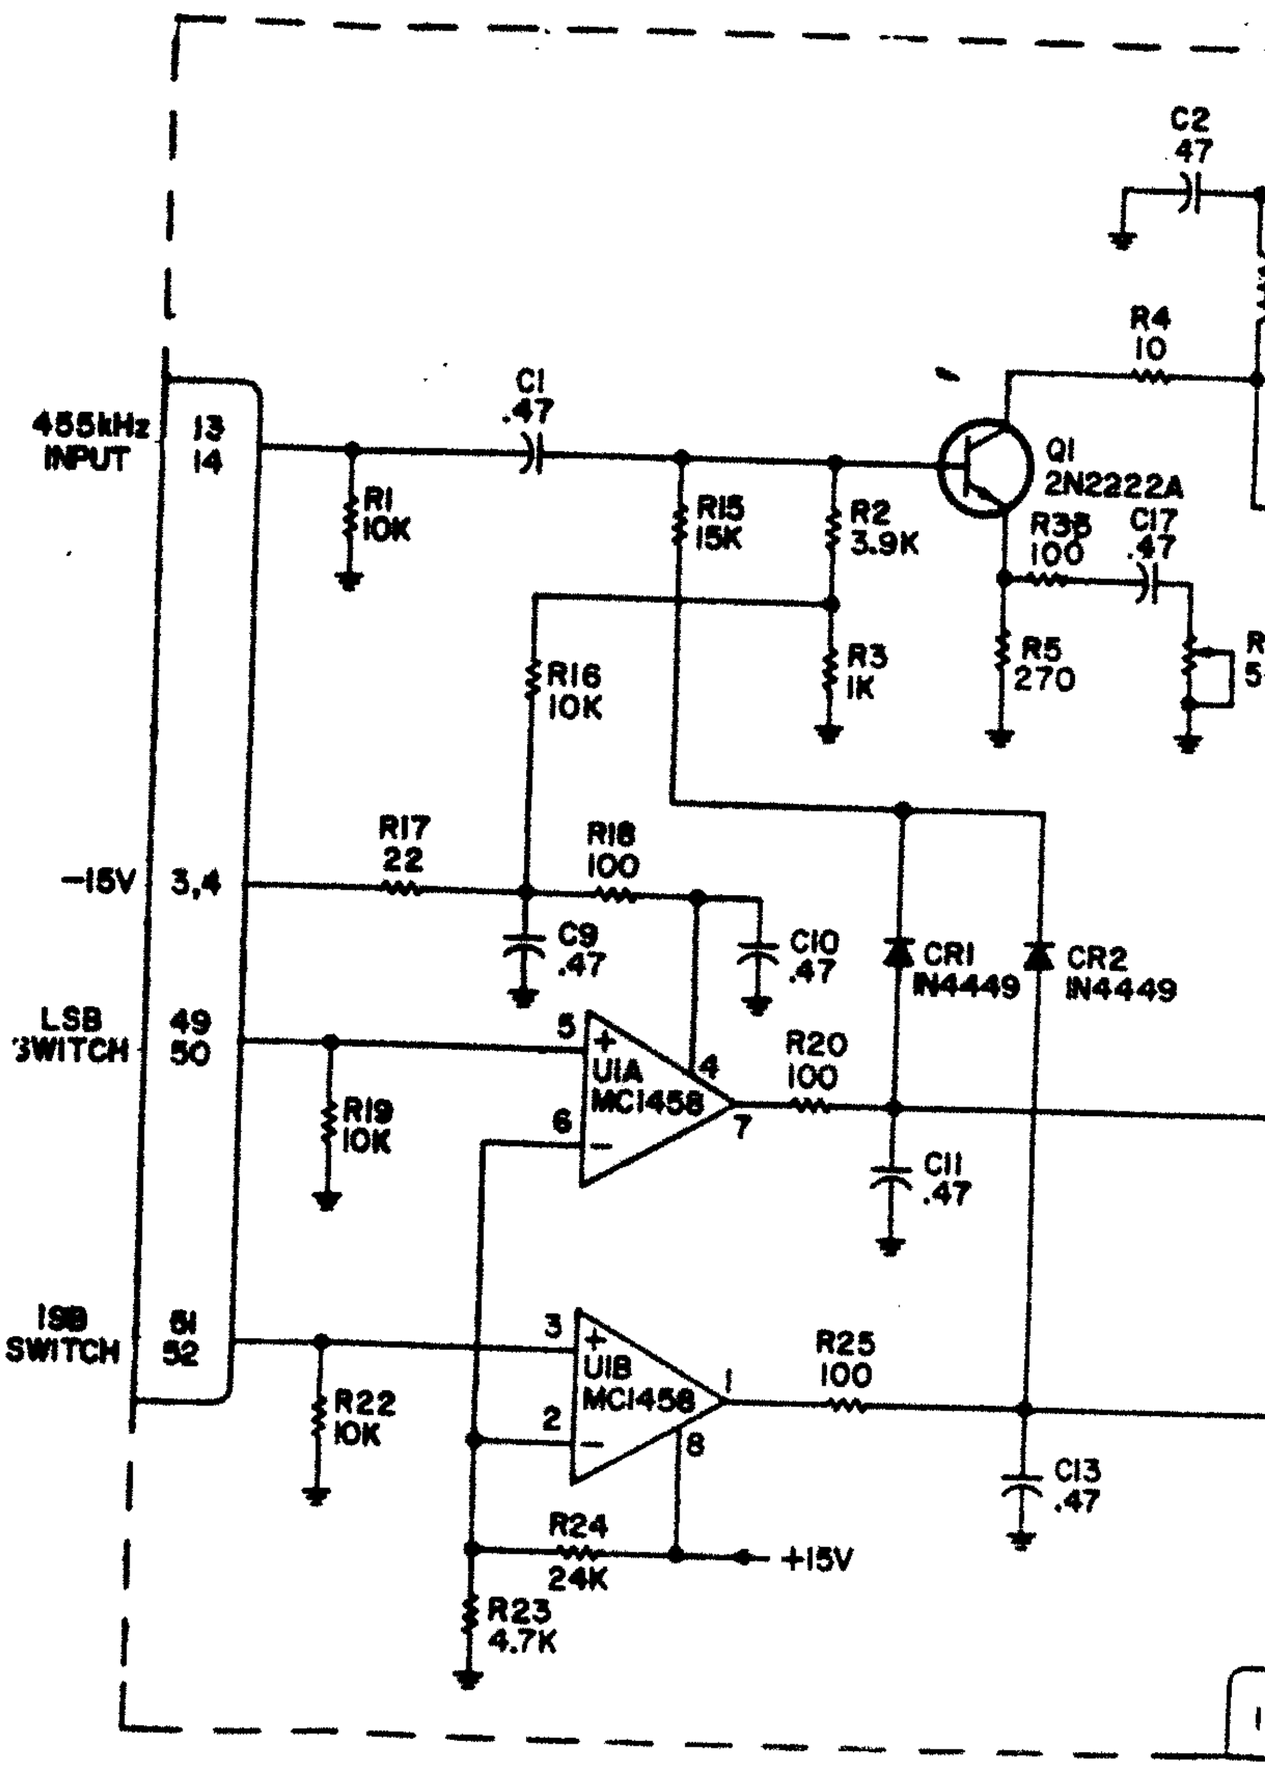


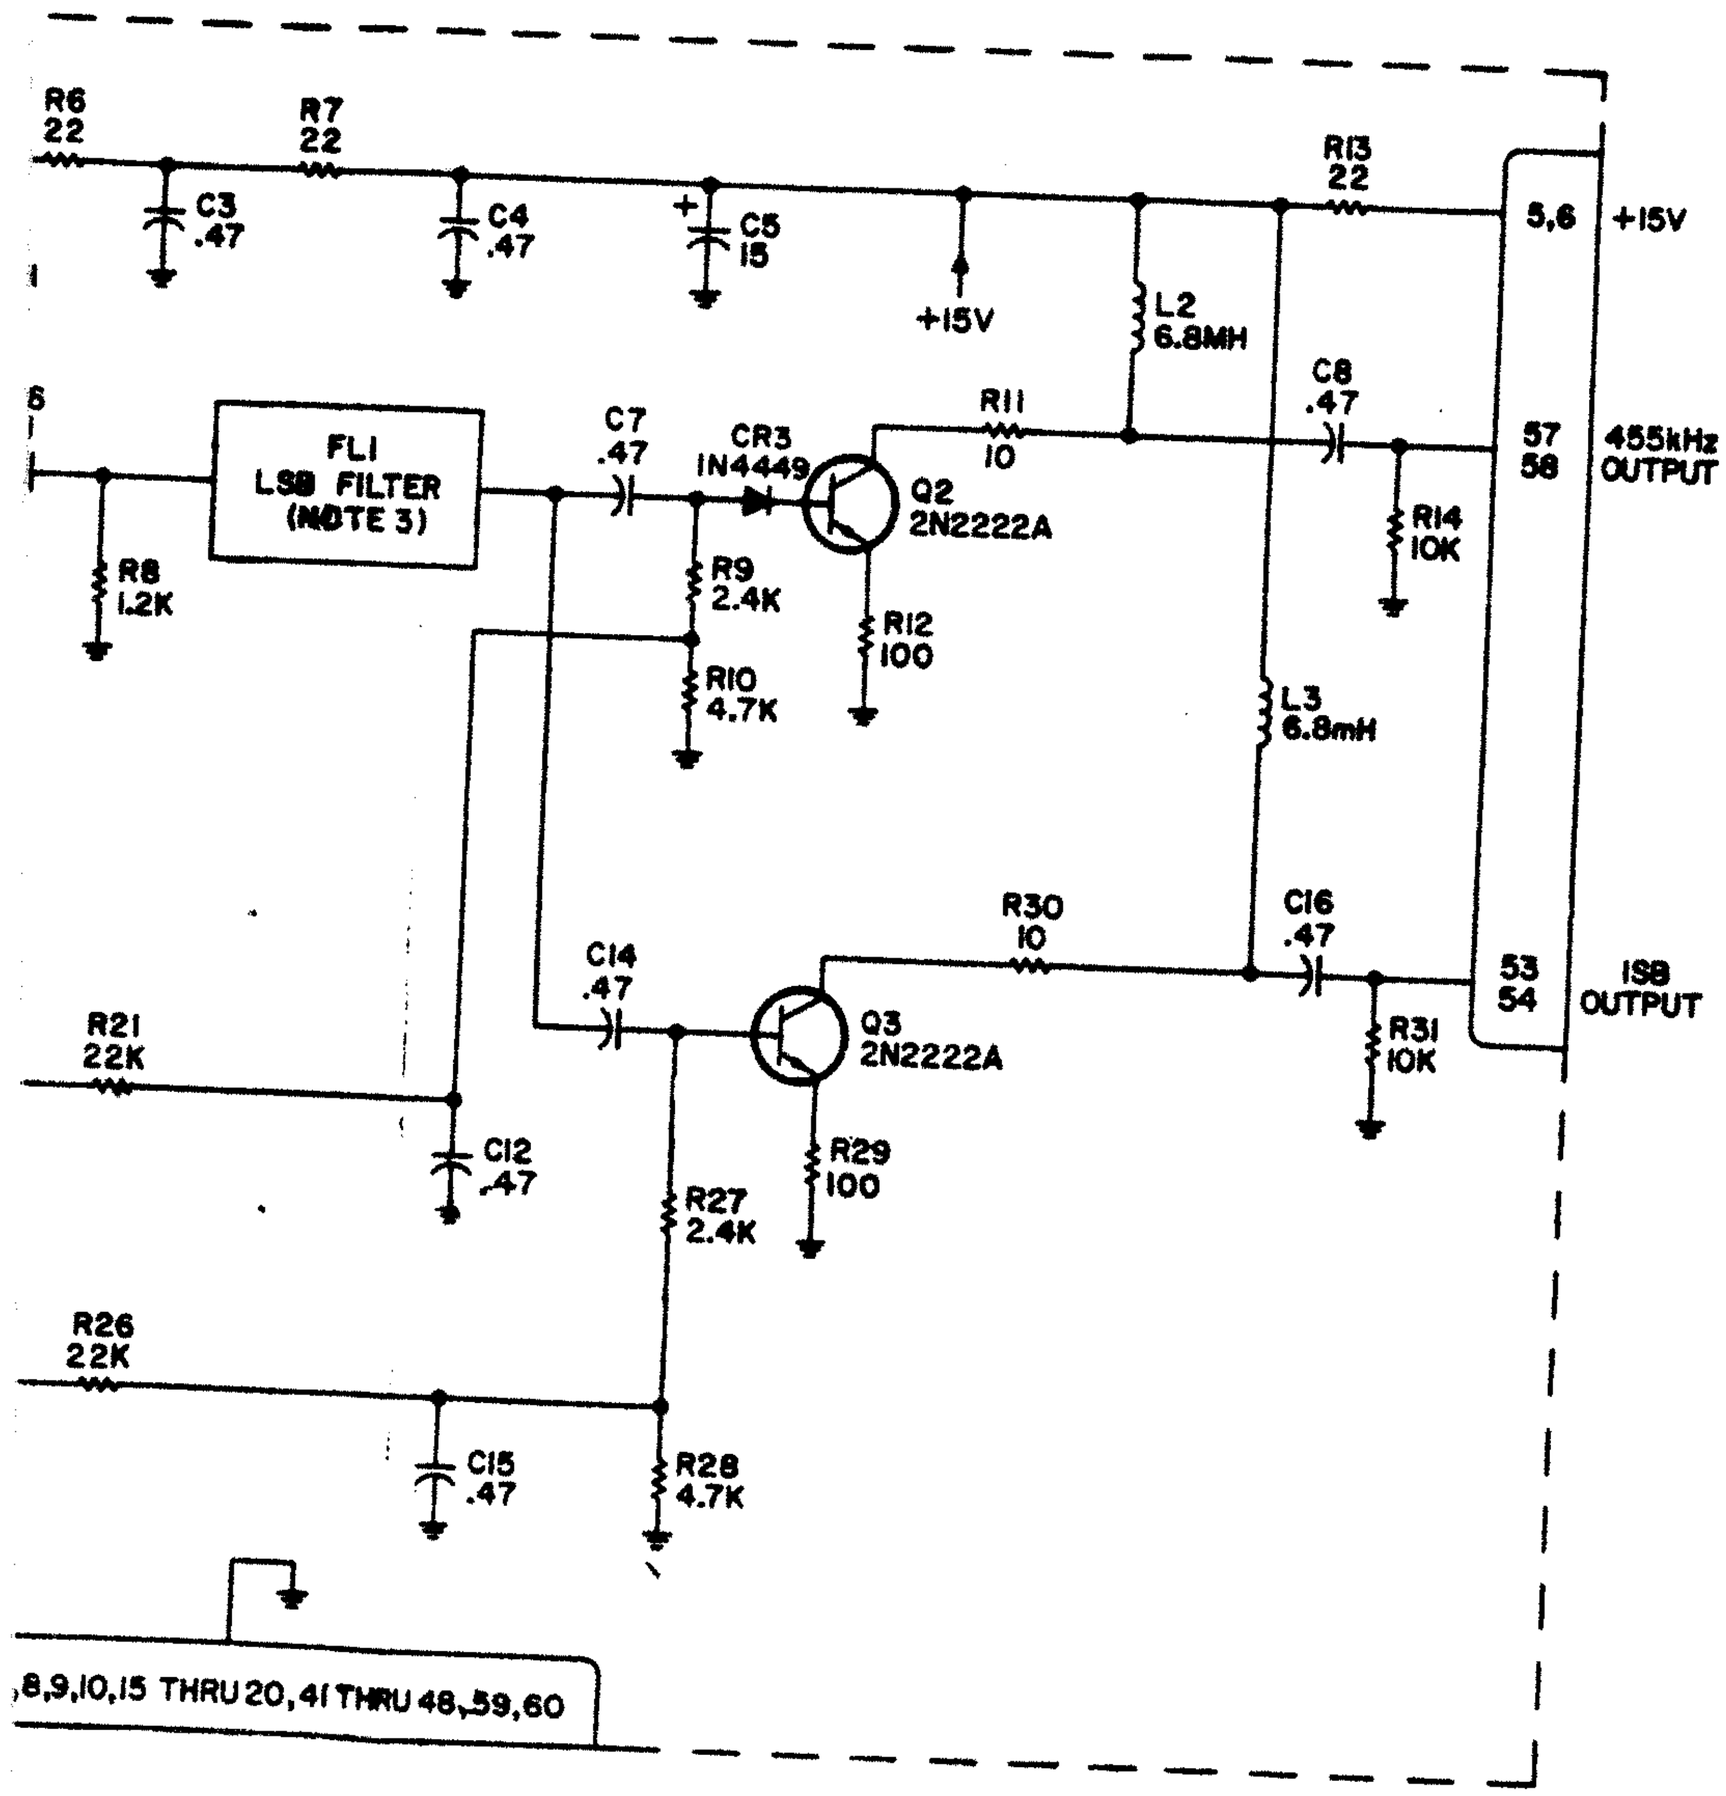
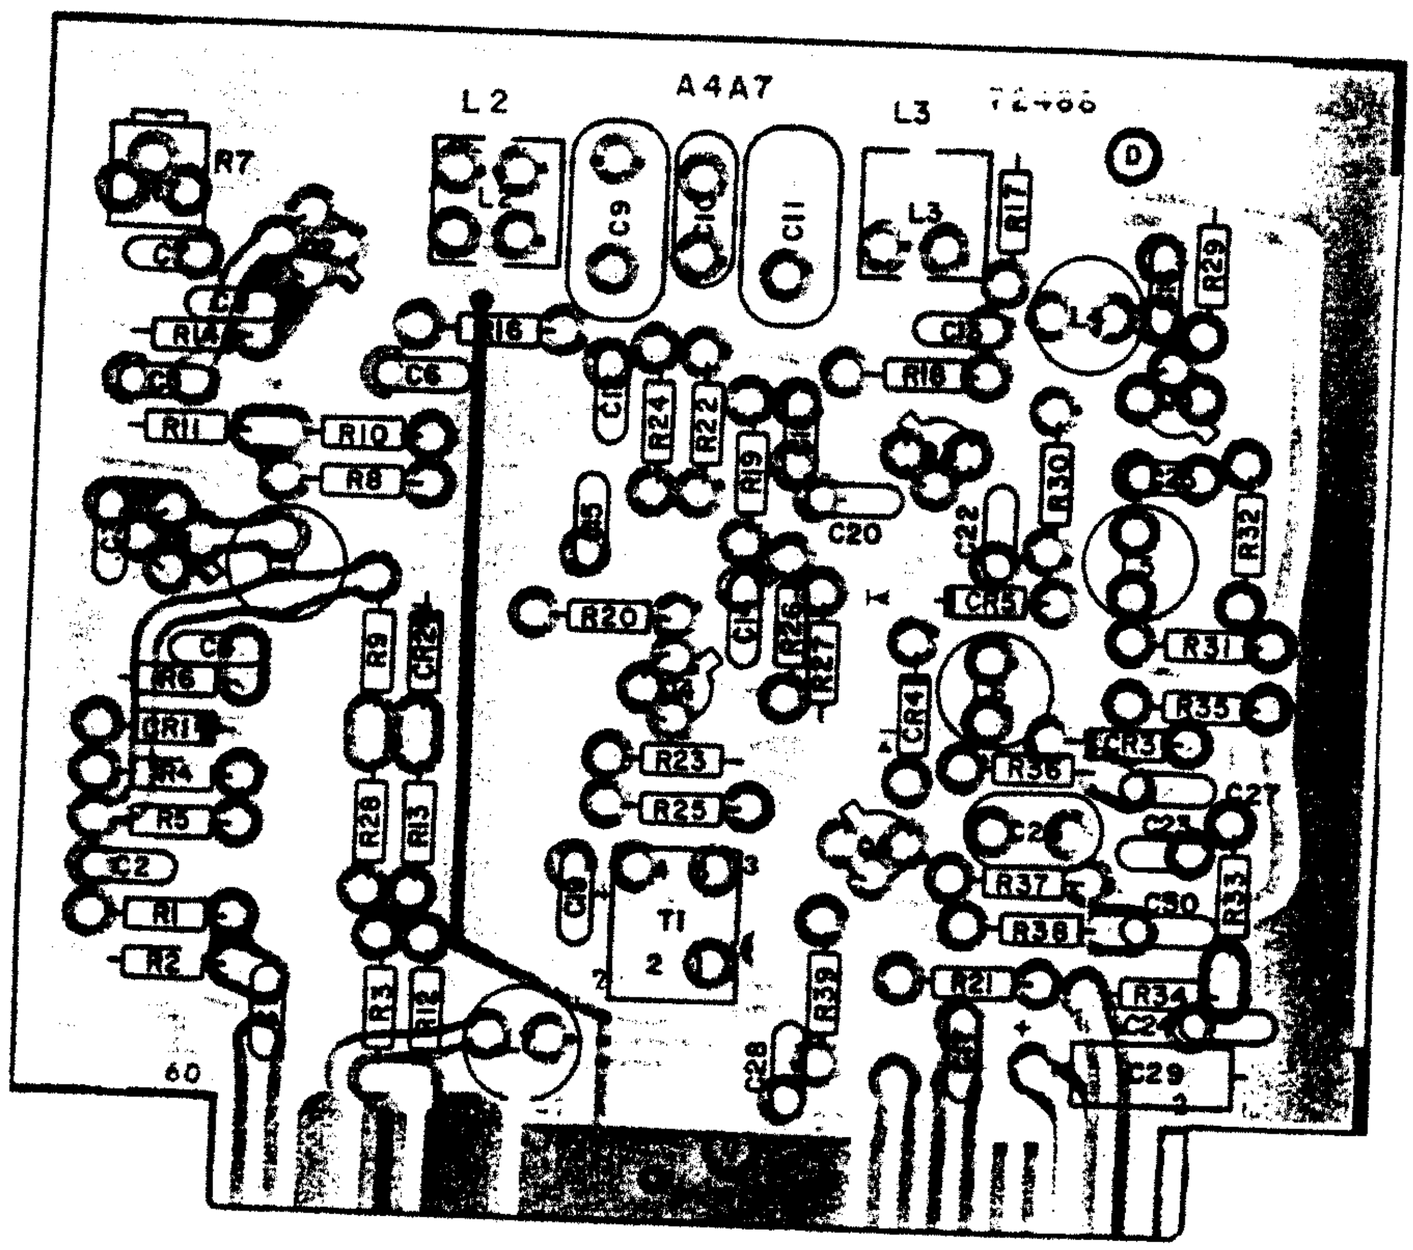



Figure 6-8. Type 791597 ISB/LSB Filter Switch (A4A5)
Schematic Diagram 480105

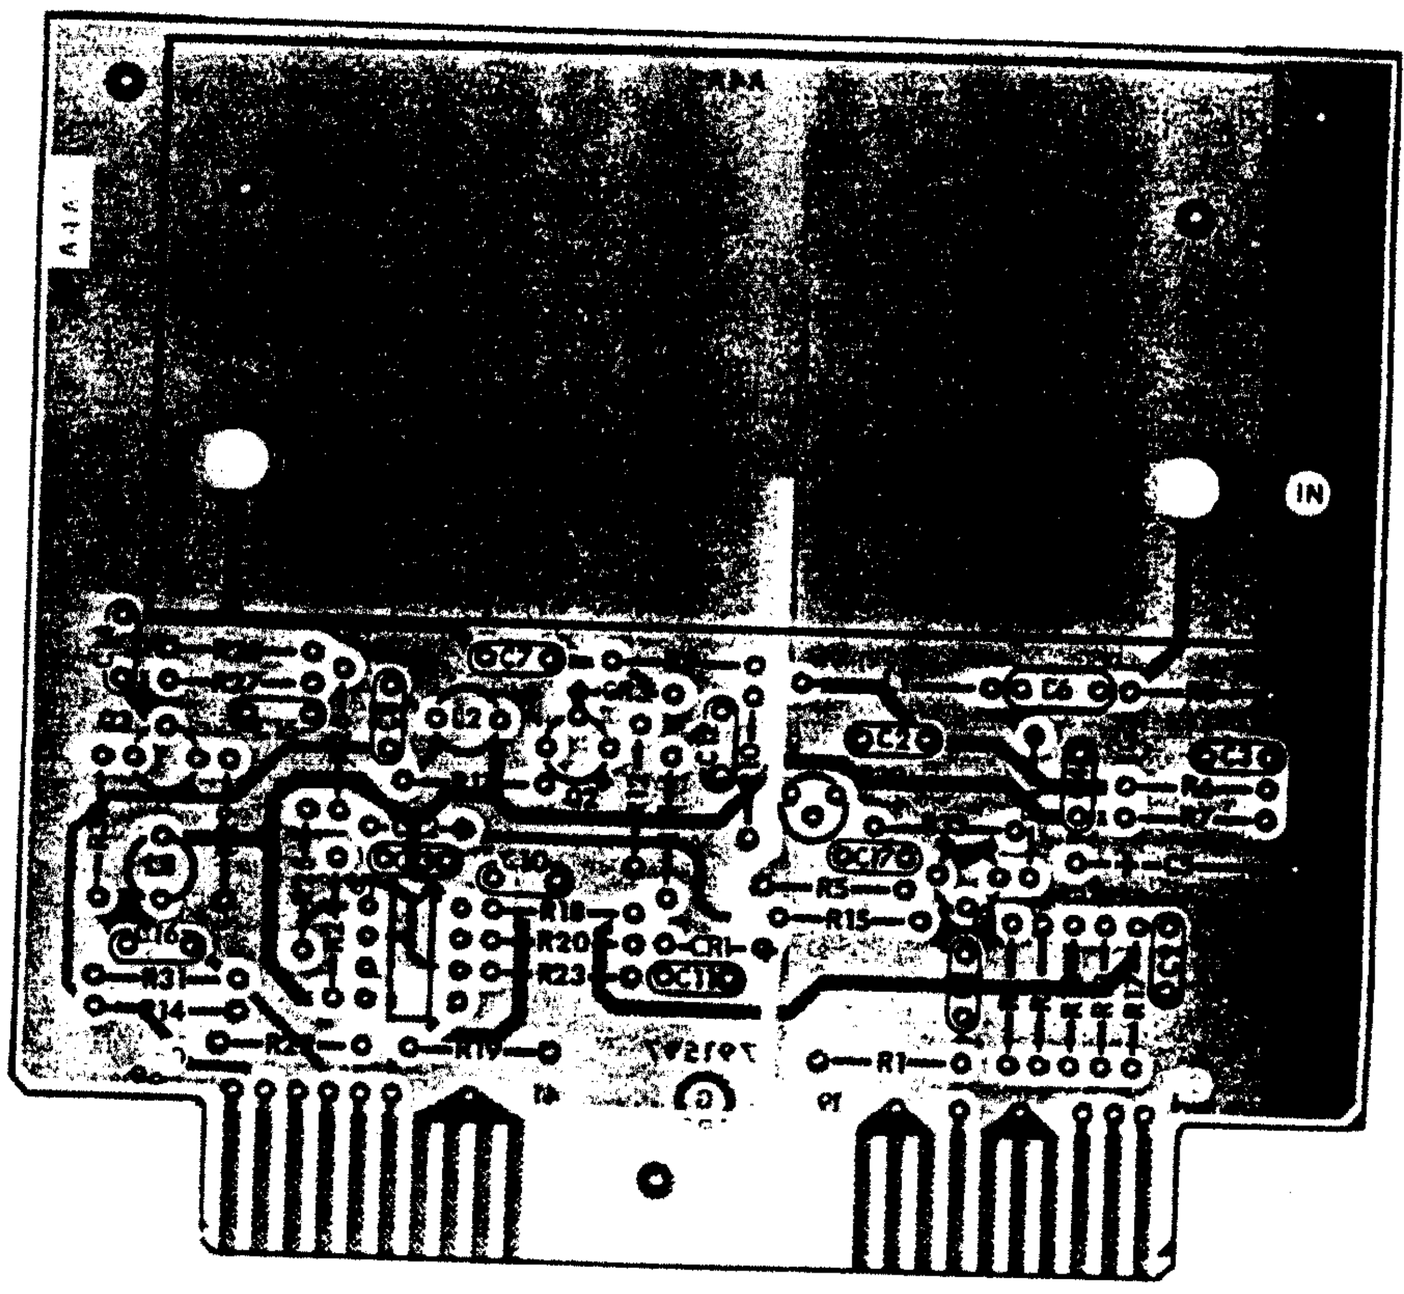
A4A7
L2
L3
R7
C6
C7
R14
C8
R11
R10
R8
C3
C5
R20
C20
C22
R30
R32
R31
R35
R36
R33
C27
C25
C30
R37
R38
R21
R34
C24
C29
R6
CR1
R4
R5
C2
R1
R2
R9
CR2
R28
R13
R3
R12
R39
C28
T1
C9
C10
C11
R17
L4
R29
C18
R16
C16
C17
R24
R22
R19
R26
R27
C1
R23
R25
C8
CR4
CR5
D
60



NOTES:

1. UNLESS OTHERWISE SPECIFIED:
   a) RESISTANCE IS IN OHMS, ±5%, 1/4W.
   b) CAPACITANCE IS IN μF.
2. ENCIRCLED NUMBERS ARE MODULE PINS.
3. U1, U2 LEAD ARRANGEMENT - DETAIL A.
4. NOMINAL VALUE, FINAL VALUE FACTORY SELECTED.
5. LM348N MAY BE USED AS AN ALTERNATIVE FOR MC3403 (SHOULD A DIFFICULTY IN PROCURING MC3403 ARISE) AT U1 AND U2 IN THIS APPLICATION.
6. DIFFERENCE BETWEEN TYPES AS INDICATED IN TABLE A

DETAIL A






TABLE A

| TYPE NO | C4 | R18 | R21 | R32 |
|---|---|---|---|---|
| 78112-1 | 33 μF | 270K | 15K | 390 |
| 78112-2 | 1.5 μF | 270K | 15K | 390 |
| 78112-3 | 33 μF | 330K | 10K(VAR) | (NOTE 4) |
| 78112-4 (MECH ONLY) | 33 μF | 270K | 15K | 390 |

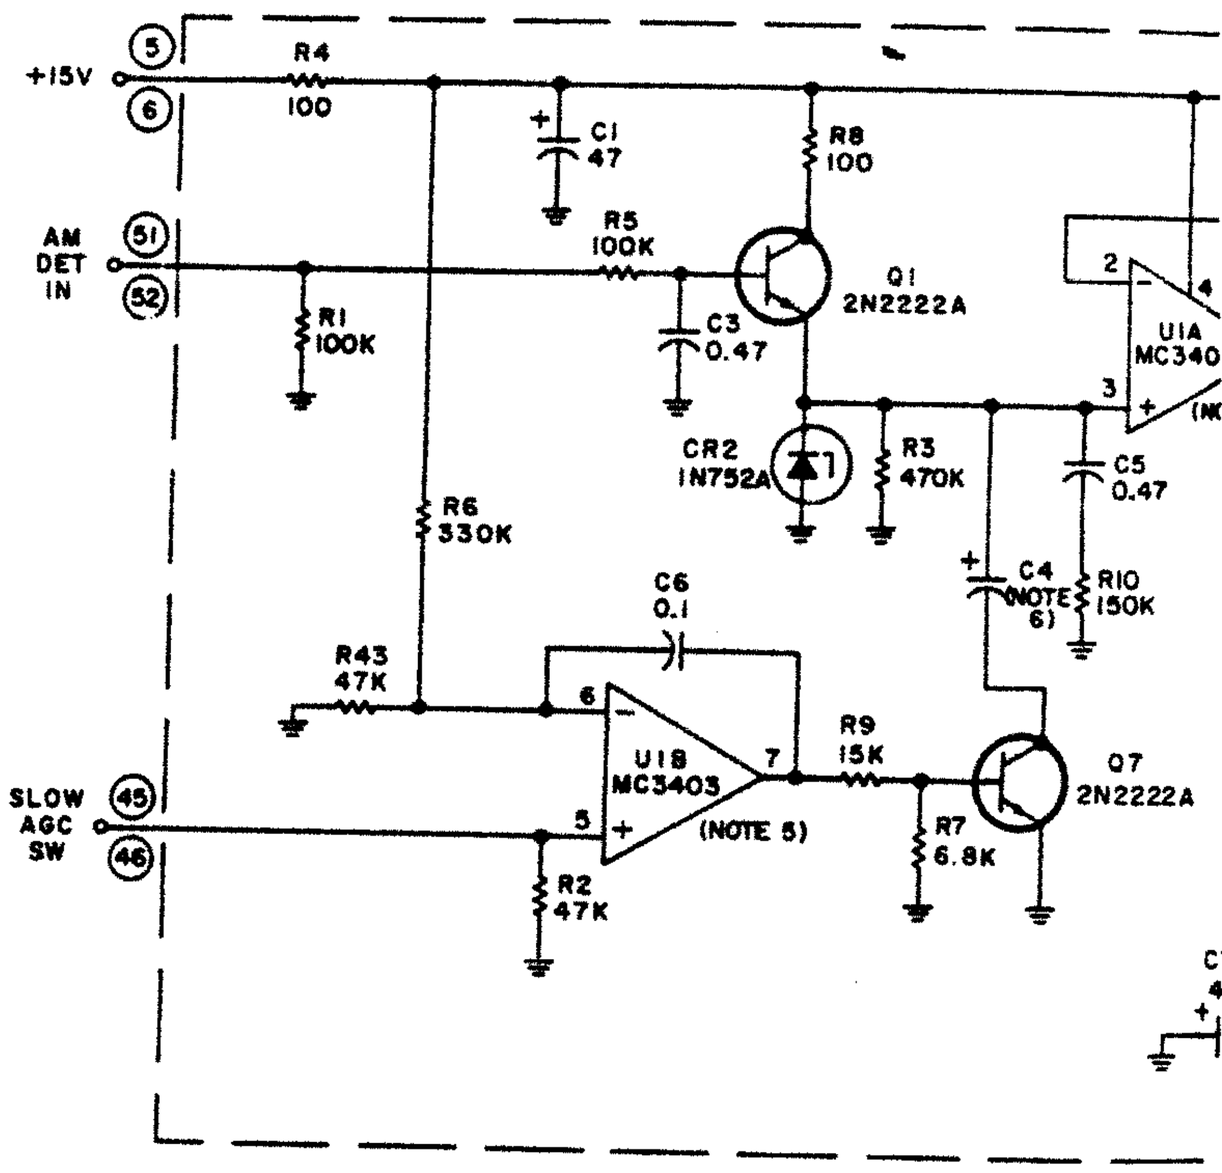

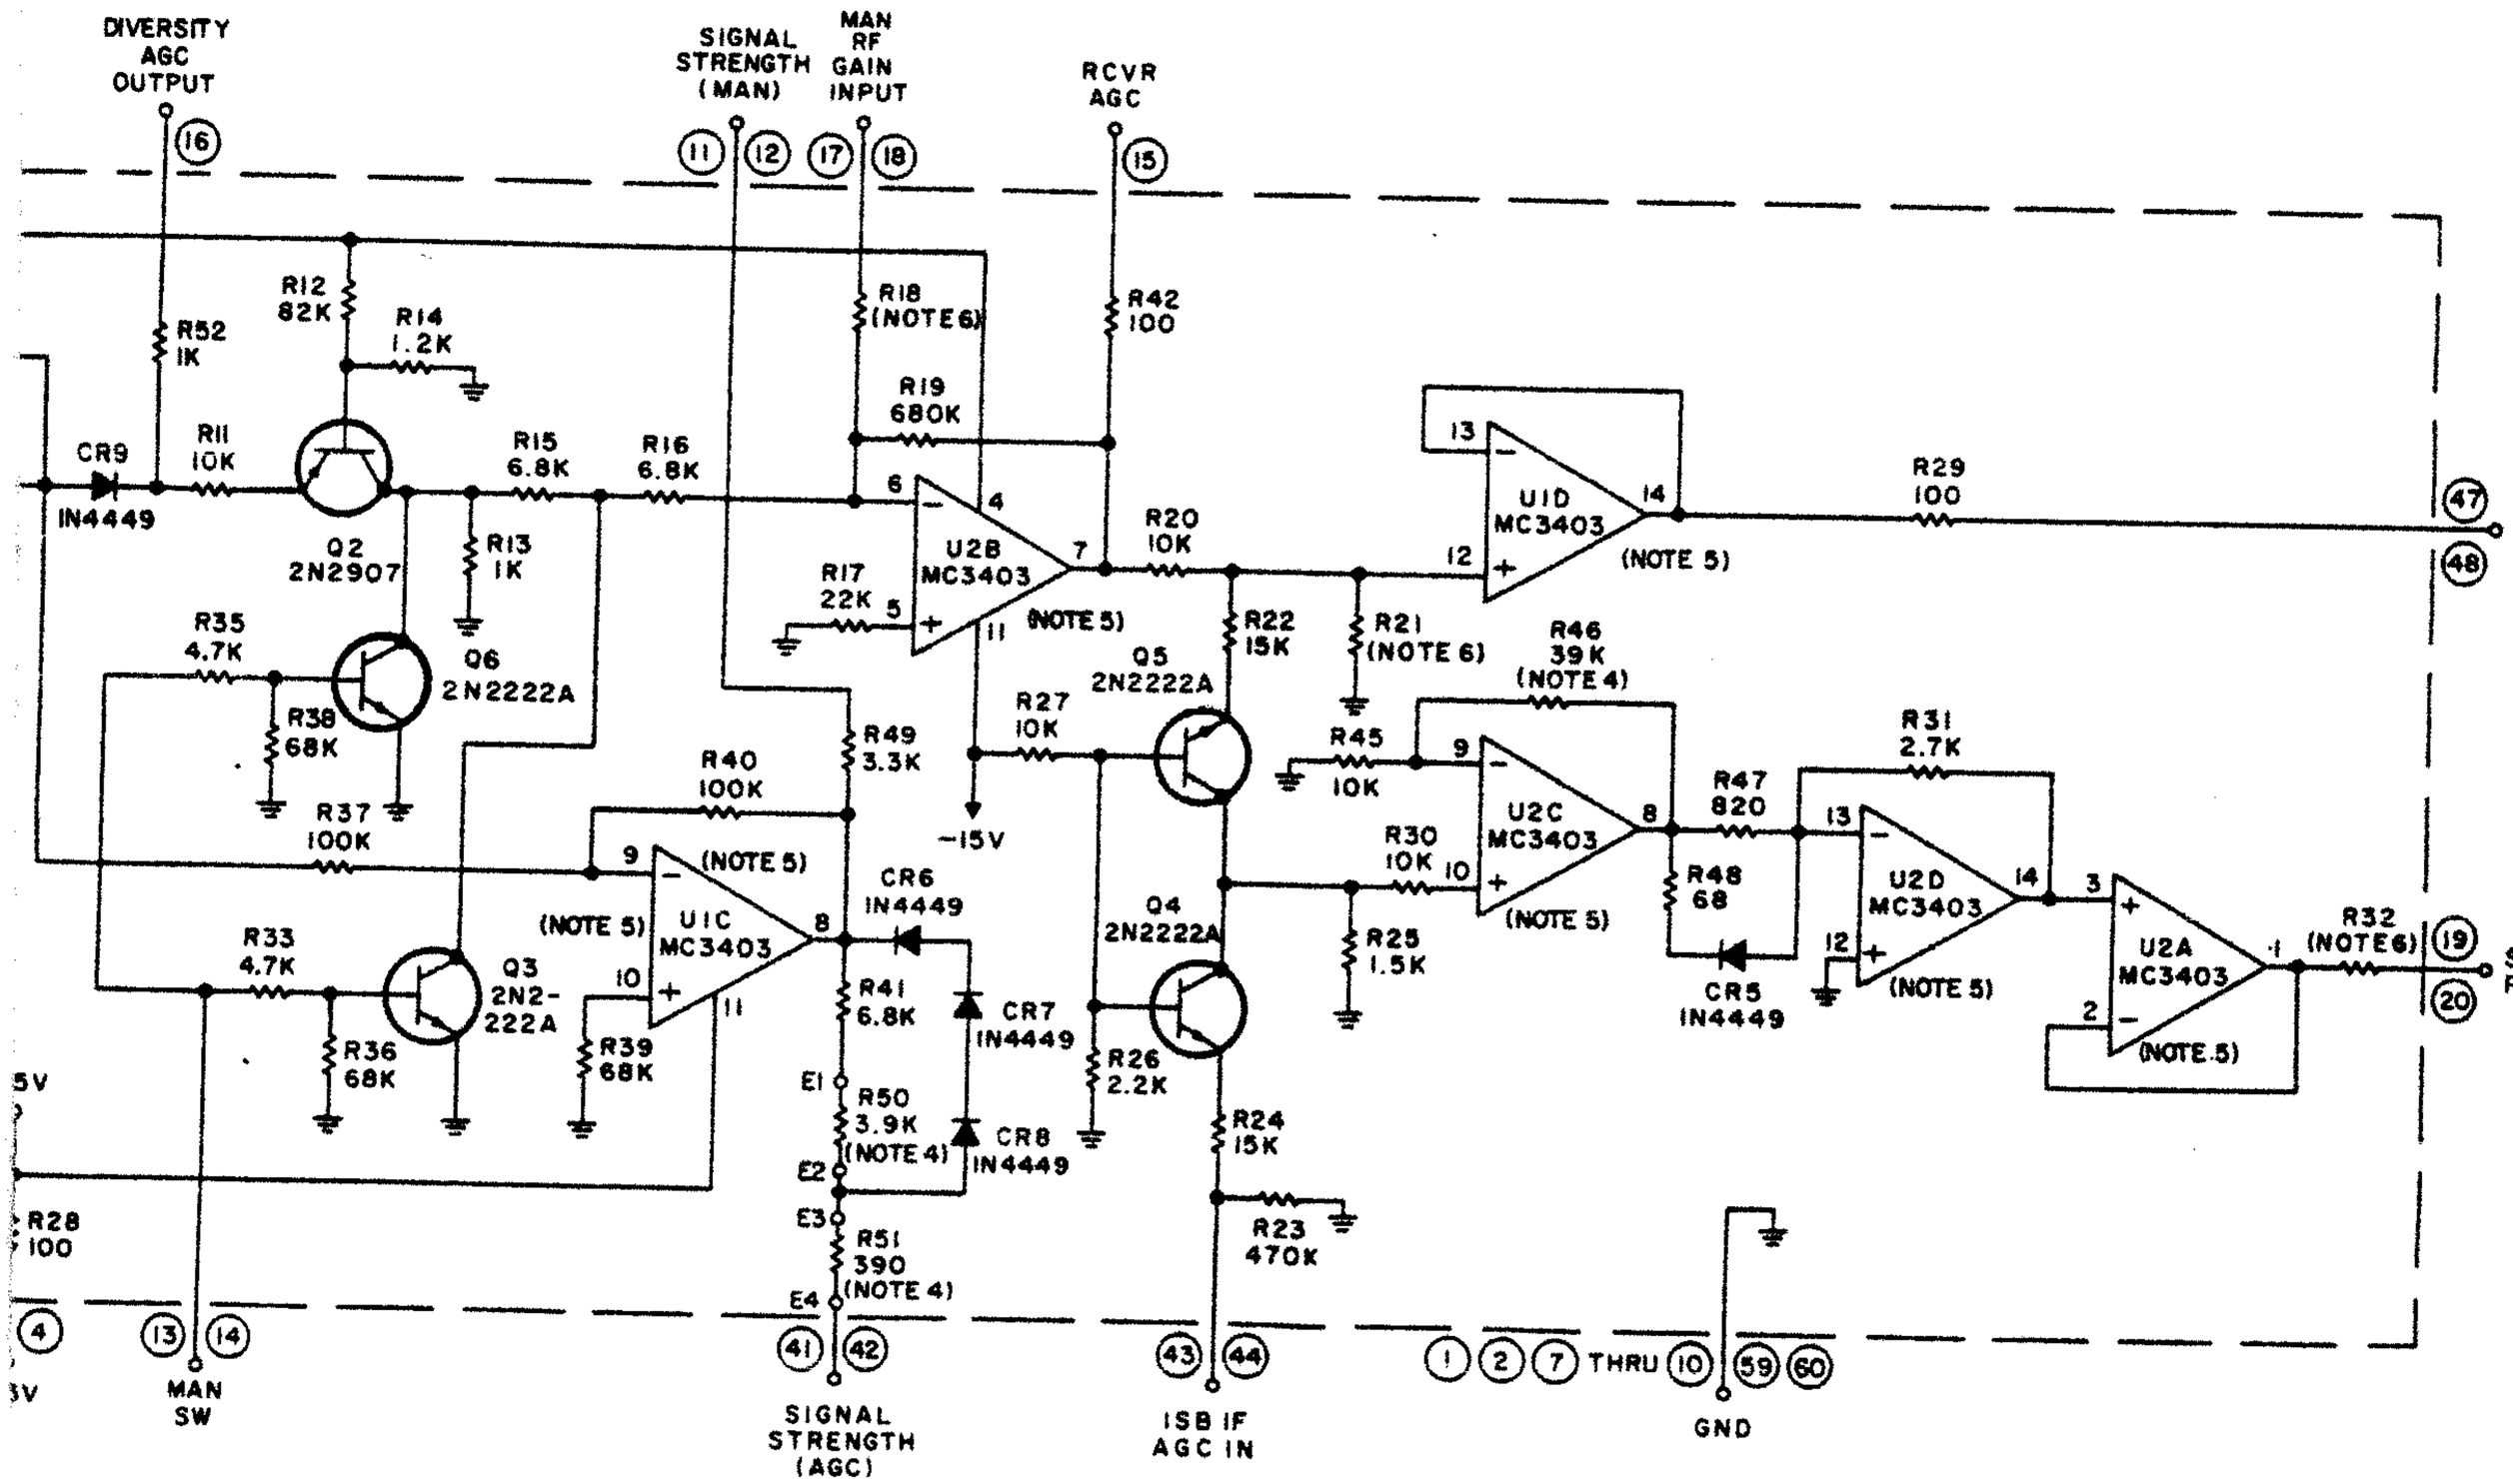
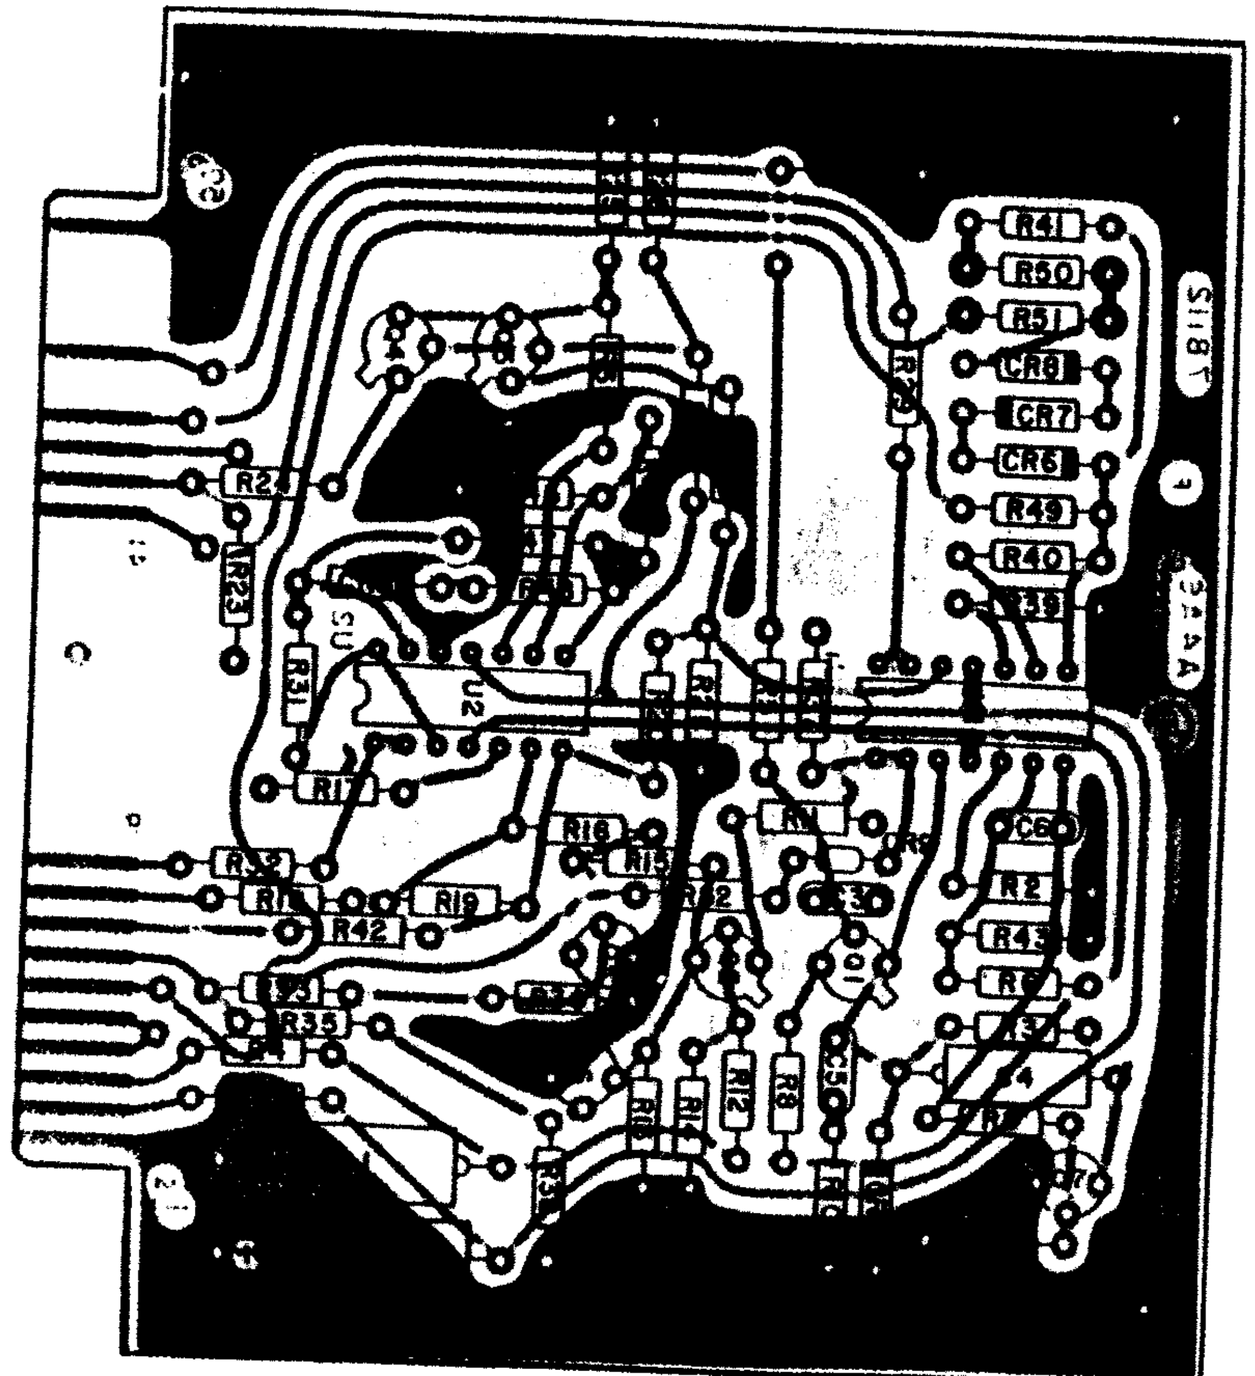



Figure 6-9. Type 78112 AGC Amplifier (A4A6)
Schematic Diagram 43229


R41
R50
R51
CR8
CR7
CR6
R49
R40
R39
R24
R23
R31
U2
R17
R16
R15
R32
R18
R19
R42
R35
R12
R8
C35
C60
R2
R43
R4

NOTES:

1. UNLESS OTHERWISE SPECIFIED:
   a) RESISTANCE IS IN OHMS, ±5%, 1/4W.
   b) CAPACITANCE IS IN μF.
2. ENCIRCLED NUMBERS ARE MODULE PINS.
3. U1, U2 LEAD ARRANGEMENT - DETAIL A.
4. NOMINAL VALUE; FINAL VALUE FACTORY SELECTED.
5. LM348N MAY BE USED AS AN ALTERNATIVE FOR MC3403 (SHOULD A DIFFICULTY IN PROCURING MC3403 ARISE) AT U1 AND U2 IN THIS APPLICATION.
6. DIFFERENCE BETWEEN TYPES AS INDICATED IN TABLE A

DETAIL A






TABLE A

| TYPE NO | C4 | R18 | R21 | R32 |
|---|---|---|---|---|
| 78112-1 | 33 μF. | 270K | 15K | 390 |
| 78112-2 | 1.5 μF | 270K | 15K | 390 |
| 78112-3 | 33 μF | 330K | 10K(VAR) | (NOTE 4) |
| 78112-4 (MECH ONLY) | 33μF | 270K | 15K | 390 |

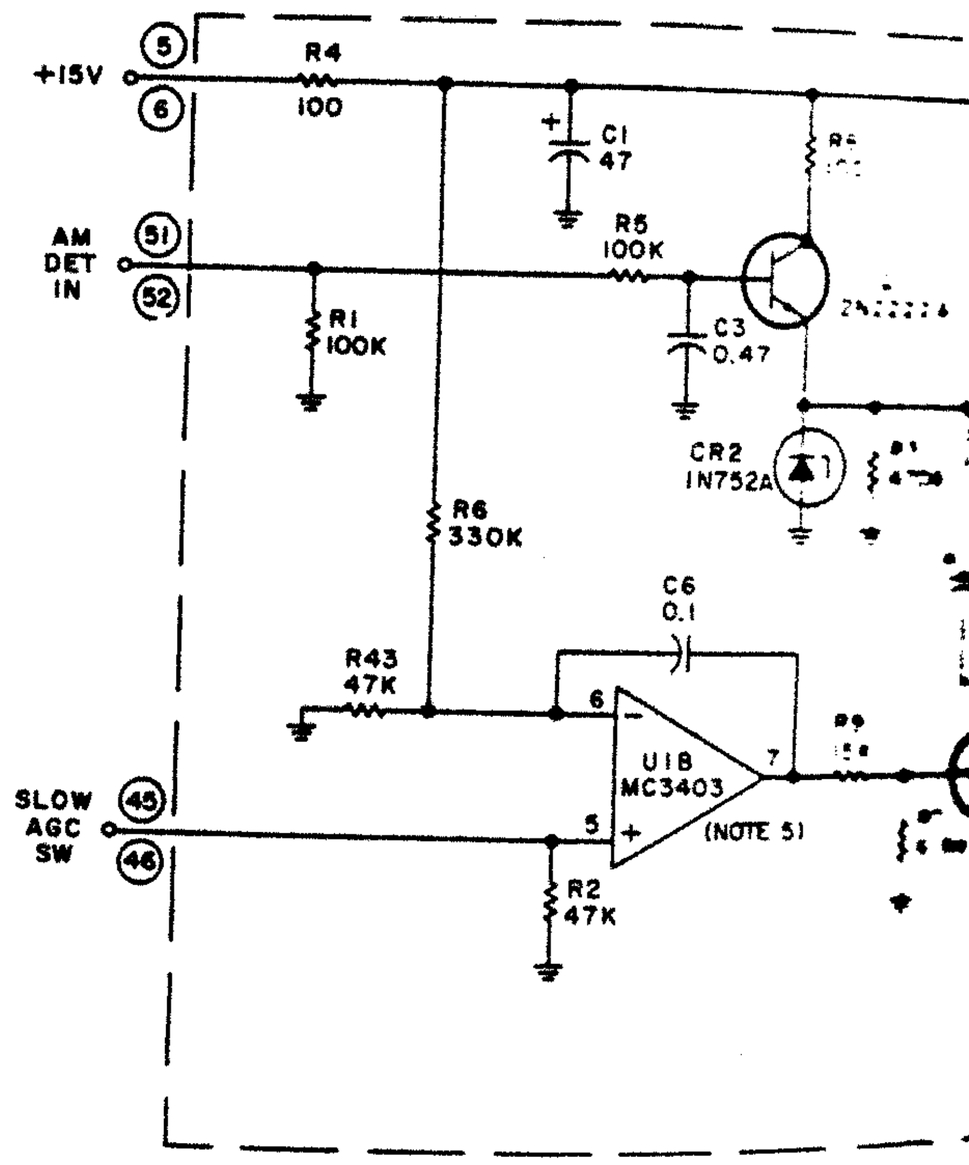


NOTES:

1. UNLESS OTHERWISE SPECIFIED:
   a) RESISTANCE IS IN OHMS, ±5%, 1/4W.
   b) CAPACITANCE IS μF.
2. ENCIRCLED NUMBERS (LETTERS) ARE MODULE PIN NUMBERS.
3. CW ON R7 INDICATES FULL CLOCKWISE POSITION OF ACTUATOR.
4. DIFERENCE BETWEEN TYPES IS SHOWN IN TABLE A.

TABLE A

| TYPE NO | C9 | C10 | C11 | C26 | L2 | L3 | L7 | USED ON |
|---|---|---|---|---|---|---|---|---|
| 72488-1 | 3300pF | 180pF | 3300pF | 180pF | 39μH | 39μH | 6.8mH | WJ-8718 |
| 72488-2 | 910pF | 110pF | 910pF | 150pF | 120mH | 120mH | 4.7mH | WJ-8718 E |
| 72488-3(ECH ONLY) | 3300pF | 180pF | 3300pF | 180pF | 39μH | 39μH | 6.8mH | AN/URR-74(VIE |

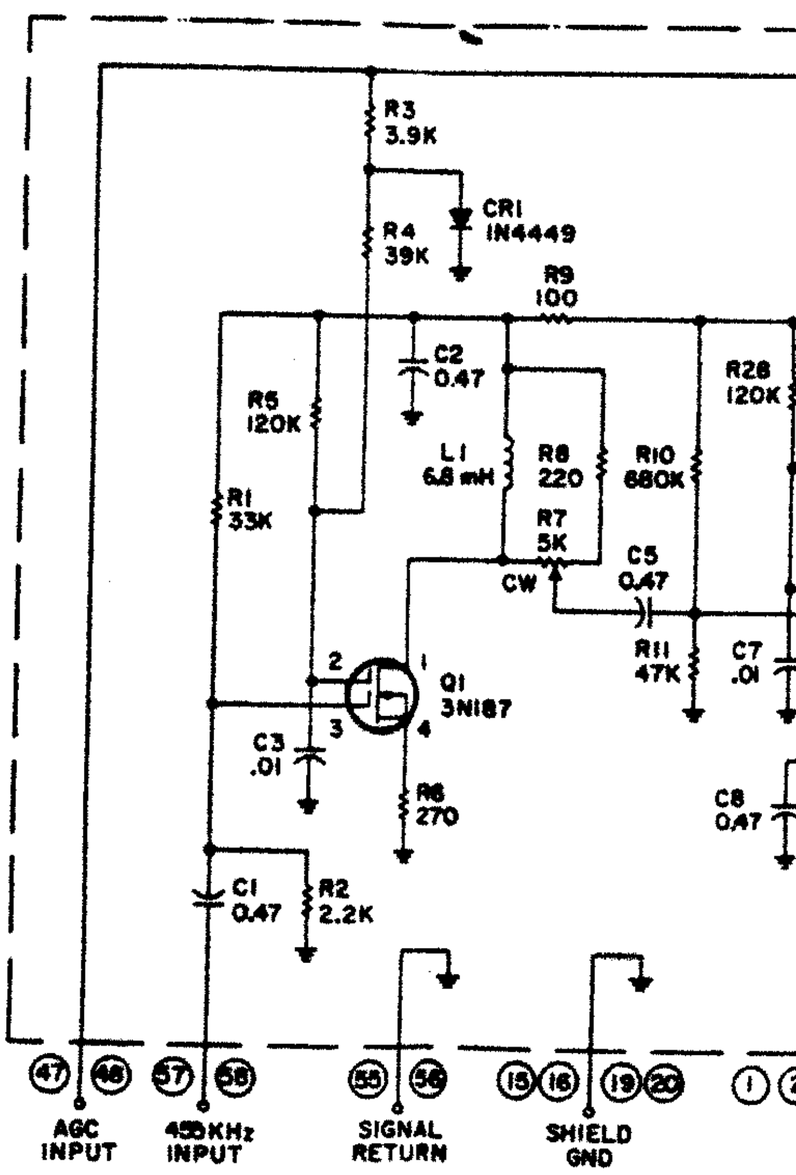


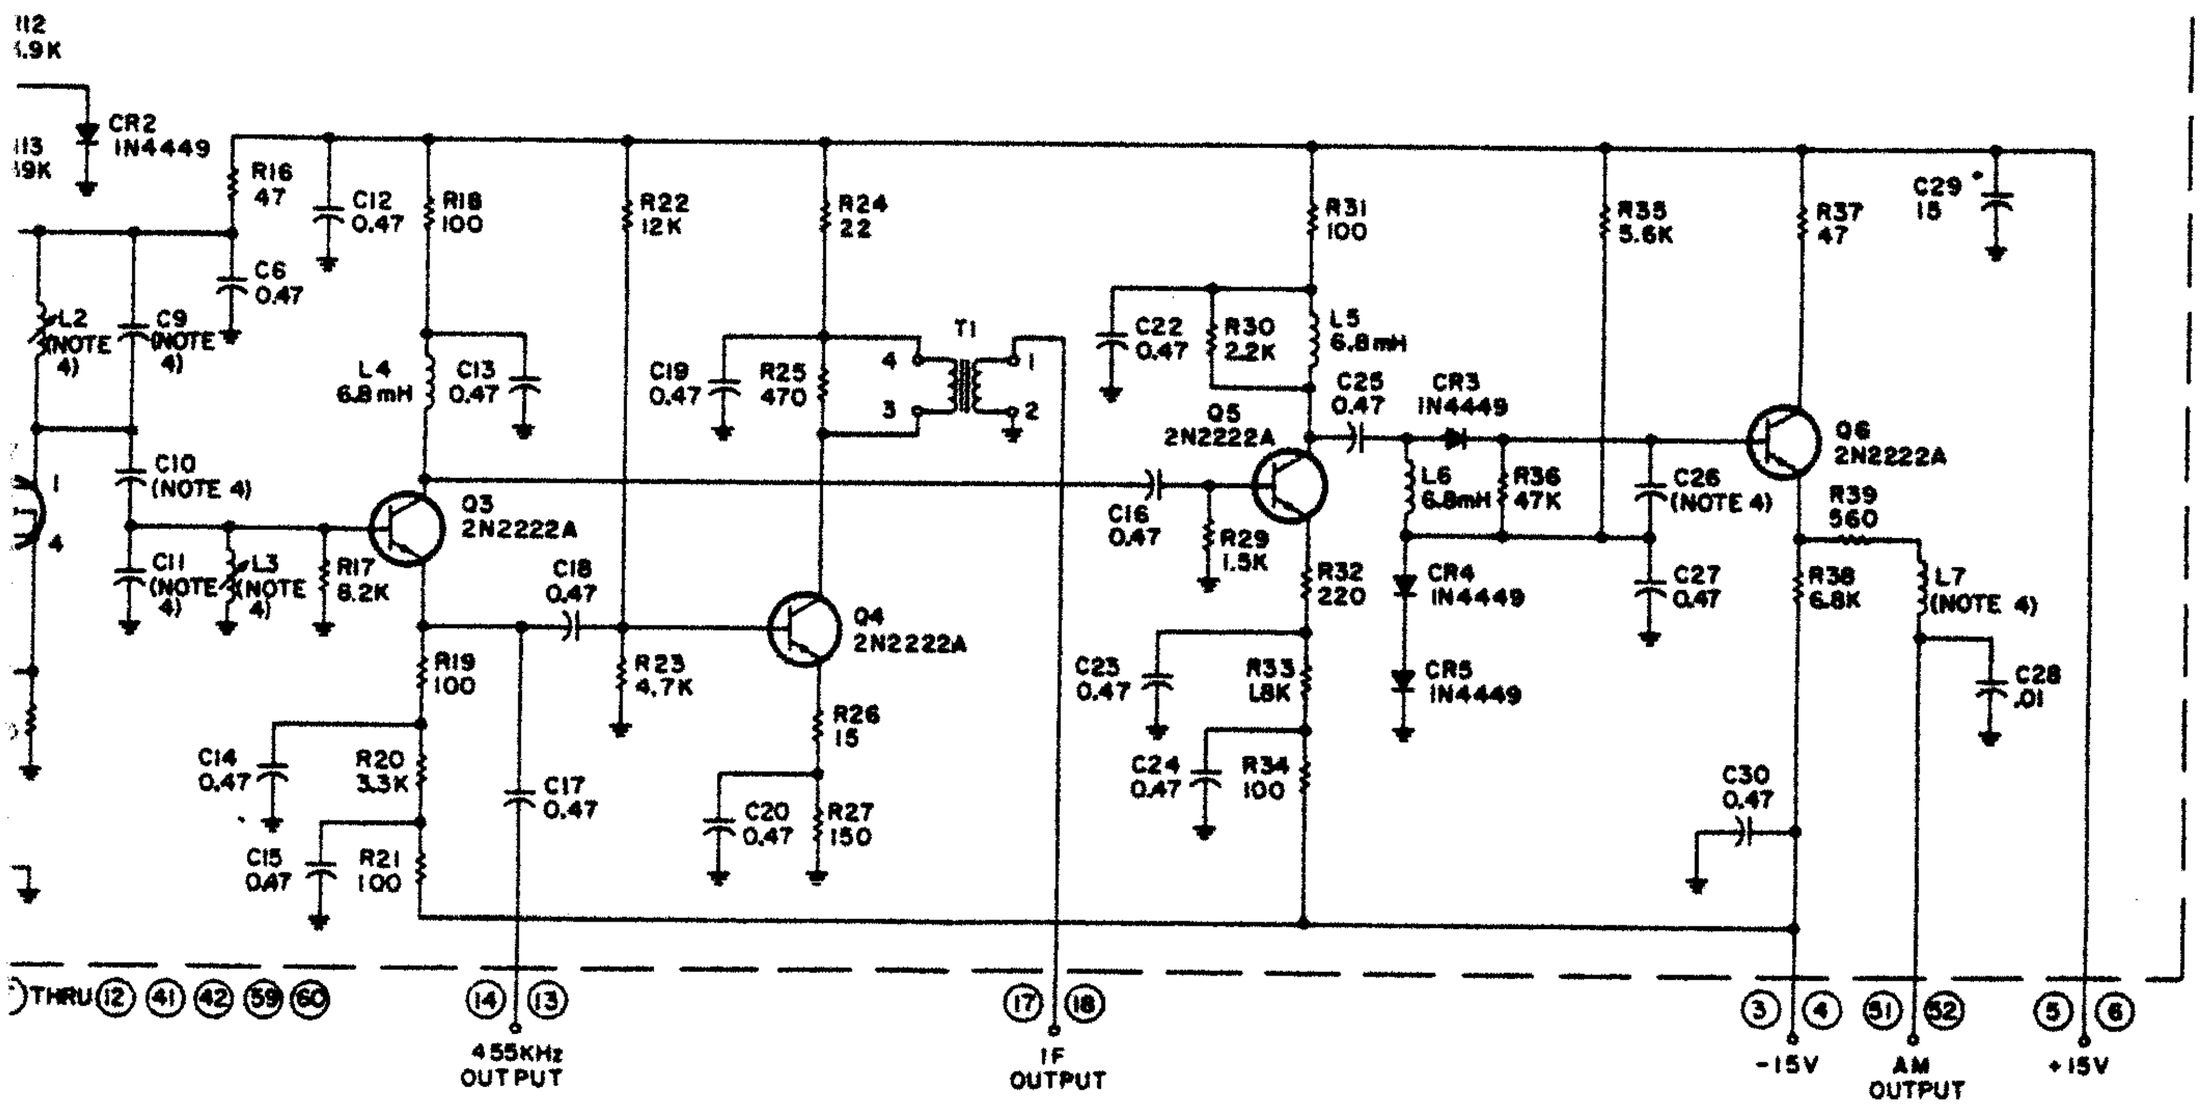




Figure 6-10. Type 72488 455 kHz Amplifier/AM Detector (A4A7) Schematic Diagram 51168

OTES

1. UNLESS OTHERWISE SPECIFIED:
   a) RESISTANCE IS IN OHMS, ±5%, 1/4W.
   b) CAPACITANCE IS IN μF
2. ENCIRCLED NUMBERS ARE MODULE PINS.
3. U1, U2, U3 LEAD ARRANGEMENT - DETAIL A
4. NOMINAL VALUE, FINAL VALUE FACTORY SELECTED.
5. DIFFERENCE BETWEEN TYPES IS MECHANICAL ONLY.

DETAIL A

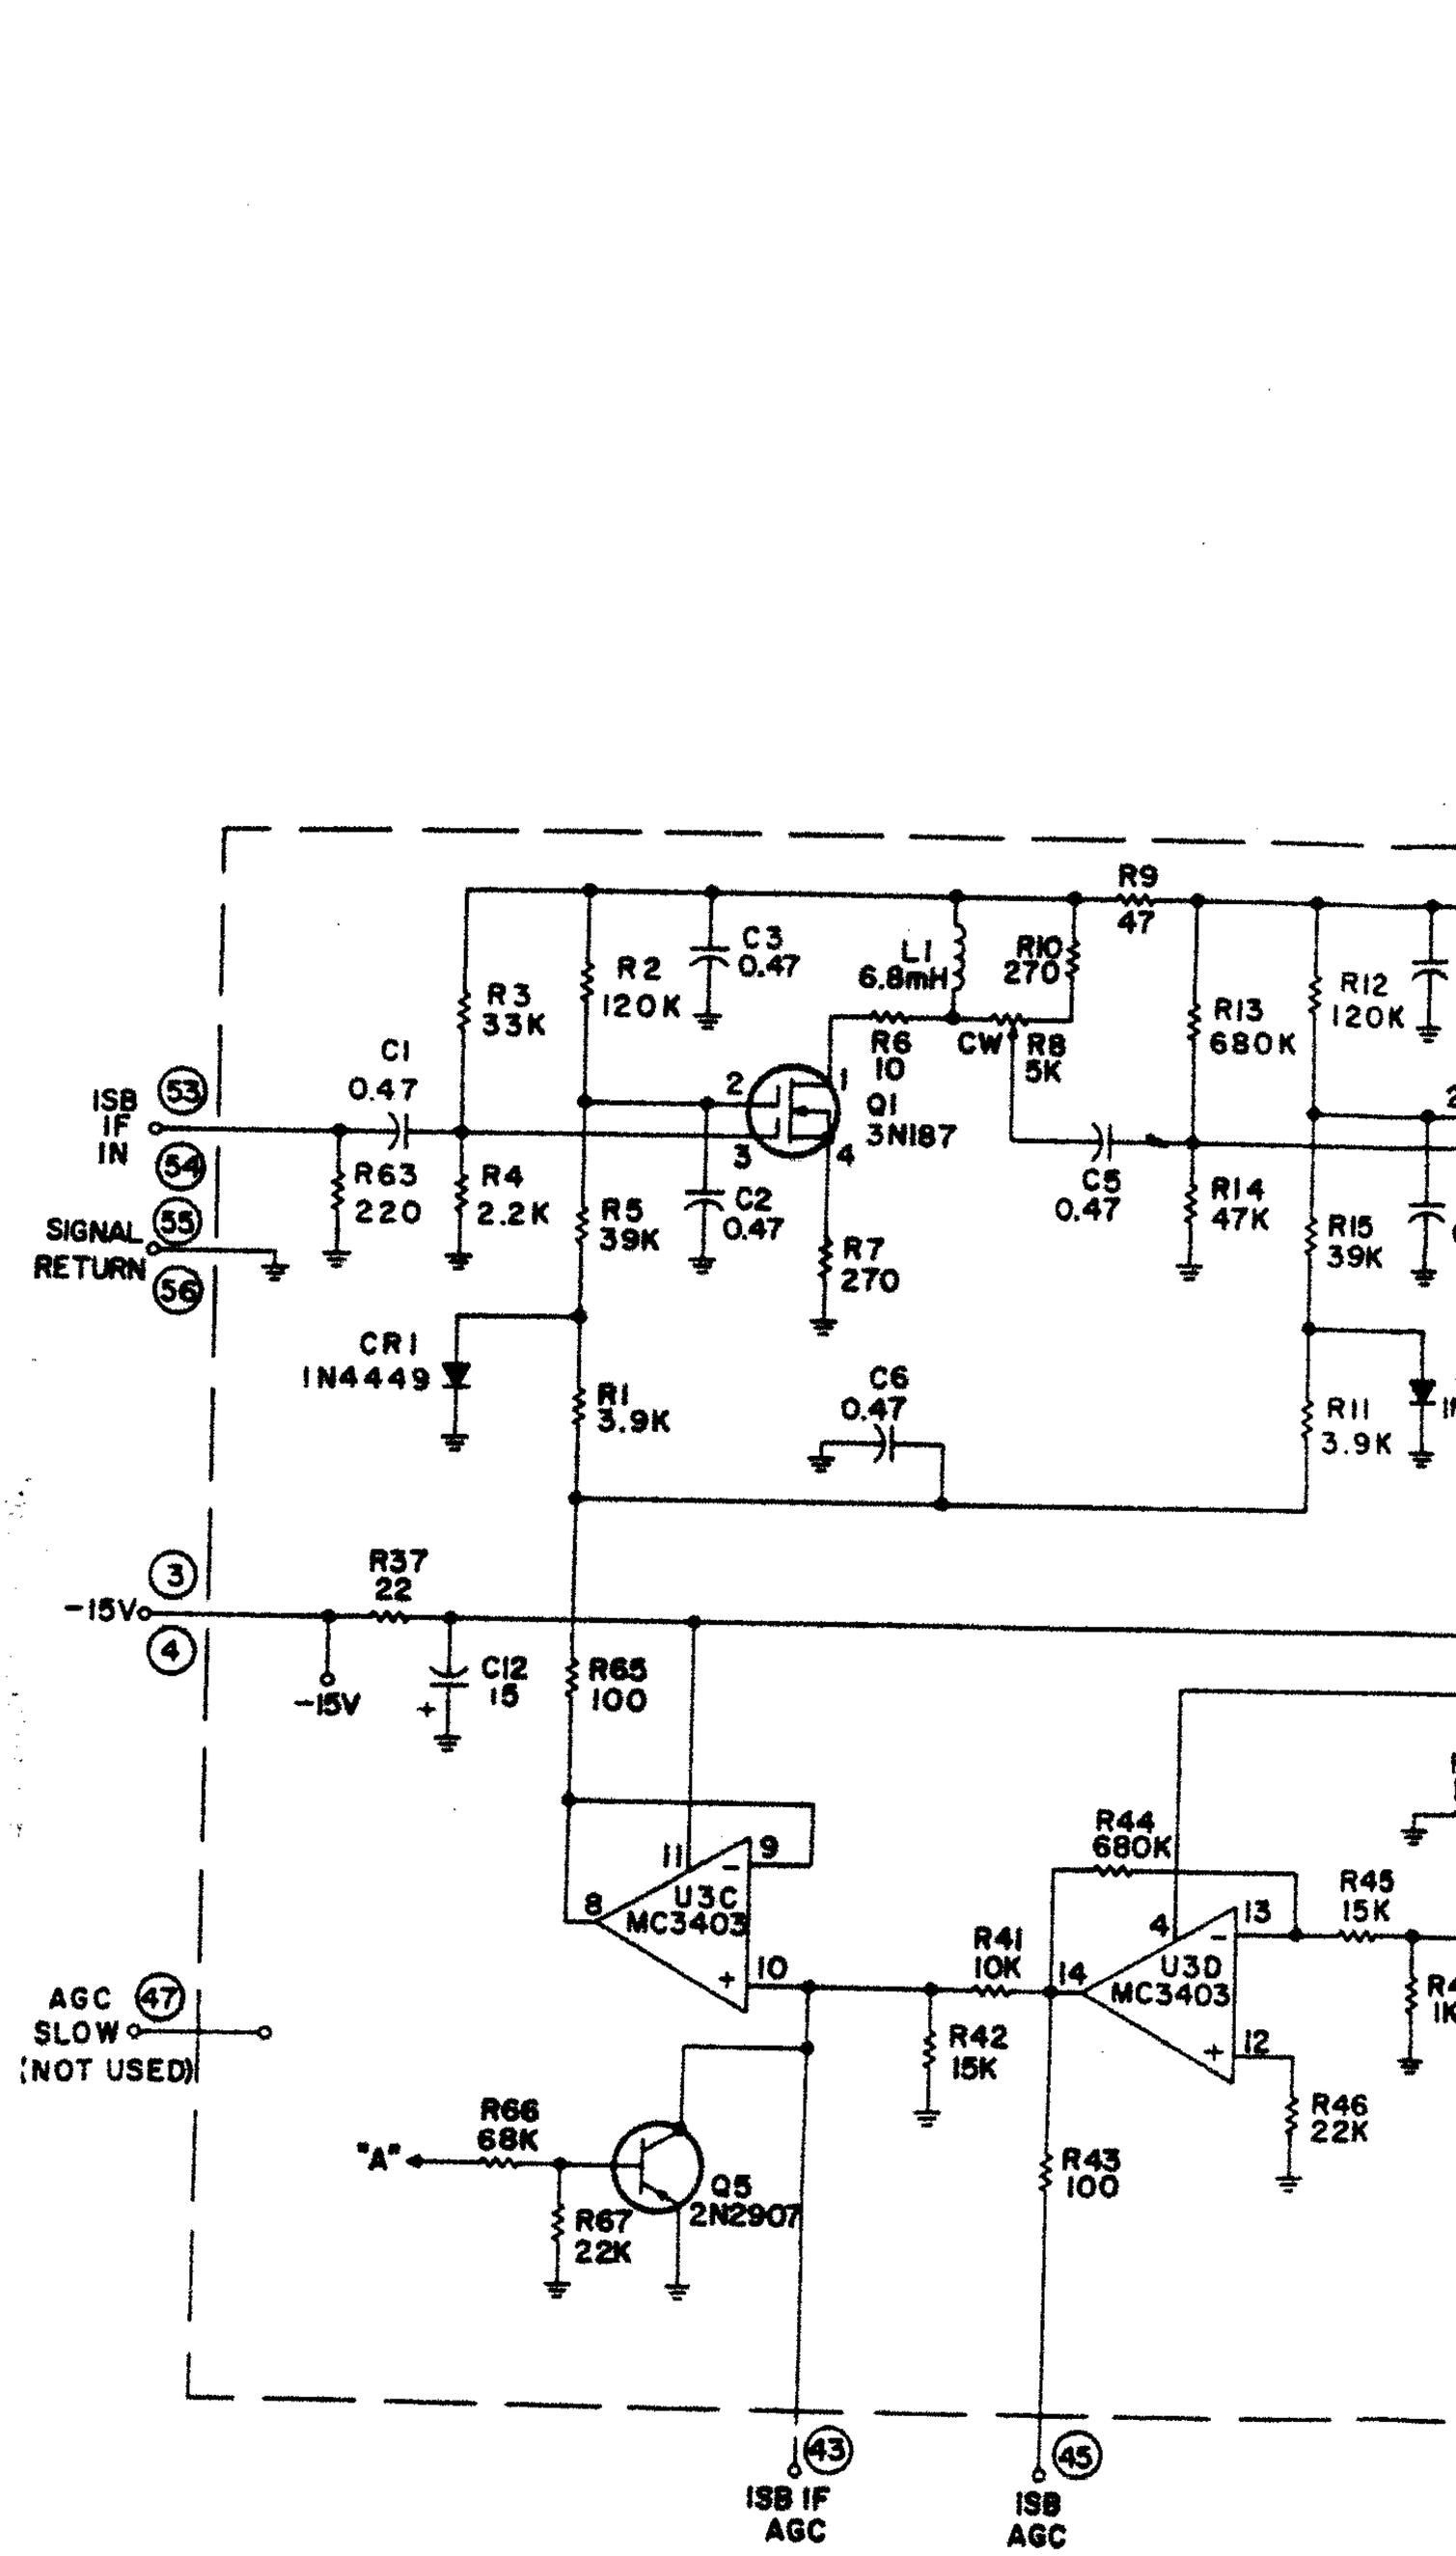

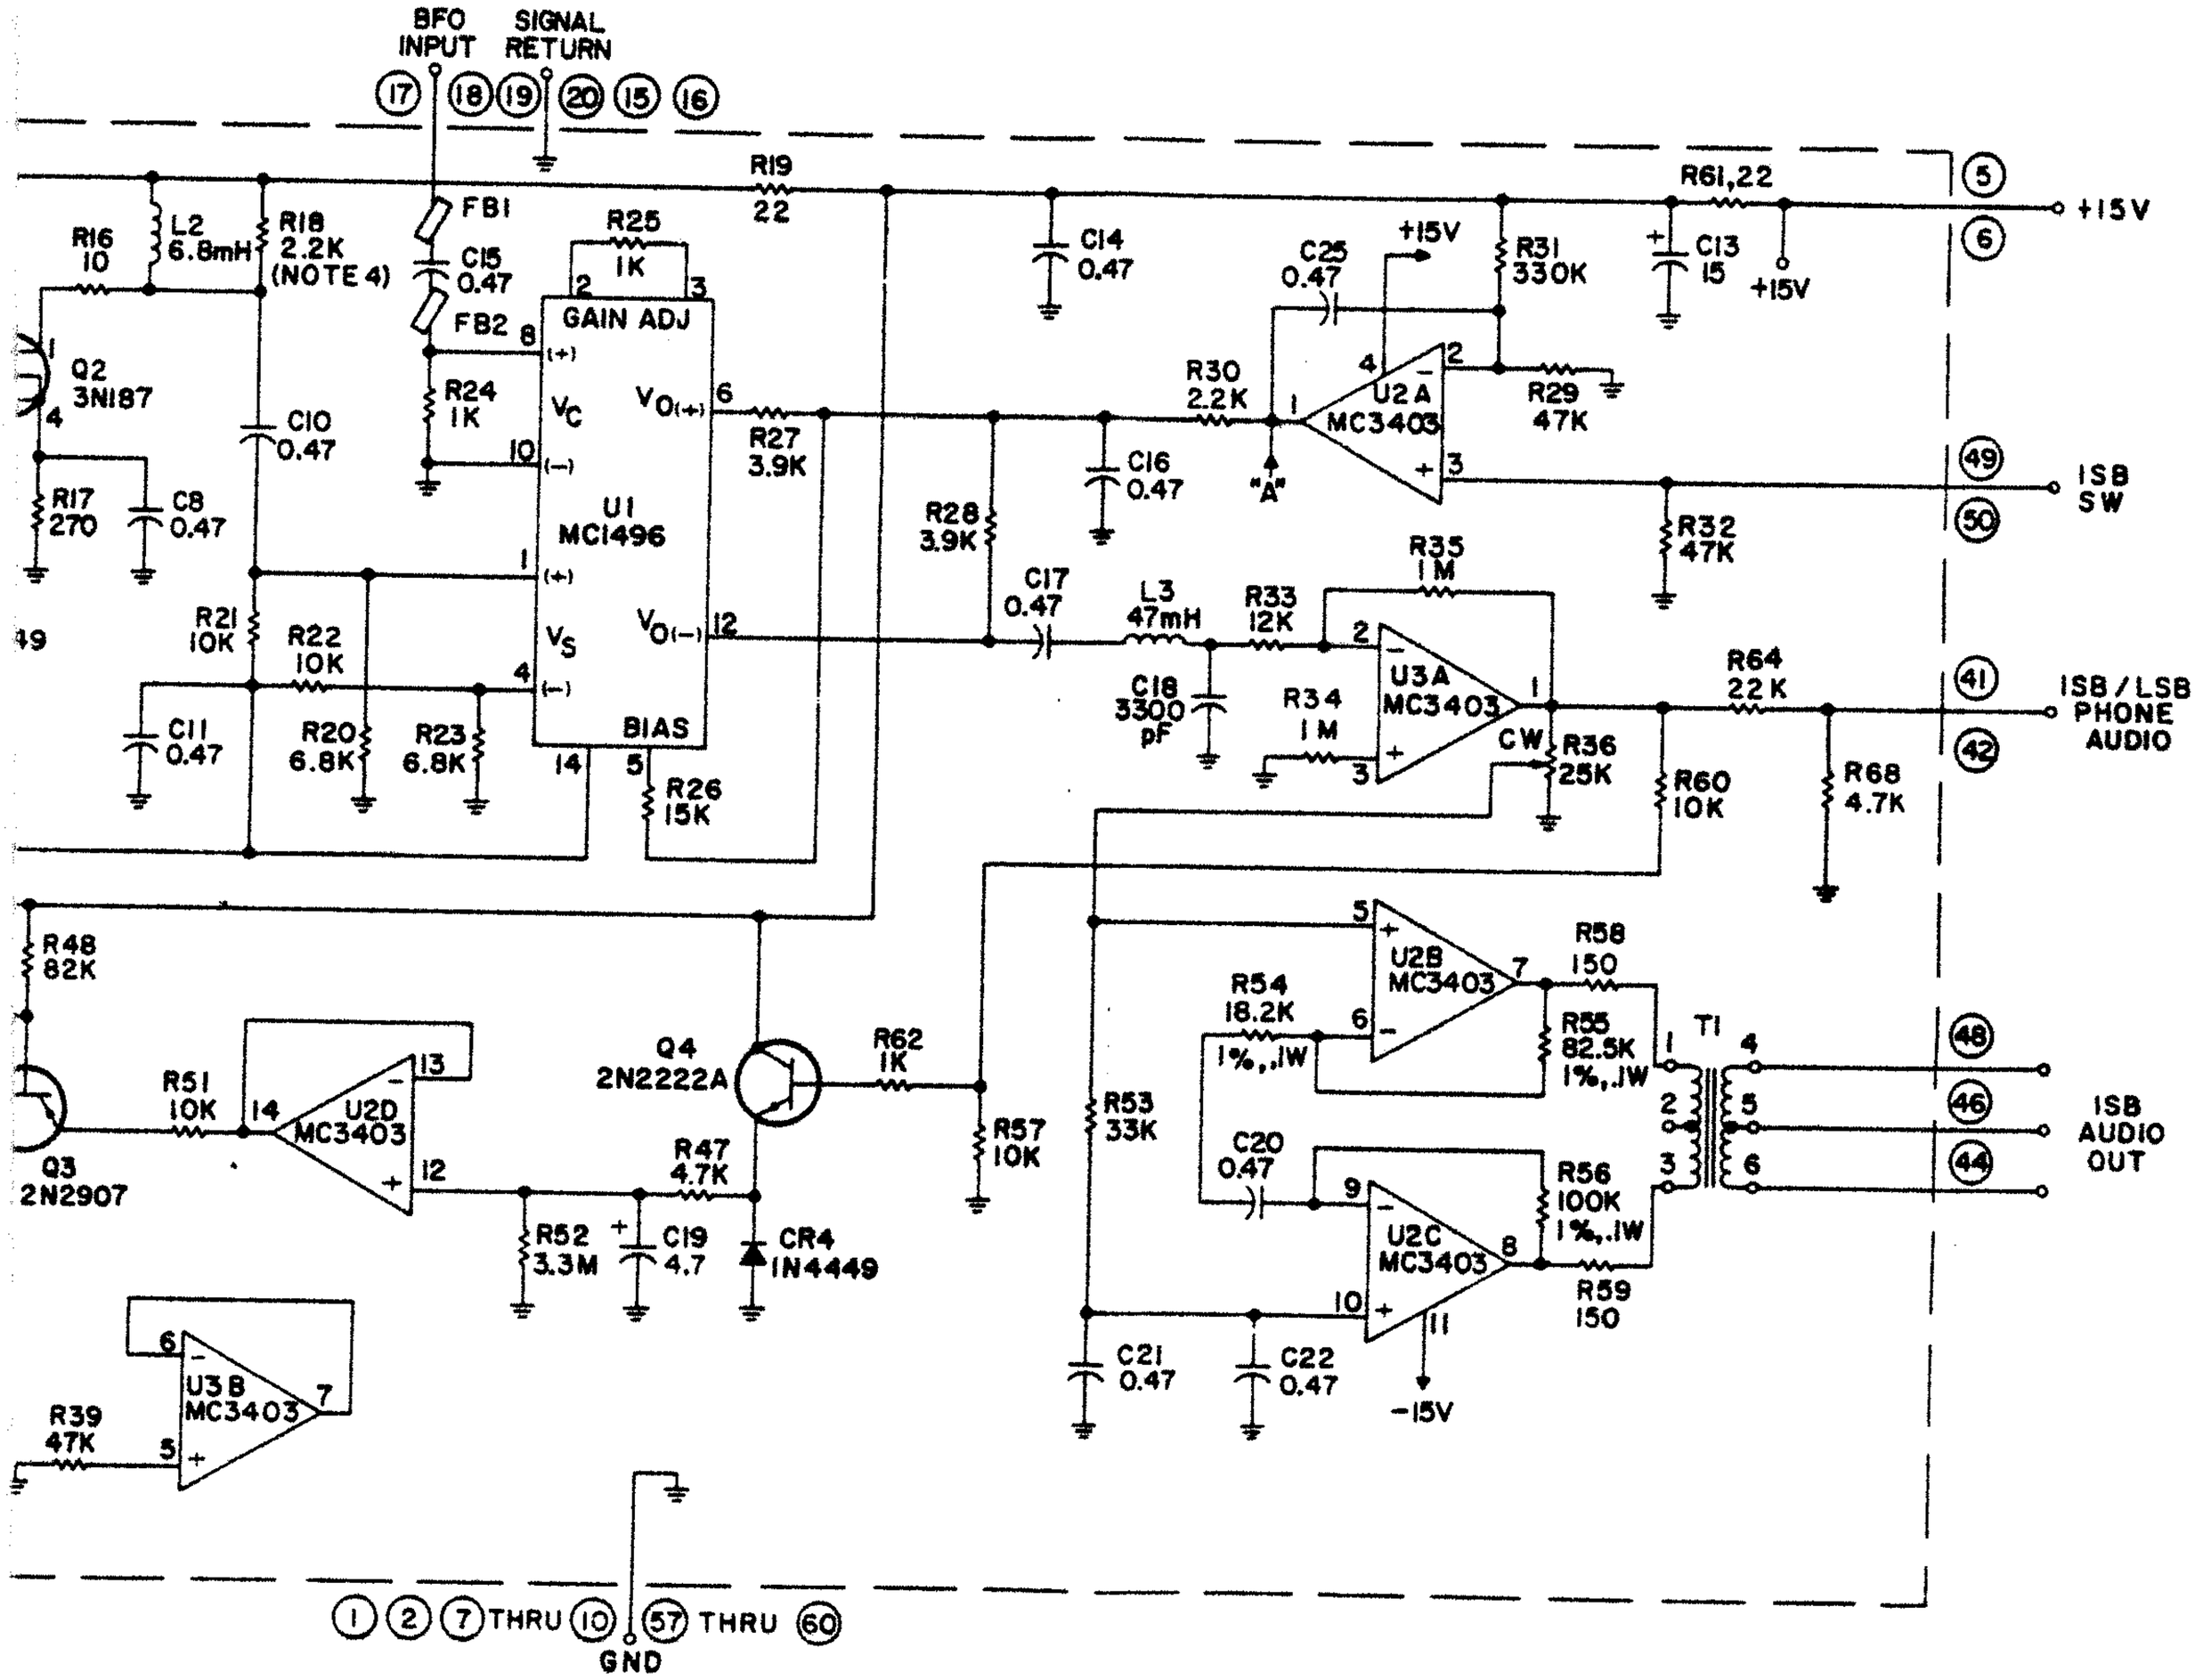



Figure 6-11. Type 791598 ISB Detector/Audio (A4A8) Schematic Diagram 43231


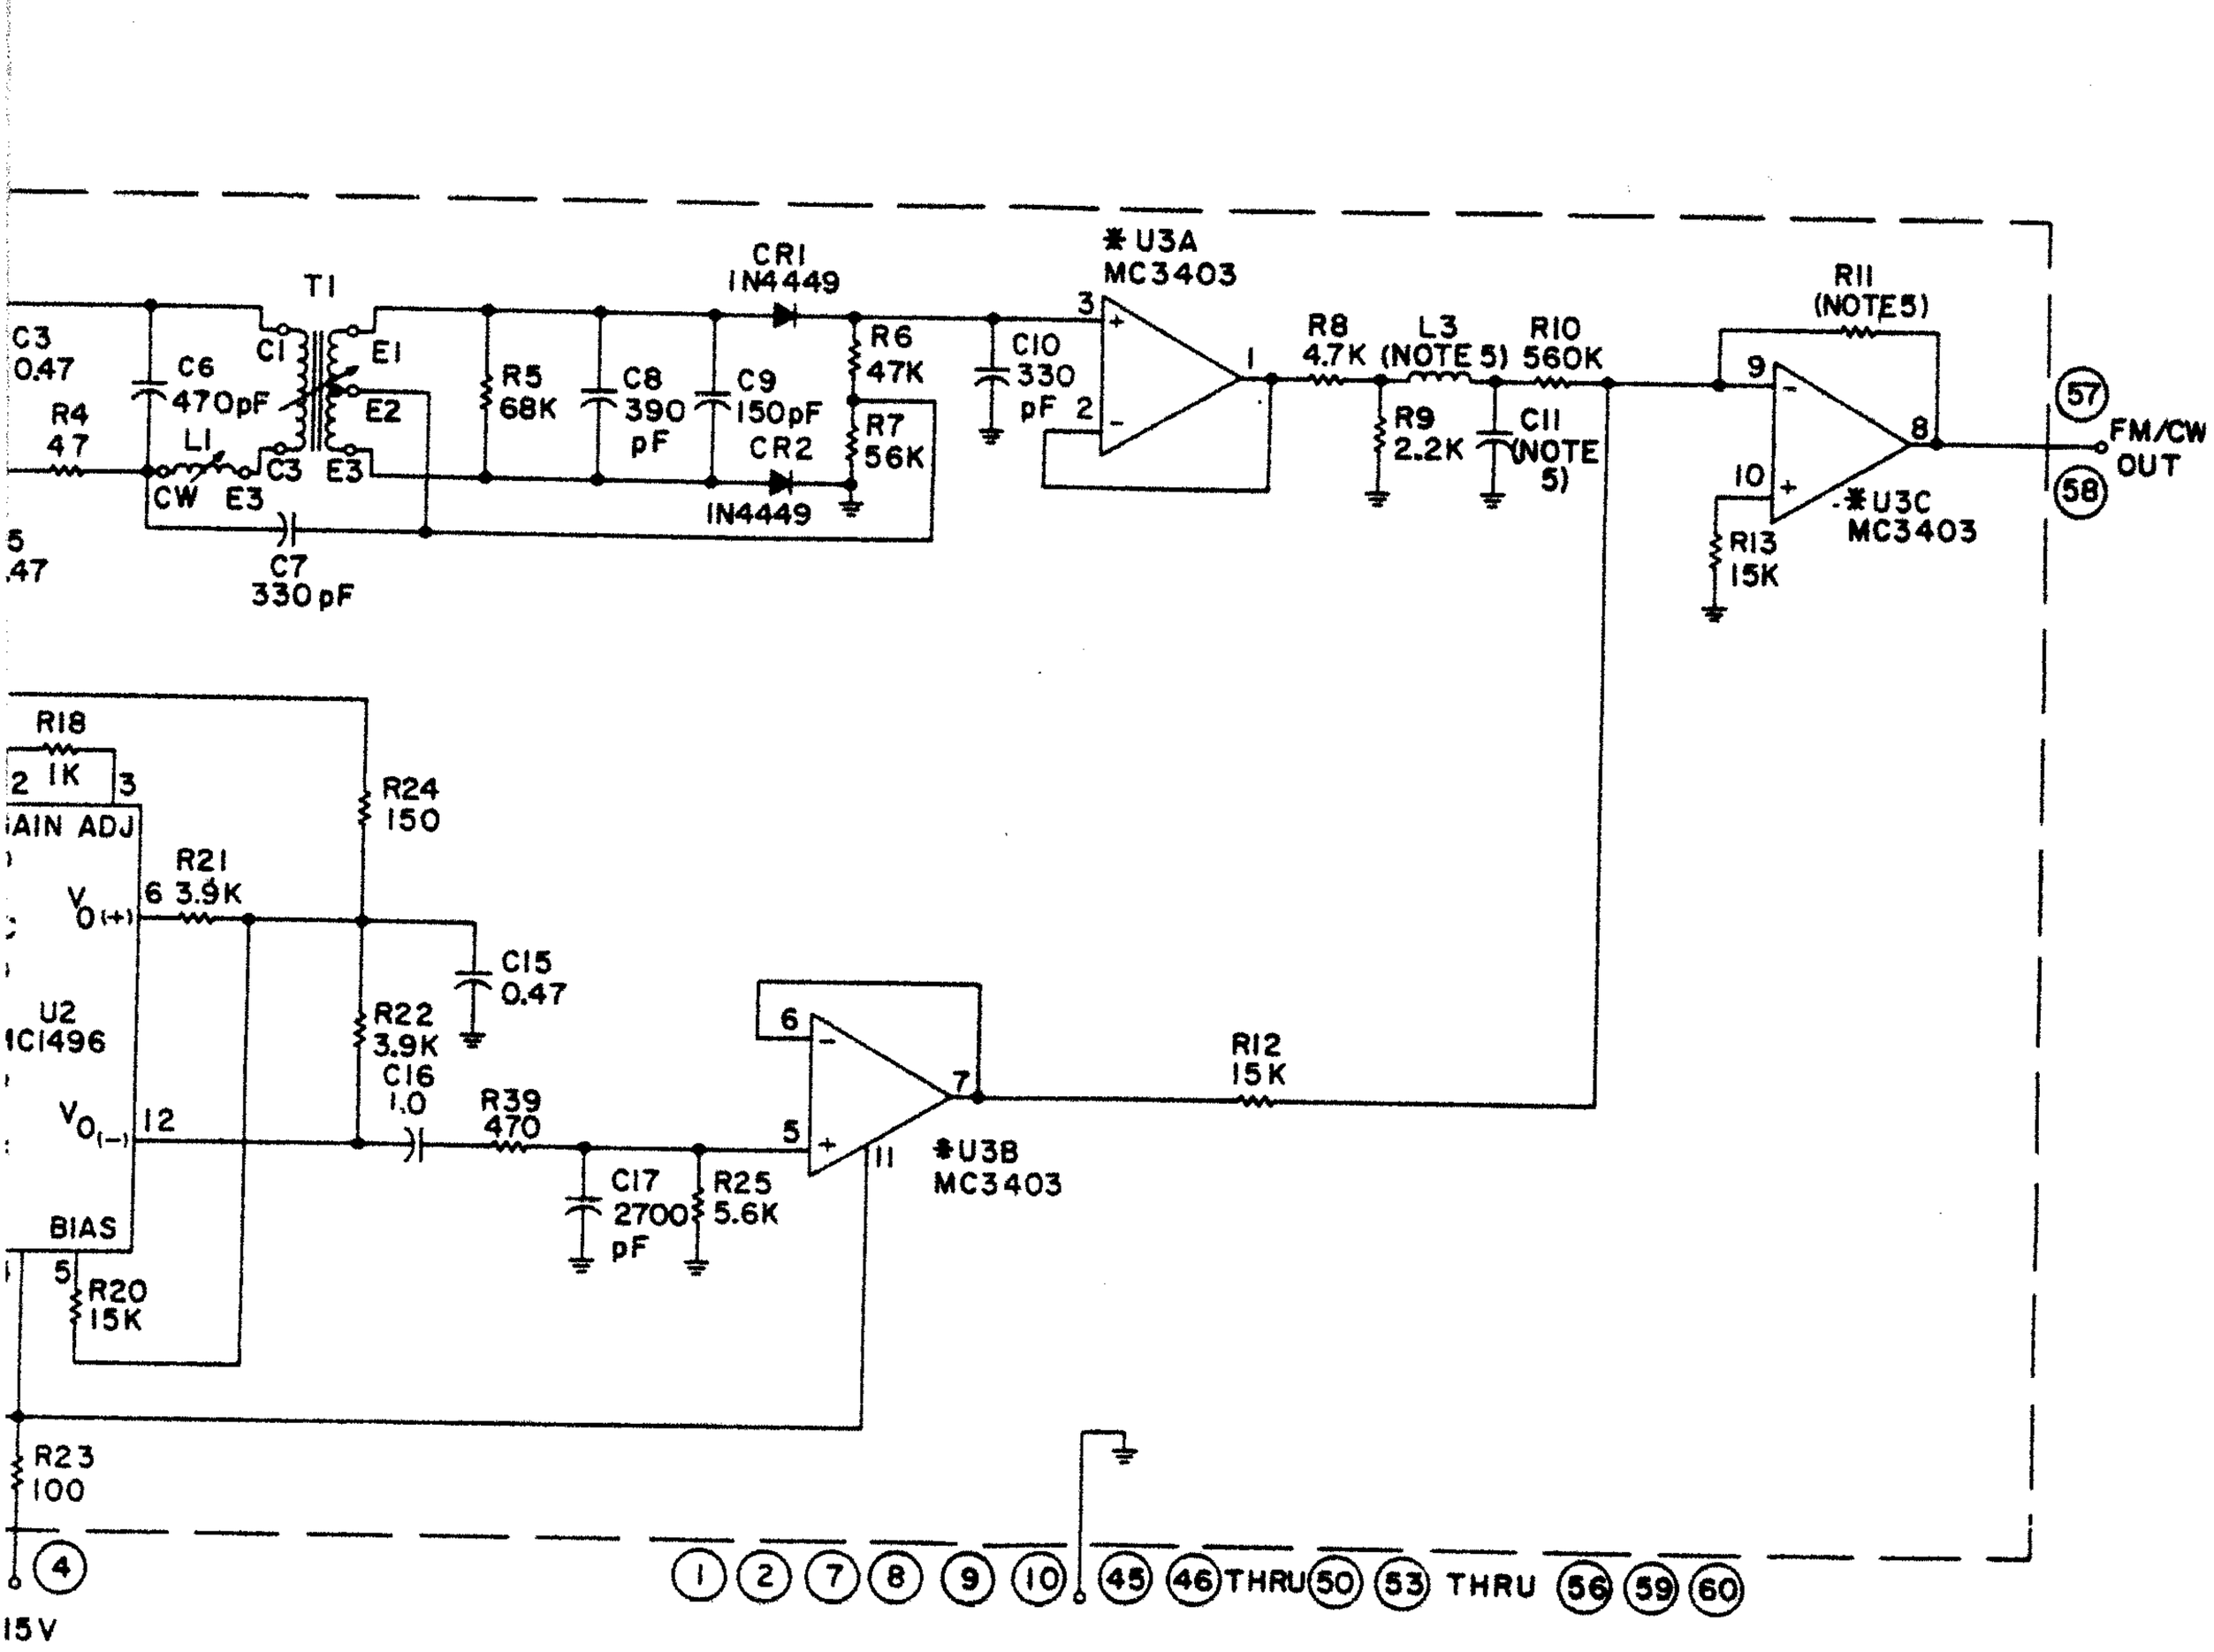



Figure 6-12. Type 791599 FM, CW & SSB Detector (A4A9) Schematic Diagram 43198

)
,1/4W.


)ULE PINS.
)ETAI. A, B
:NT EXISTS
348N MAY
HIS APPLICATION.
S INDICATED IN TABLE A.


DETAIL B





U2 , U3

| R11 |
|---|
| 470K |
| 390K |
| 470K |

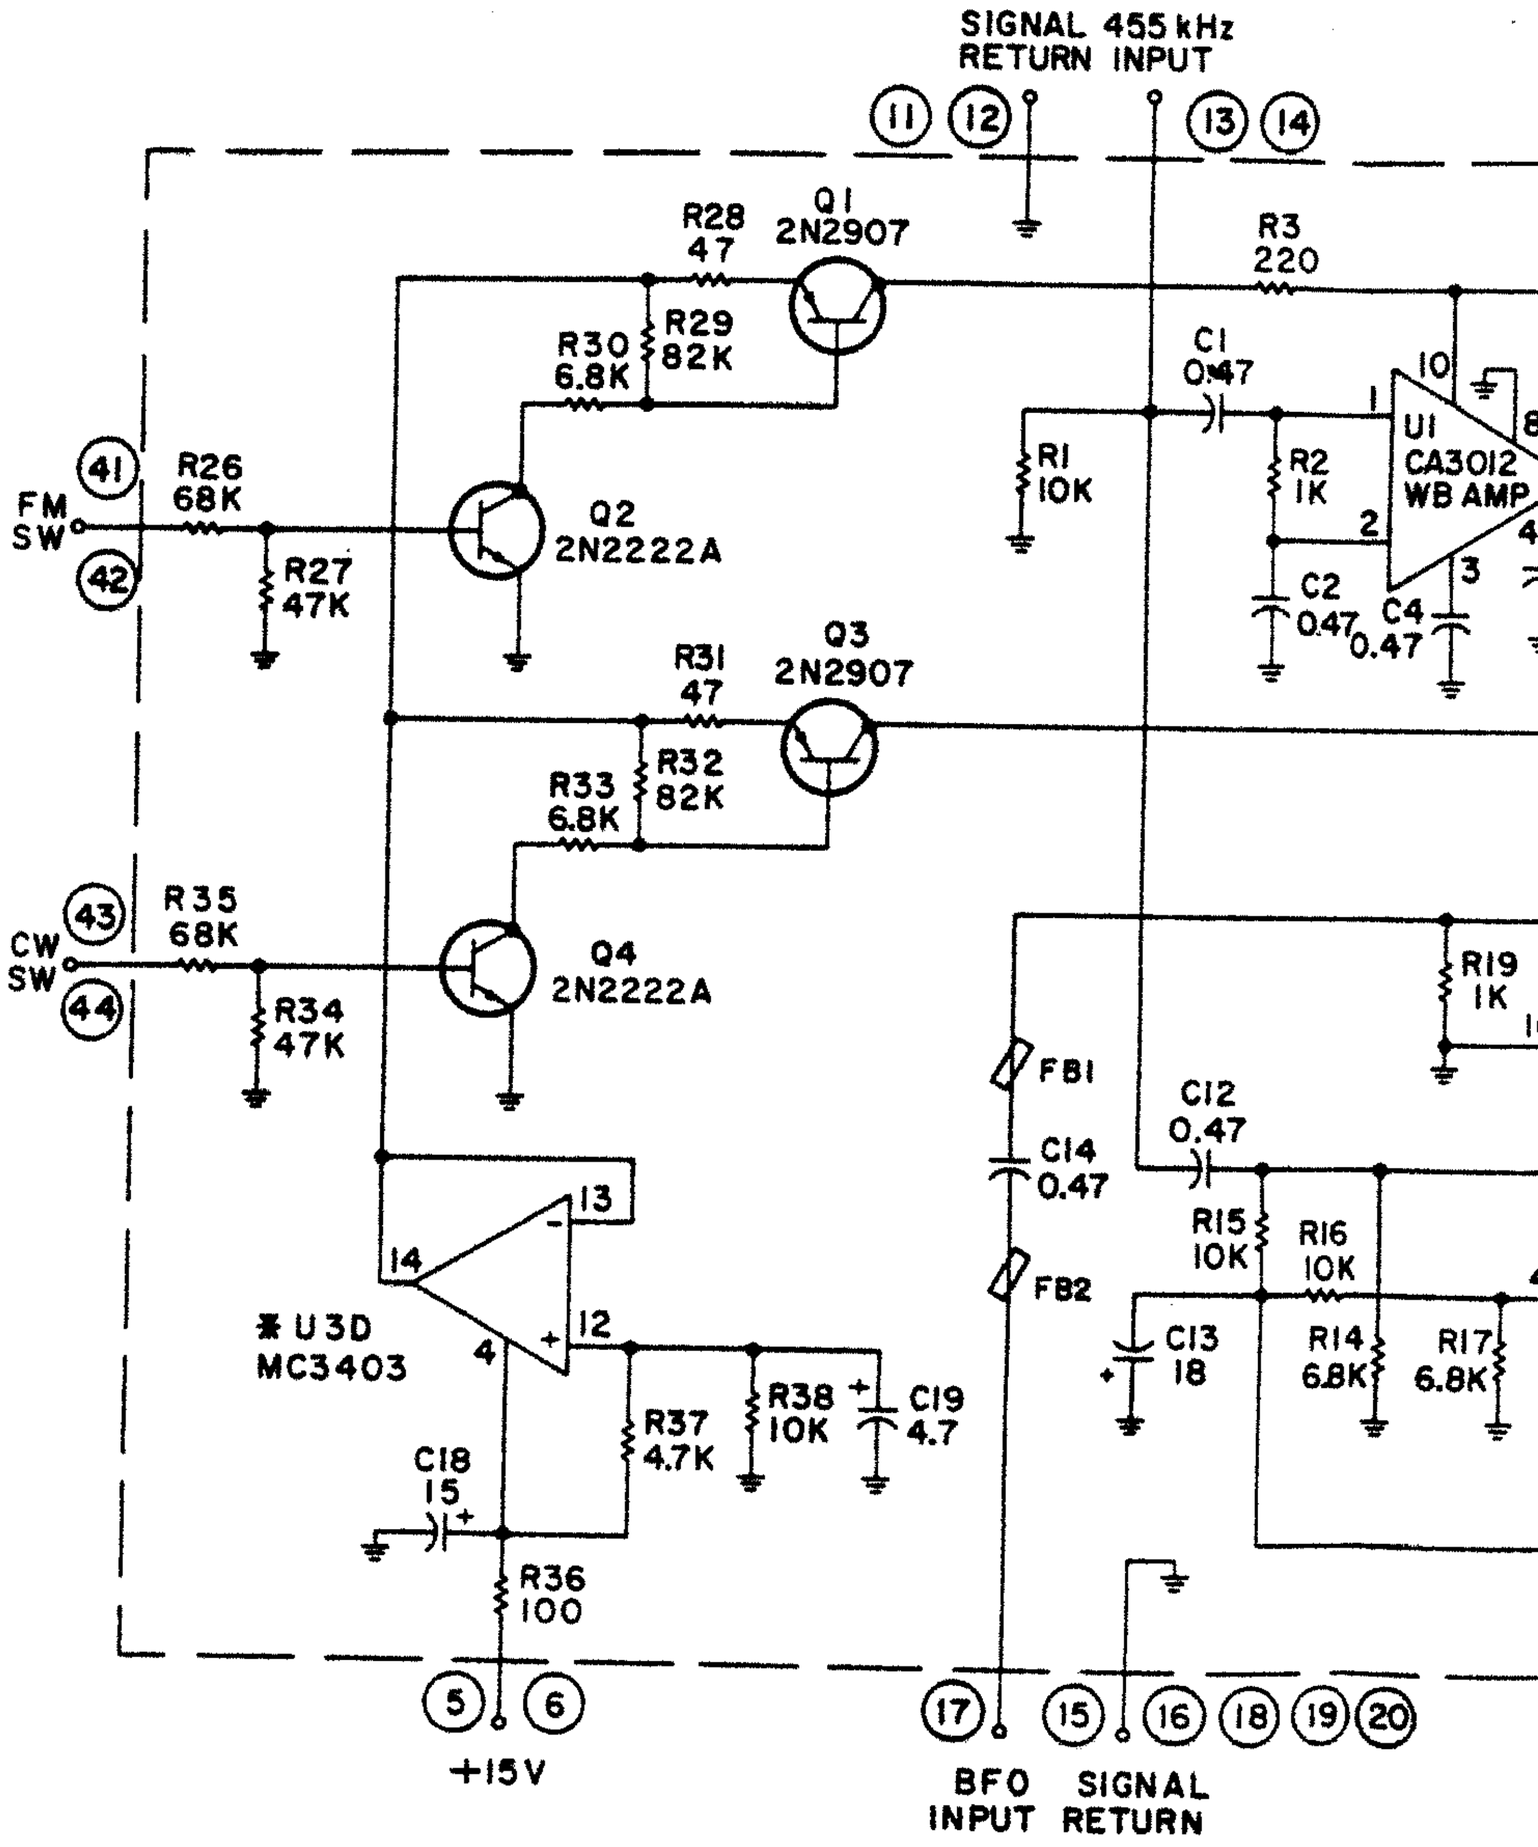

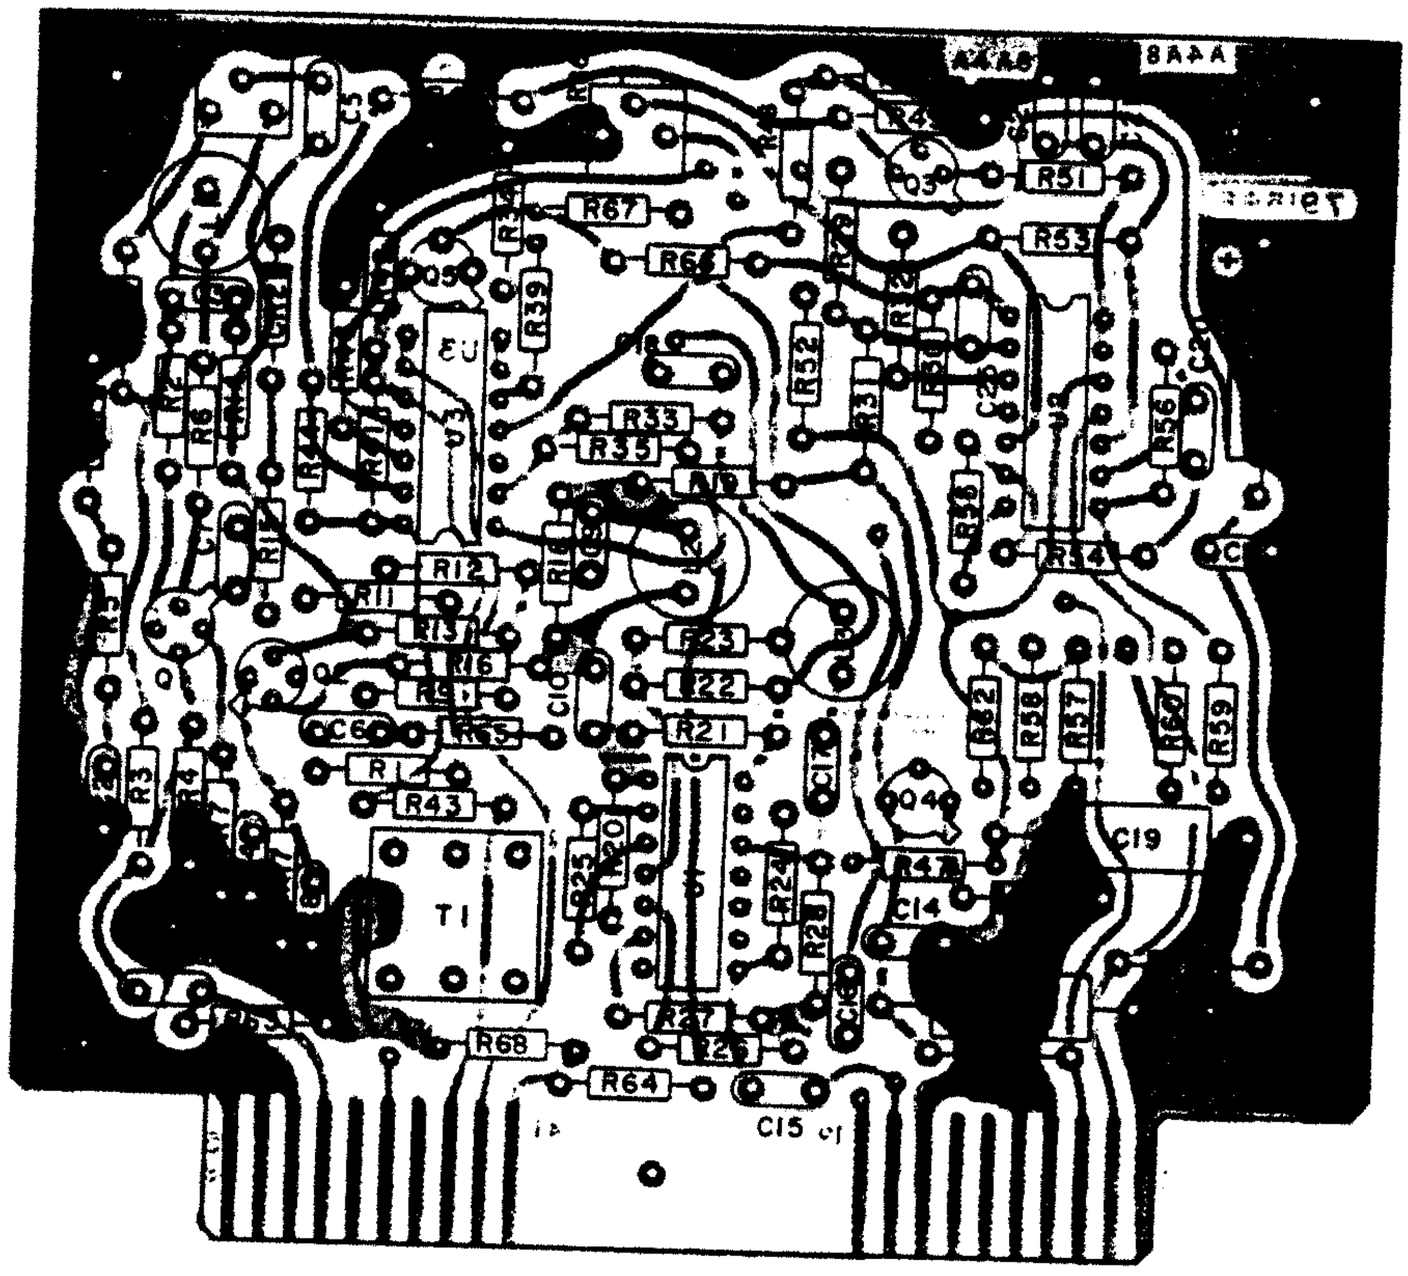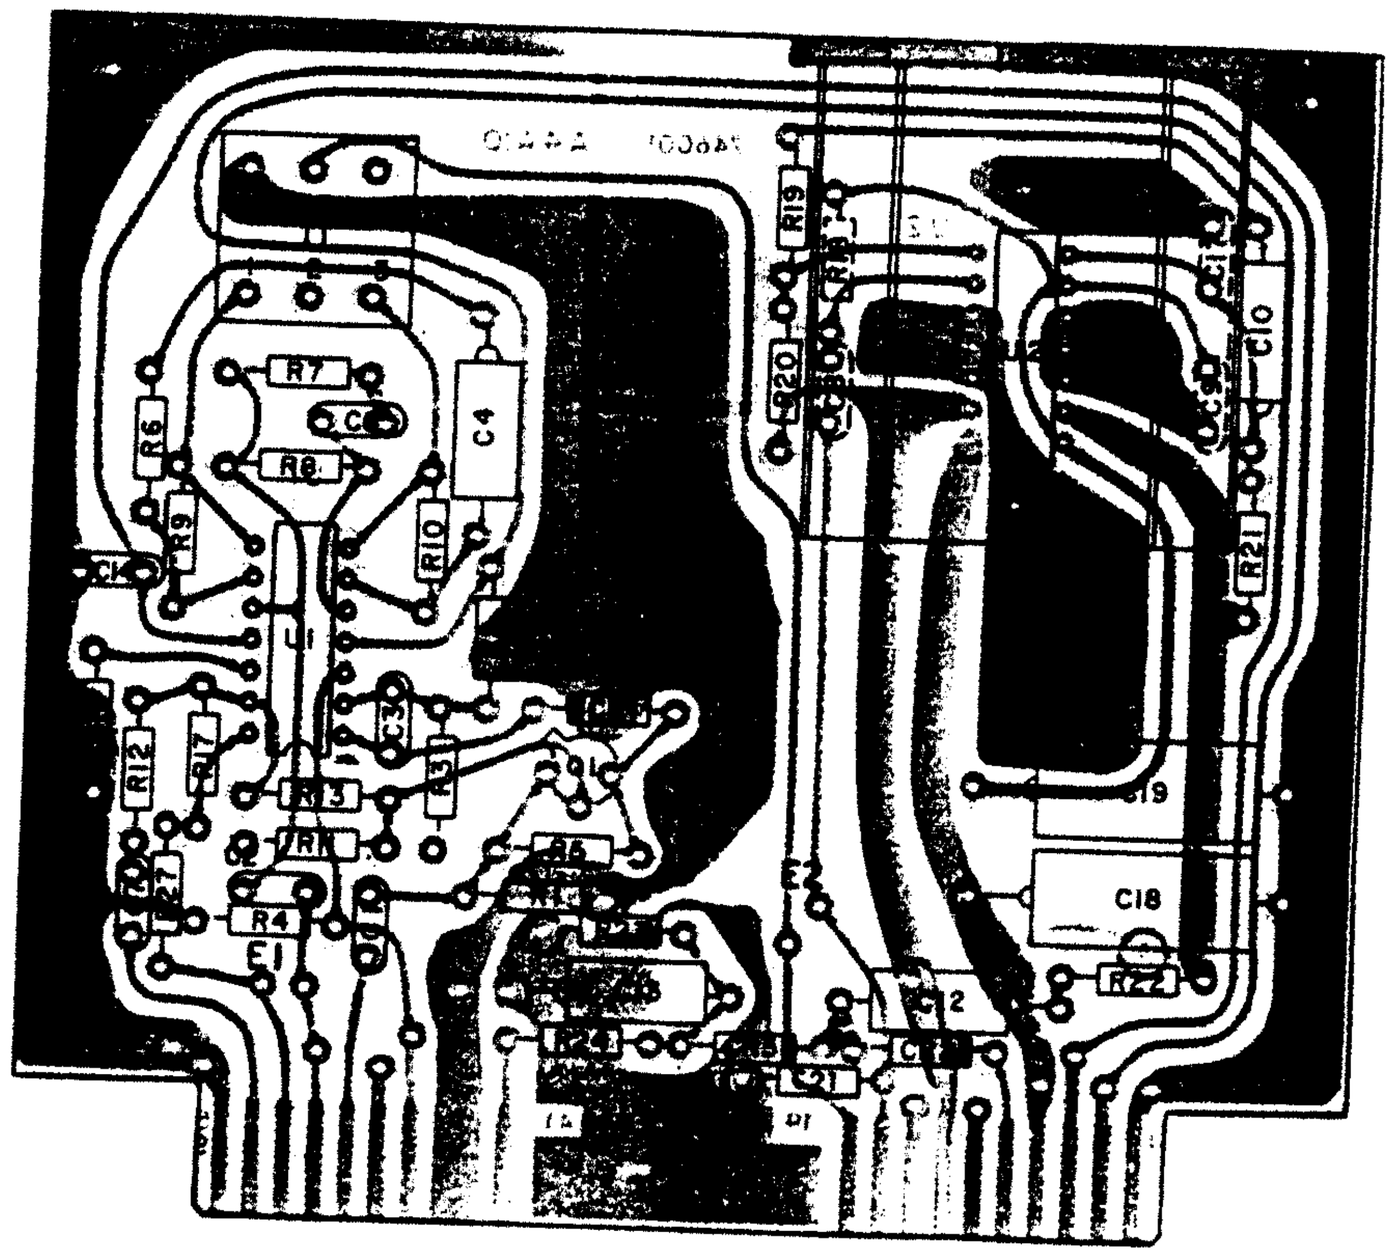
R67
R66
R39
R33
R35
R12
R11
R13
R16
R23
R22
R21
R43
R68
R64
R51
R53
R52
R54
R42
R58
R57
R59
R56
C19
C14
T1
Q4


R7
C6
C4
R6
R8
R9
R10
C1
U1
R12
R13
R4
E1
R19
R20
C10
R21
C19
C18
R22
C12


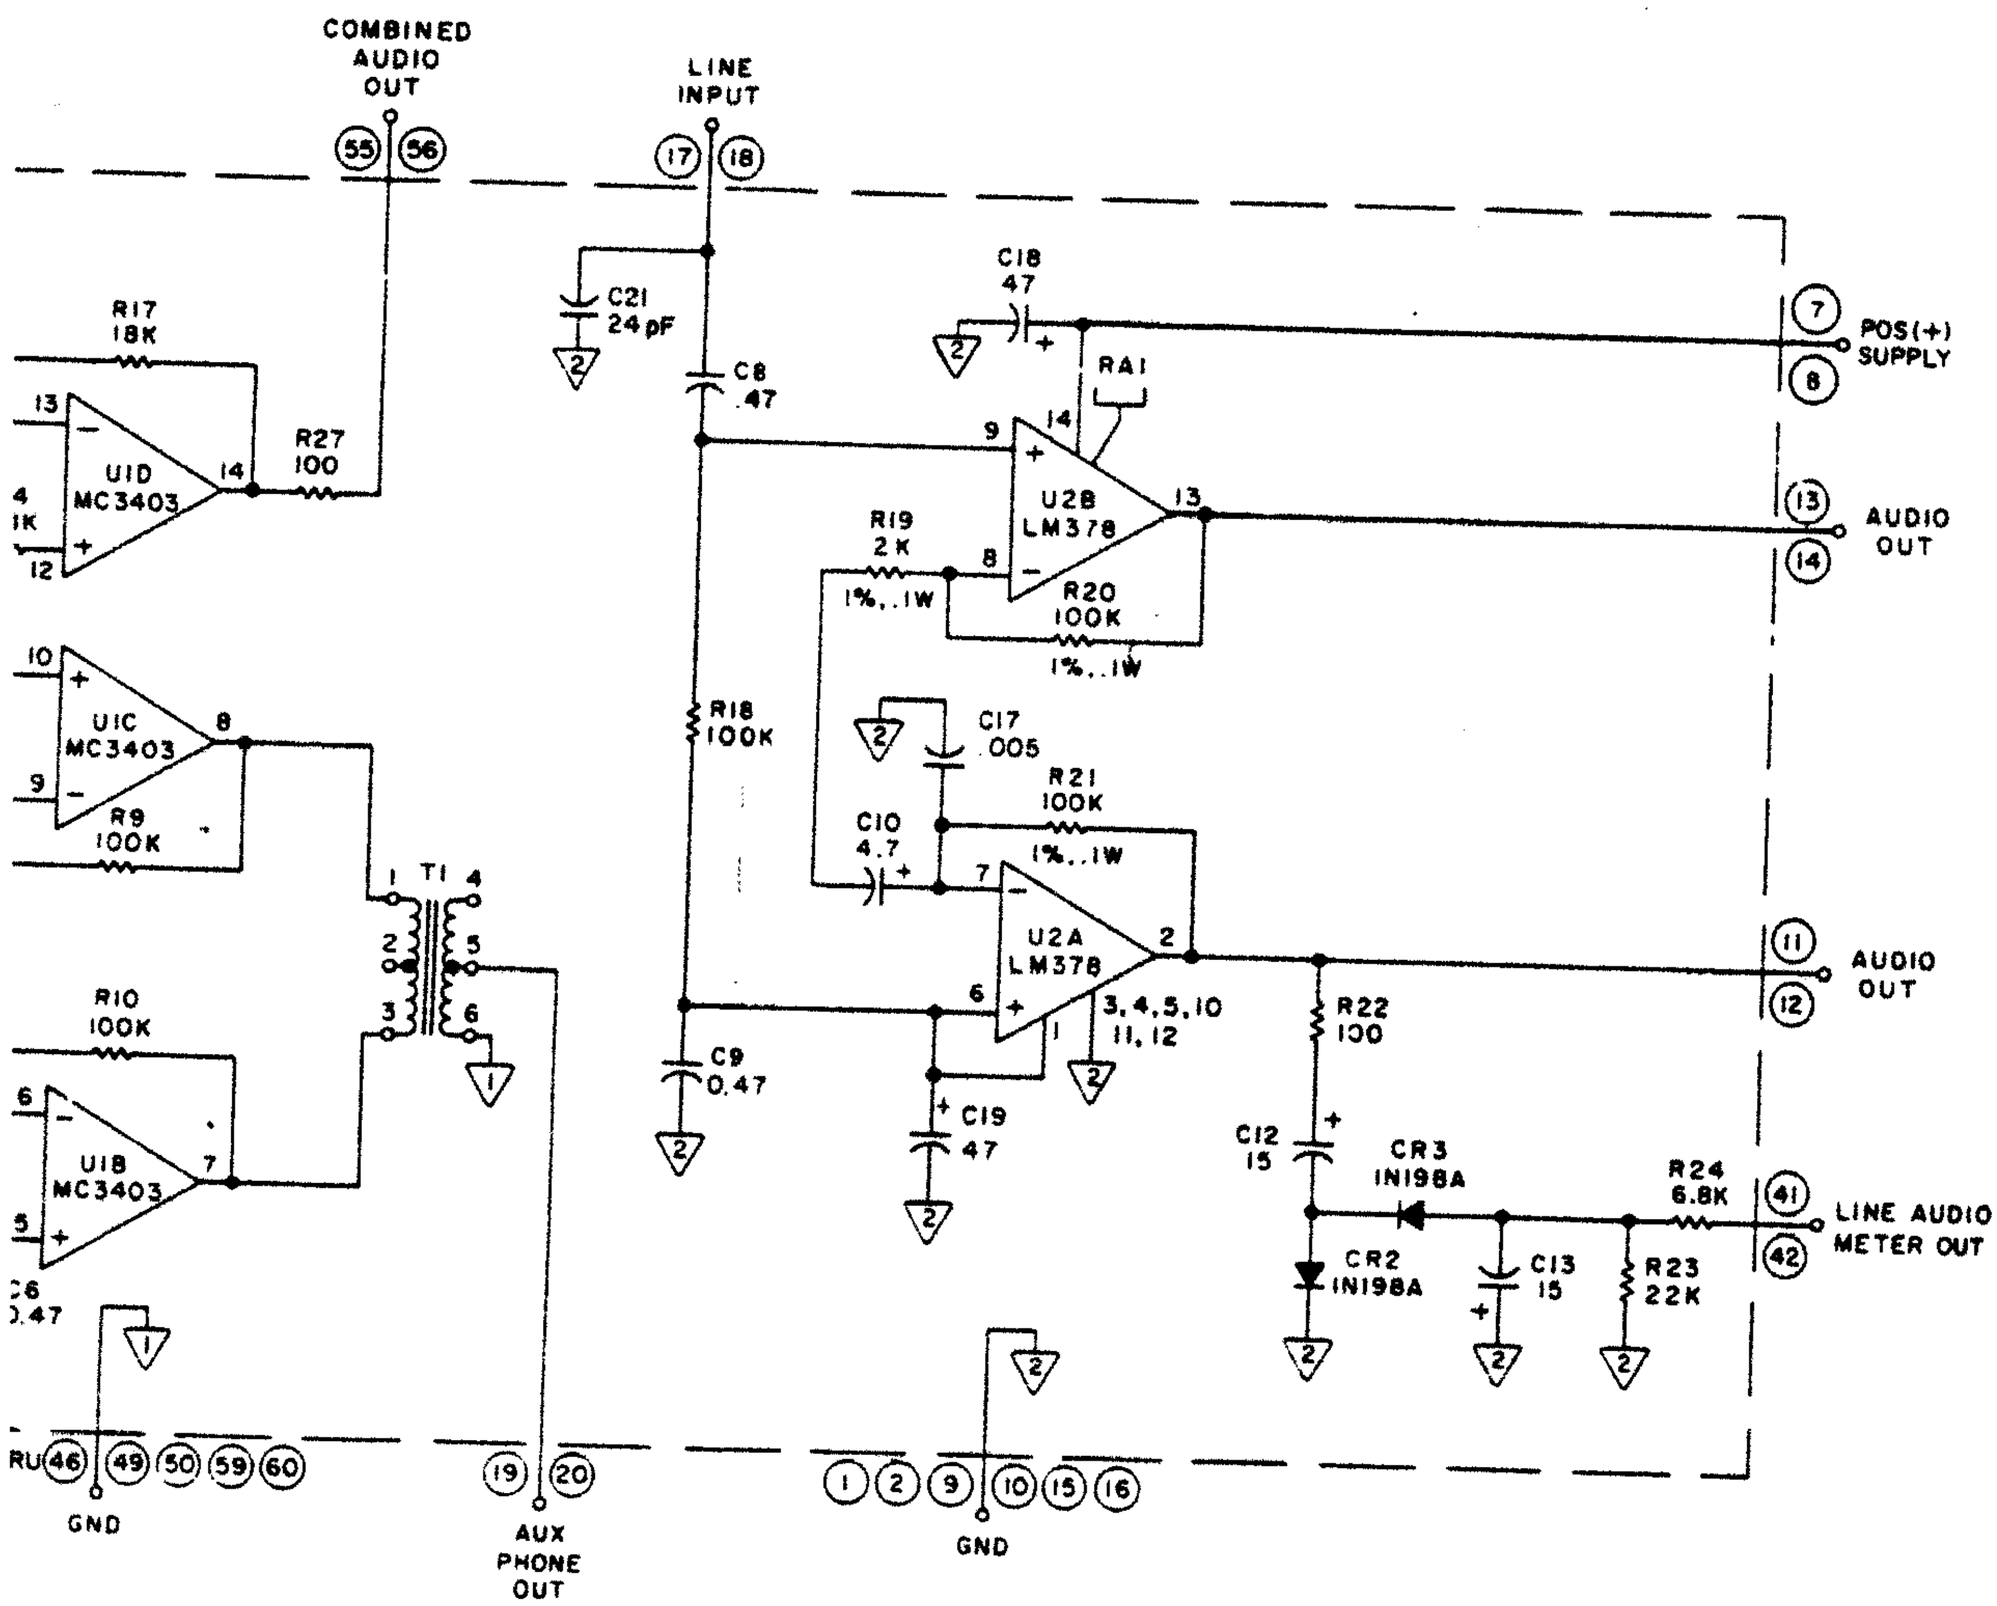



Figure 6-13. Type 746001 Audio Amplifier (A4A10) Schematic Diagram 480089


NOTES:

1. UNLESS OTHERWISE SPECIFIED:
   a) RESISTANCE IS IN OHMS, ±5%, 1/4W.
   b) CAPACITANCE IS IN μF.
2. ENCIRCLED NUMBERS ARE MODULE PINS.
3. U1, U2 LEAD ARRANGEMENT – DETAIL A.
4. DIFFERENCE BETWEEN TYPES IS MECHANICAL ONLY.

DETAIL A




MC3403
LM378

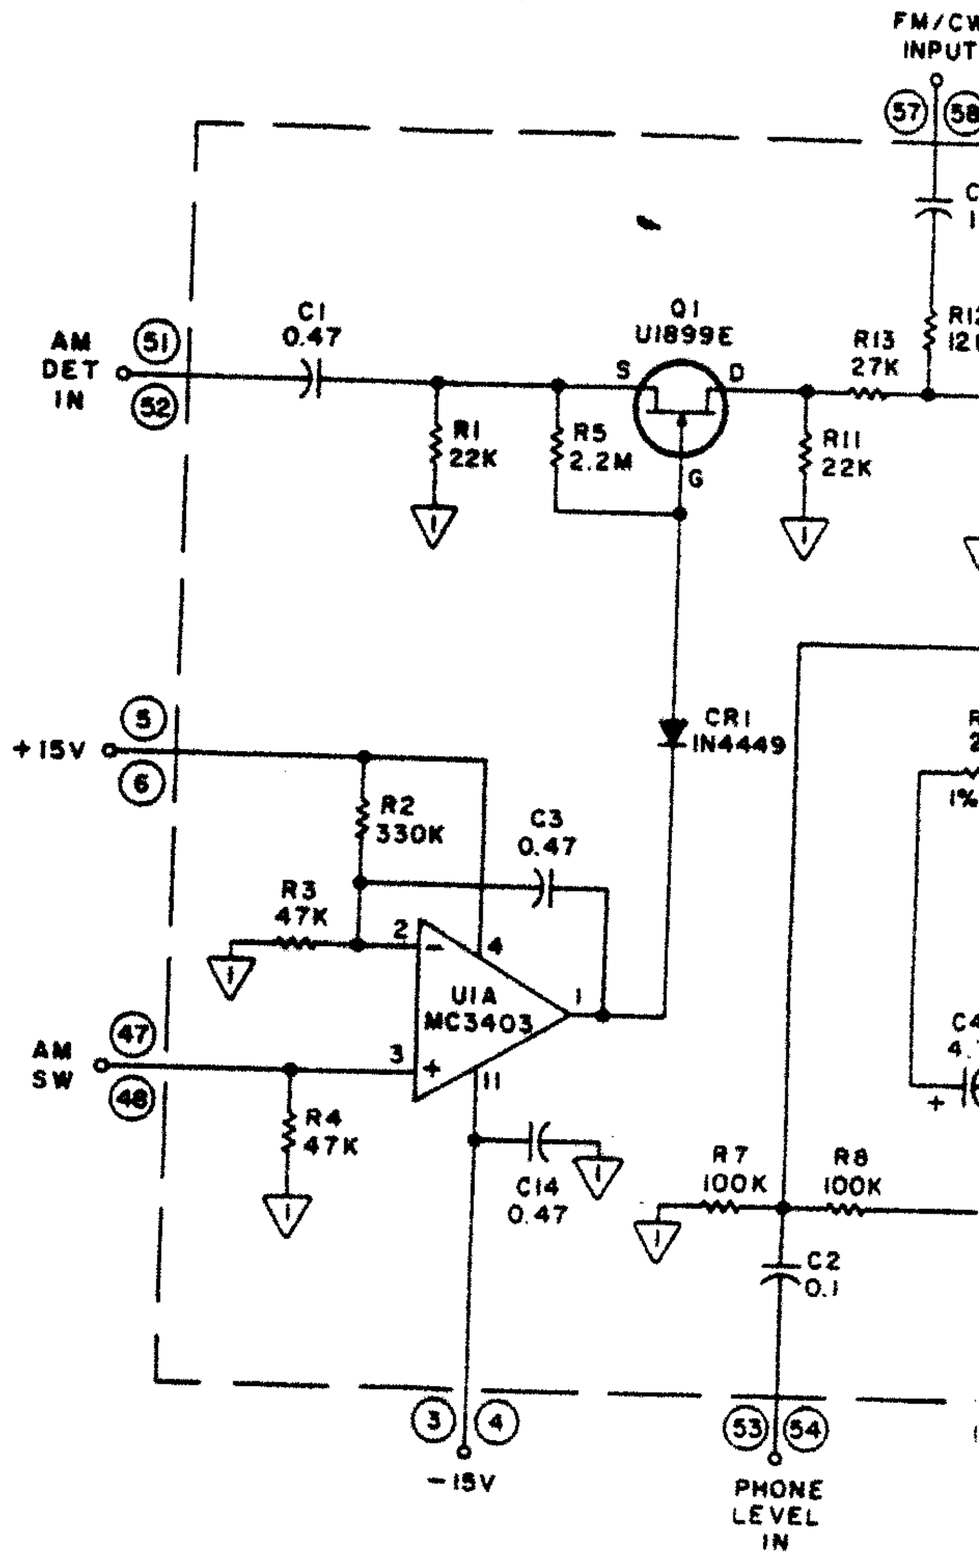


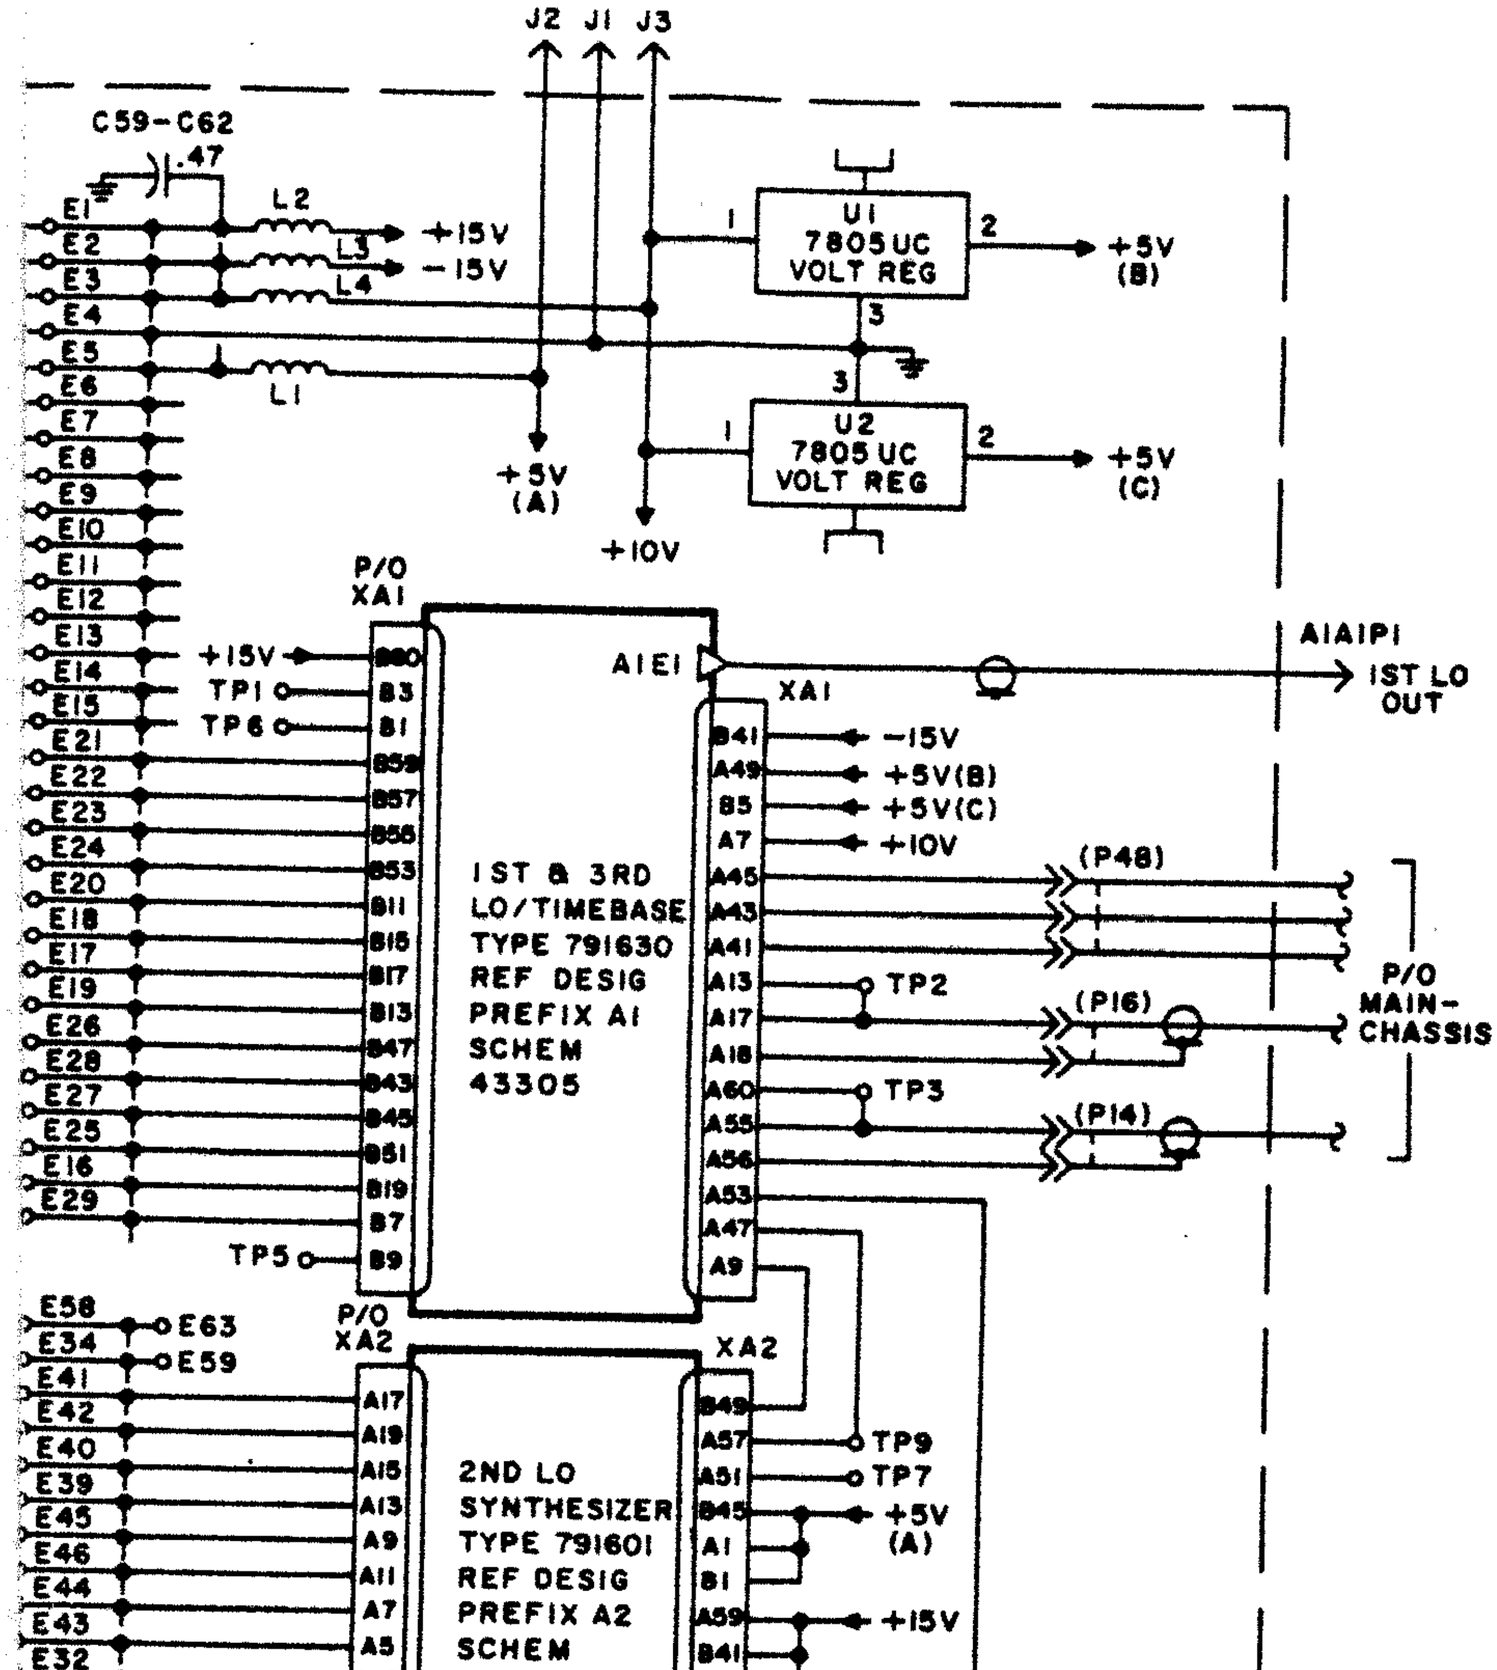



Figure 6-14. Type 791570 Synthesizer Motherboard (A5) Schematic Diagram 470518

NOTES:

1. MOST MODULE PINS ARE NOT SHOWN DUE TO UNNECESSARY LINE DUPLICATIONS. GROUND PINS ON SOME MODULES ARE NOT SHOWN BECAUSE OF COMPLEXITY (SEE EACH MODULE'S DWG FOR CLARITY).
2. EACH CAPACITOR REFERENCE NO. IS IDENTICAL TO EACH "E" NO.
3. TEST POINT DESCRIPTIONS:

| | |
|---|---|
| TP1 | N/U |
| TP2 | 1 MHz REF OUT |
| TP3 | 3RD LO OUT |
| TP4 | N/U |
| TP5 | 1ST LO UNLOCK |
| TP6 | 1ST LO TUNING VOLTS |
| TP7 | 2ND LO MAIN LOOP TUNING VOLTS |
| TP8 | 2ND LO 32.2 MHz TUNING VOLTS |
| TP9 | 10 kHz |
| TP10 | 2ND LO UNLOCK |
| TP11 | N/U |
| TP12 | 2ND LO 32 MHz TUNING VOLTS |
| TP13 | 2ND LO OUT |
| TP14 | 1 kHz |
| TP15 | BFO TUNING VOLTS |
| TP16 | BFO OUT |
| TP17 | FIXED BFO |
| TP18 | BFO INHIBIT |

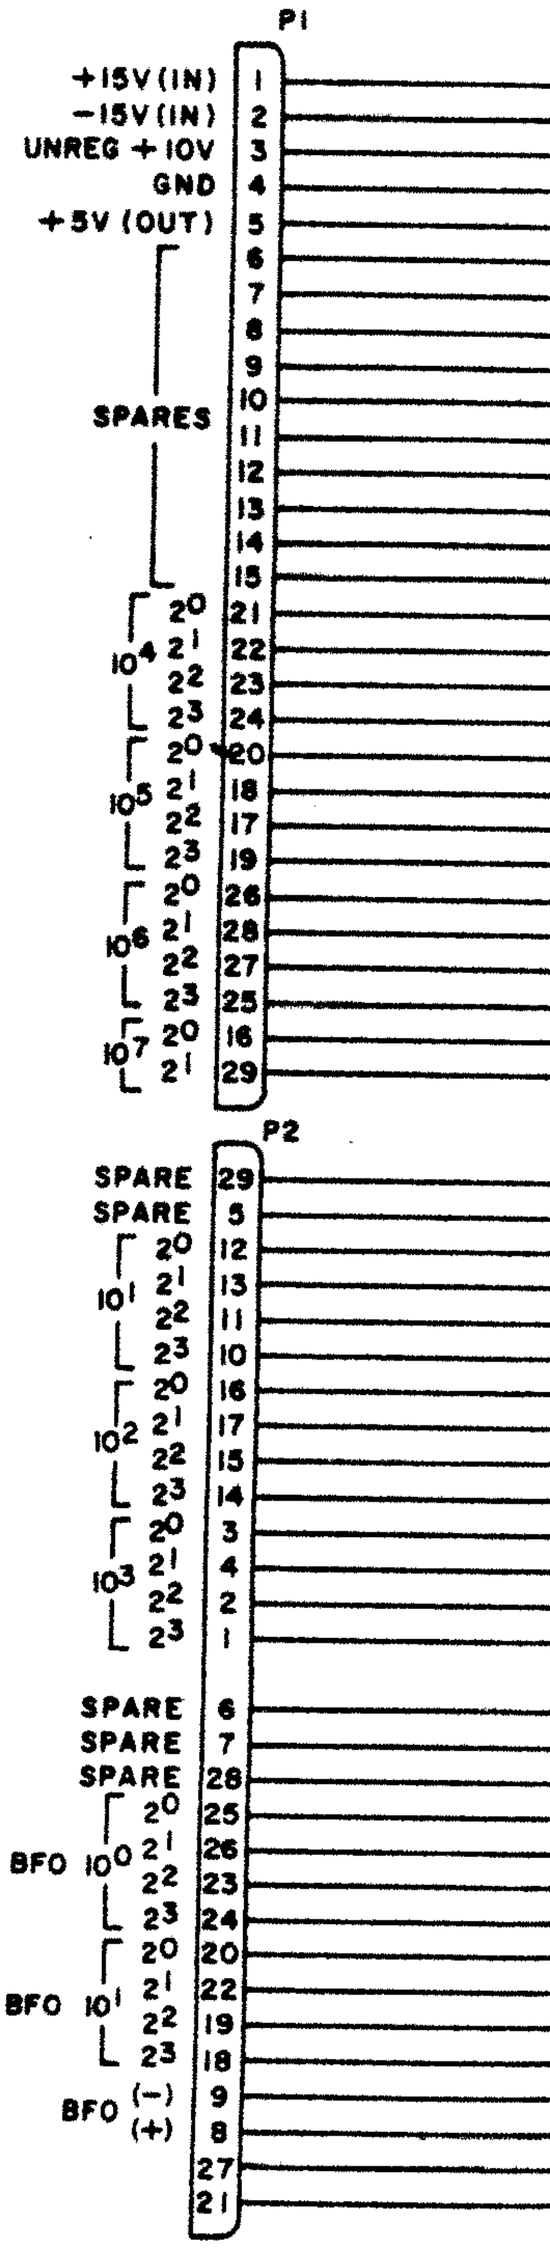

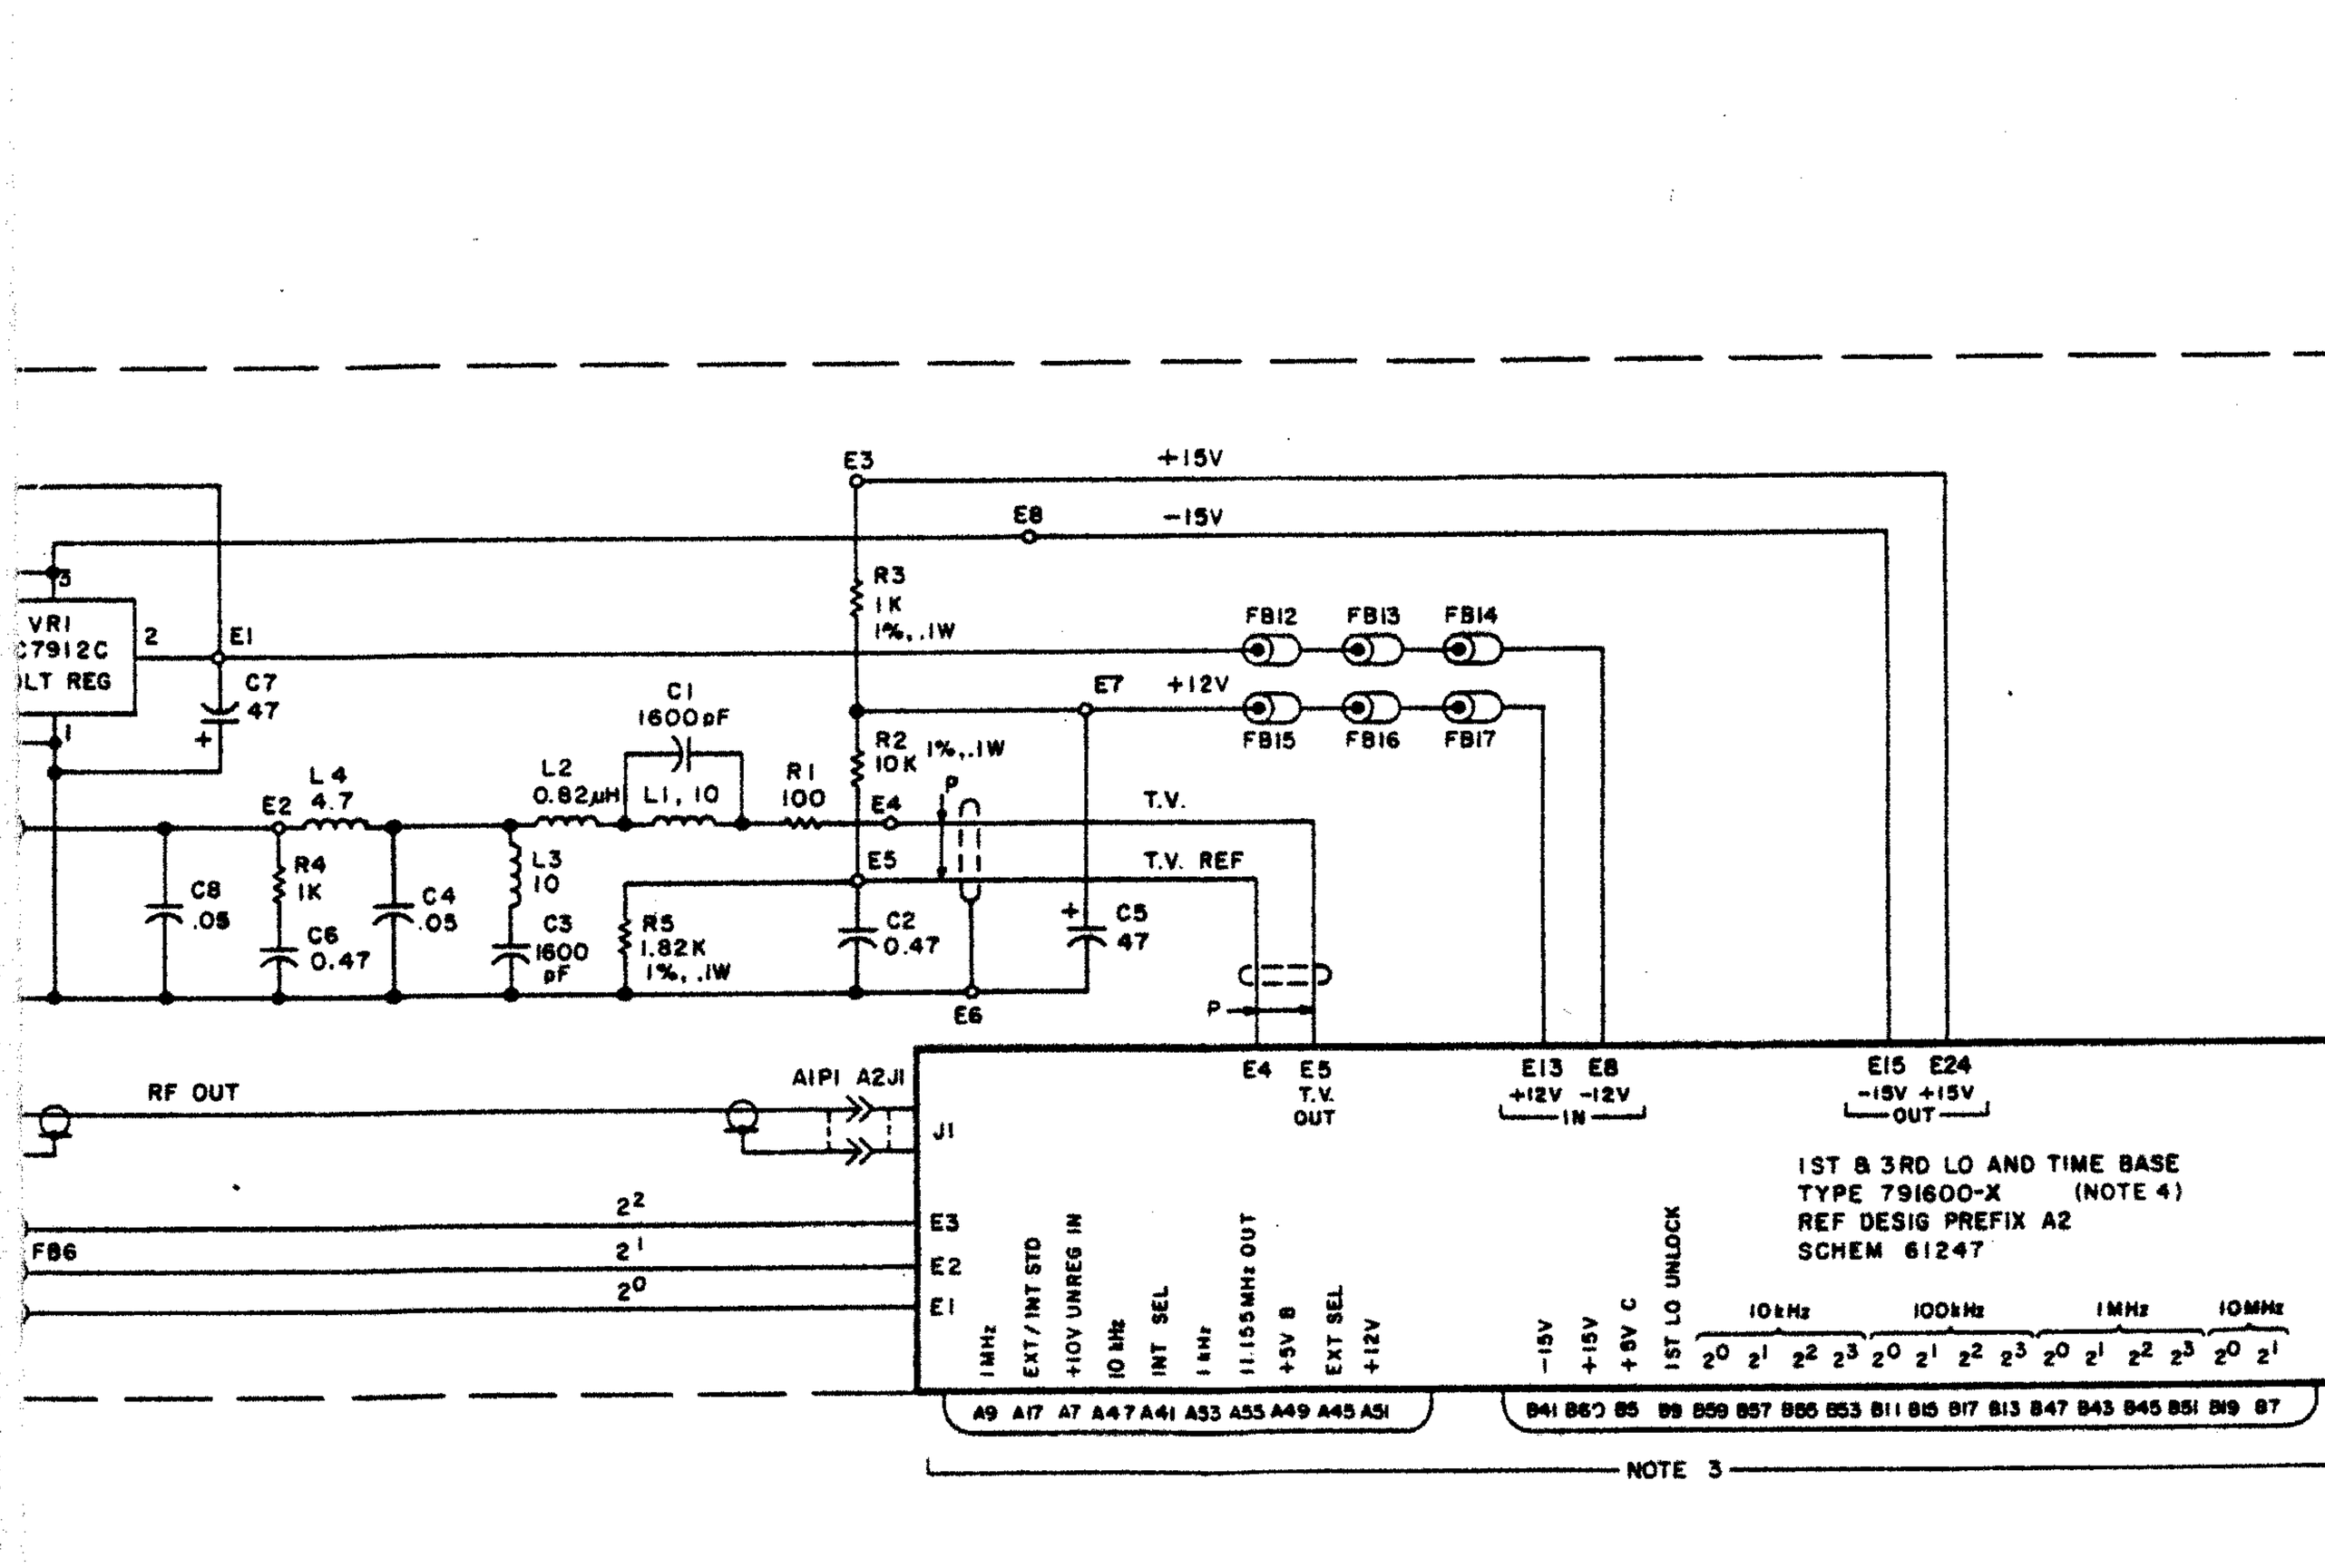



Figure 6-15. Type 791630-1 1st & 3rd LO Synthesizer/Timebase (A5A1) Schematic Diagram 470518

NOTES :

1. UNLESS OTHERWISE SPECIFIED
   a) RESISTANCE IS IN OHMS, ± 5%, 1/4W
   b) CAPACITANCE IS IN μF
   c) INDUCTANCE IS IN mH
2. LEAD ARRANGEMENT FOR VRI IS SHOWN IN DETAIL A.
3. LETTERS (NUMBERS) ARE MODULE (A2) PINS. GND PINS FOR $GND_1$, $GND_2$, $GND_3$, ARE LISTED IN TABLE A
4. DIFFERENCE BETWEEN TYPES IS SHOWN IN TABLE B.

DETAIL A






TABLE A

| GND | MODULE PIN |
|---|---|
| $GND_1$ | A48, 50, 52, 54, 56, 58, 60 |
| $GND_2$ | A2, 4, 6, 8, 10, 14, 16, 18, 20, 42, 44, 46 |
| $GND_3$ | B2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 42, 44, 46, 48, 50, 52, 54, 56, 58 |

TABLE B

| TYPE | A2 |
|---|---|
| 791630-1 | 791600-1 |
| 791630-2 | 791600-2 |
| 791630-3 | 791600-3 |
| 791630-4 (MECH ONLY) | 791600-4 (MECH ONLY) |

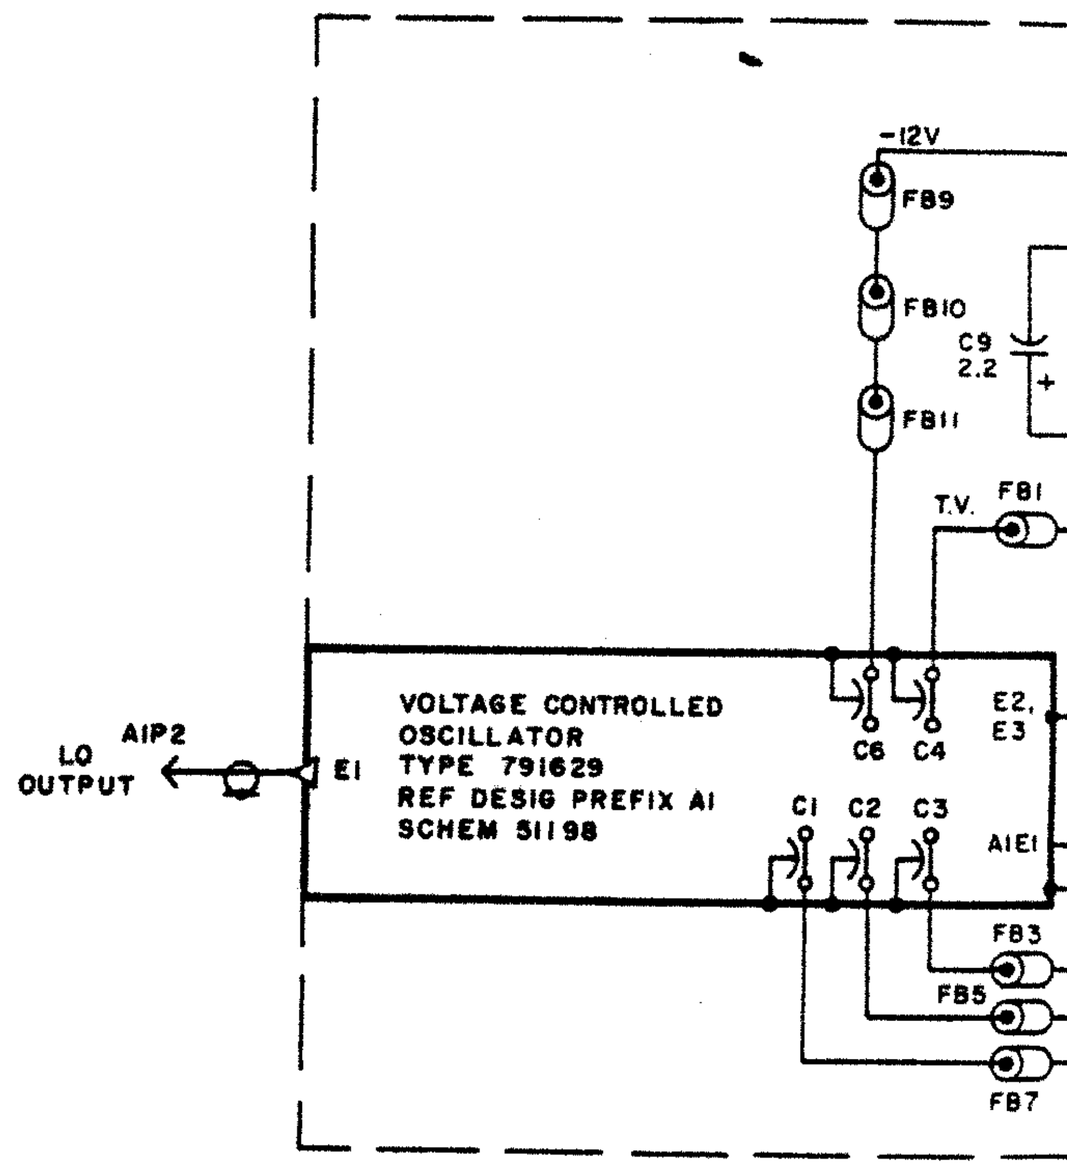


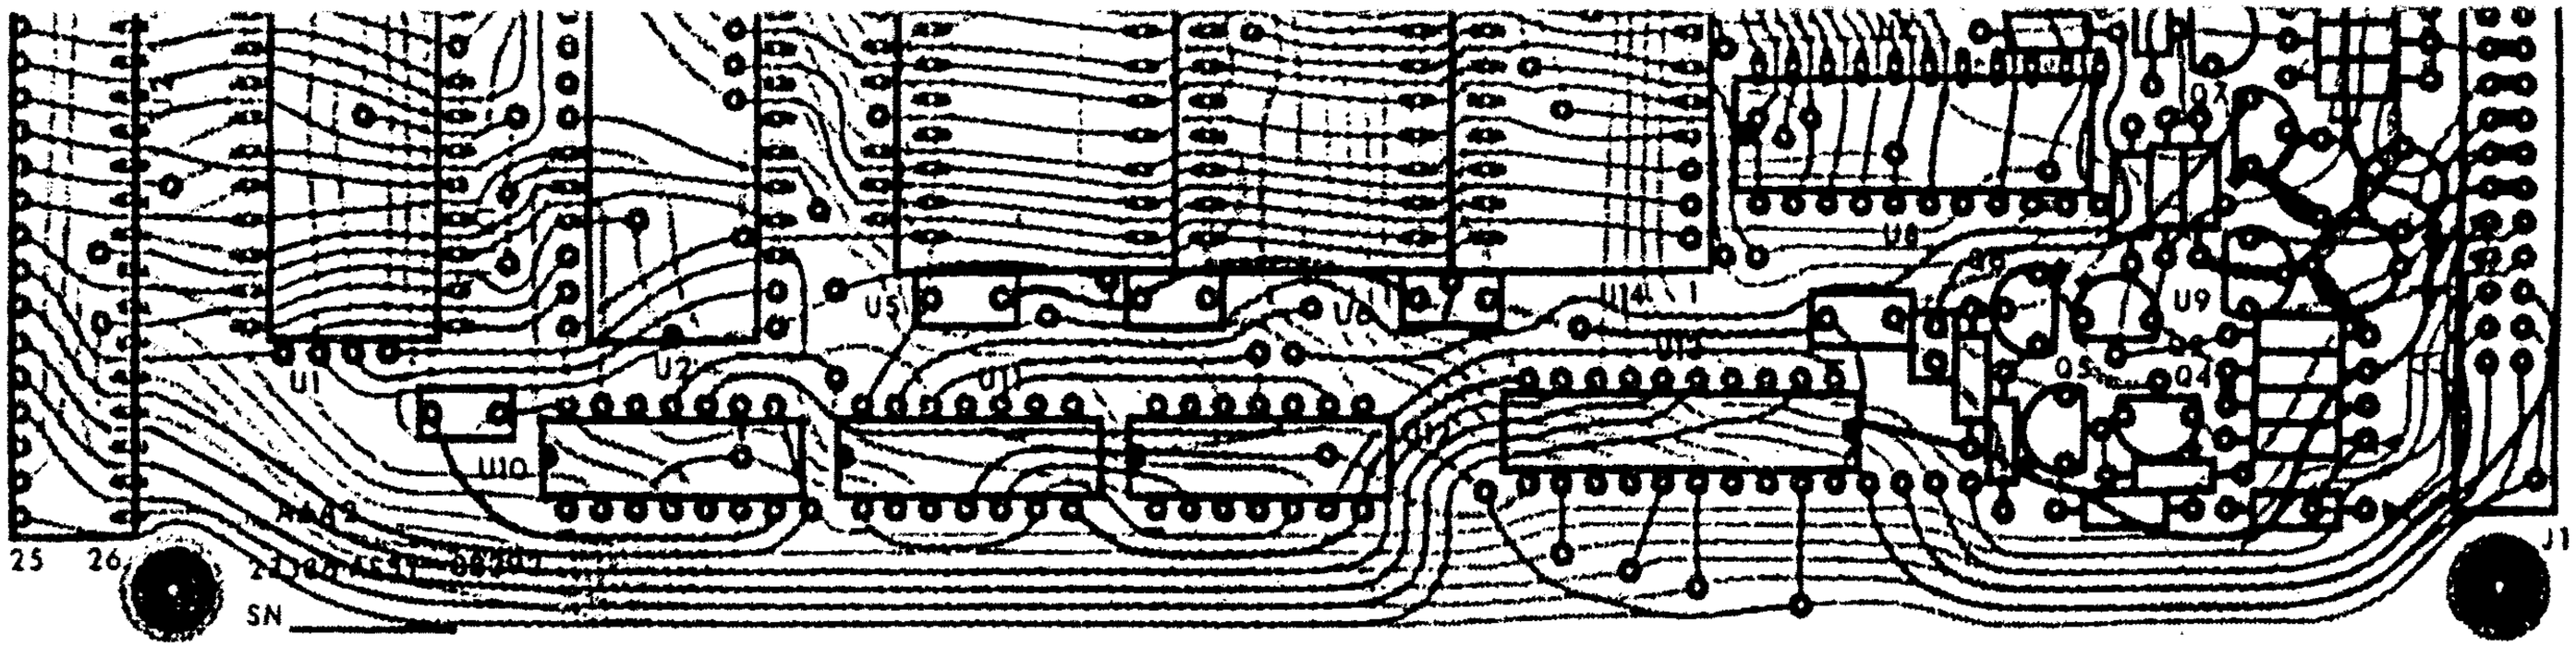
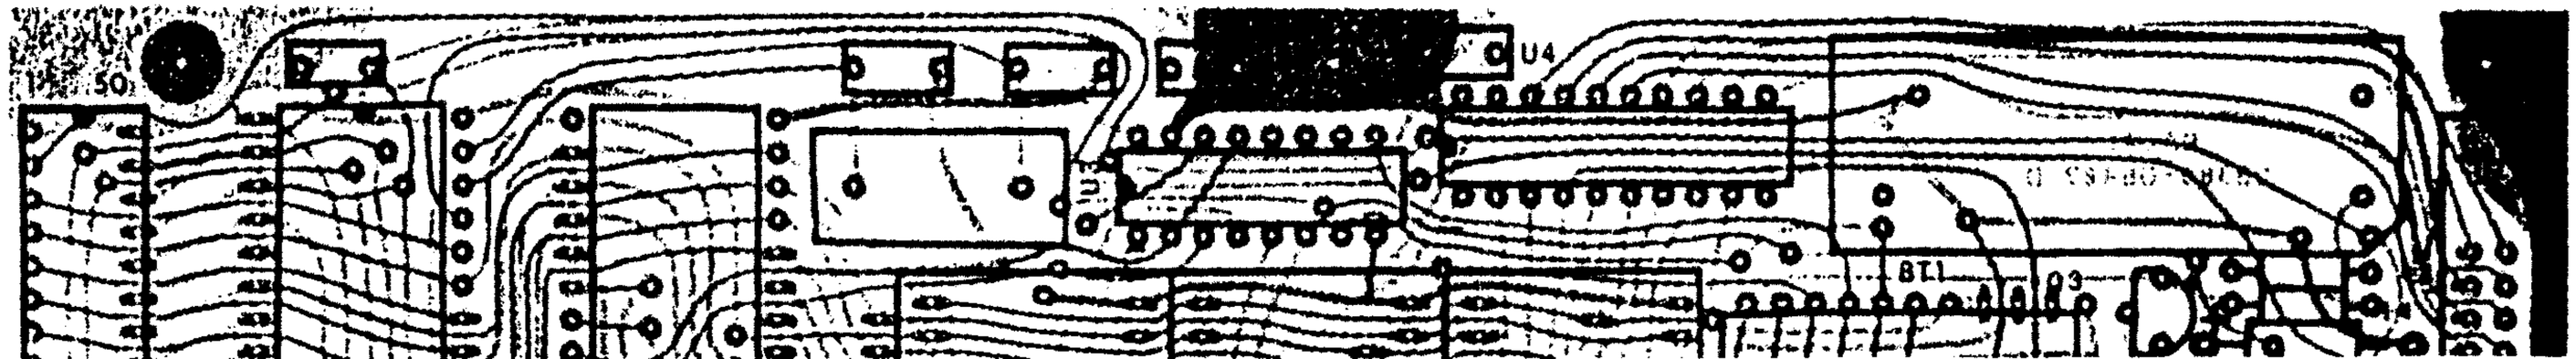



Figure 6-11B. Microcomputer A6A2 Printed Circuit

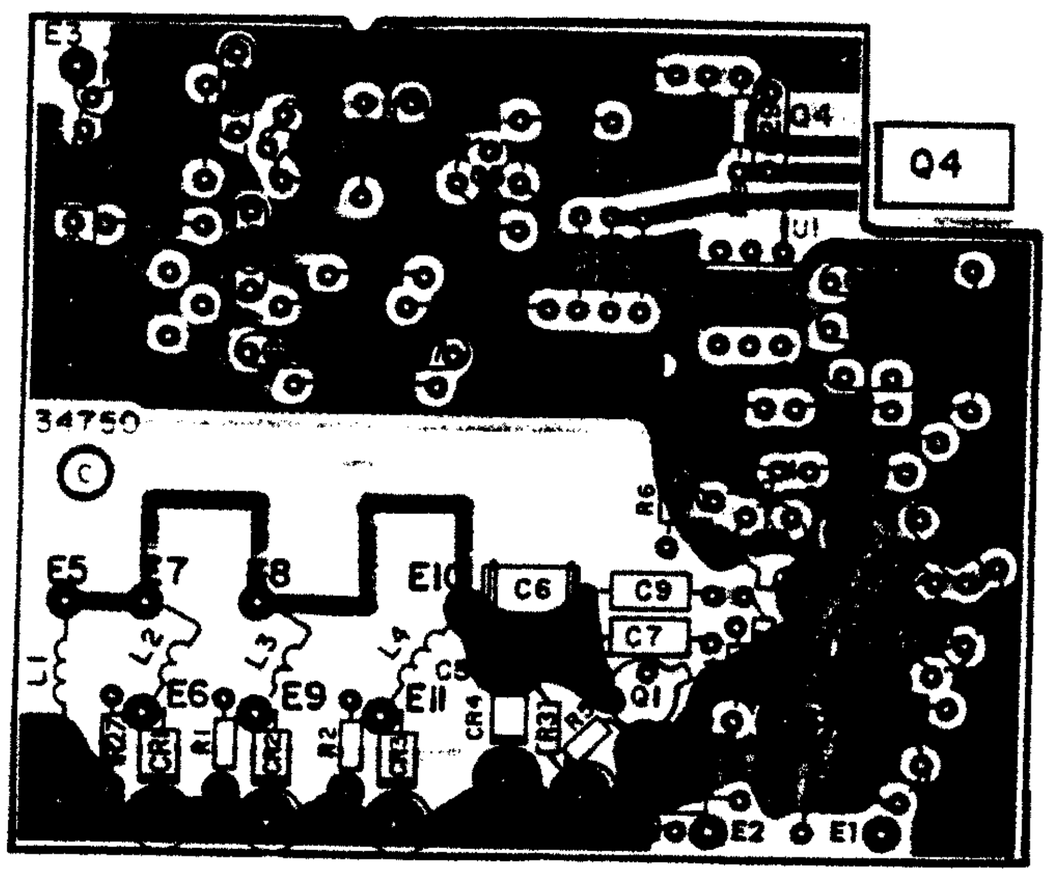
J1
50
U4
BT1
D3




NOTES:

1 UNLESS OTHERWISE S
a) RESISTANCE IS IN O
b) CAPACITANCE IS IN
2. NOMINAL VALUE; FINA

M
I
4
TO

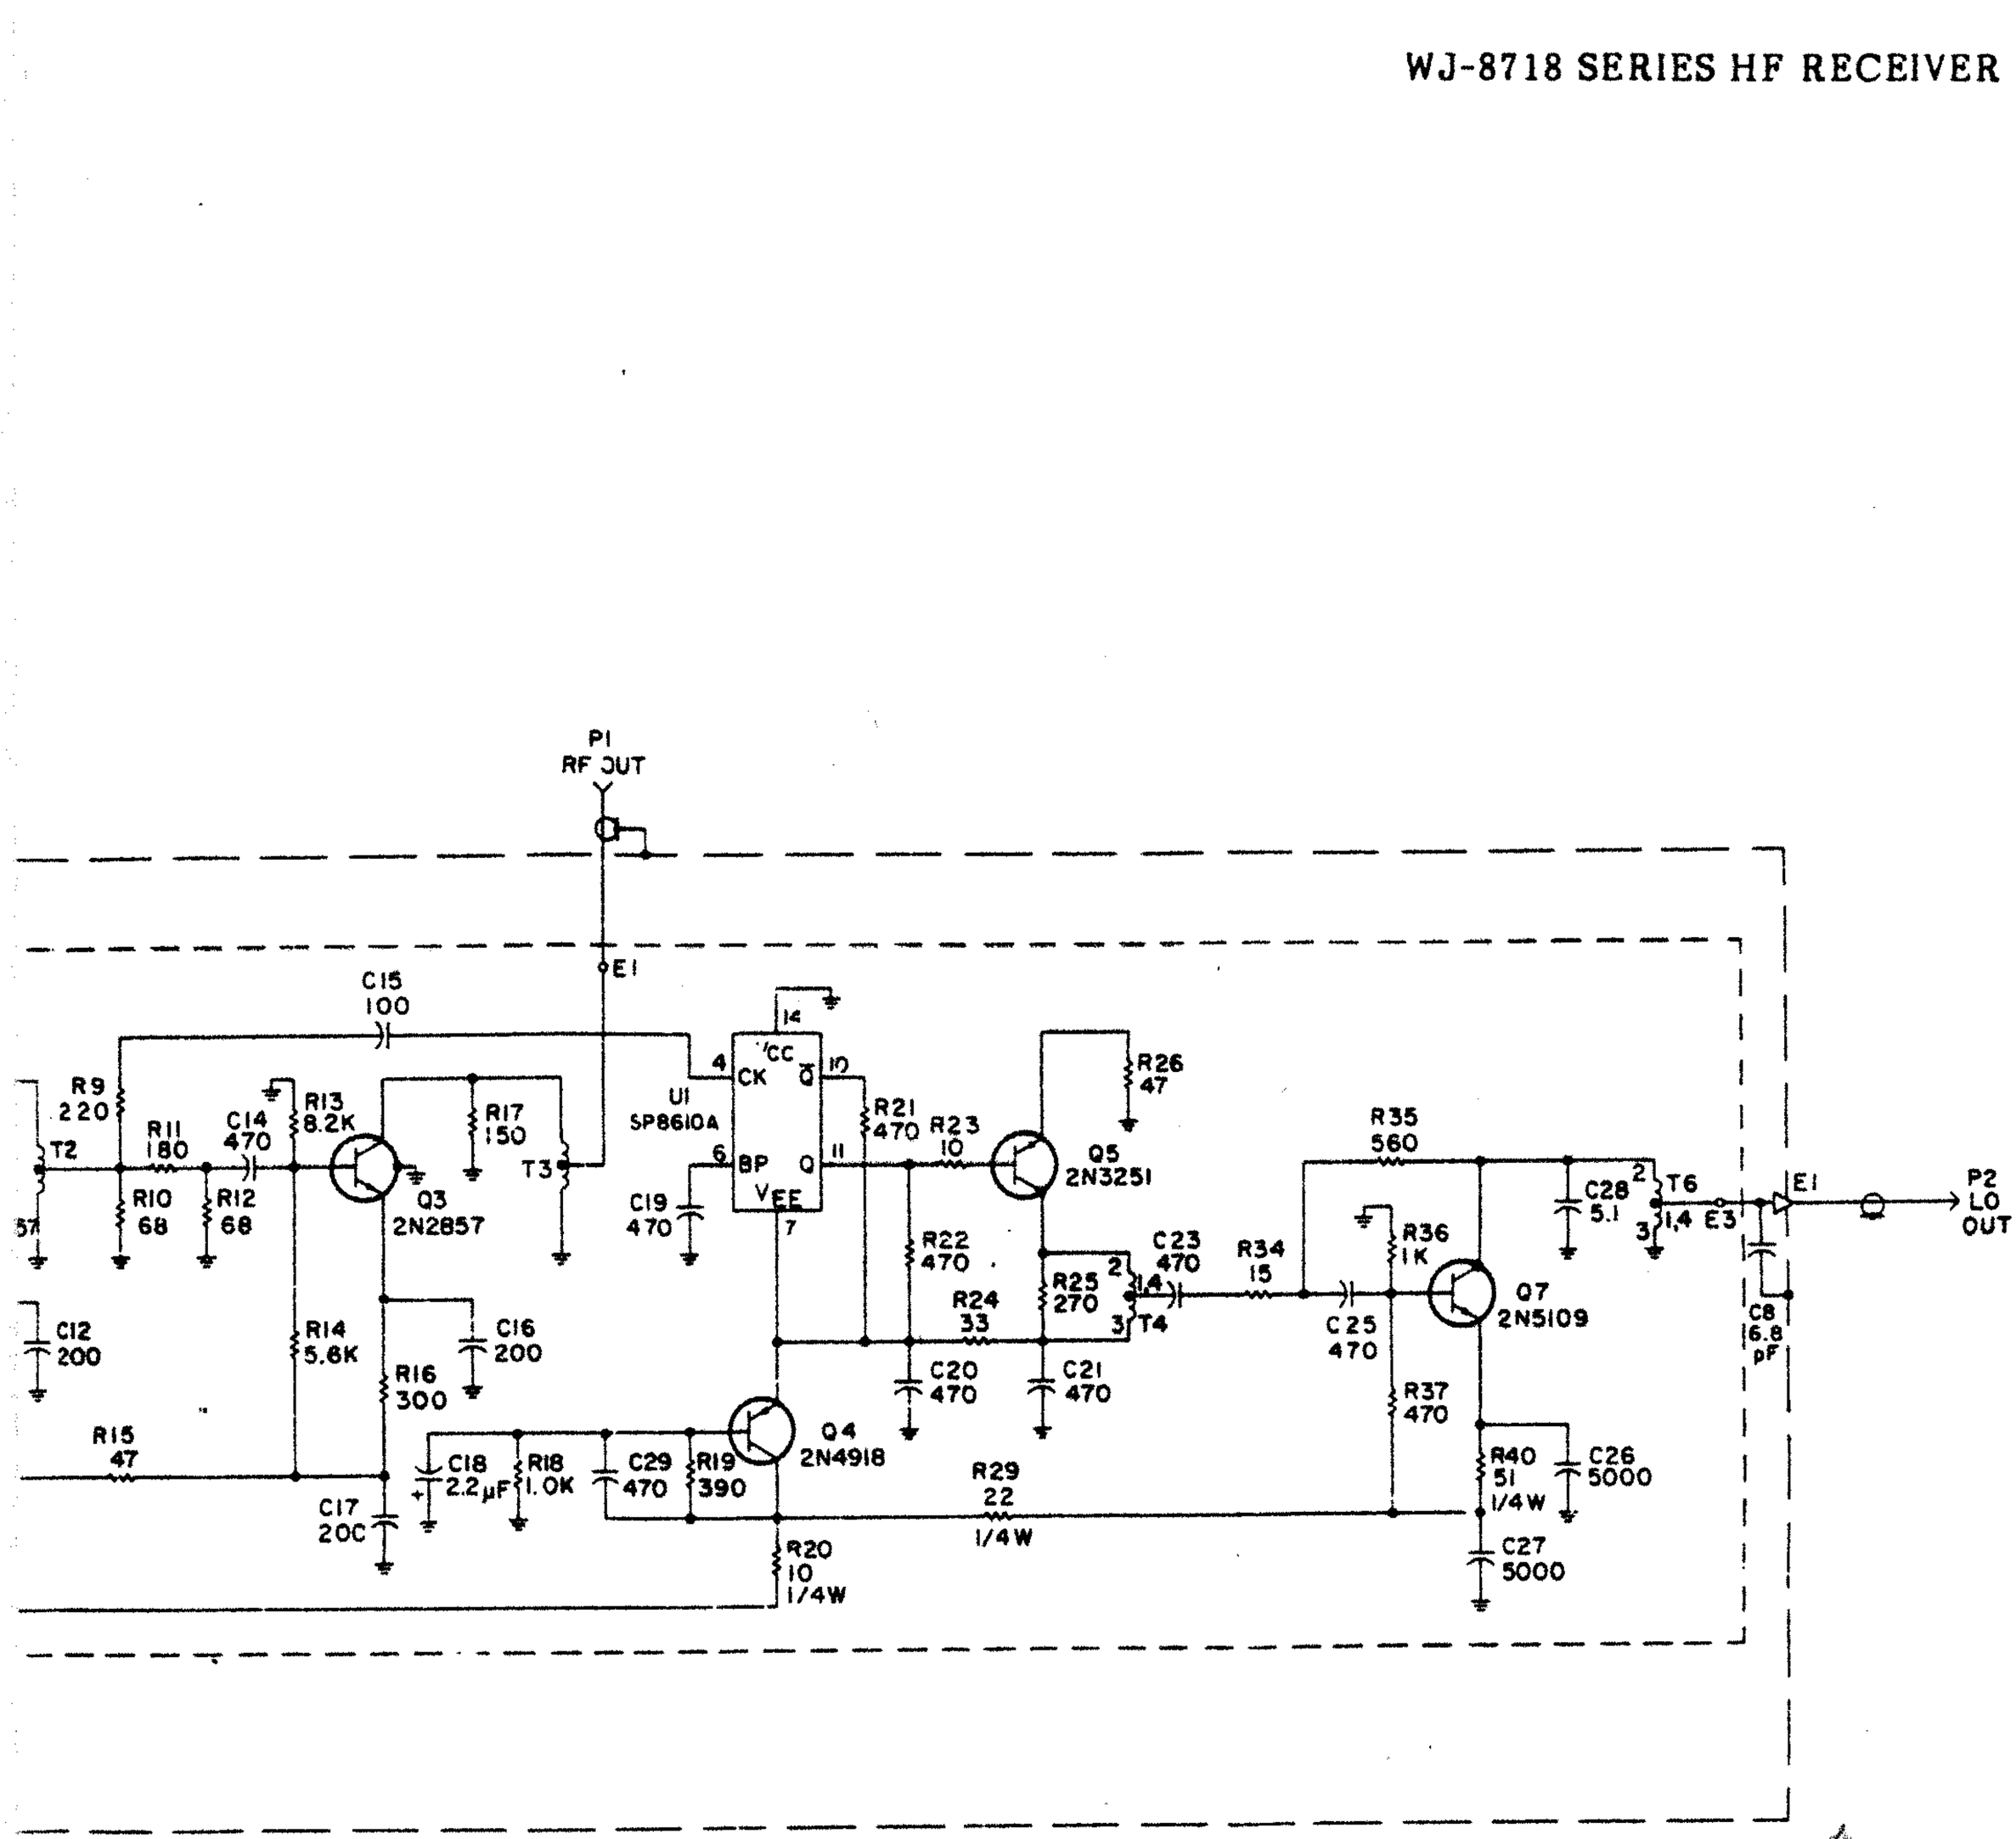



Figure 6-16. Type 791629 1st LO/VCO Assembly (A5A1A1), Schematic Diagram 51198 (P)


NOTES:

1 UNLESS OTHERWISE SPECIFIED
  a) RESISTANCE IS IN OHMS ±5%, 1/8W
  b) CAPACITANCE IS IN pF.


2. NOMINAL VALUE; FINAL VALUE FACTORY SELECTED.


3 DIFFERENCE BETWEEN 791629-1 AND 791629-2 AND 791629-3 IS MECHANICAL.

MC1697P




TOP VIEW

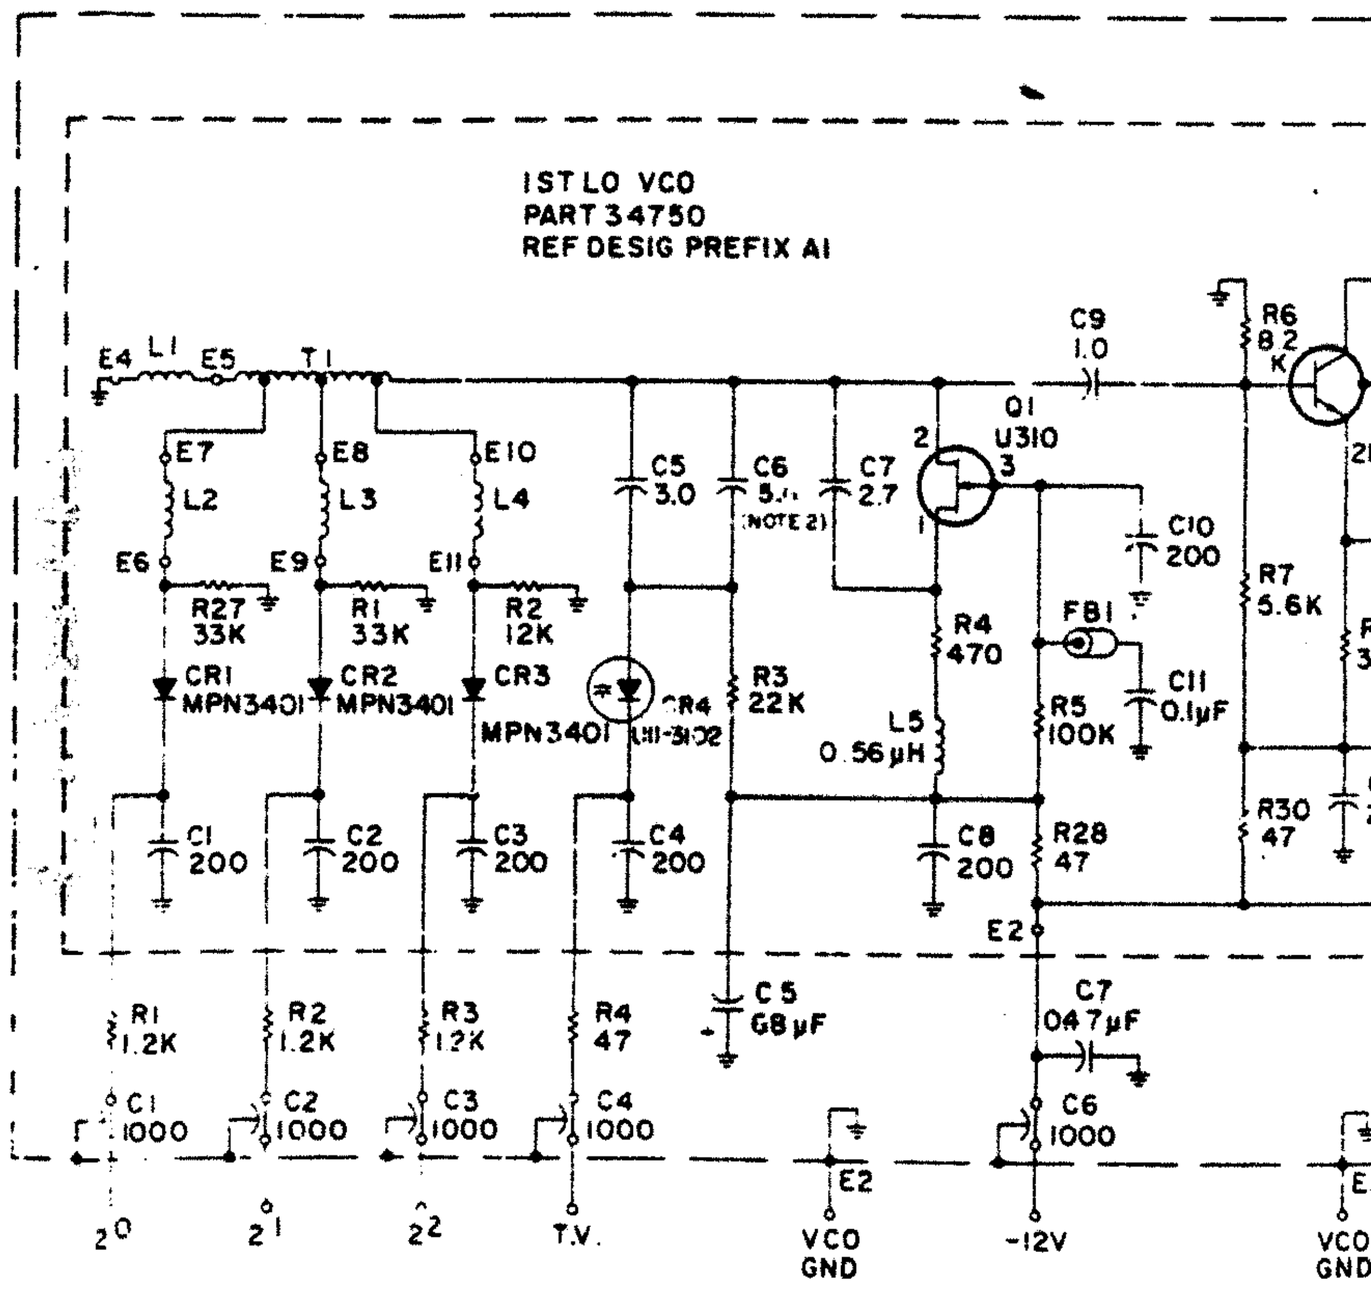

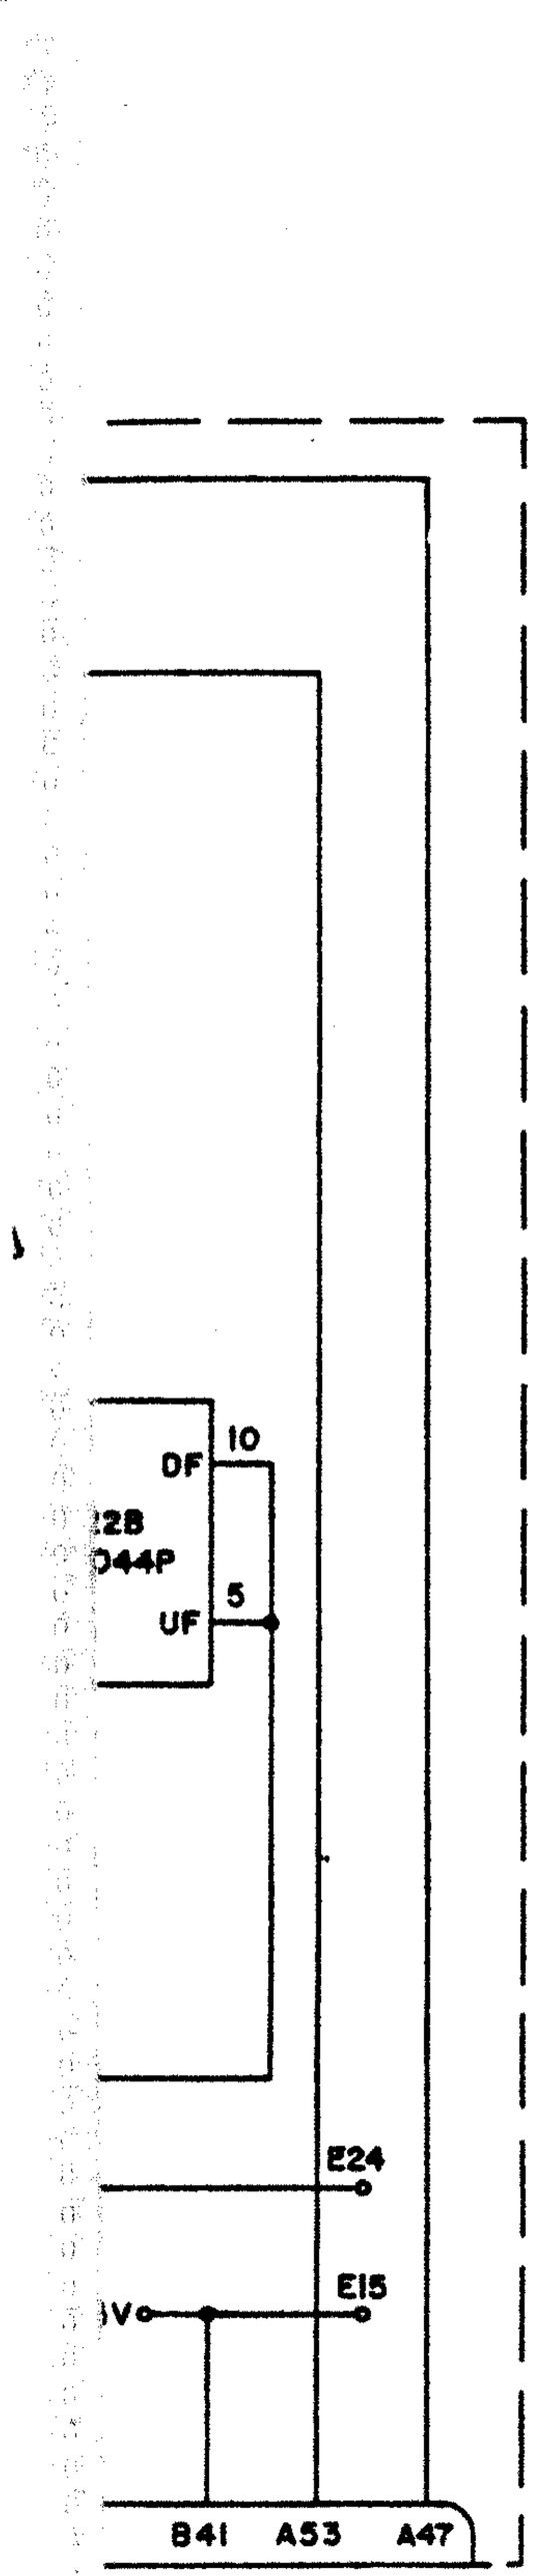


NOTES:

1. UNLESS OTHERWISE SPECIFIED:
   a) RESISTANCE IS IN OHMS, ±5%, 1/4W.
   b) CAPACITANCE IS IN uF.
2. VCC, GND PINS OF IC,S ARE SHOWN IN TABLE A.
3. LEAD ARRANGEMENT FOR IC,S ARE SHOWN IN TABLE A.
4. NOMINAL VALUE. FINAL VALUE FACTORY SELECTED.
5. DIFFERENCE BETWEEN TYPES IS SHOWN IN TABLE B.
6. GROUND LEVEL PINS ARE LISTED BELOW.
   a) PIN NOS. OF GND LEVEL ONE ARE A48, A50, A52, A54, A56 & A58.
   b) GND LEVEL TWO ARE A2, A4, A6, A8, A10, A12, A14, A16, A18 A20, A42, A44, A46, A43.
   c) GND LEVEL THREE ARE B2, B4, B6, B8, B10, B12, B14, B16, B18, B20 B42, B44, B46, B48, B50, B52, B54, B56 & B58.

TABLE A

| IC | REF DESIG | VCC | | | GND | | | DTL | VCC2 (FIL) |
|---|---|---|---|---|---|---|---|---|---|
| | | 1 | 2 | 3 | 1 | 2 | 3 | | |
| MC4044P | U5 | | | 14 | | | 7 | B | |
| MC4044P | U22 | | | | | 7 | | B | 14 |
| MC12013L | U1 | | | 16 | | | 8 | A | |
| MC12014L | U3 | | | 16 | | | 8 | A | |
| SN74LS196N | U9 | | | 14 | | | 7 | B | |
| SN74LS196 | U2 | | | 14 | | | 7 | B | |
| SN7400 | U6 | | | 14 | | | 7 | B | |
| 82S123 | U4 | | | 16 | | | 8 | A | |
| SN74LS190 | U8, U10 | | | 16 | | | 8 | A | |
| SN74S74 | U11 | | | 16 | | | 8 | A | |
| SN74184 | U13 | | | 16 | | | 8 | A | |
| SN75140 | U16 | 8 | | | 4 | | | C | |
| 74LS74 | U21 | | | | | 7 | | B | 14 |
| 8292 | U15, U17 | 14 | | | 7 | | | B | |
| 8292 | U18, U20 | | 14 | | | 7 | | B | |
| 741 | U7 | | | | | | | C | |
| SN74LS74 | U12 | | | 14 | | | 7 | B | |
| SN74125 | U23 | 14 | | | 7 | | | B | |
| SN74LS02 | U24 | | | 14 | | | 7 | B | |

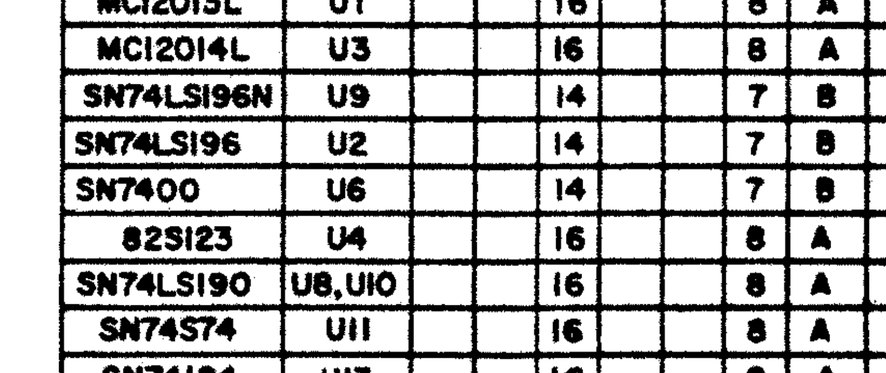



Figure 6-17. Type 791600-1 1st & 3rd LO Synthesizer (A5A1A2) Schematic Diagram 61247 (Sheet 1 of 2)

U19A SN74LS196N ÷2
U19B SN74LS196N ÷5
U18B SN74LS196N ÷5
U20A SN74LS196N ÷2
U20B SN74LS196N ÷5
$VCC_2$
R44 470
R46 270
R47 270
R75 1K
$VCC_2$ (FIL)
U21A 74LS74
C42 22
R76 1K
$VCC_2$
R80 1K
U21B 74LS74
U22A MC4044P
R81 1K
$VCC_2$
U22C MC4044P
R49 330
R51 1K
C30 2.2
C32 0.1
C31 22
R77 22
C45 22
L3 100 µH (NOTE 5)
R63 220
R52 1K
R54 22
R57 22
R61 10K
R50 10K
E14 (TP)
C33 2-8 pF
C43 15pF (NOTE 4)
Y1 11.155 MHz
Q8 2N2222A
Q9 2N2222A
Q10 2N706
C37 .01
R53 10K
C34 220 pF
R58 150
R59 150
C35 220 pF
R55 27
R56 270
CR7 BB105B
C36 .01 (NOTE 5)
W1 (NOTE 5)
E12
E11
E10
E9
IR48 1K
RA1
VR1 78M05 VOLT REG
C39 22
C38 22
$VCC_2$ (+5V)
U1-16 U2-14 U3-16 U5-14 U8-16 U9-16 U10-16 U11-16 U13-16
C7 .01
C8 .01
C9 .01
C10 .01
C11 .01
C12 .01
C13 .01
C14 .01
C15 .01
$VCC_3$
R86 270
+15V
C26 22
$VCC_1$ (+5V)
C25 22
A3
A55
B5
A49
(NOTE 6a)
(NOTE 6b)
(NOTE 6c)
B60
11.155MHz OUT
$VCC_3$ (+5V)
$VCC_1$ (+5V)
$GND_1$ $GND_2$ $GND_3$
+15V (OUT)

| W1 | U14 |
|---|---|
| USED | 92063-1 |
| SHOWN | 92063-1 |
| USED | 841038 |
| USED | 92063-1 |

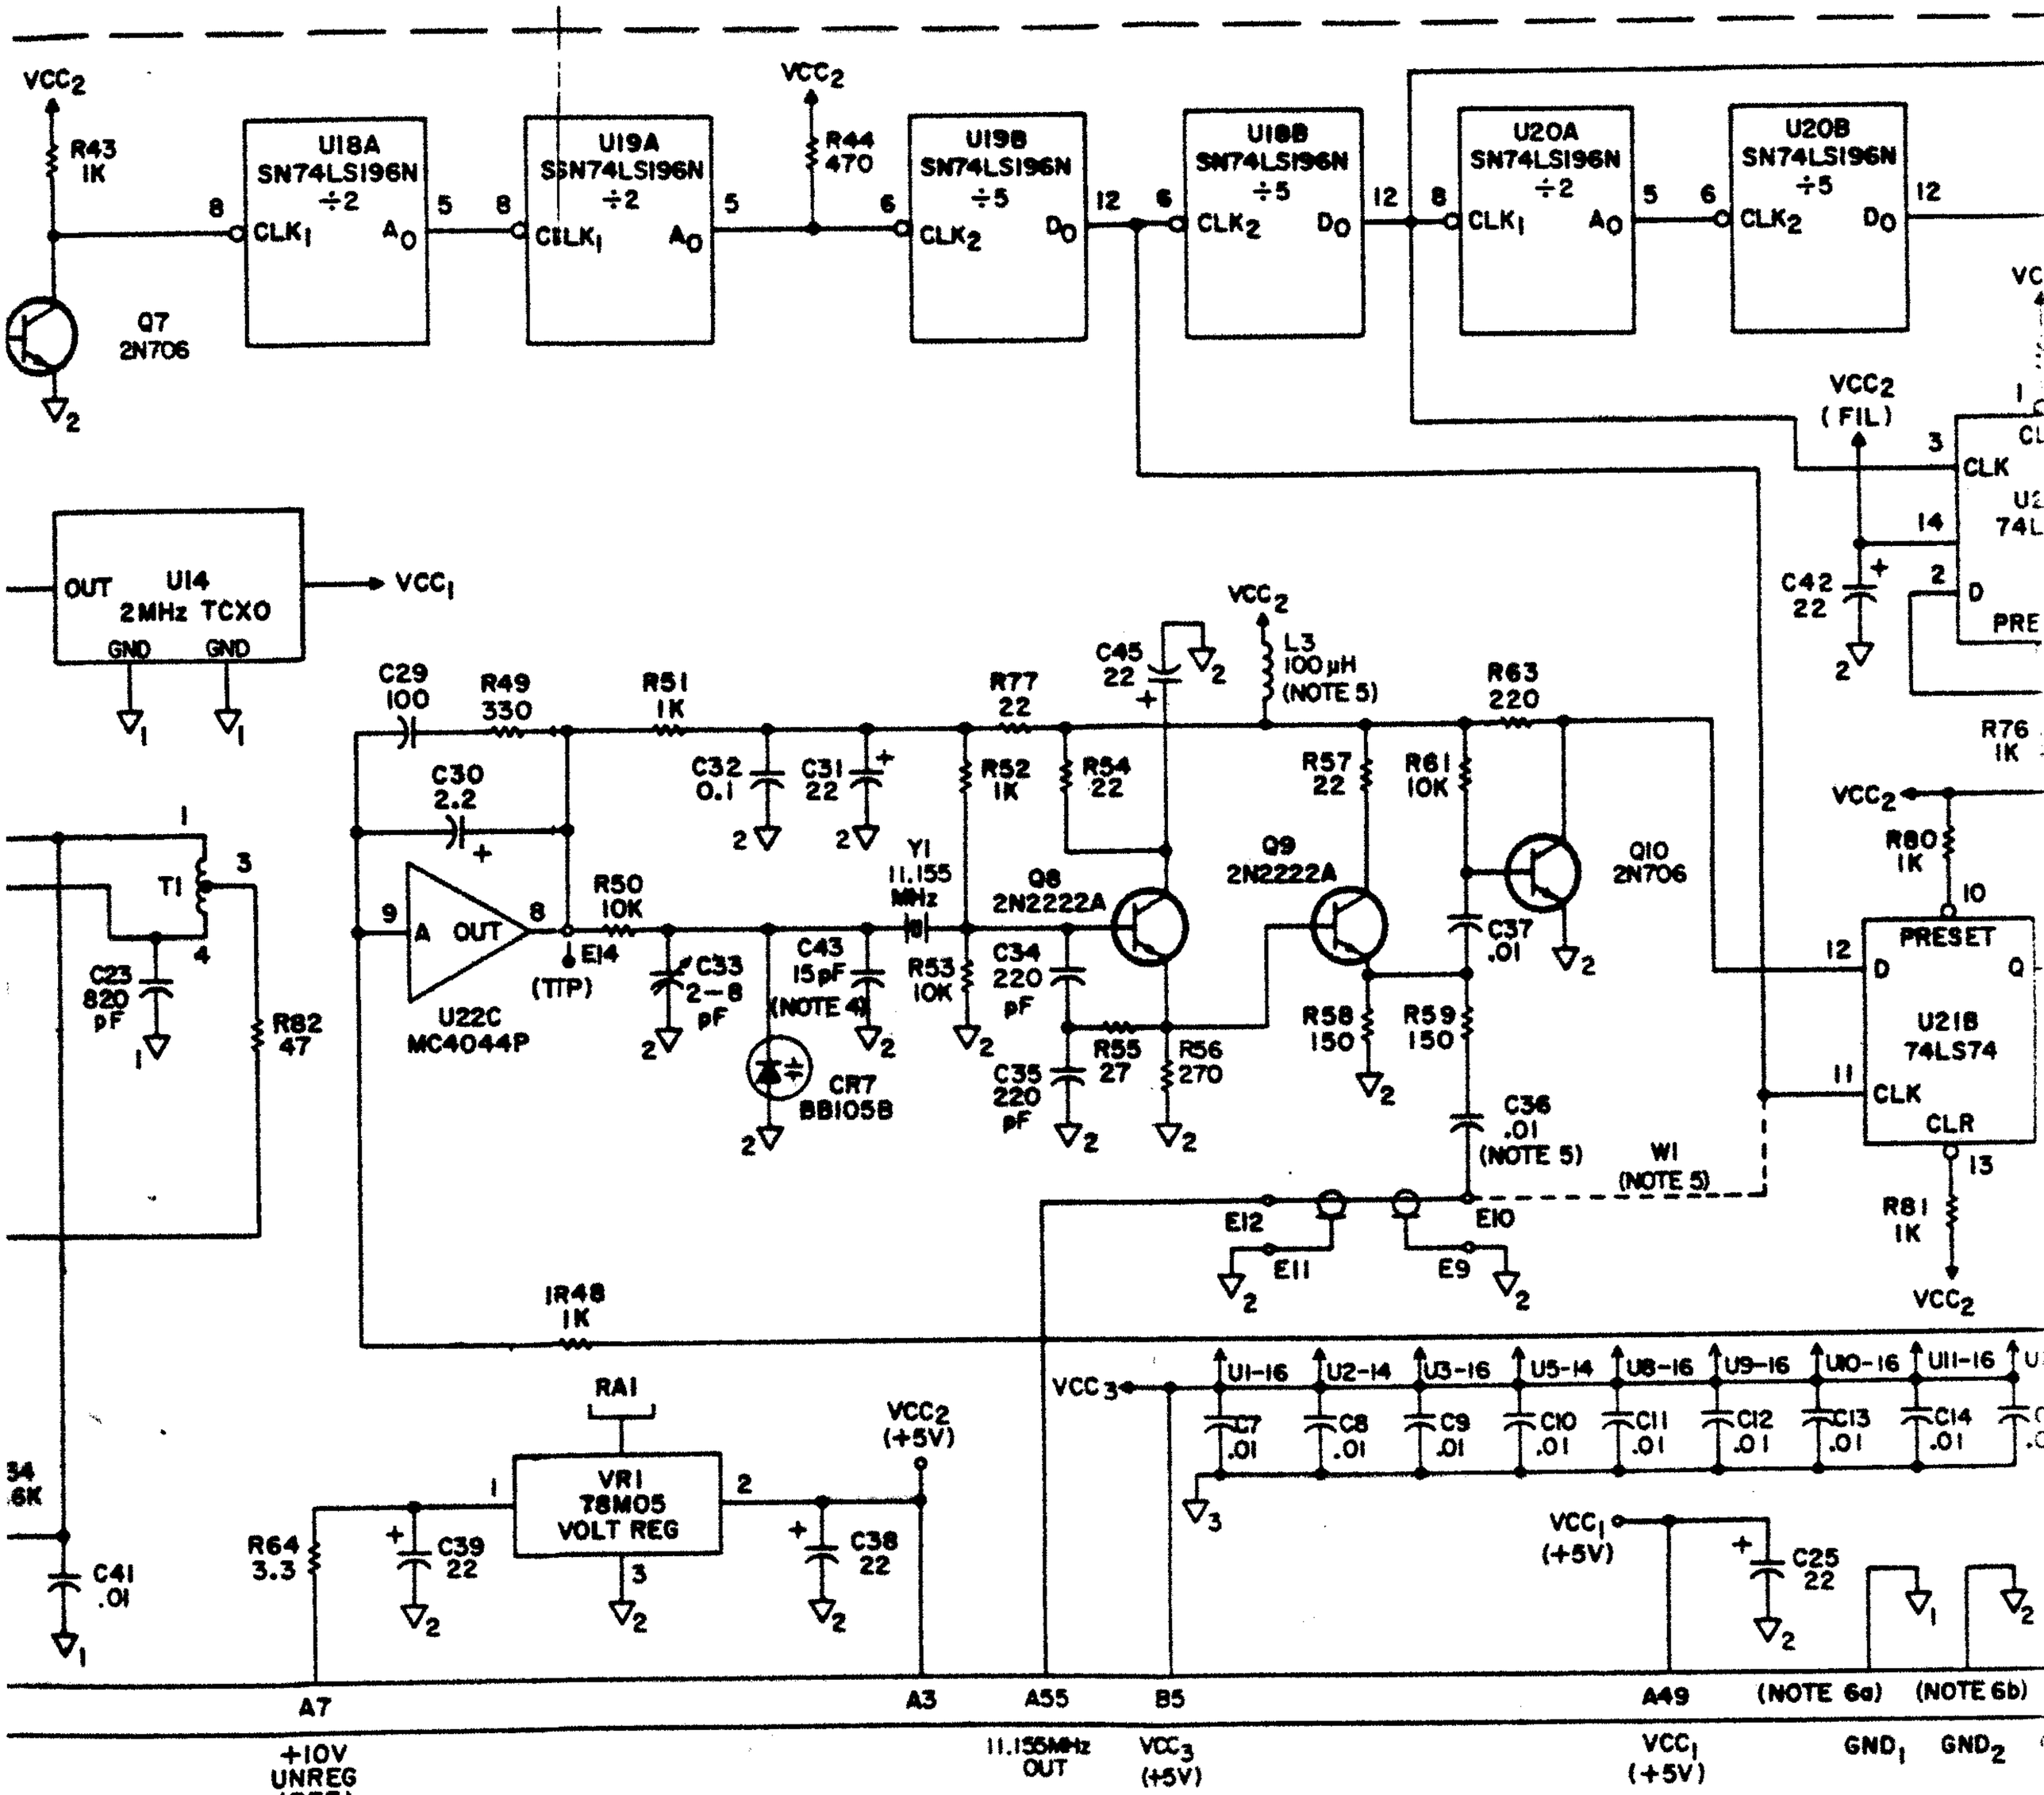
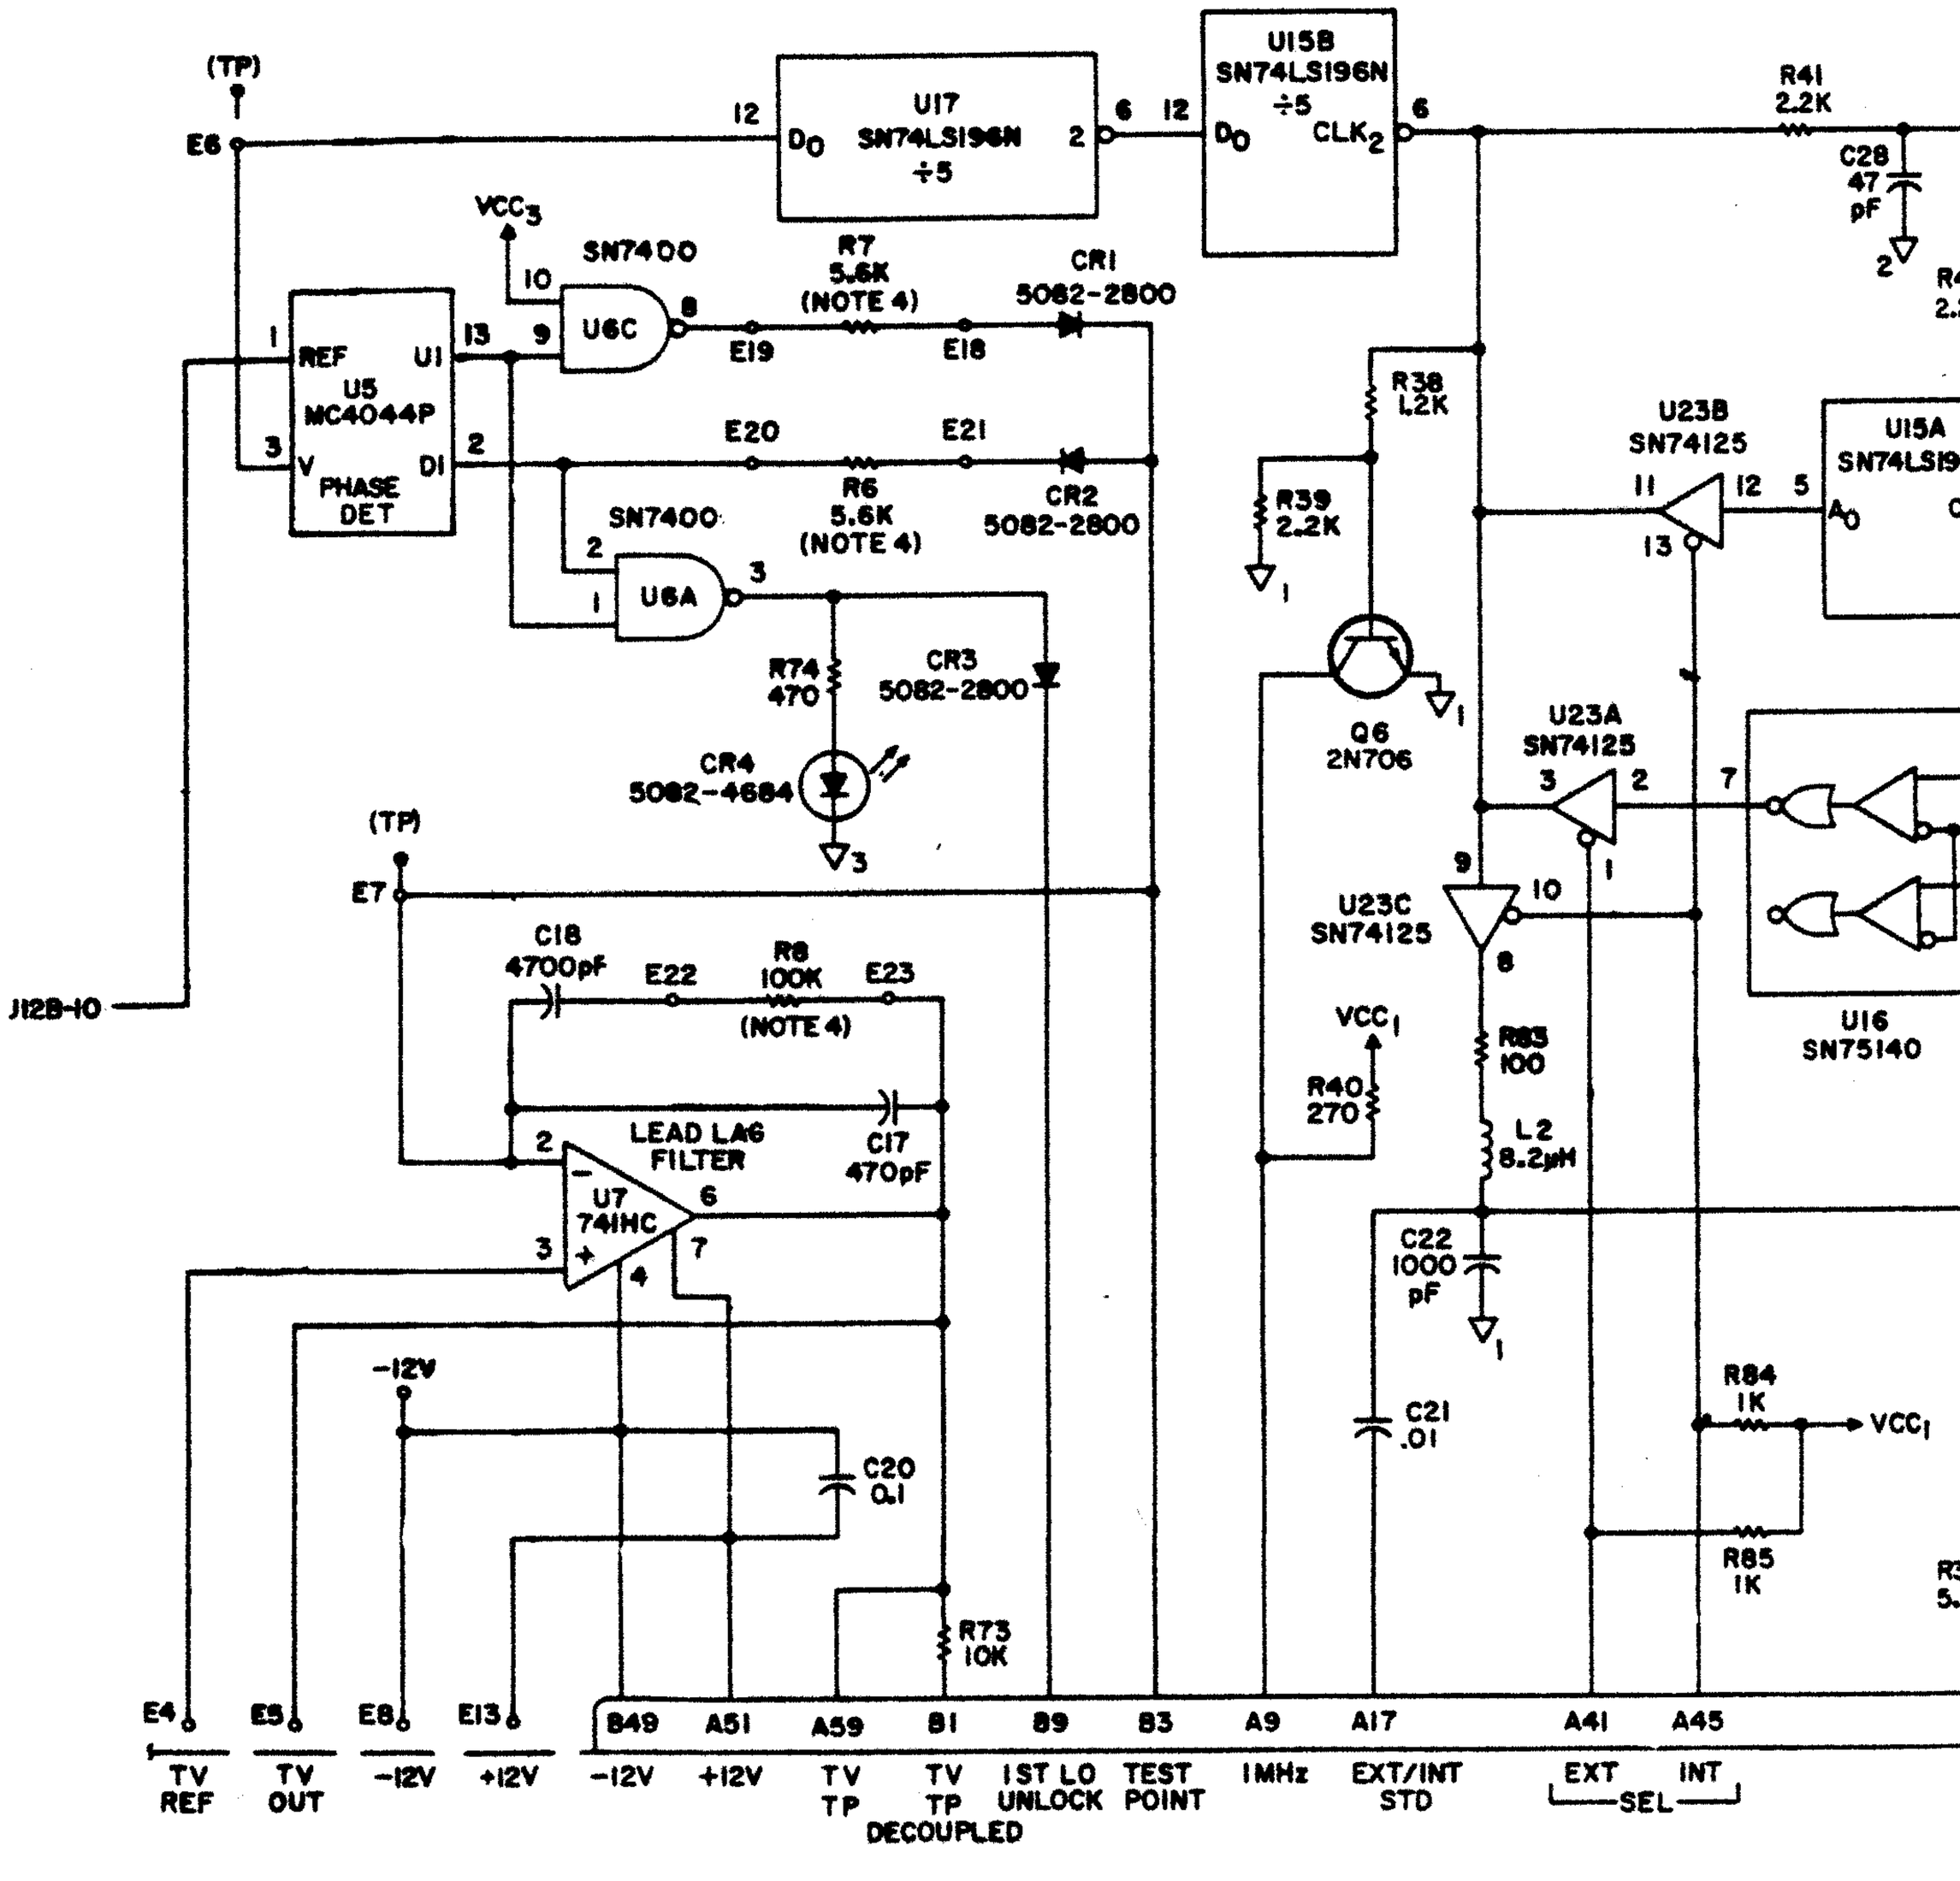
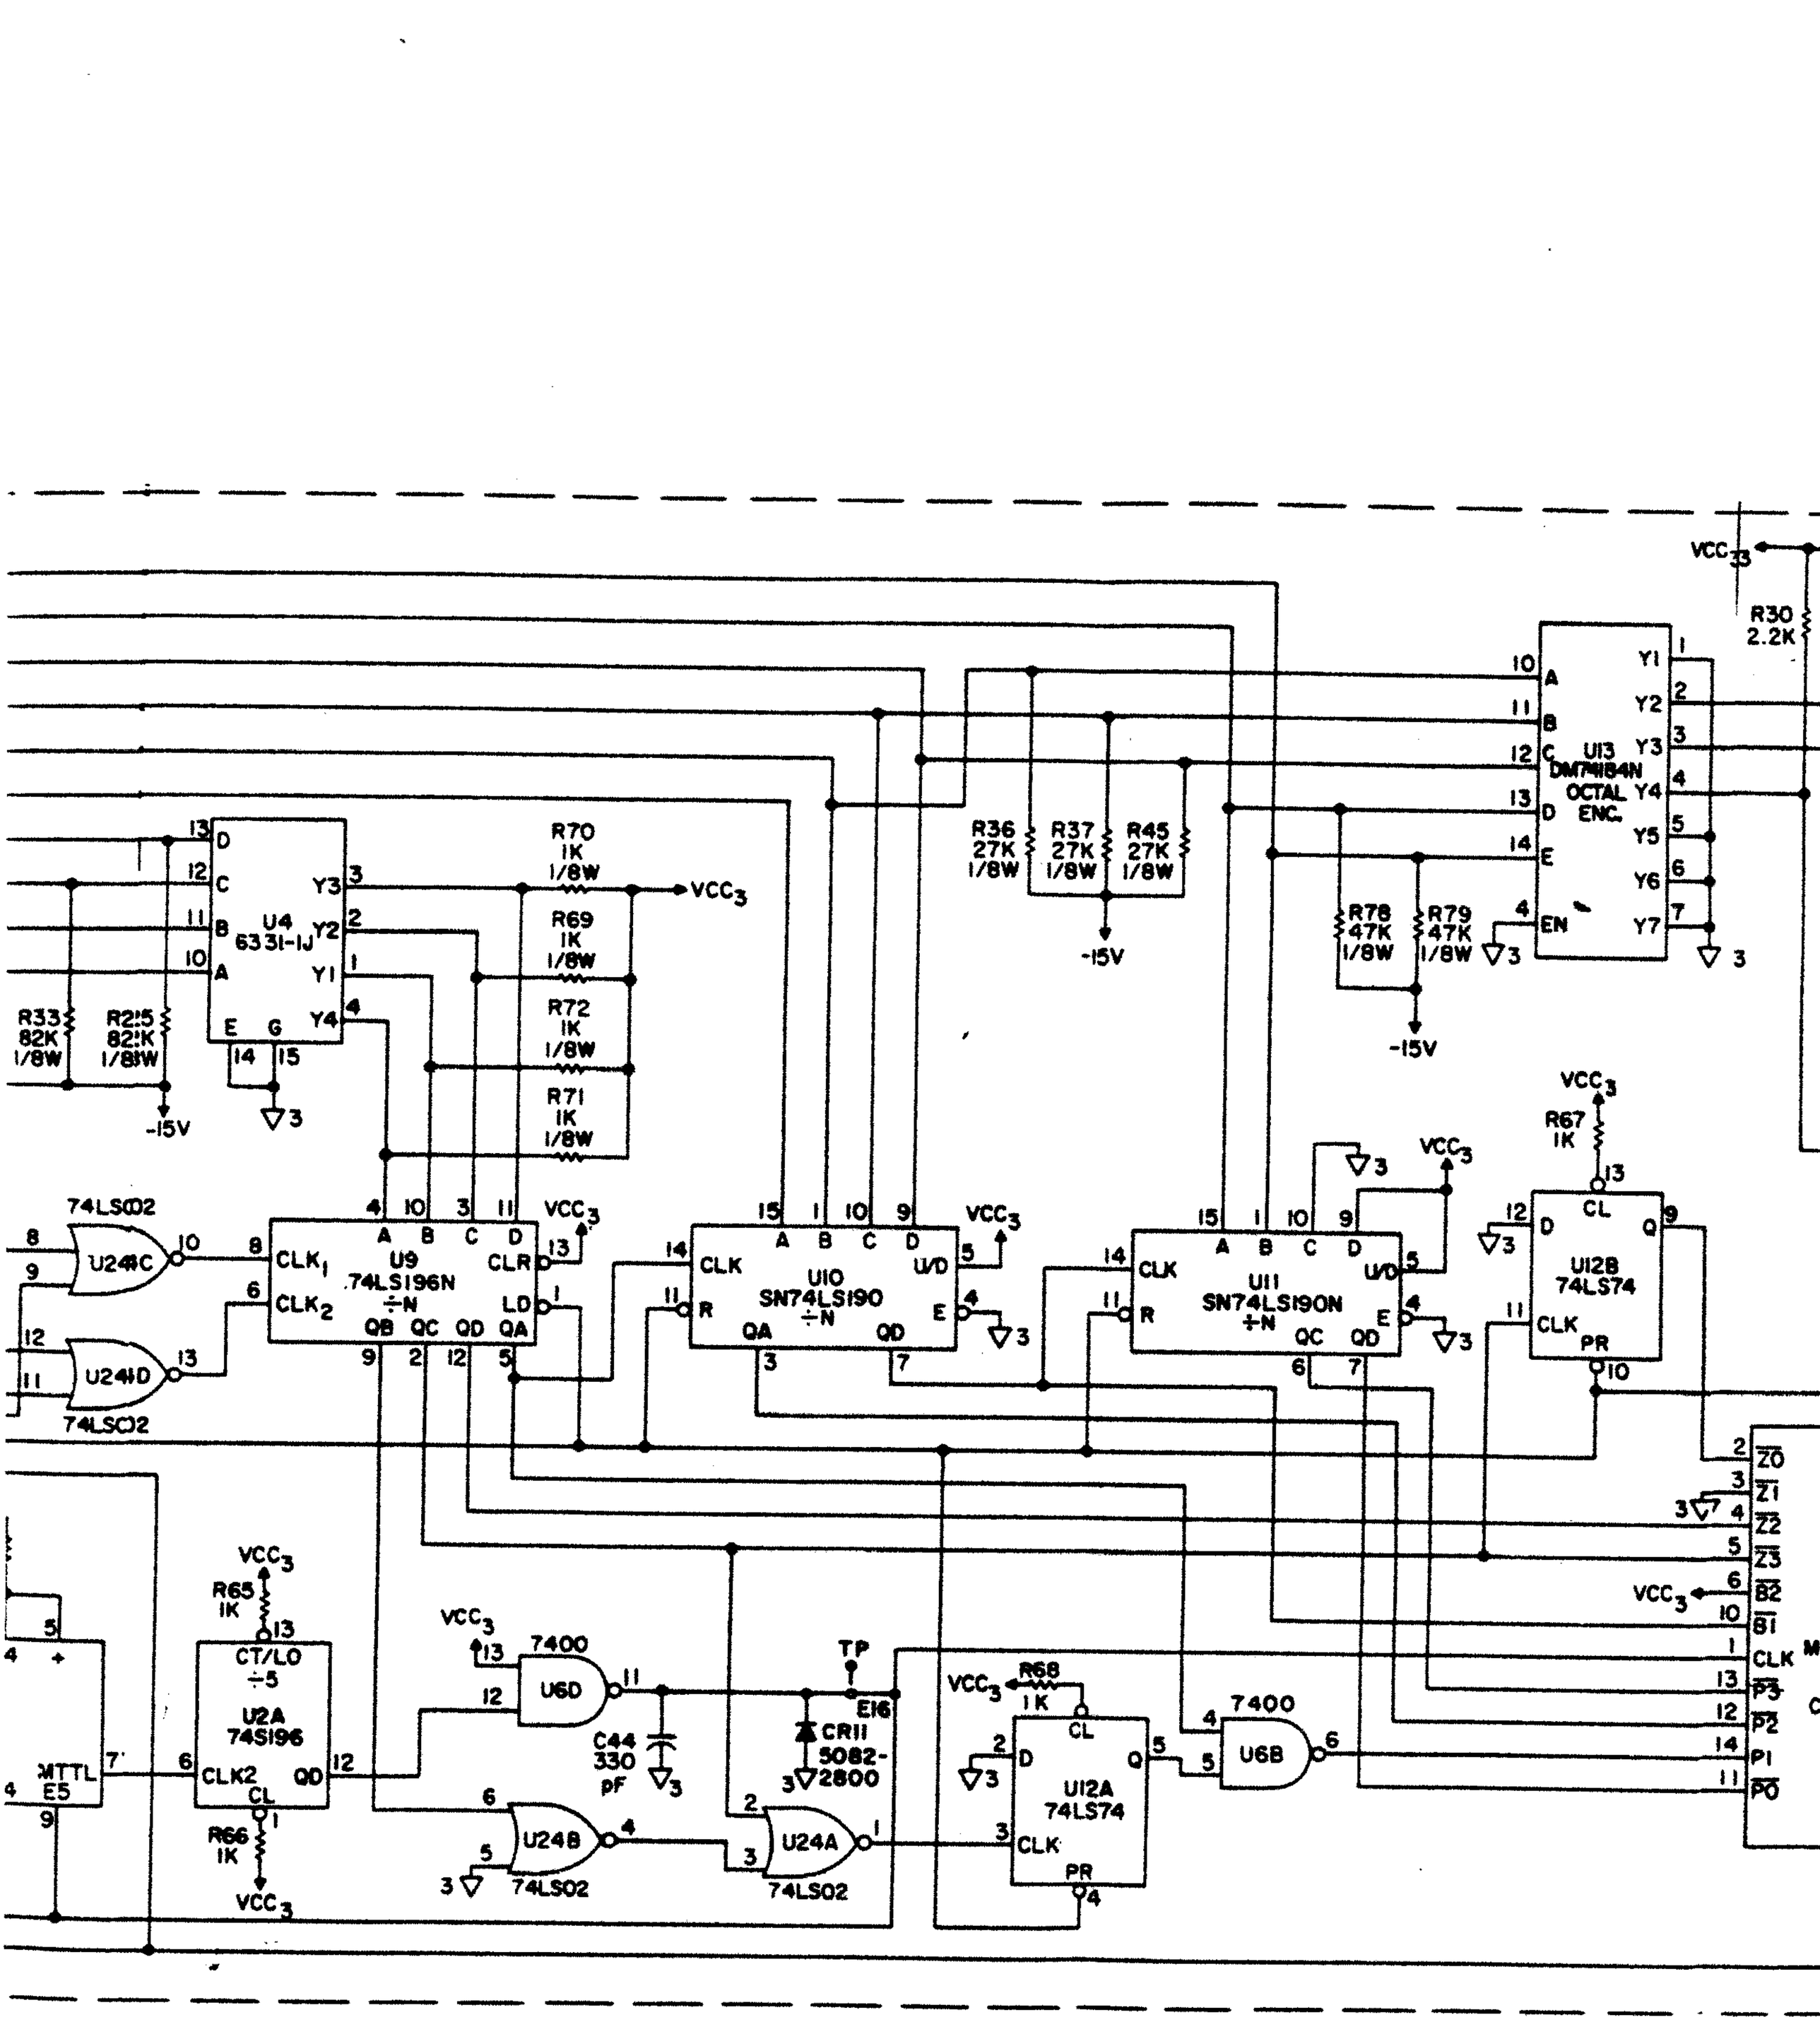



TABLE B

| C36 | L3 | W1 | U14 |
|---|---|---|---|
| AS SHOWN | AS SHOWN | NOT USED | 92063-1 |
| NOT USED | NOT USED | AS SHOWN | 92063-1 |
| AS SHOWN | AS SHOWN | NOT USED | 841038 |
| AS SHOWN | AS SHOWN | NOT USED | 92063-1 |


(TP)
E6
12
U17
SN74LS196N
÷5
D0
2
6
12
U15B
SN74LS196N
÷5
D0
CLK2
6
R41
2.2K
C28
47
pF
2
VCC3
SN7400
10
U6C
8
R7
5.6K
(NOTE 4)
CR1
5082-2800
E19
E18
1
REF
U1
13
9
U5
MC4044P
3
V
PHASE
DET
D1
2
E20
E21
R6
5.6K
(NOTE 4)
CR2
5082-2800
SN7400
2
1
U6A
3
R74
470
CR3
5082-2800
CR4
5082-4684
3
(TP)
E7
J12B-10
C18
4700pF
E22
R8
100K
(NOTE 4)
E23
LEAD LAG
FILTER
C17
470pF
2
U7
74IHC
6
3
4
7
R38
1.2K
R39
2.2K
1
Q6
2N706
1
U23B
SN74125
11
12
13
5
U23A
SN74125
3
2
1
7
9
10
8
U23C
SN74125
VCC1
R40
270
R83
100
L2
8.2μH
C22
1000
pF
1
U16
SN75140
C21
.01
R84
1K
VCC1
R85
1K
-12V
C20
0.1
R73
10K
E4
E5
E8
E13
B49
A51
A59
B1
B9
B3
A9
A17
A41
A45
TV
REF
TV
OUT
-12V
+12V
-12V
+12V
TV
TP
TV
TP
1ST LO
UNLOCK
TEST
POINT
1MHz
EXT/INT
STD
EXT
INT
SEL
DECOUPLED


VCC3
R30 2.2K
U13 DM74184N OCTAL ENC.
R36 27K 1/8W
R37 27K 1/8W
R45 27K 1/8W
-15V
R78 47K 1/8W
R79 47K 1/8W
U4 6331-1J
R70 1K 1/8W
R69 1K 1/8W
R72 1K 1/8W
R71 1K 1/8W
R33 82K 1/8W
R25 82K 1/8W
74LSO02
U24C
U24D
U9 74LS196N ÷N
U10 SN74LS190 ÷N
U11 SN74LS190N ÷N
R67 1K
U12B 74LS74
R65 1K
R66 1K
U2A 74S196
CT/LO ÷5
7400
U6D
U6B
U24B
U24A
C44 330 pF
TP
E16
CR11 5082-2800
R68 1K
U12A 74LS74
Z0
Z1
Z2
Z3
B2
B1
CLK
P3
P2
P1
P0

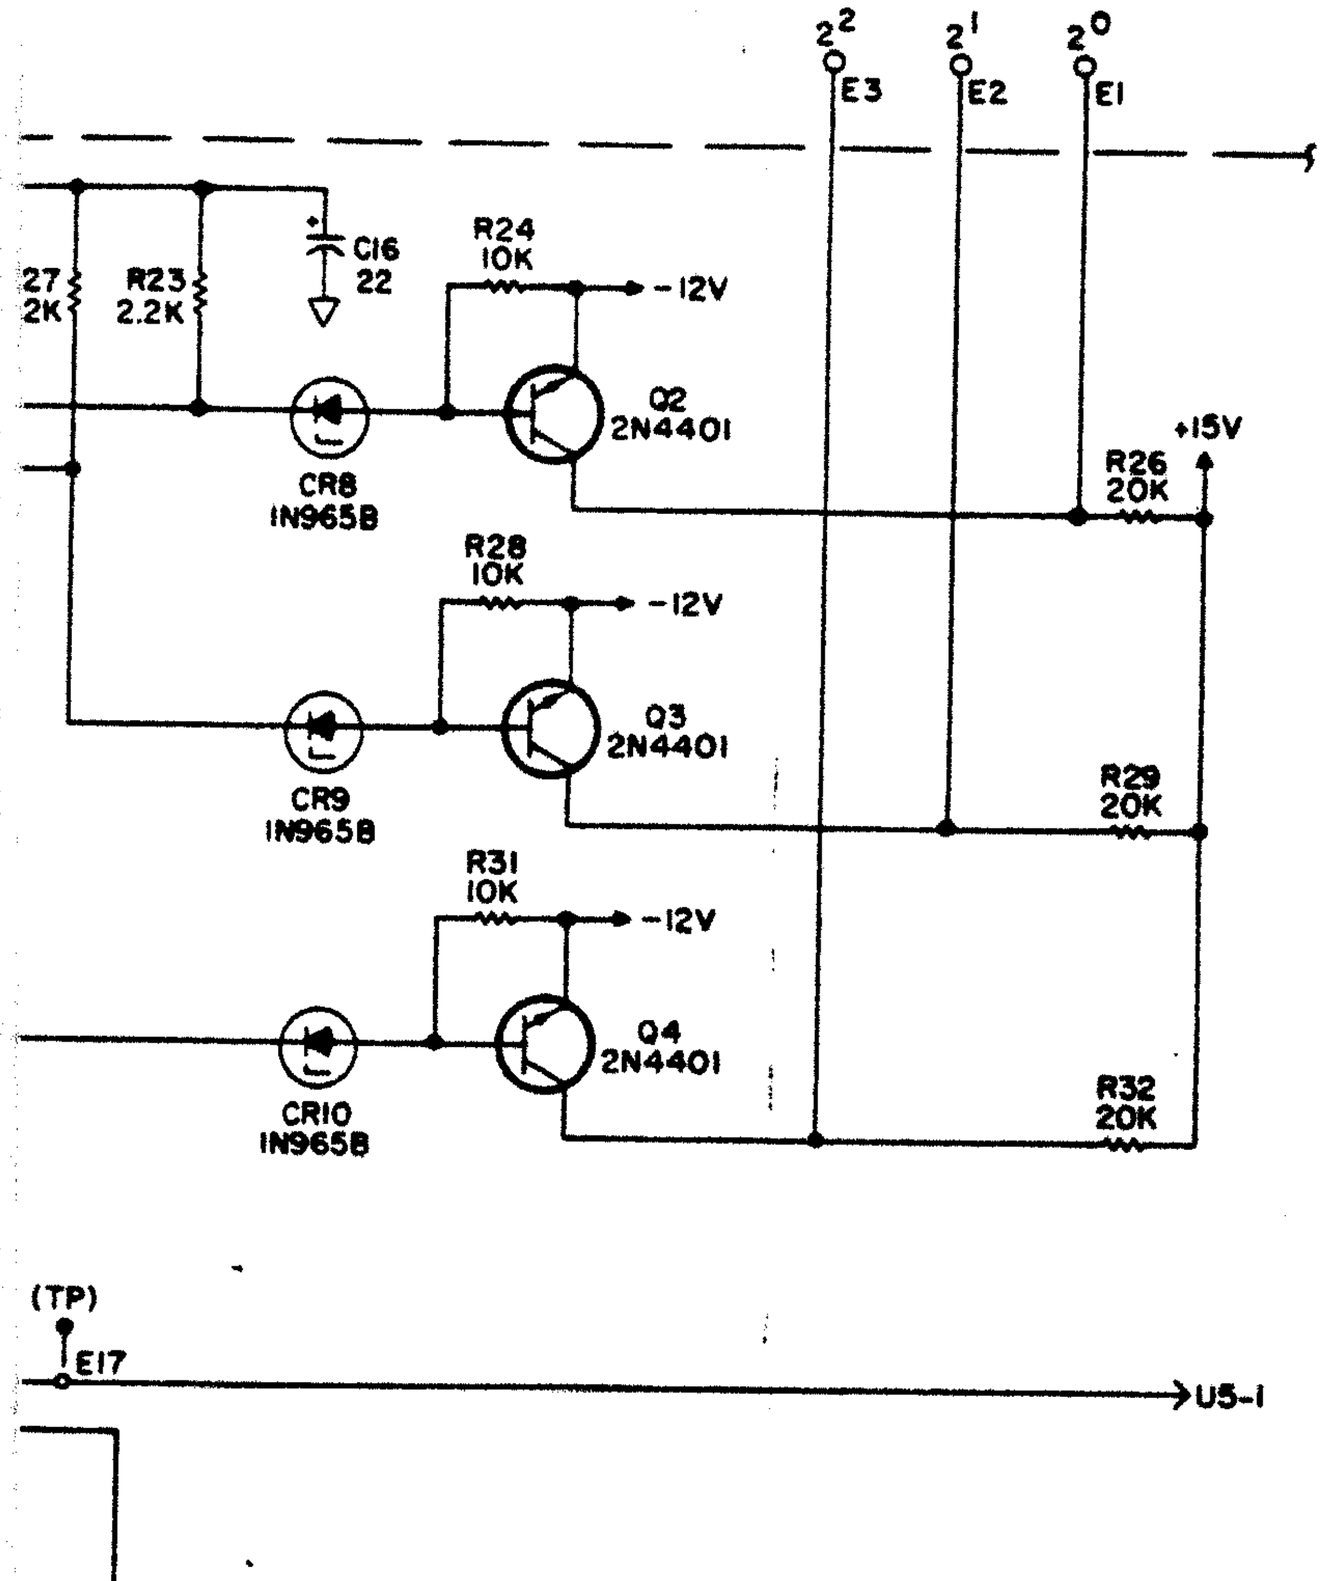
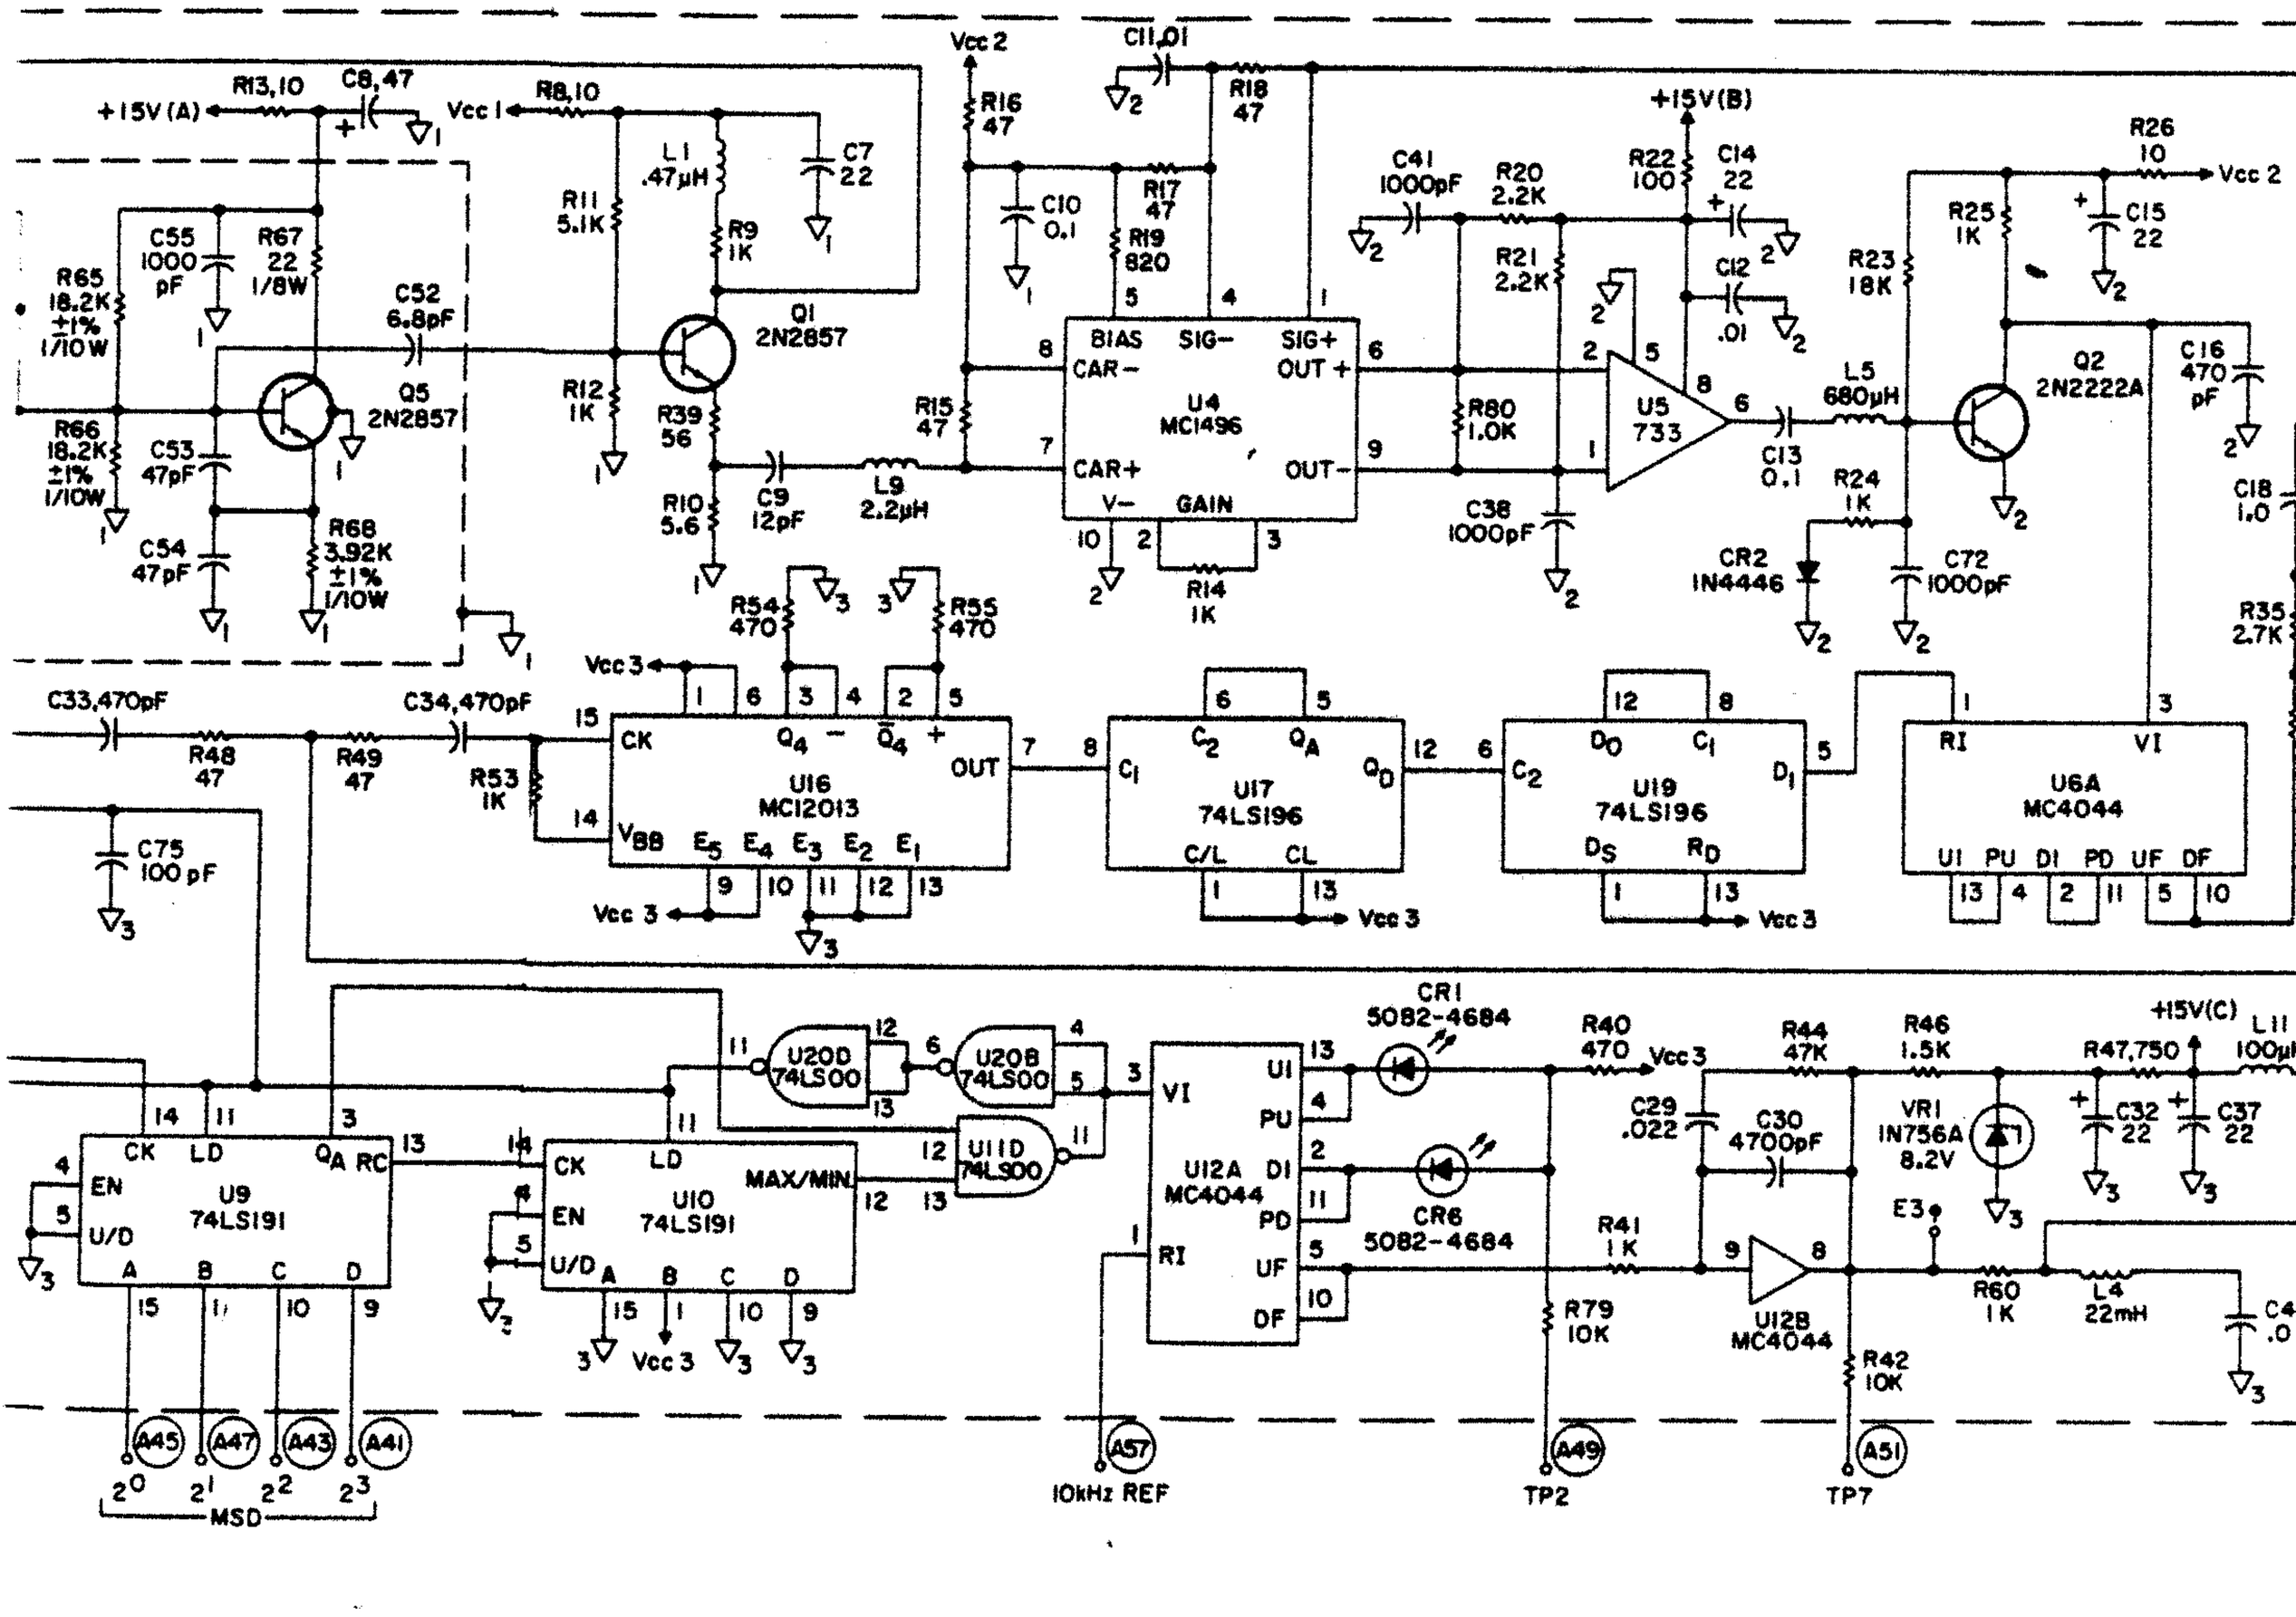



Figure 6-17 Type 791600-1 1st & 3rd LO Synthesizer (A5A1A2)
Schematic Diagram 61247 (Sheet 2 of 2)


+15V(A)
R13,10
C8,47
Vcc 1
R8,10
L1 .47µH
C7 22
R11 5.1K
R9 1K
Q1 2N2857
C52 6.8pF
R65 18.2K ±1% 1/10W
C55 1000 pF
R67 22 1/8W
Q5 2N2857
R66 18.2K ±1% 1/10W
C53 47pF
C54 47pF
R68 3.92K ±1% 1/10W
R12 1K
R39 56
R10 5.6
C9 12pF
L9 2.2µH
Vcc 2
C11,01
R16 47
R18 47
C10 0.1
R17 47
R19 820
R15 47
U4 MC1496
BIAS CAR−
SIG− CAR+
SIG+ OUT+
OUT−
V− GAIN
R14 1K
+15V(B)
C41 1000pF
R20 2.2K
R21 2.2K
R22 100
C14 22
C12 .01
R80 1.0K
U5 733
C38 1000pF
L5 680µH
C13 0.1
R24 1K
CR2 IN4446
C72 1000pF
R25 1K
R23 18K
Q2 2N2222A
R26 10
Vcc 2
C15 22
C16 470 pF
C18 1.0
R35 2.7K
R54 470
R55 470
Vcc 3
C33,470pF
C34,470pF
R48 47
R49 47
R53 1K
C75 100 pF
U16 MCI2013
CK Q4 − Q̄4 + OUT
VBB E5 E4 E3 E2 E1
U17 74LS196
C/L CL
C2 QA QD C1
U19 74LS196
DS RD
D0 C1 C2 D1
U6A MC4044
RI VI
UI PU DI PD UF DF
U9 74LS191
U10 74LS191
CK LD EN U/D
A B C D
MAX/MIN
U20D 74LS00
U20B 74LS00
U11D 74LS00
U12A MC4044
VI RI
UI PU DI PD UF DF
CR1 5082-4684
CR6 5082-4684
R40 470
R41 1K
R79 10K
R42 10K
R44 47K
C29 .022
C30 4700pF
R46 1.5K
VR1 IN756A 8.2V
E3
R60 1K
L4 22mH
+15V(C)
L11 100µH
R47,750
C32 22
C37 22
A45
A47
A43
A41
2⁰ 2¹ 2² 2³
MSD
A57
10kHz REF
A49
TP2
A51
TP7

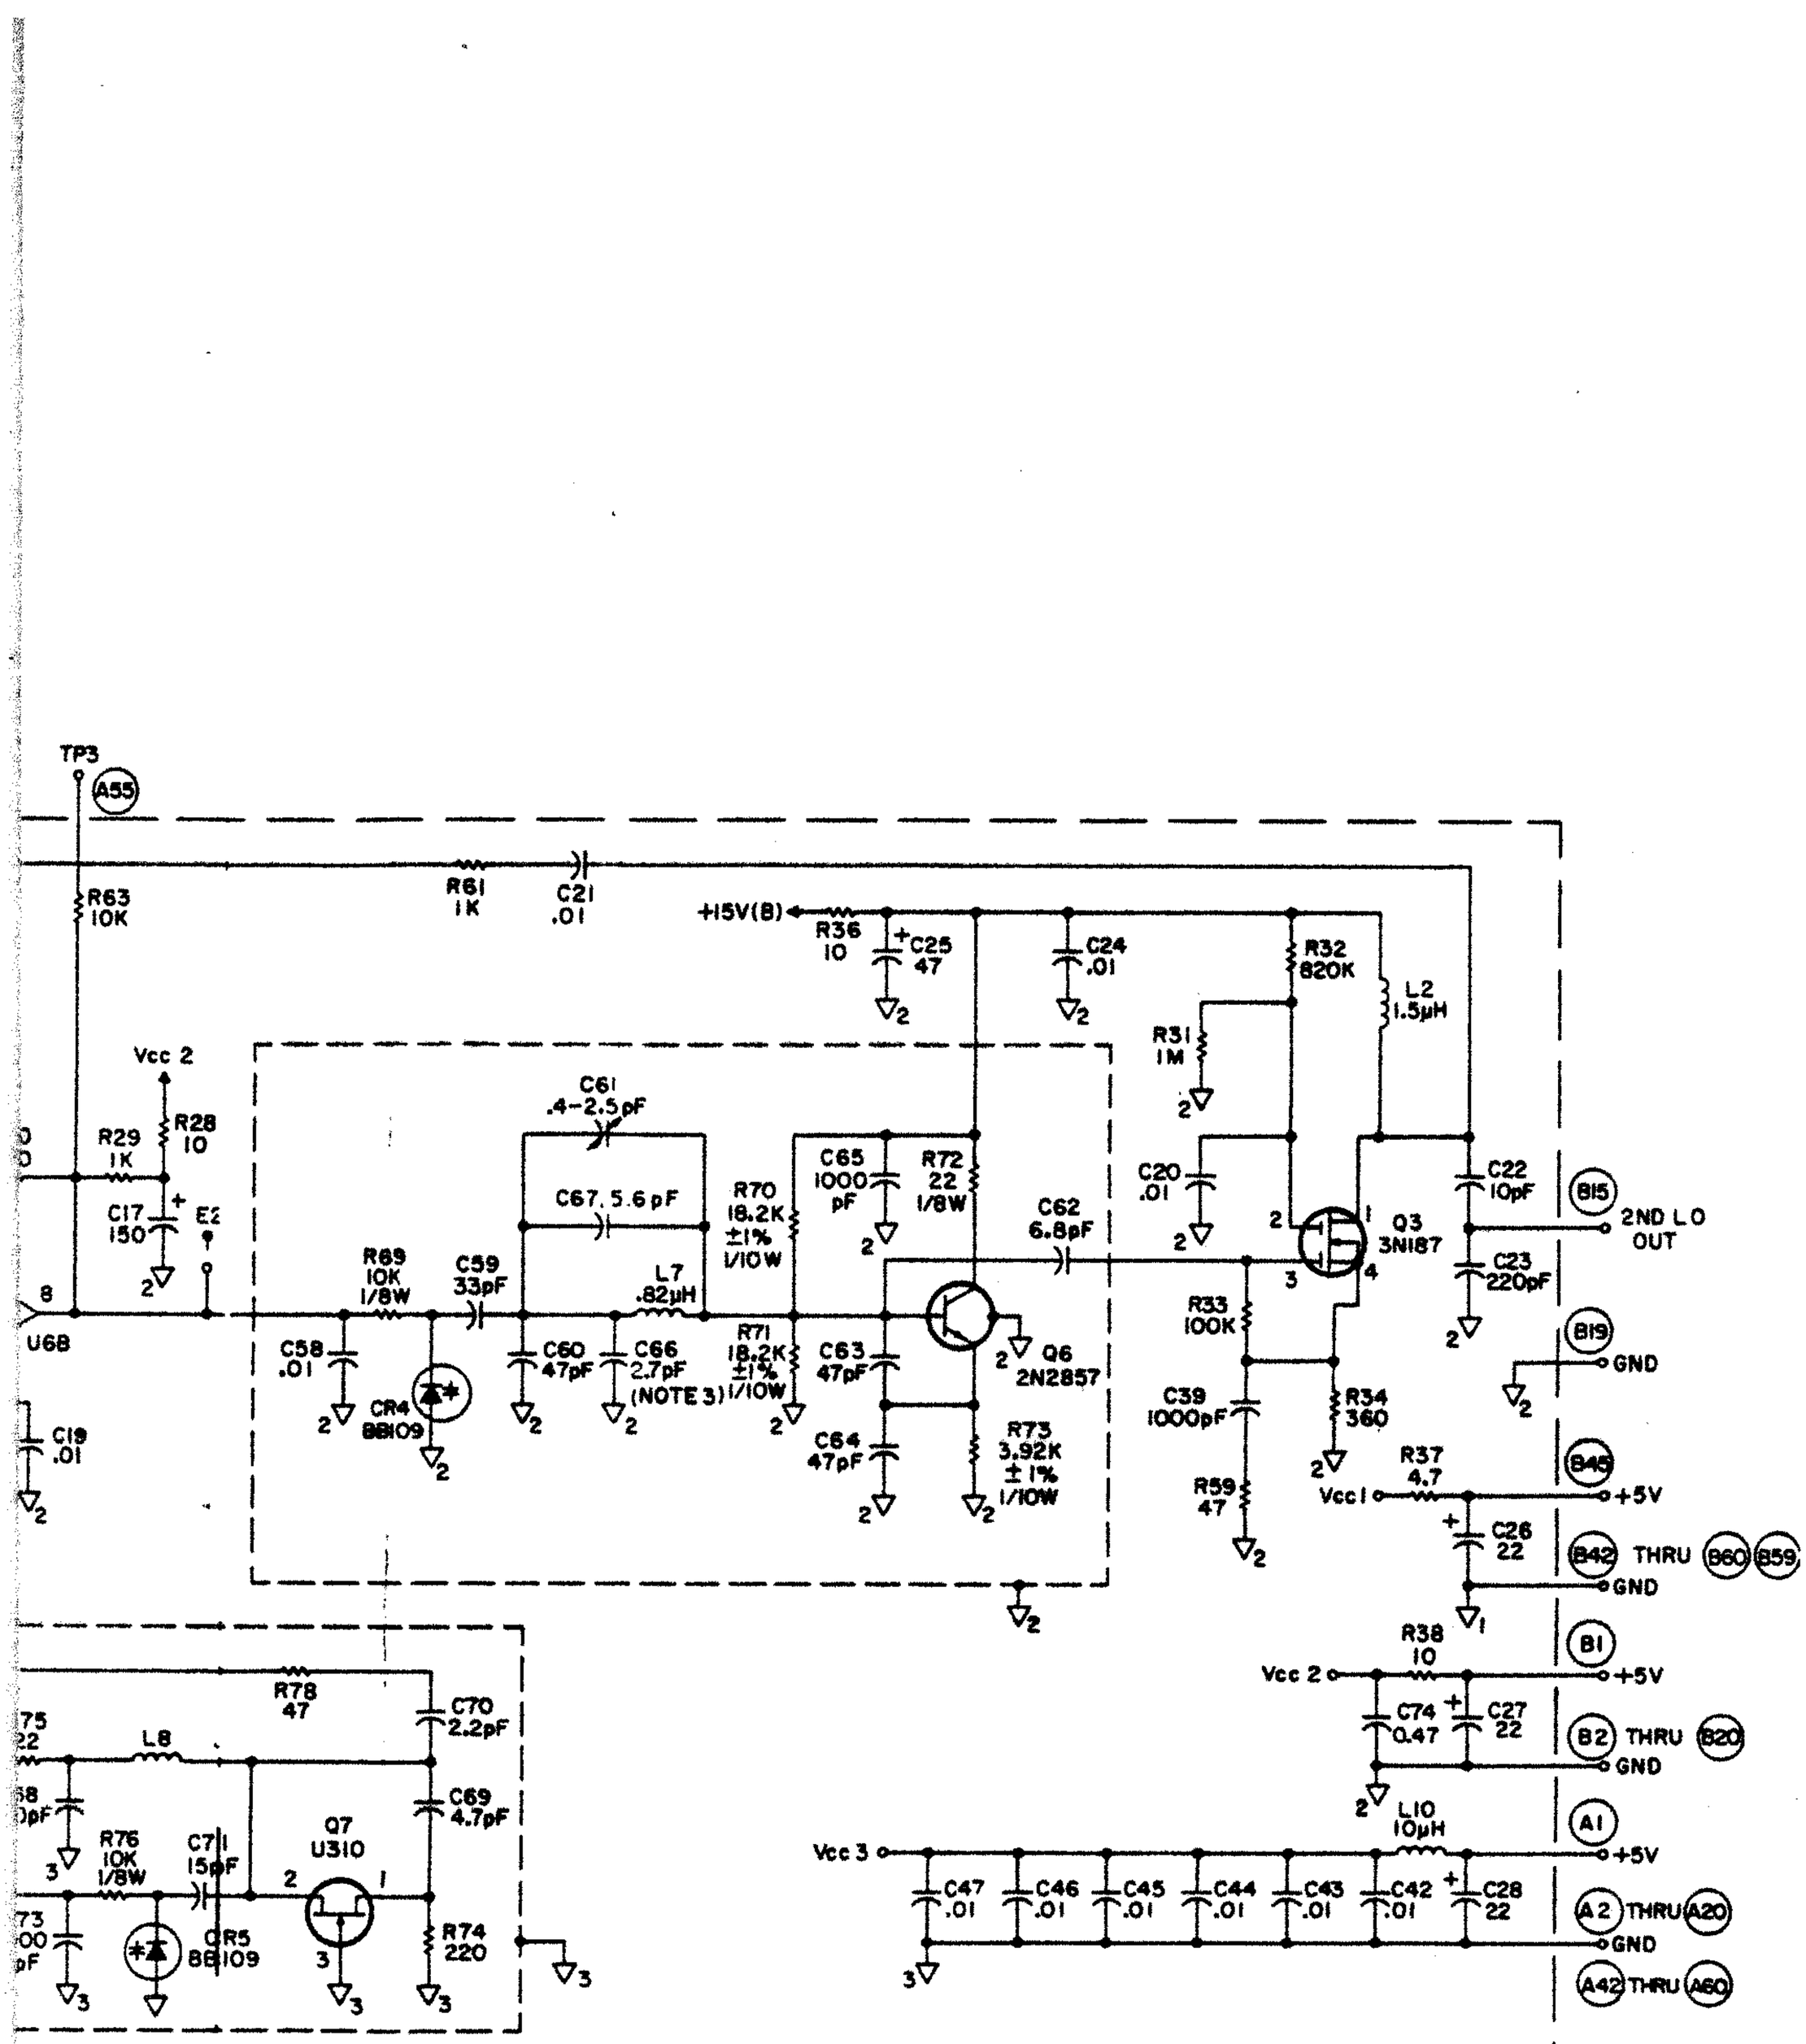



Figure 6-18. Type 791601 2nd LO Synthesizer (A5A2) Schematic Diagram 61256

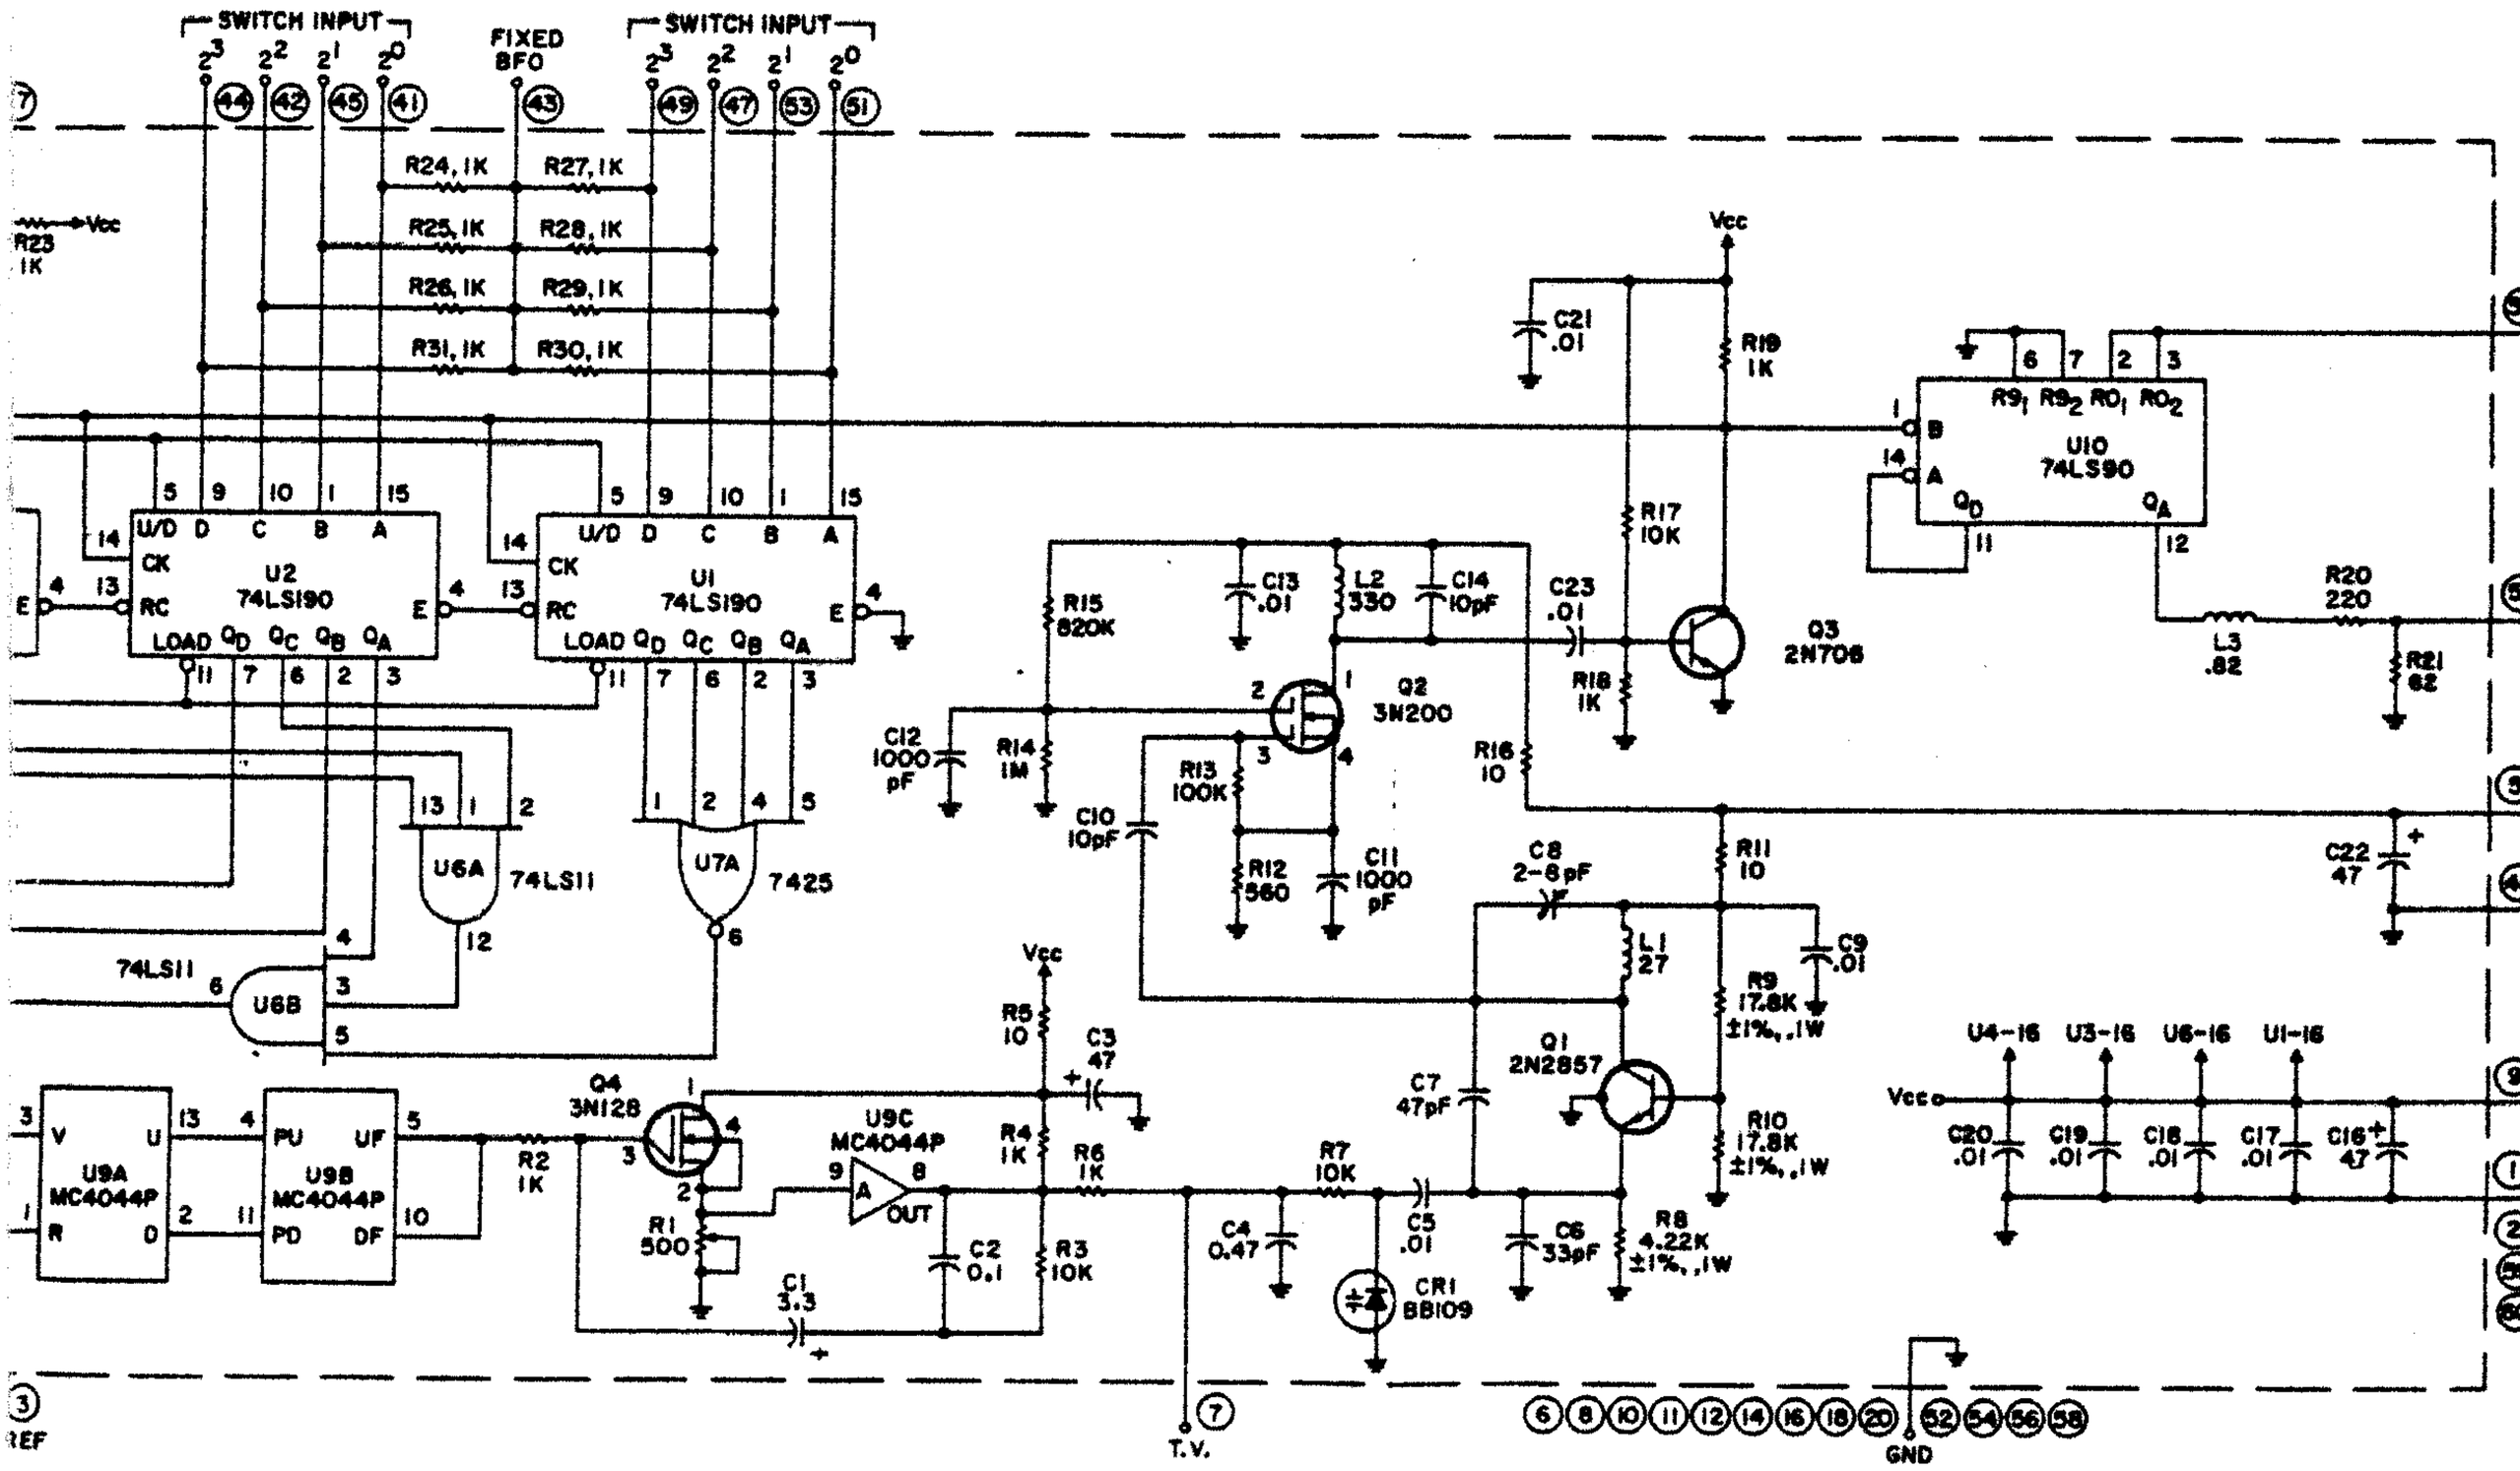



Figure 6-19. Type 791576 BFO Synthesizer (A5A
Schematic Diagram 51183


NOTES:

1. UNLESS OTHERWISE SPECIFIED:
   a) RESISTANCE IS IN OHMS, ±5%, 1/4W.
   b) CAPACITANCE IS IN μF.
   c) INDUCTANCE IS IN μH.
2. ENCIRCLED NUMBERS ARE MODULE PIN NUMBERS.
3. FOR I/C PIN ARRANGEMENTS SEE DETAILS A & B.
4. FOR PIN NOS. OF Vcc & GND SEE TABLE A.
5. DIFFERENCE BETWEEN TYPES IS MECHANICAL ONLY.

TABLE A


| I/C | REF DESIG | Vcc | GND |
|---|---|---|---|
| 74LS190 | U1,U2,U3,U4 | 16 | 8 |
| 7425 | U5,U7 | 14 | 7 |
| 74LS11 | U6 | 14 | 7 |
| 7474 | U8 | 14 | 7 |
| MC4044P | U9 | 14 | 7 |
| 74LS90 | U10 | 5 | 10 |

DETAIL A






7425, 7474
MC4044P
74LS90
74LS11

DETAIL B





74LS190

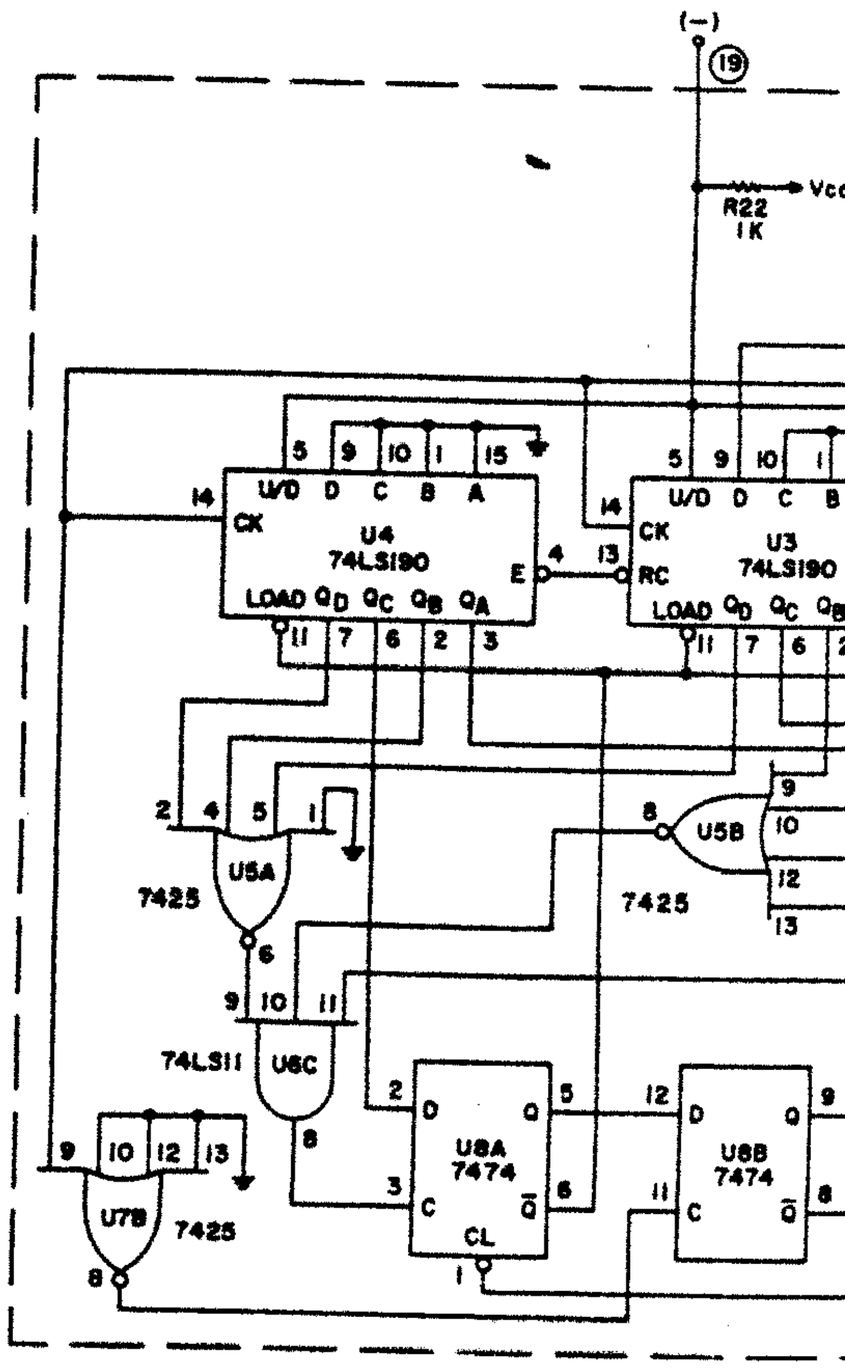

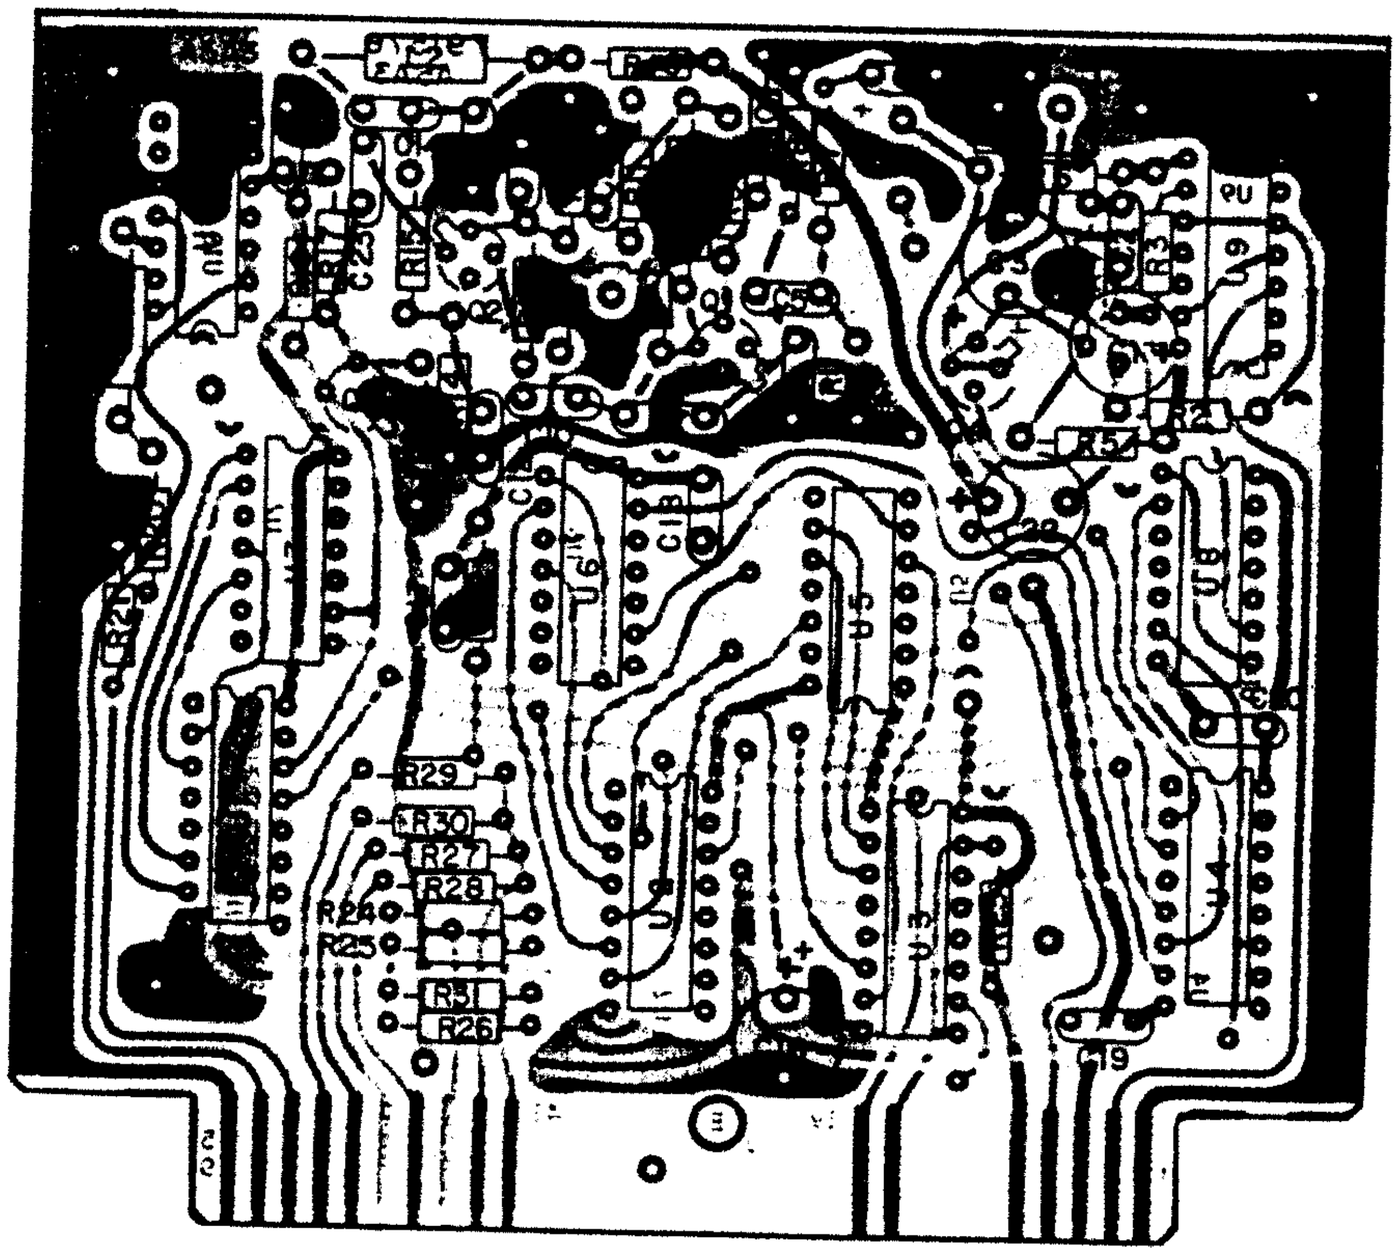


p/o Fig 6-19
in L-41

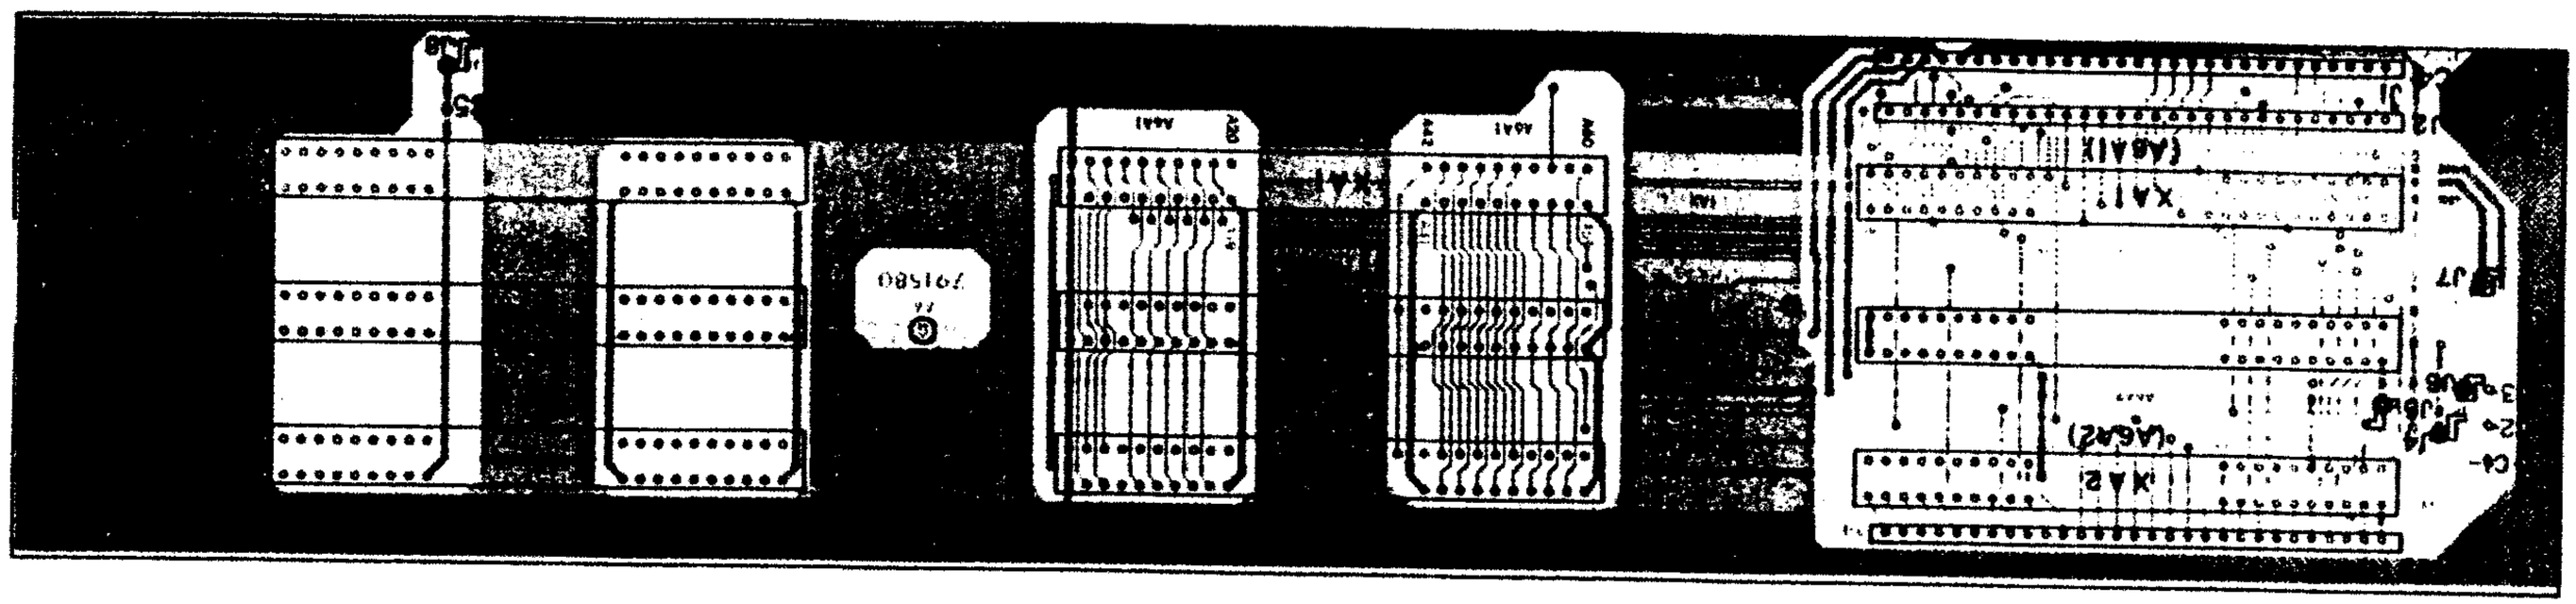


i, f3

NOTES:

1. MOST MODULE PINS ARE NOT SHOWN DUE TO UNNECESSARY LINE DUPLICATIONS. OPTIONAL PINS ON SOME MODULES ARE NOT SHOWN BECAUSE OF COMPLEXITY (SEE EACH OPTION DWG FOR CLARITY).
2. PLUGS A7P1, A8P1, A9P1, A10P1 ARE FOR REF ONLY, AND ARE NOT OF THIS ASSEMBLY.
3. TEST POINTS DESCRIPTIONS:

| | |
|---|---|
| TP1 | AS SHOWN |
| TP2 | |
| TP3 | |
| TP4 | |
| TP5 | |
| TP6 | |
| TP7 | |
| TP8 | |
| TP9 | |
| TP10 | |
| TP11 | |
| TP12 | |
| TP13 | |
| TP14 | |
| TP15 | |
| TP16 | |
| TP17 | |
| TP18 | |
| TP19 | |
| TP20 | |

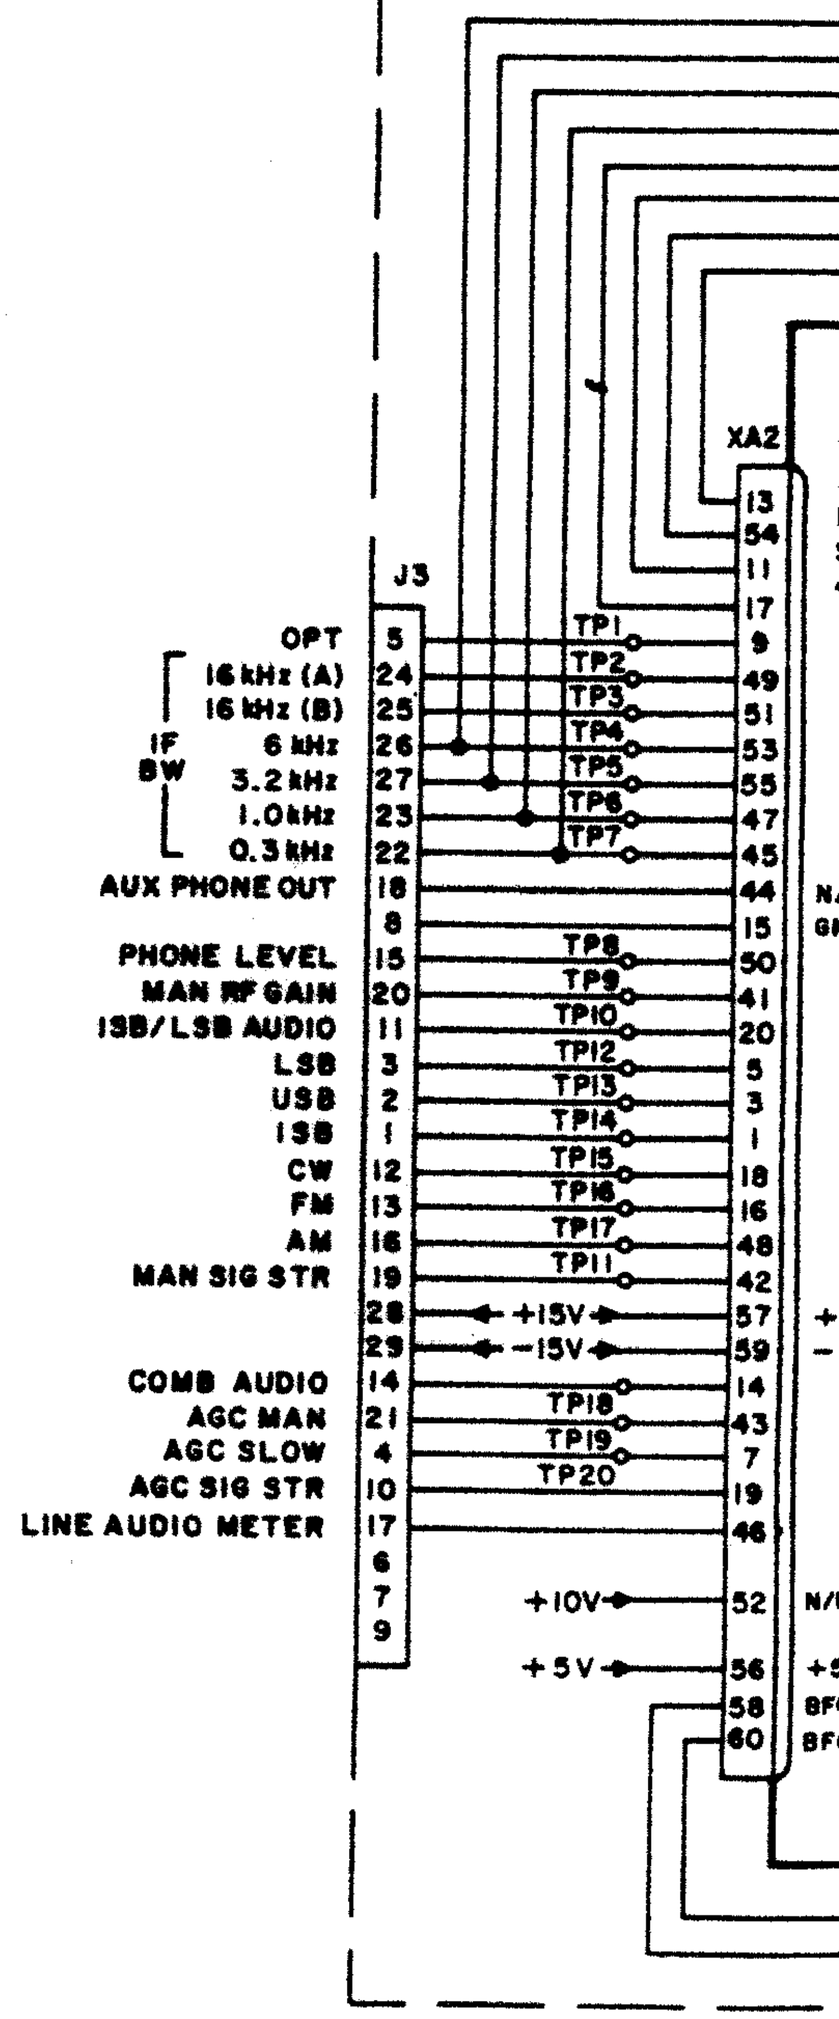

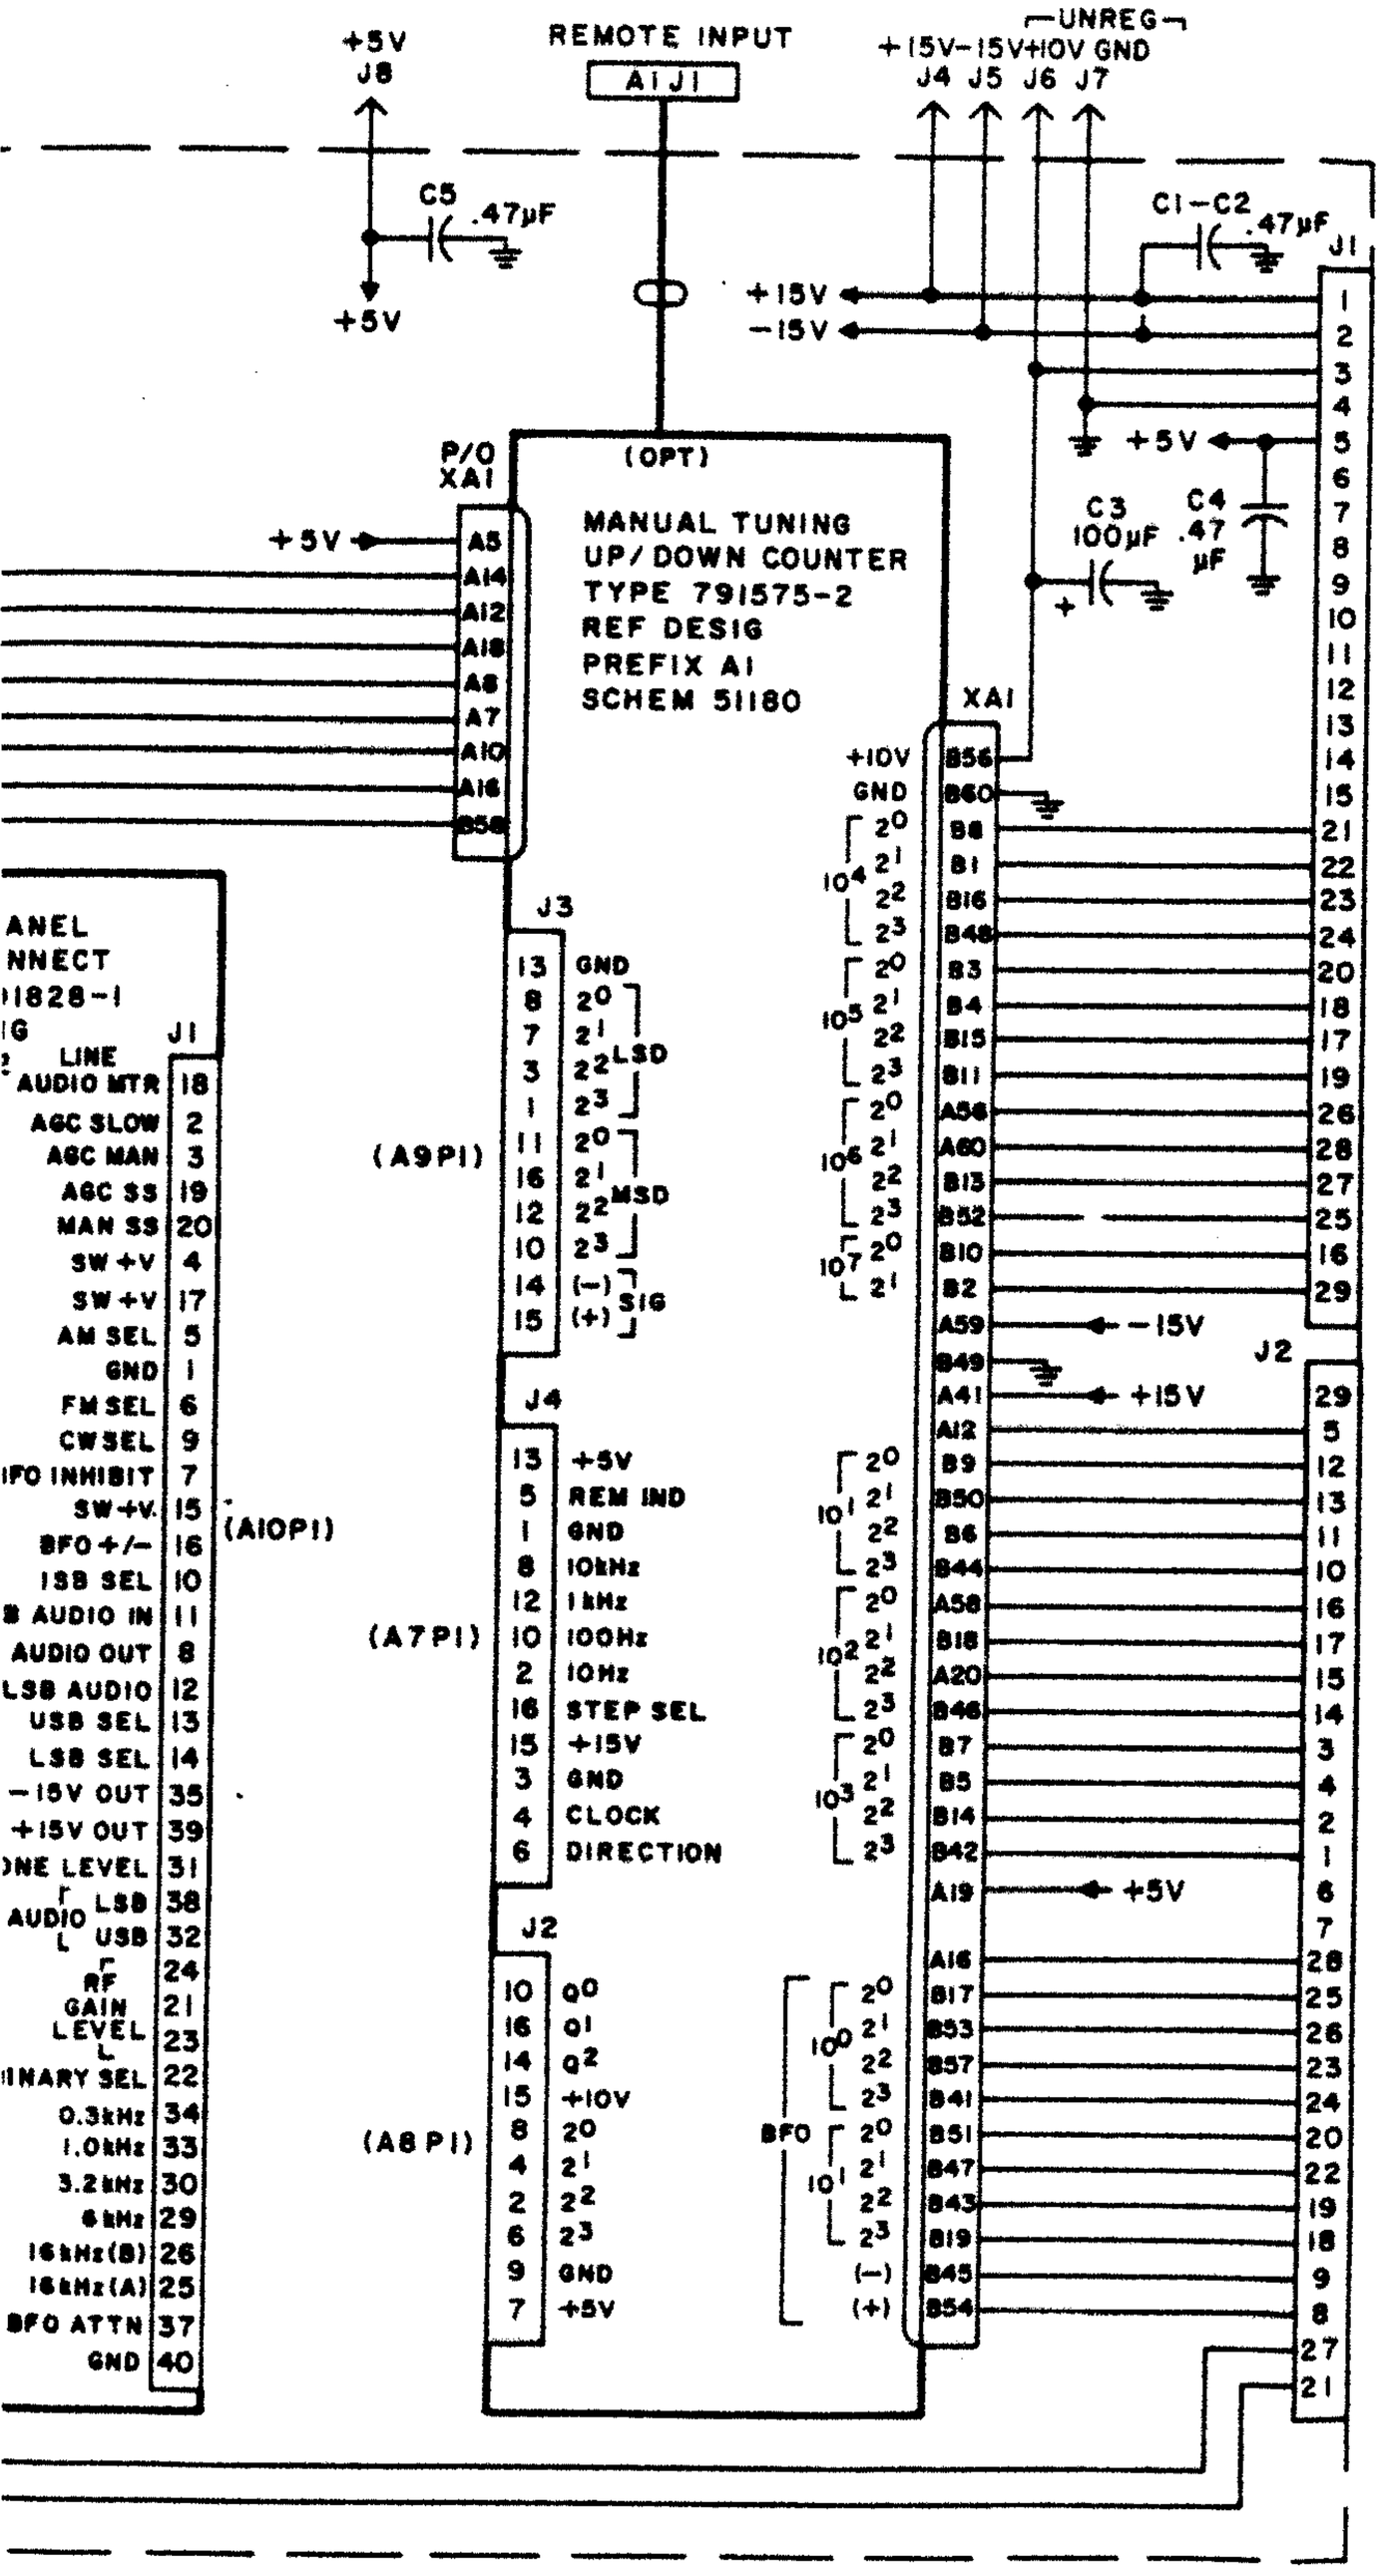



Figure 6-20. Type 791580 I/O Motherboard (A6) Schematic Diagram 470519

NOTES:

1. UNLESS OTHERWISE SPECIFIED, RESISTANCE IS IN OHMS ± 5%, 1/4 W
2. POWER CONNECTIONS AND PIN ARRANGEMENTS FOR ICs ARE GIVEN IN TABLE 2
3. ENCIRCLED NUMBERS ARE MODULE PIN NUMBERS.
4. REMOVE JUMPER BETWEEN E42 AND E41 FOR EXTERNALLY ACTIVATED REMOTE CONTROL. THE PRESENSE OF THE JUMPER PROVIDES FRONT-PANEL ACTIVATED REMOTE CONTROL.
5. DIFFERENCE BETWEEN TYPES IS SHOWN IN TABLE 3.


TABLE 2

| IC | $V_{DD}$ PIN | $V_{DD2}$ PIN | GND PIN | DETAIL |
|---|---|---|---|---|
| U1, U6, U18 | | 14 | 7 | B |
| U2~U7, U9, U12~U15 | | 16 | 8 | A |
| U10, U11 | 14 | | 7 | B |
| U16 | 16 | | 8 | A |
| U17 | 1 | | 8 | A |


TABLE 3


| TYPE NO | J1(RMT IN) |
|---|---|
| 791575-1 | OMIT |
| 791575-2 | AS SHOWN |
| 791575-3 | AS SHOWN |
| 791575-4 | AS SHOWN |
| 791575-5 | AS SHOWN |

DETAIL-A




DETAIL-B

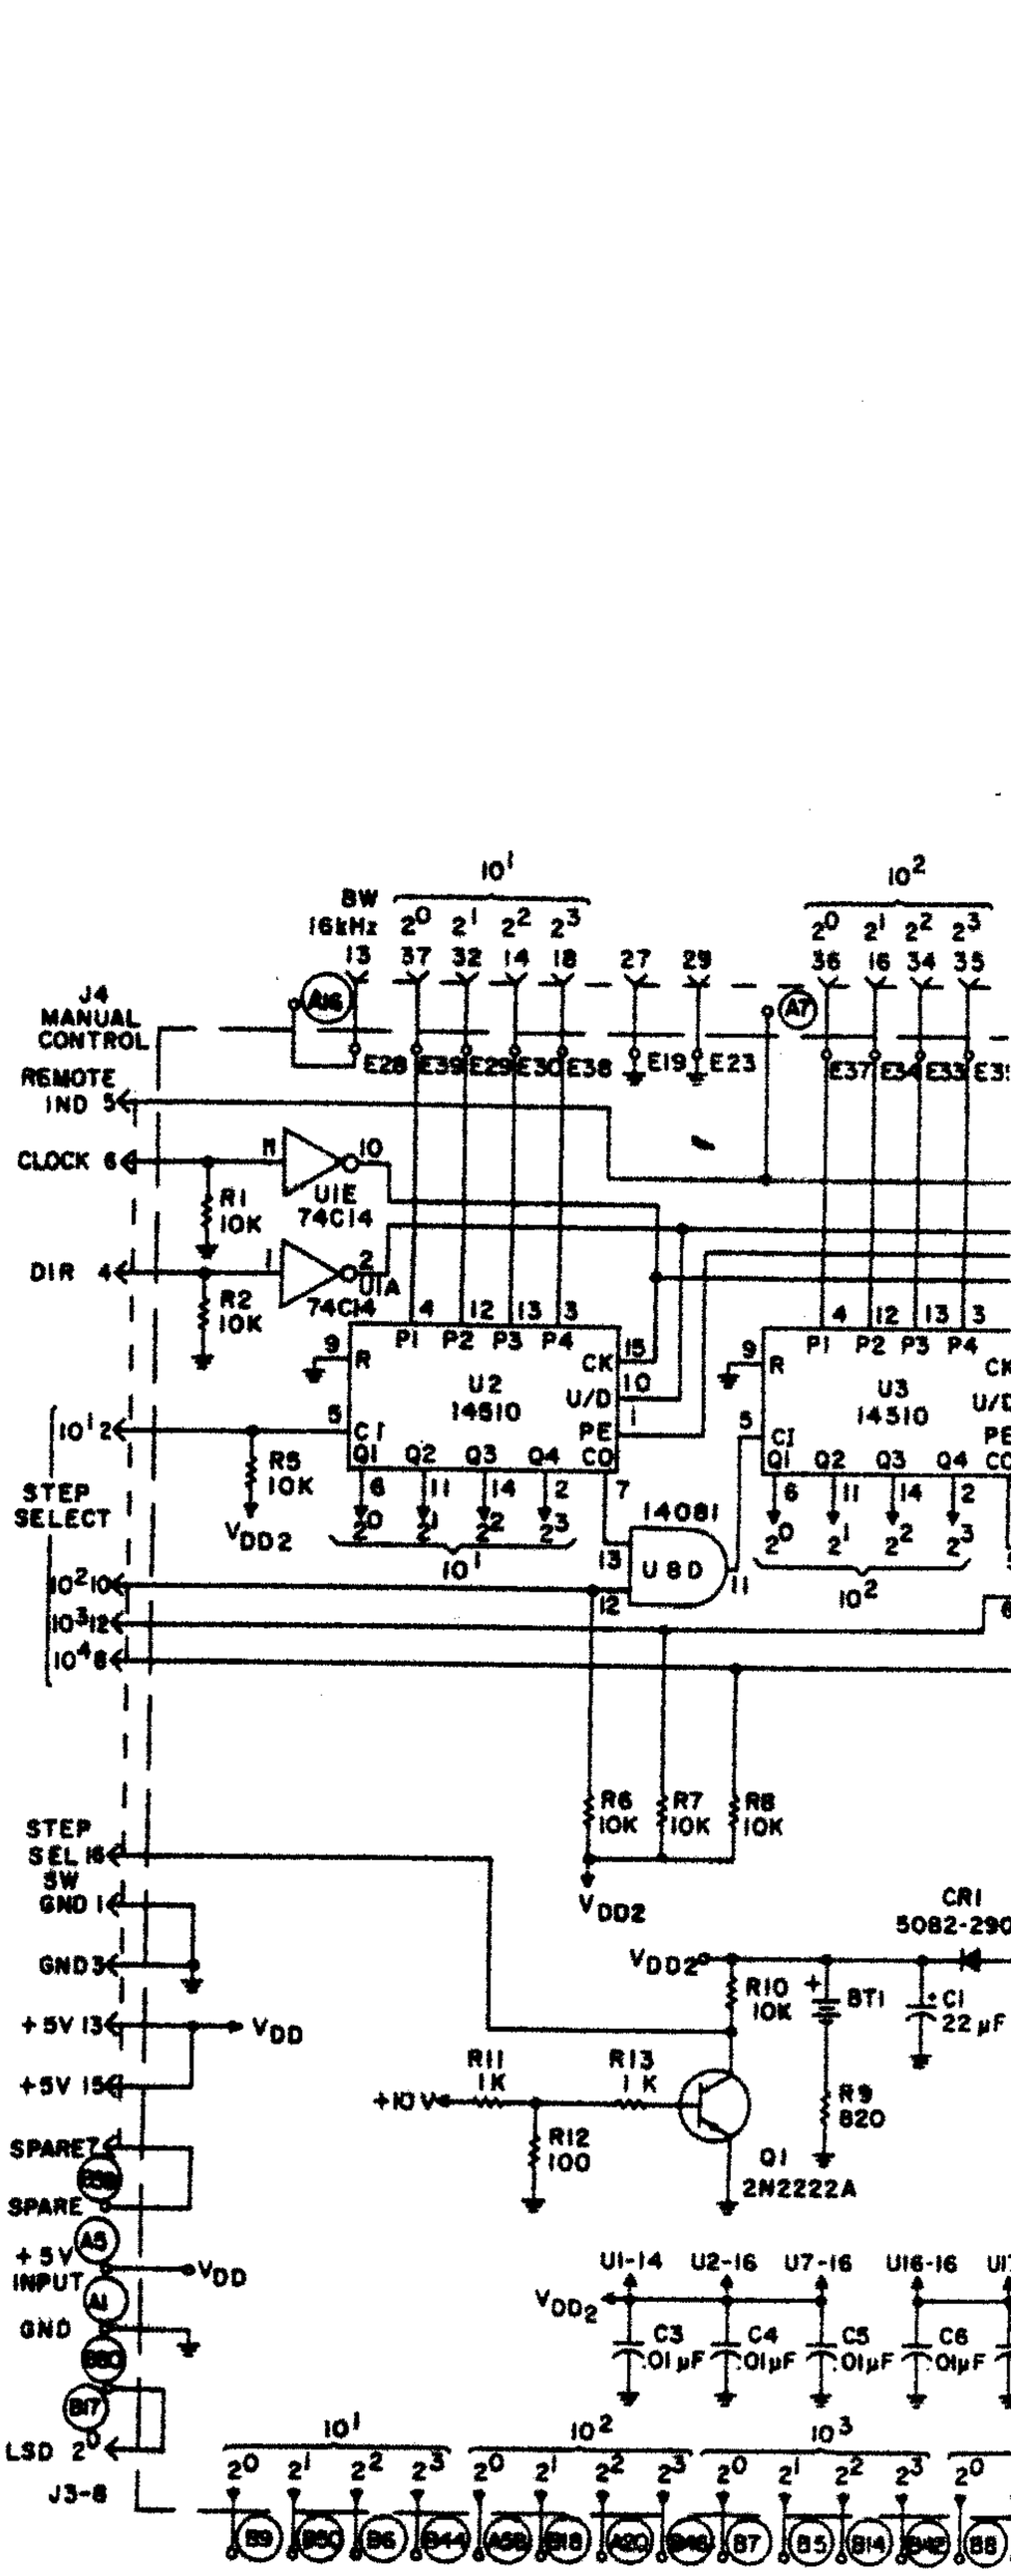


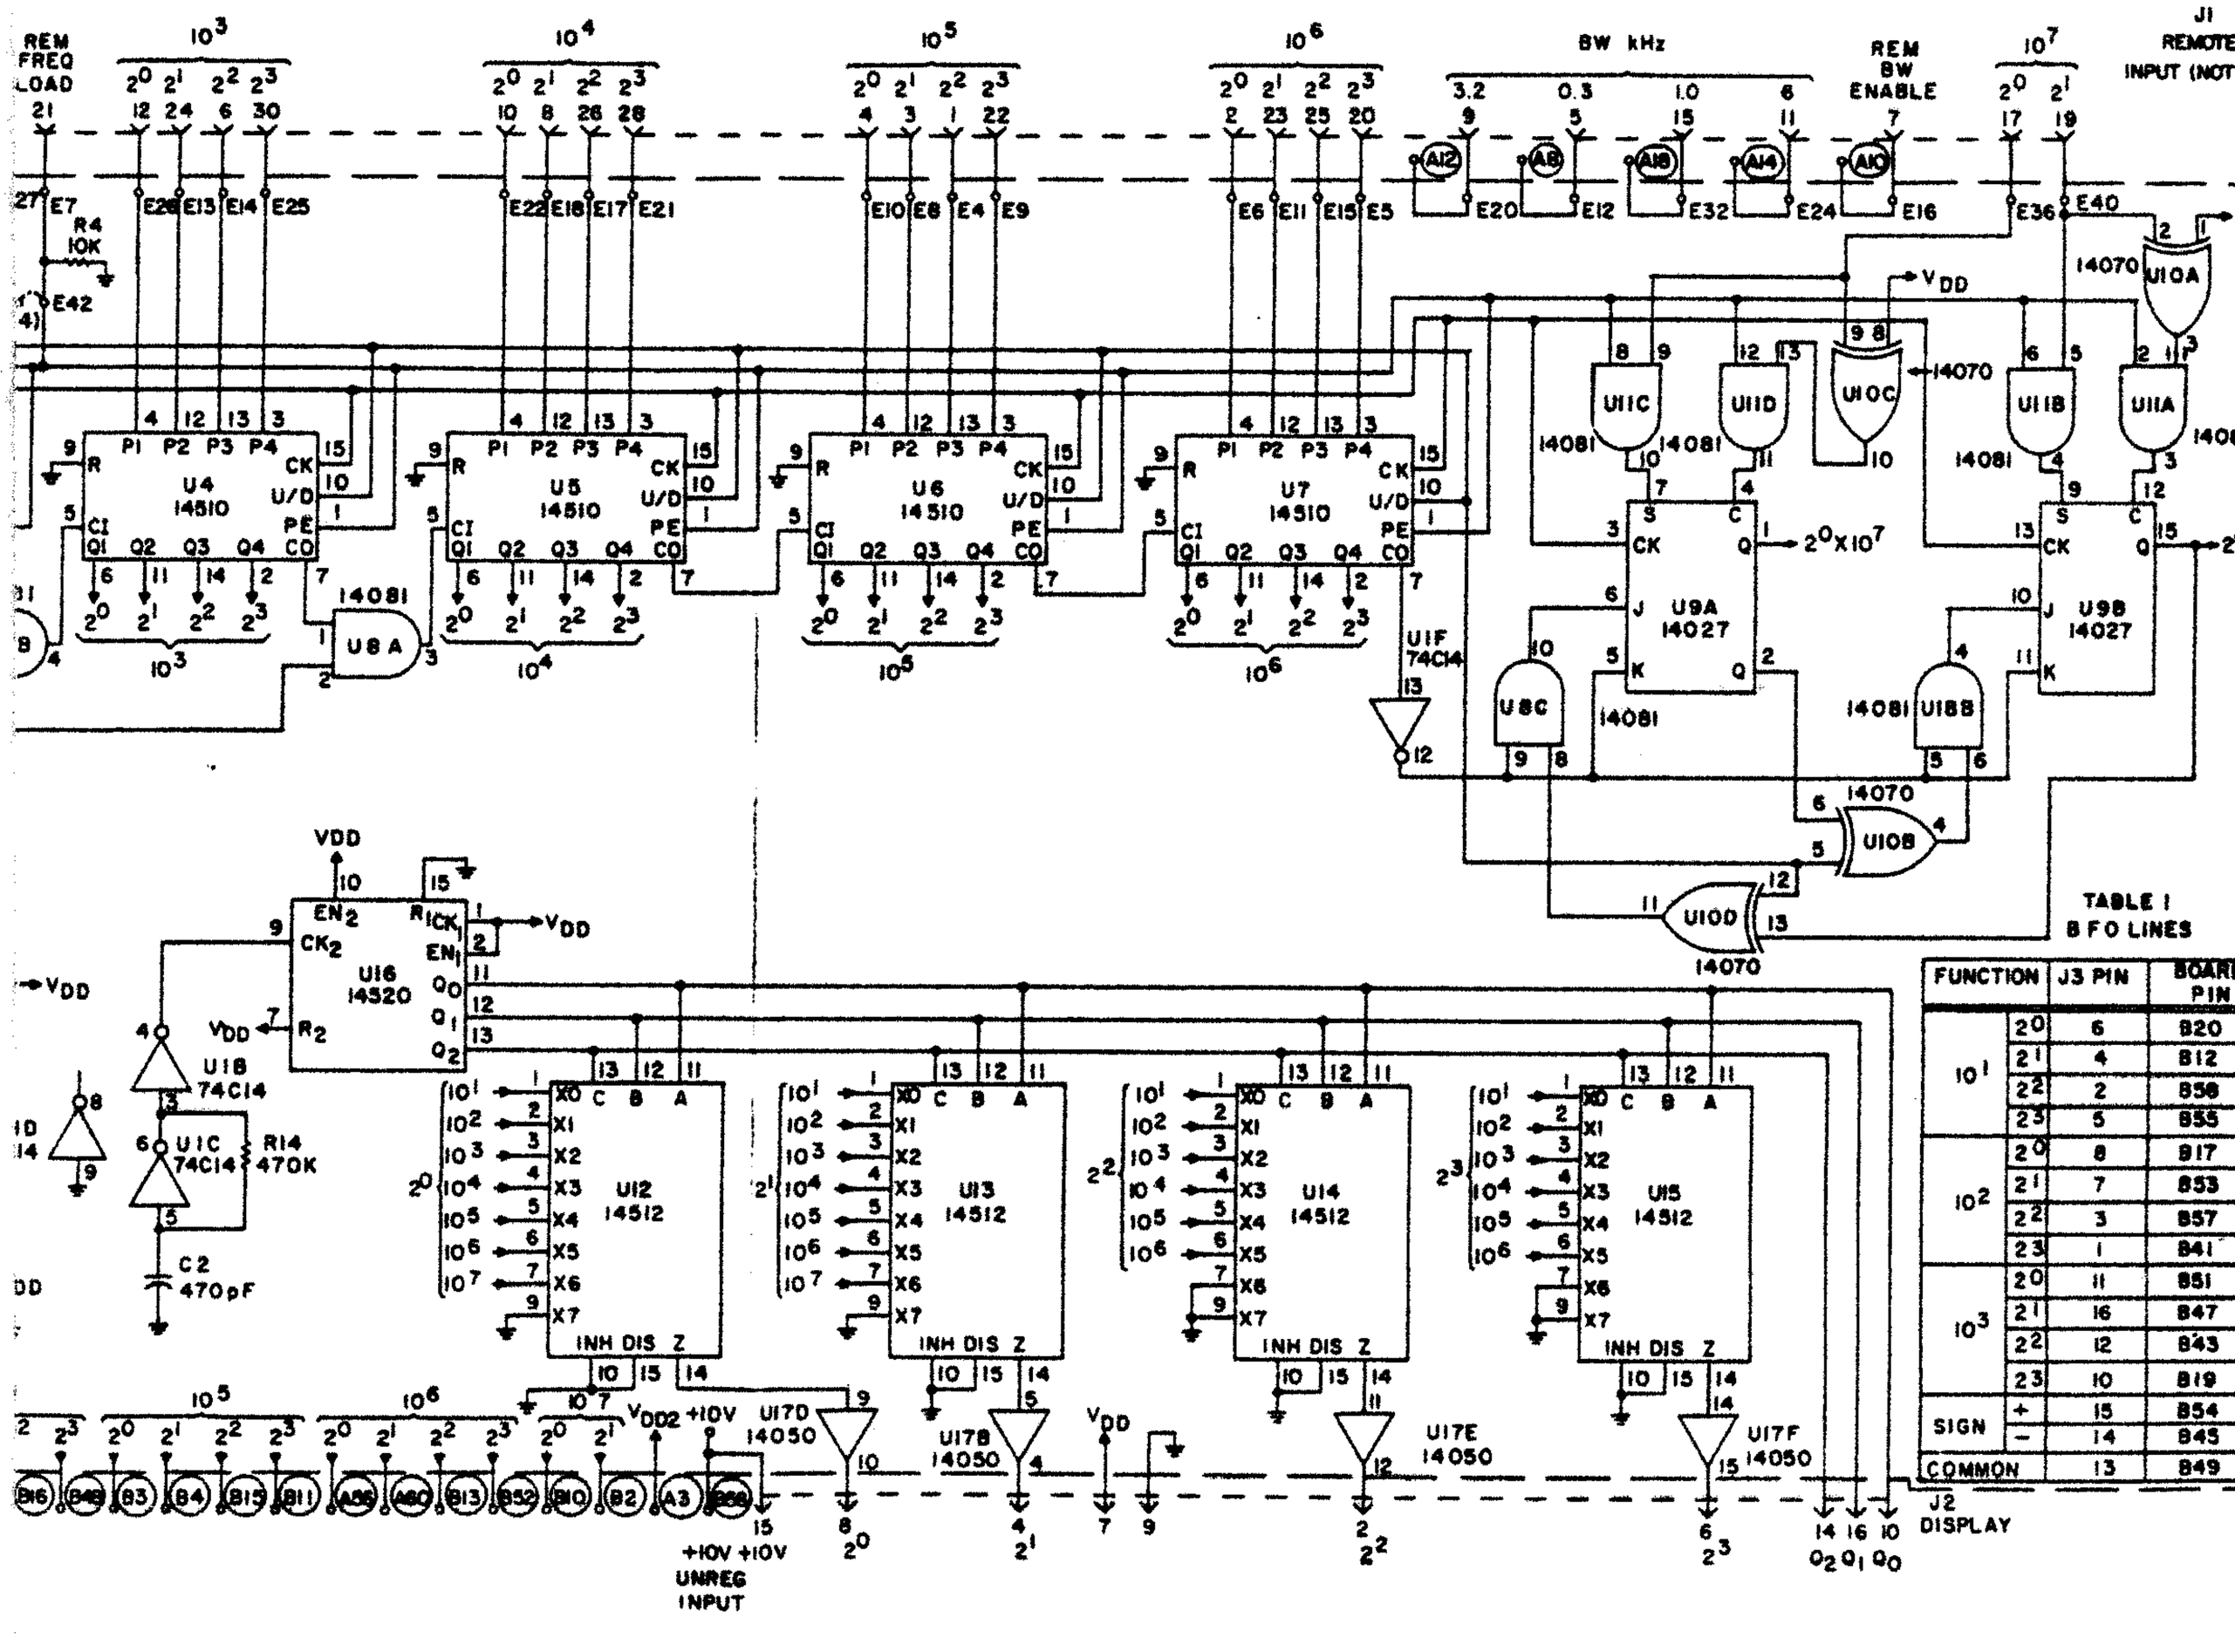



TABLE I
8 FO LINES

| FUNCTION | | J3 PIN | BOARD PIN |
|---|---|---|---|
| $10^1$ | $2^0$ | 6 | 820 |
| | $2^1$ | 4 | 812 |
| | $2^2$ | 2 | 856 |
| | $2^3$ | 5 | 855 |
| $10^2$ | $2^0$ | 8 | 817 |
| | $2^1$ | 7 | 853 |
| | $2^2$ | 3 | 857 |
| | $2^3$ | 1 | 841 |
| $10^3$ | $2^0$ | 11 | 851 |
| | $2^1$ | 16 | 847 |
| | $2^2$ | 12 | 843 |
| | $2^3$ | 10 | 819 |
| SIGN | + | 15 | 854 |
| | − | 14 | 845 |
| COMMON | | 13 | 849 |


Figure 6-21. Type 791575-3 Manual Tuning Up/Down Counter (A6A1
Schematic Diagram 51180

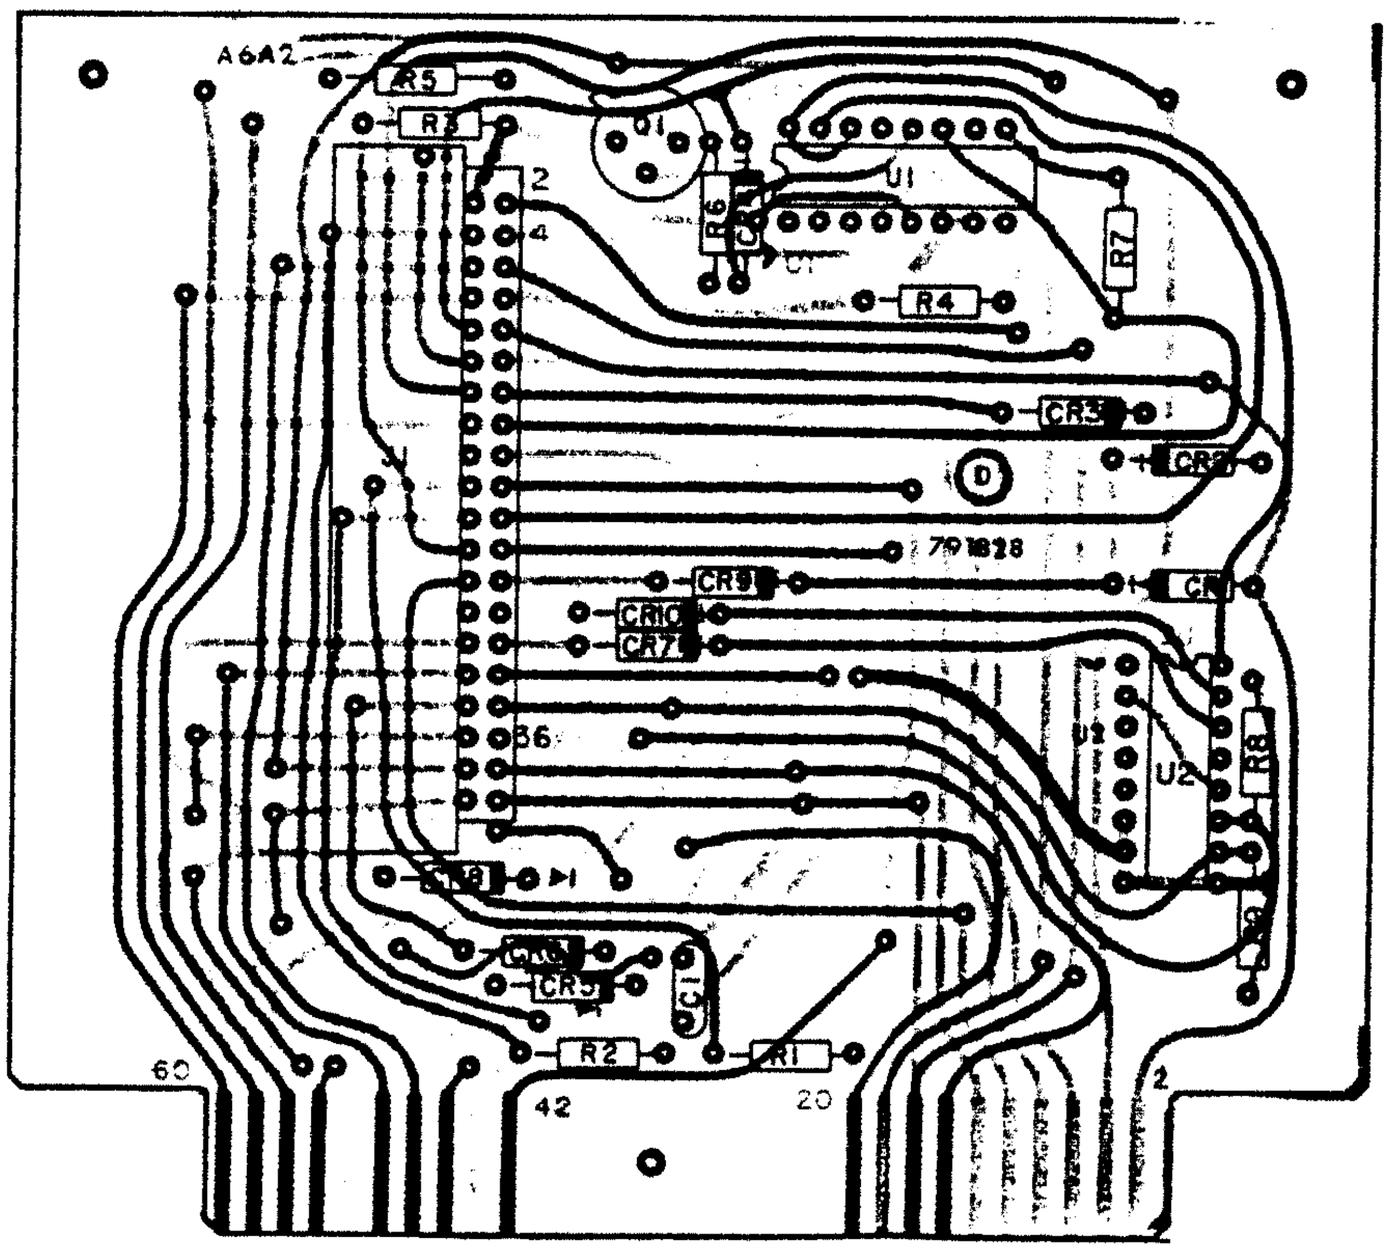

A6A2
R5
R3
Q1
U1
R6
C3
R7
R4
CR5
CR6
D
79 1828
CR9
CR10
CR7
CR8
U2
R8
C2
CR4
CR3
C1
R2
R1
60
42
20
2
36
2
4



P/O Fig 6-22

NOTE:
UNLESS OTHERWISE SPECIFIED:
a) RESISTANCE IS IN OHMS, ±5%, 1/4W.
b) CAPACITANCE IS IN μF.

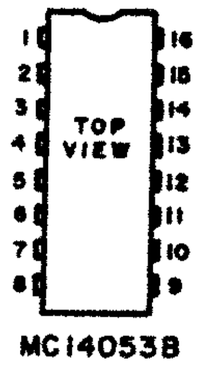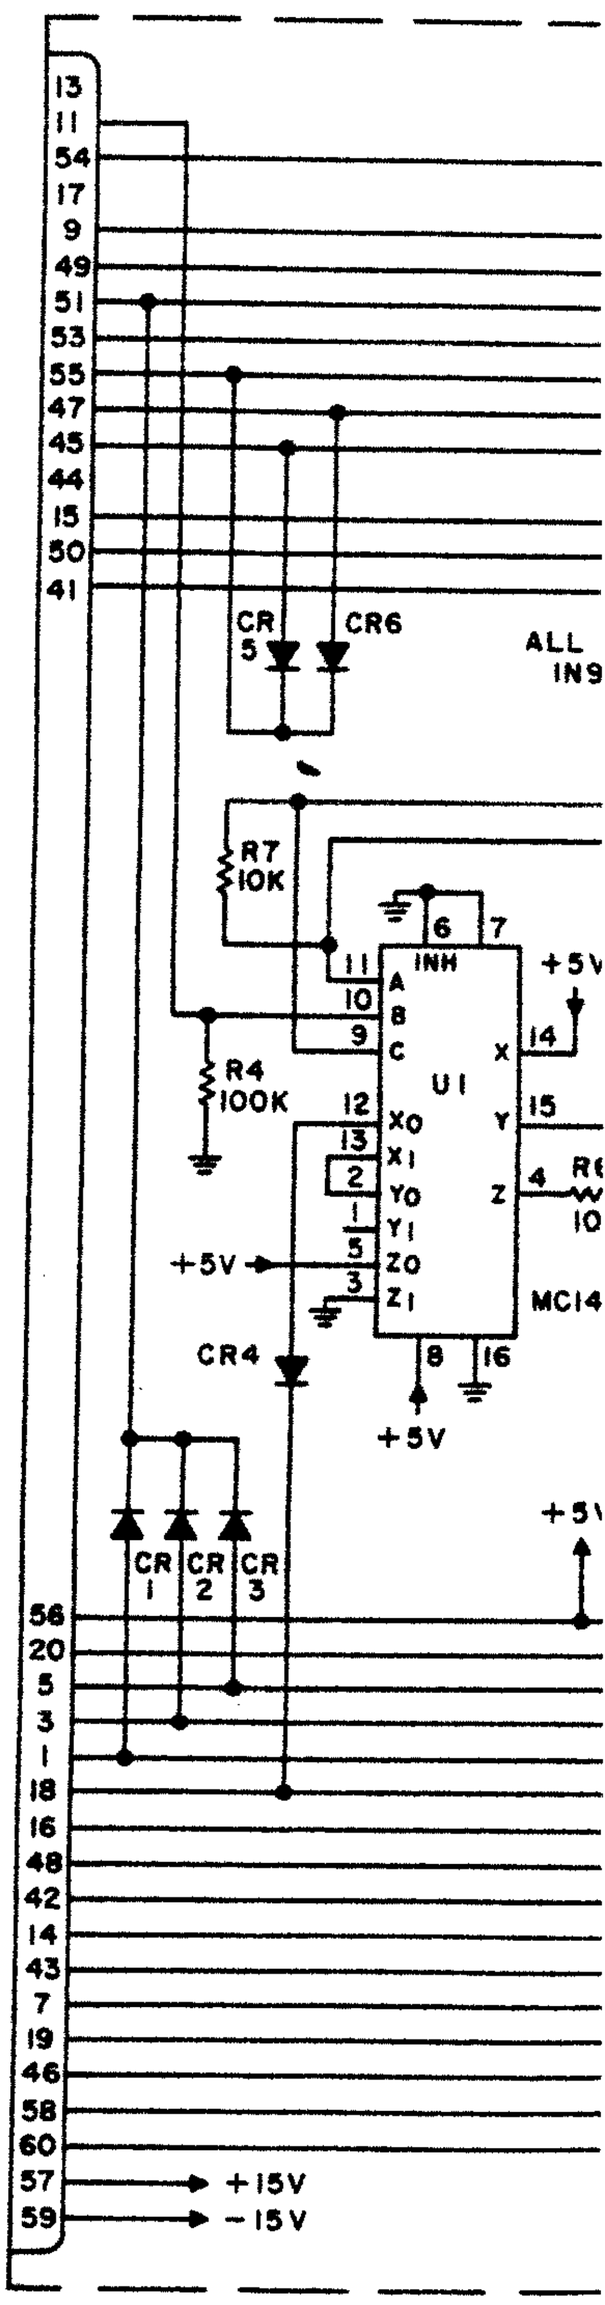

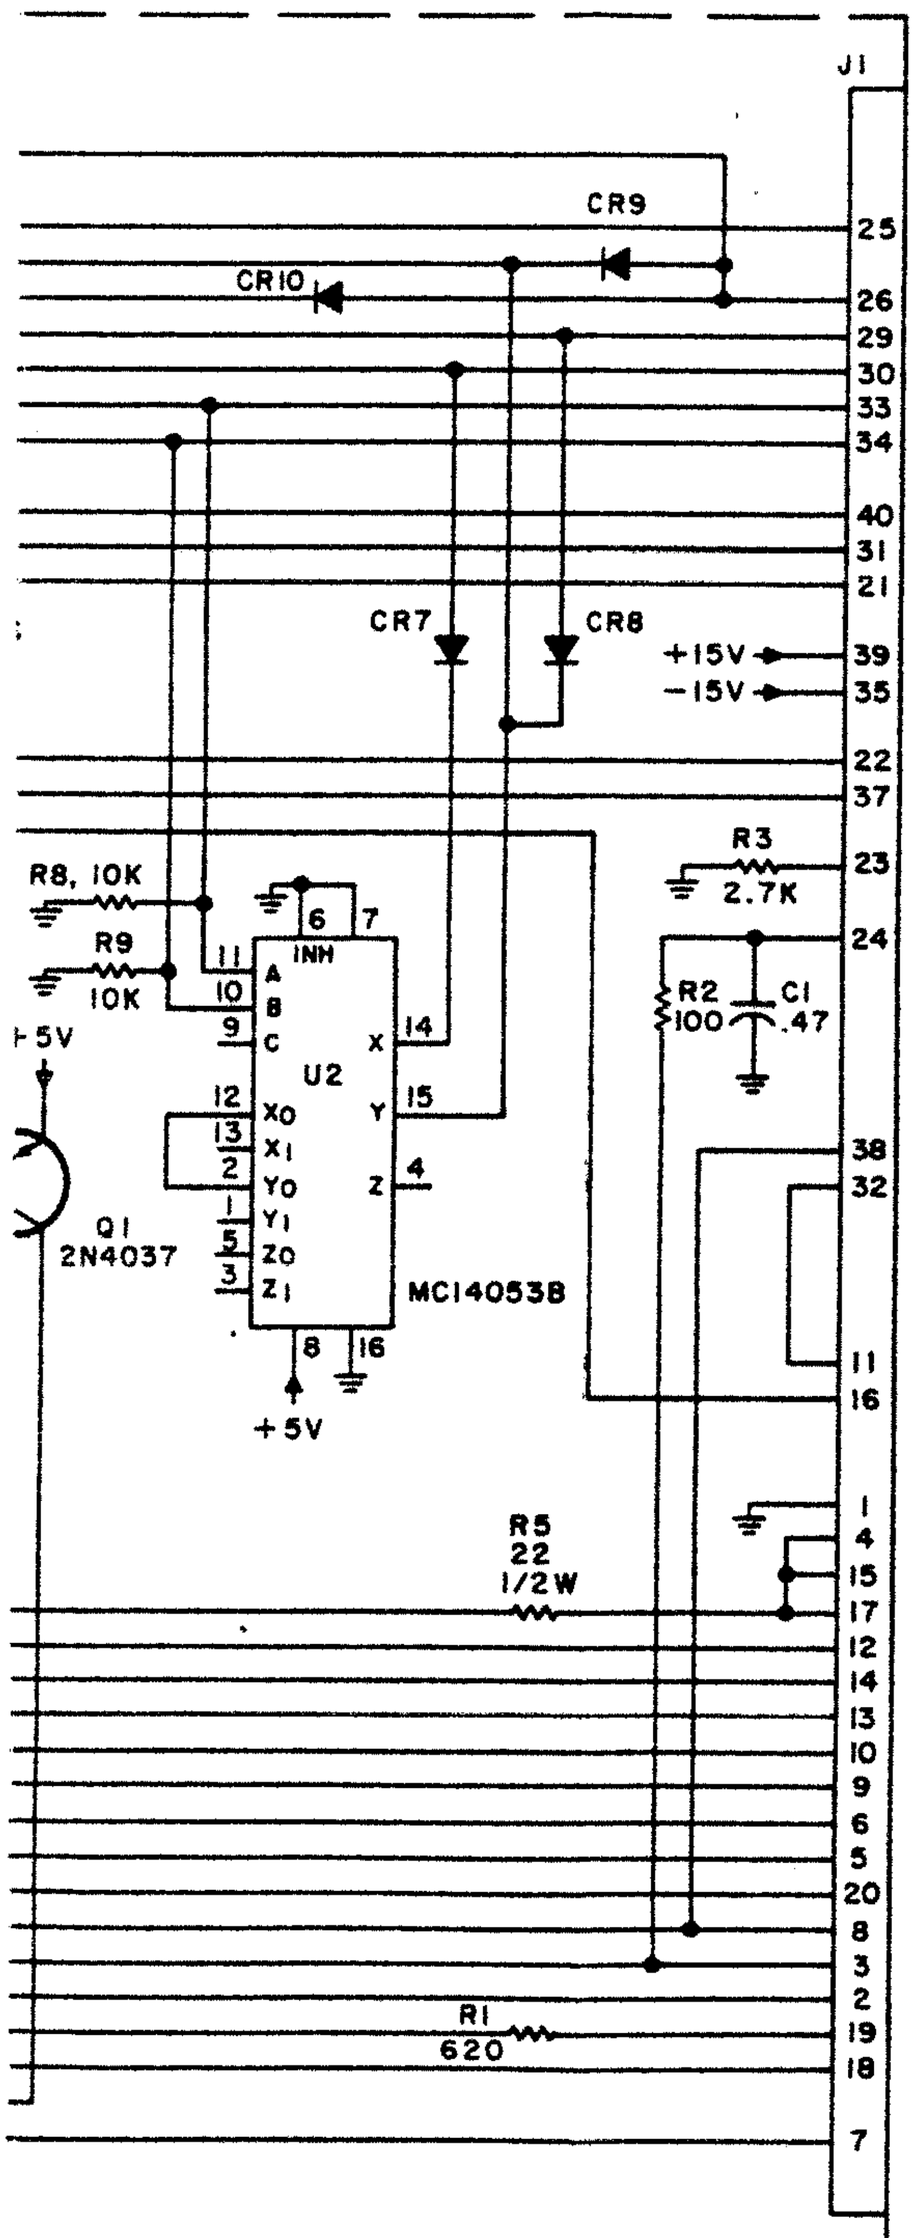



Figure 6-22. Type 791828 Front Panel Interconnect (A6A2) Schematic Diagram 470522

S:


UNLESS OTHERWISE SPECIFIED,
RESISTANCE IS IN OHMS, ±5%, 1/4W.

UIO PIN 16 IS +5V; UIO PIN 9 IS GND.

PIN ARRANGEMENT FOR ICs IS SHOWN IN DETAILS A-C.


DIFFERENCE BETWEEN TYPES IS MECHANICAL ONLY.

DETAIL A
U1-U7






TOP VIEW

DETAIL B
U8, U9




DETAIL C
U10

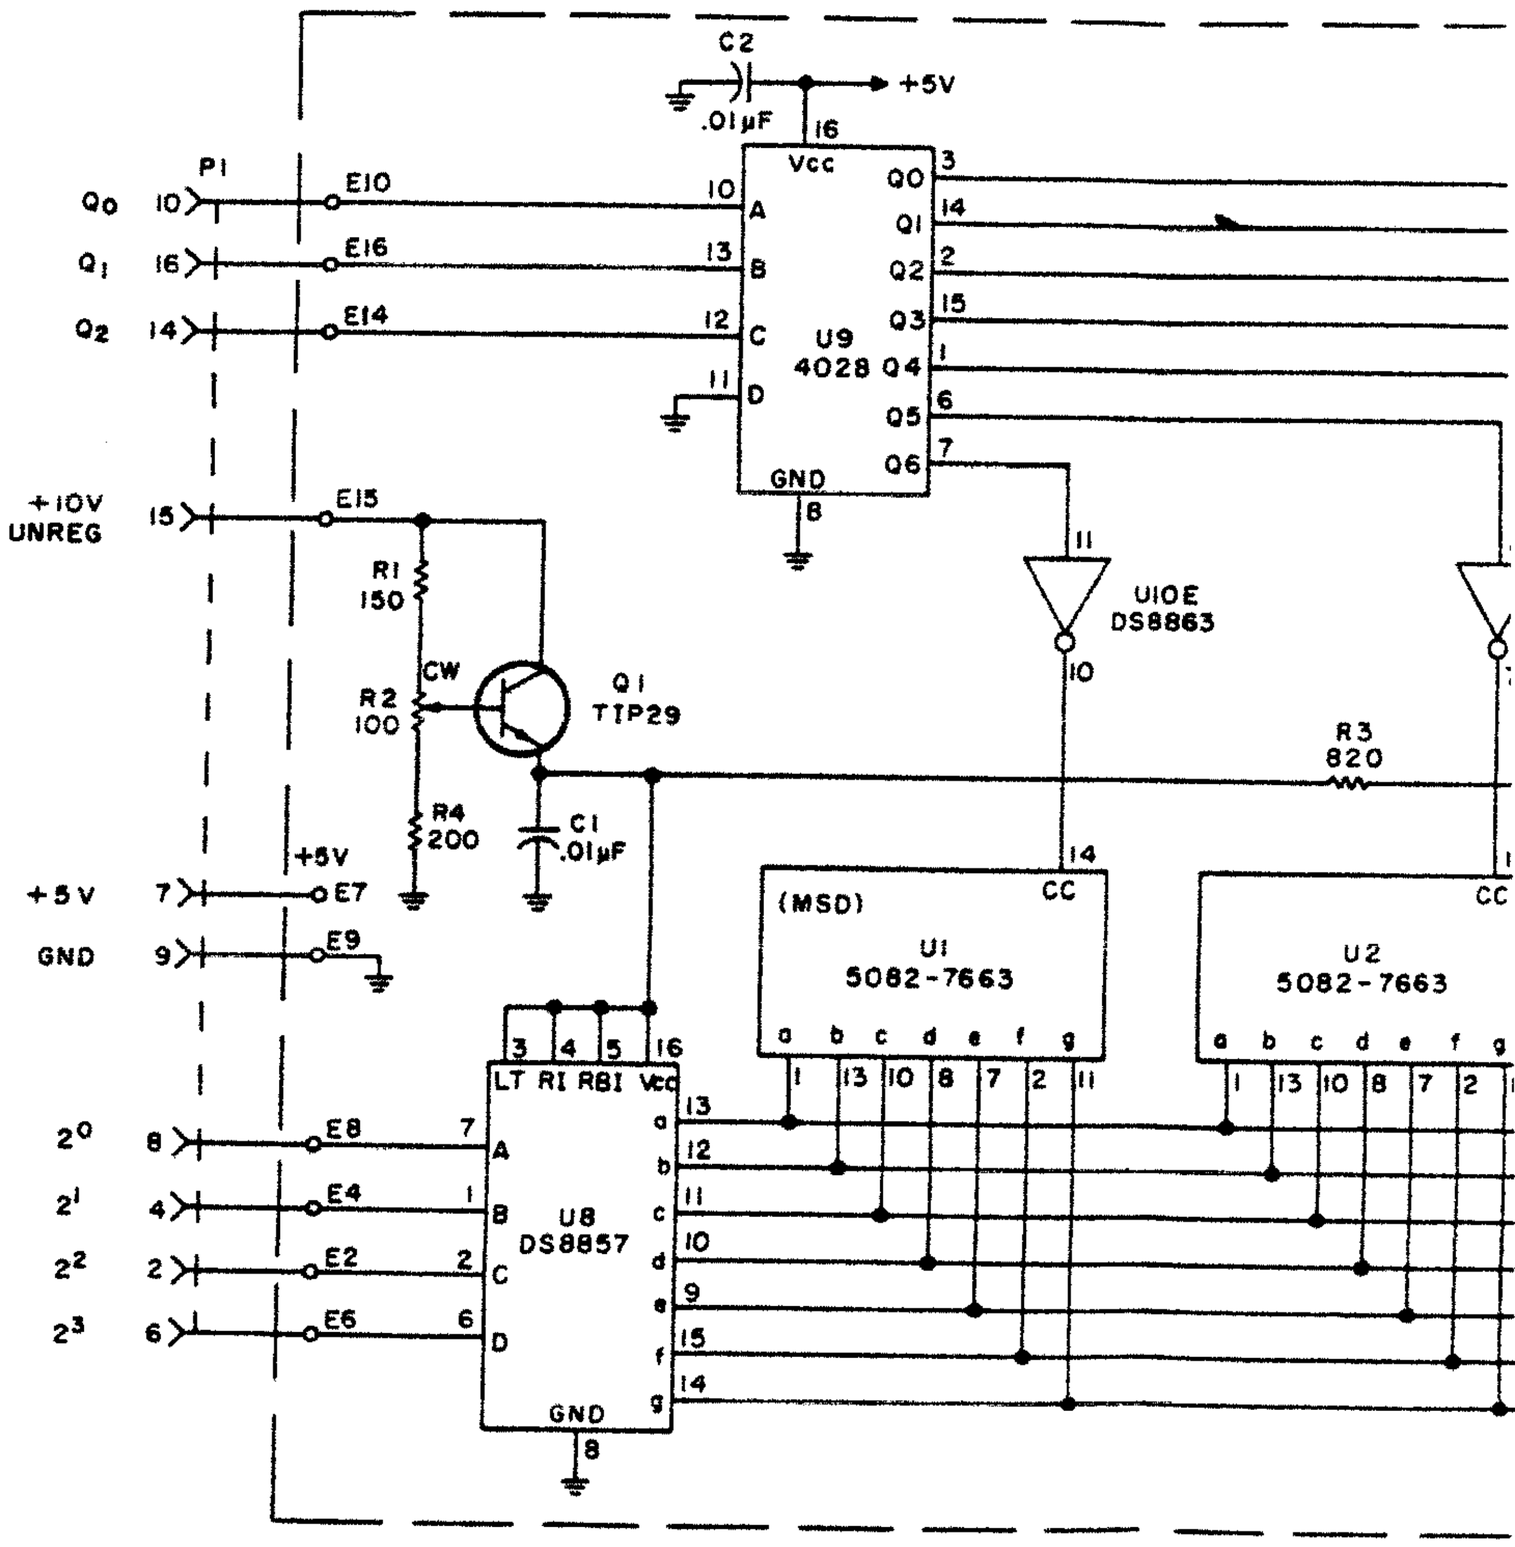

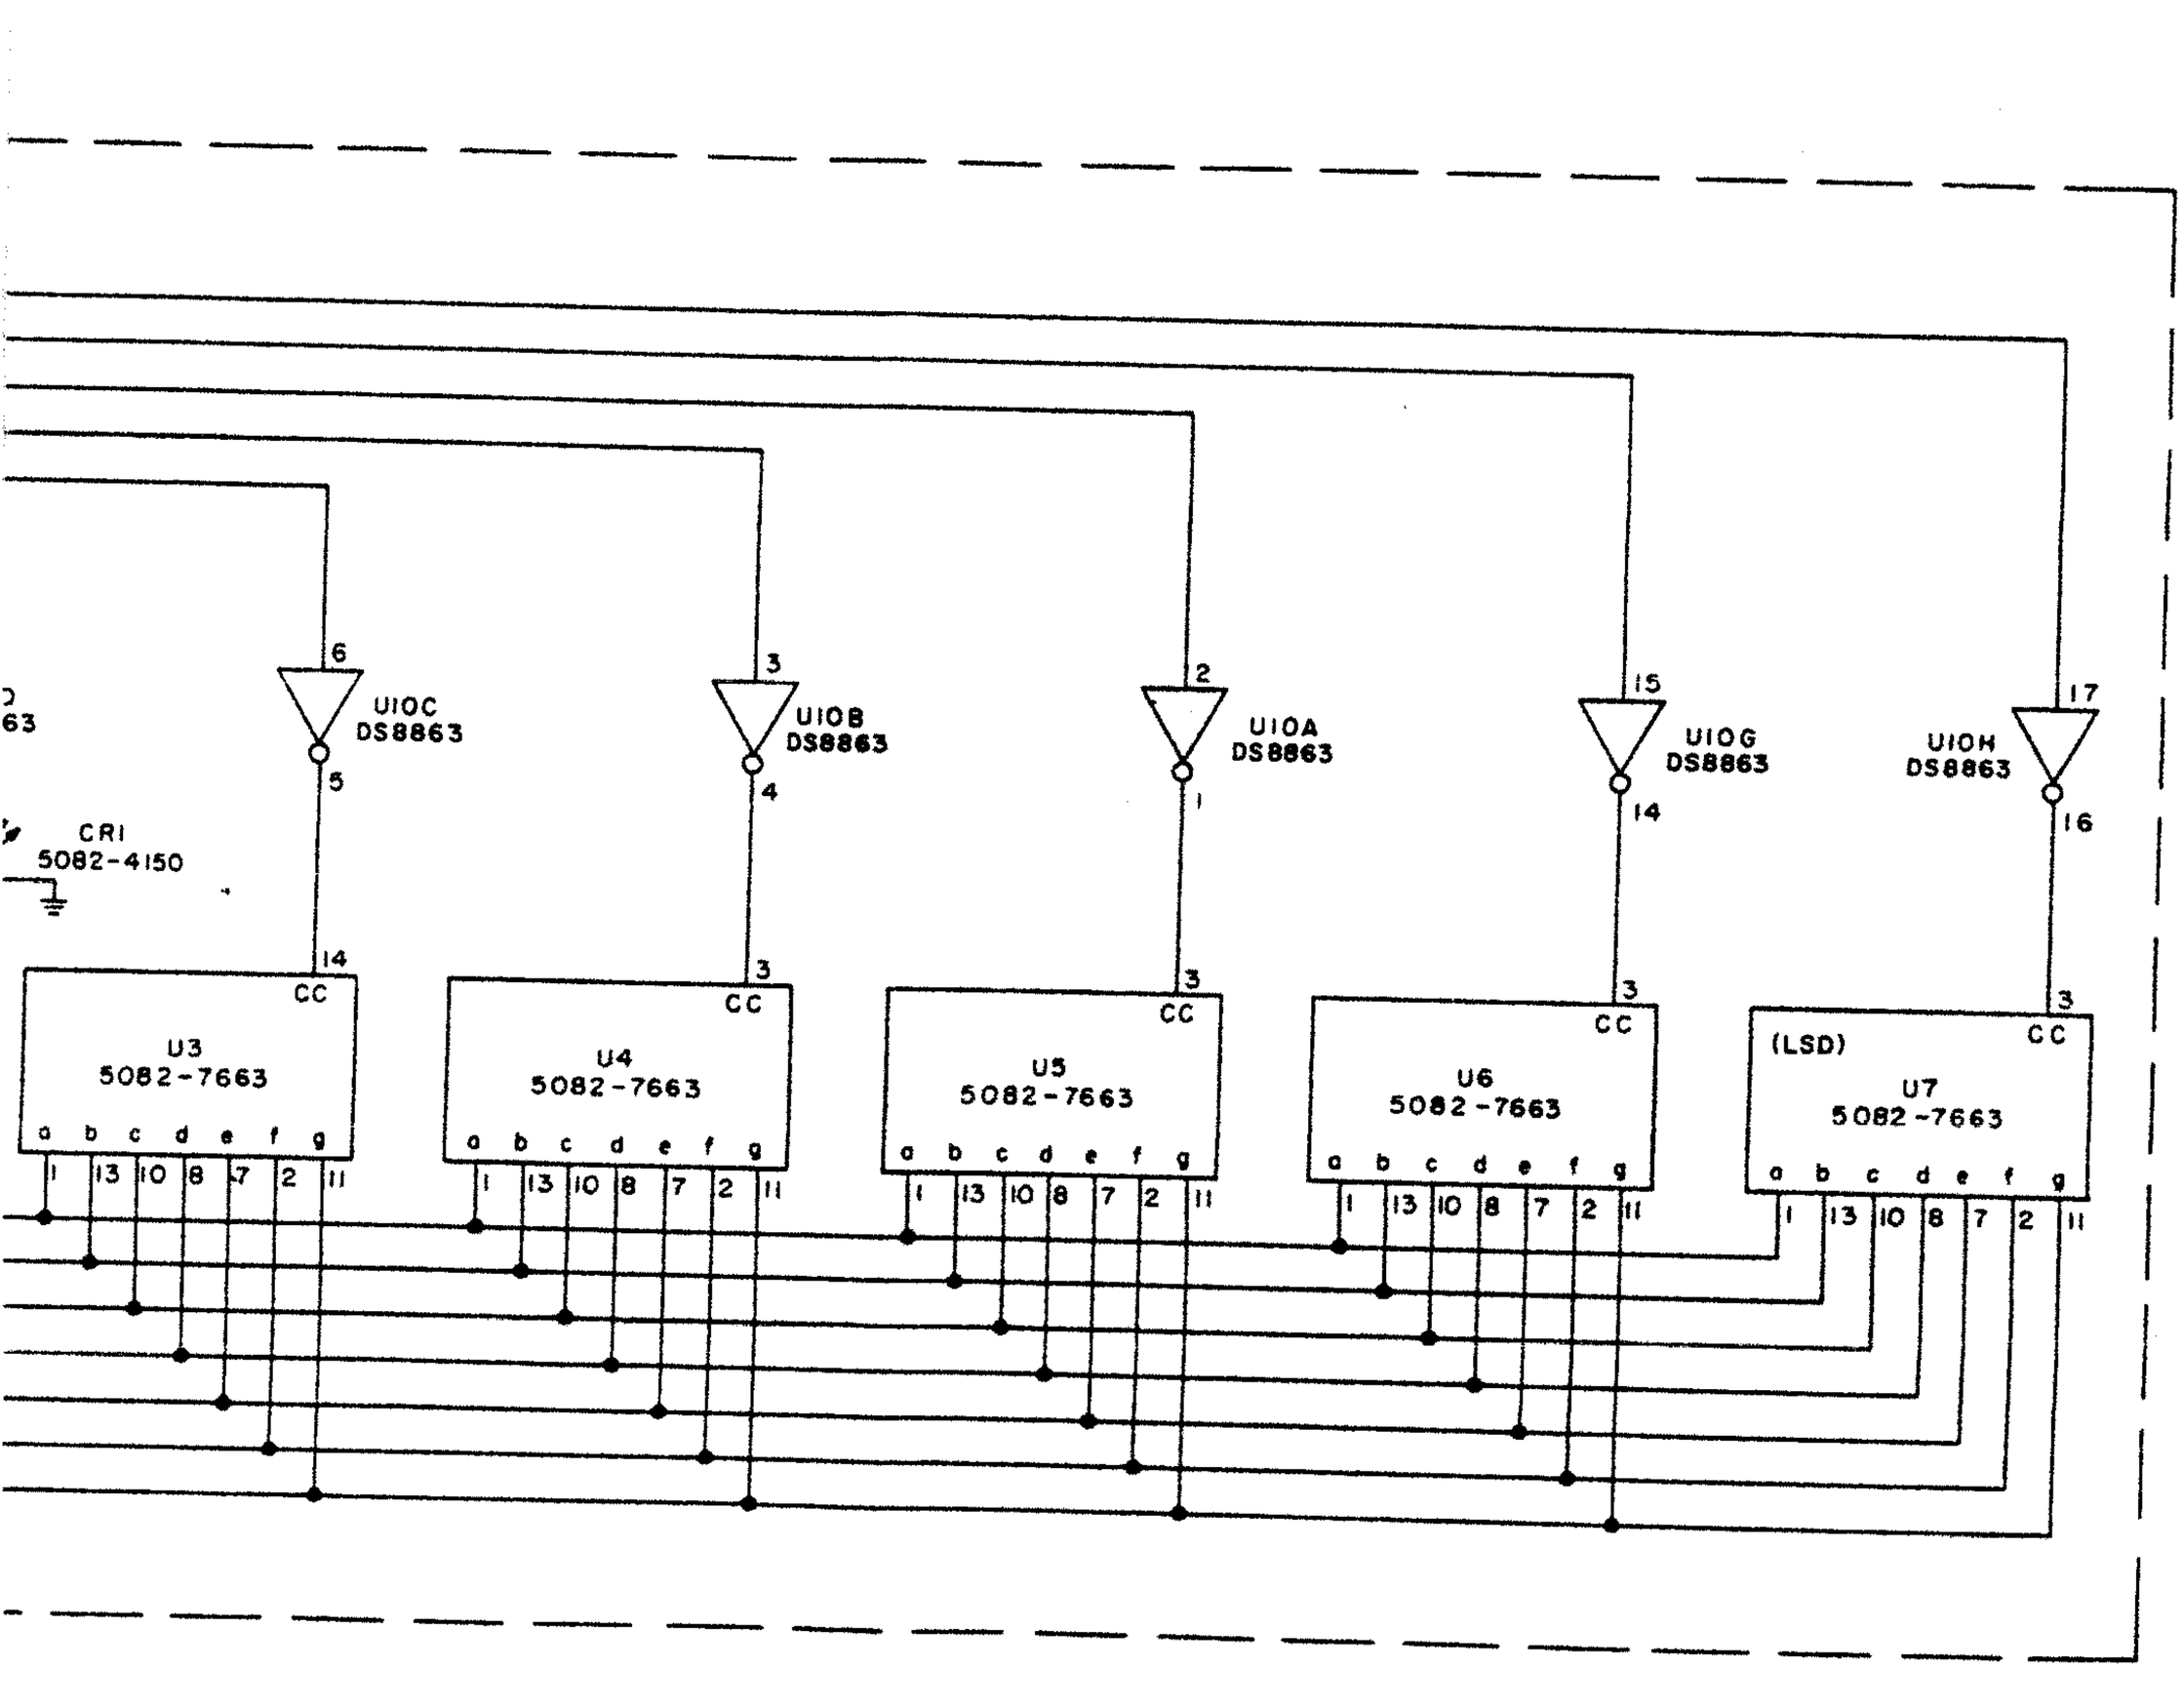



Figure 6-23. Type 791578 Frequency Display (A8)
Schematic Diagram 43242


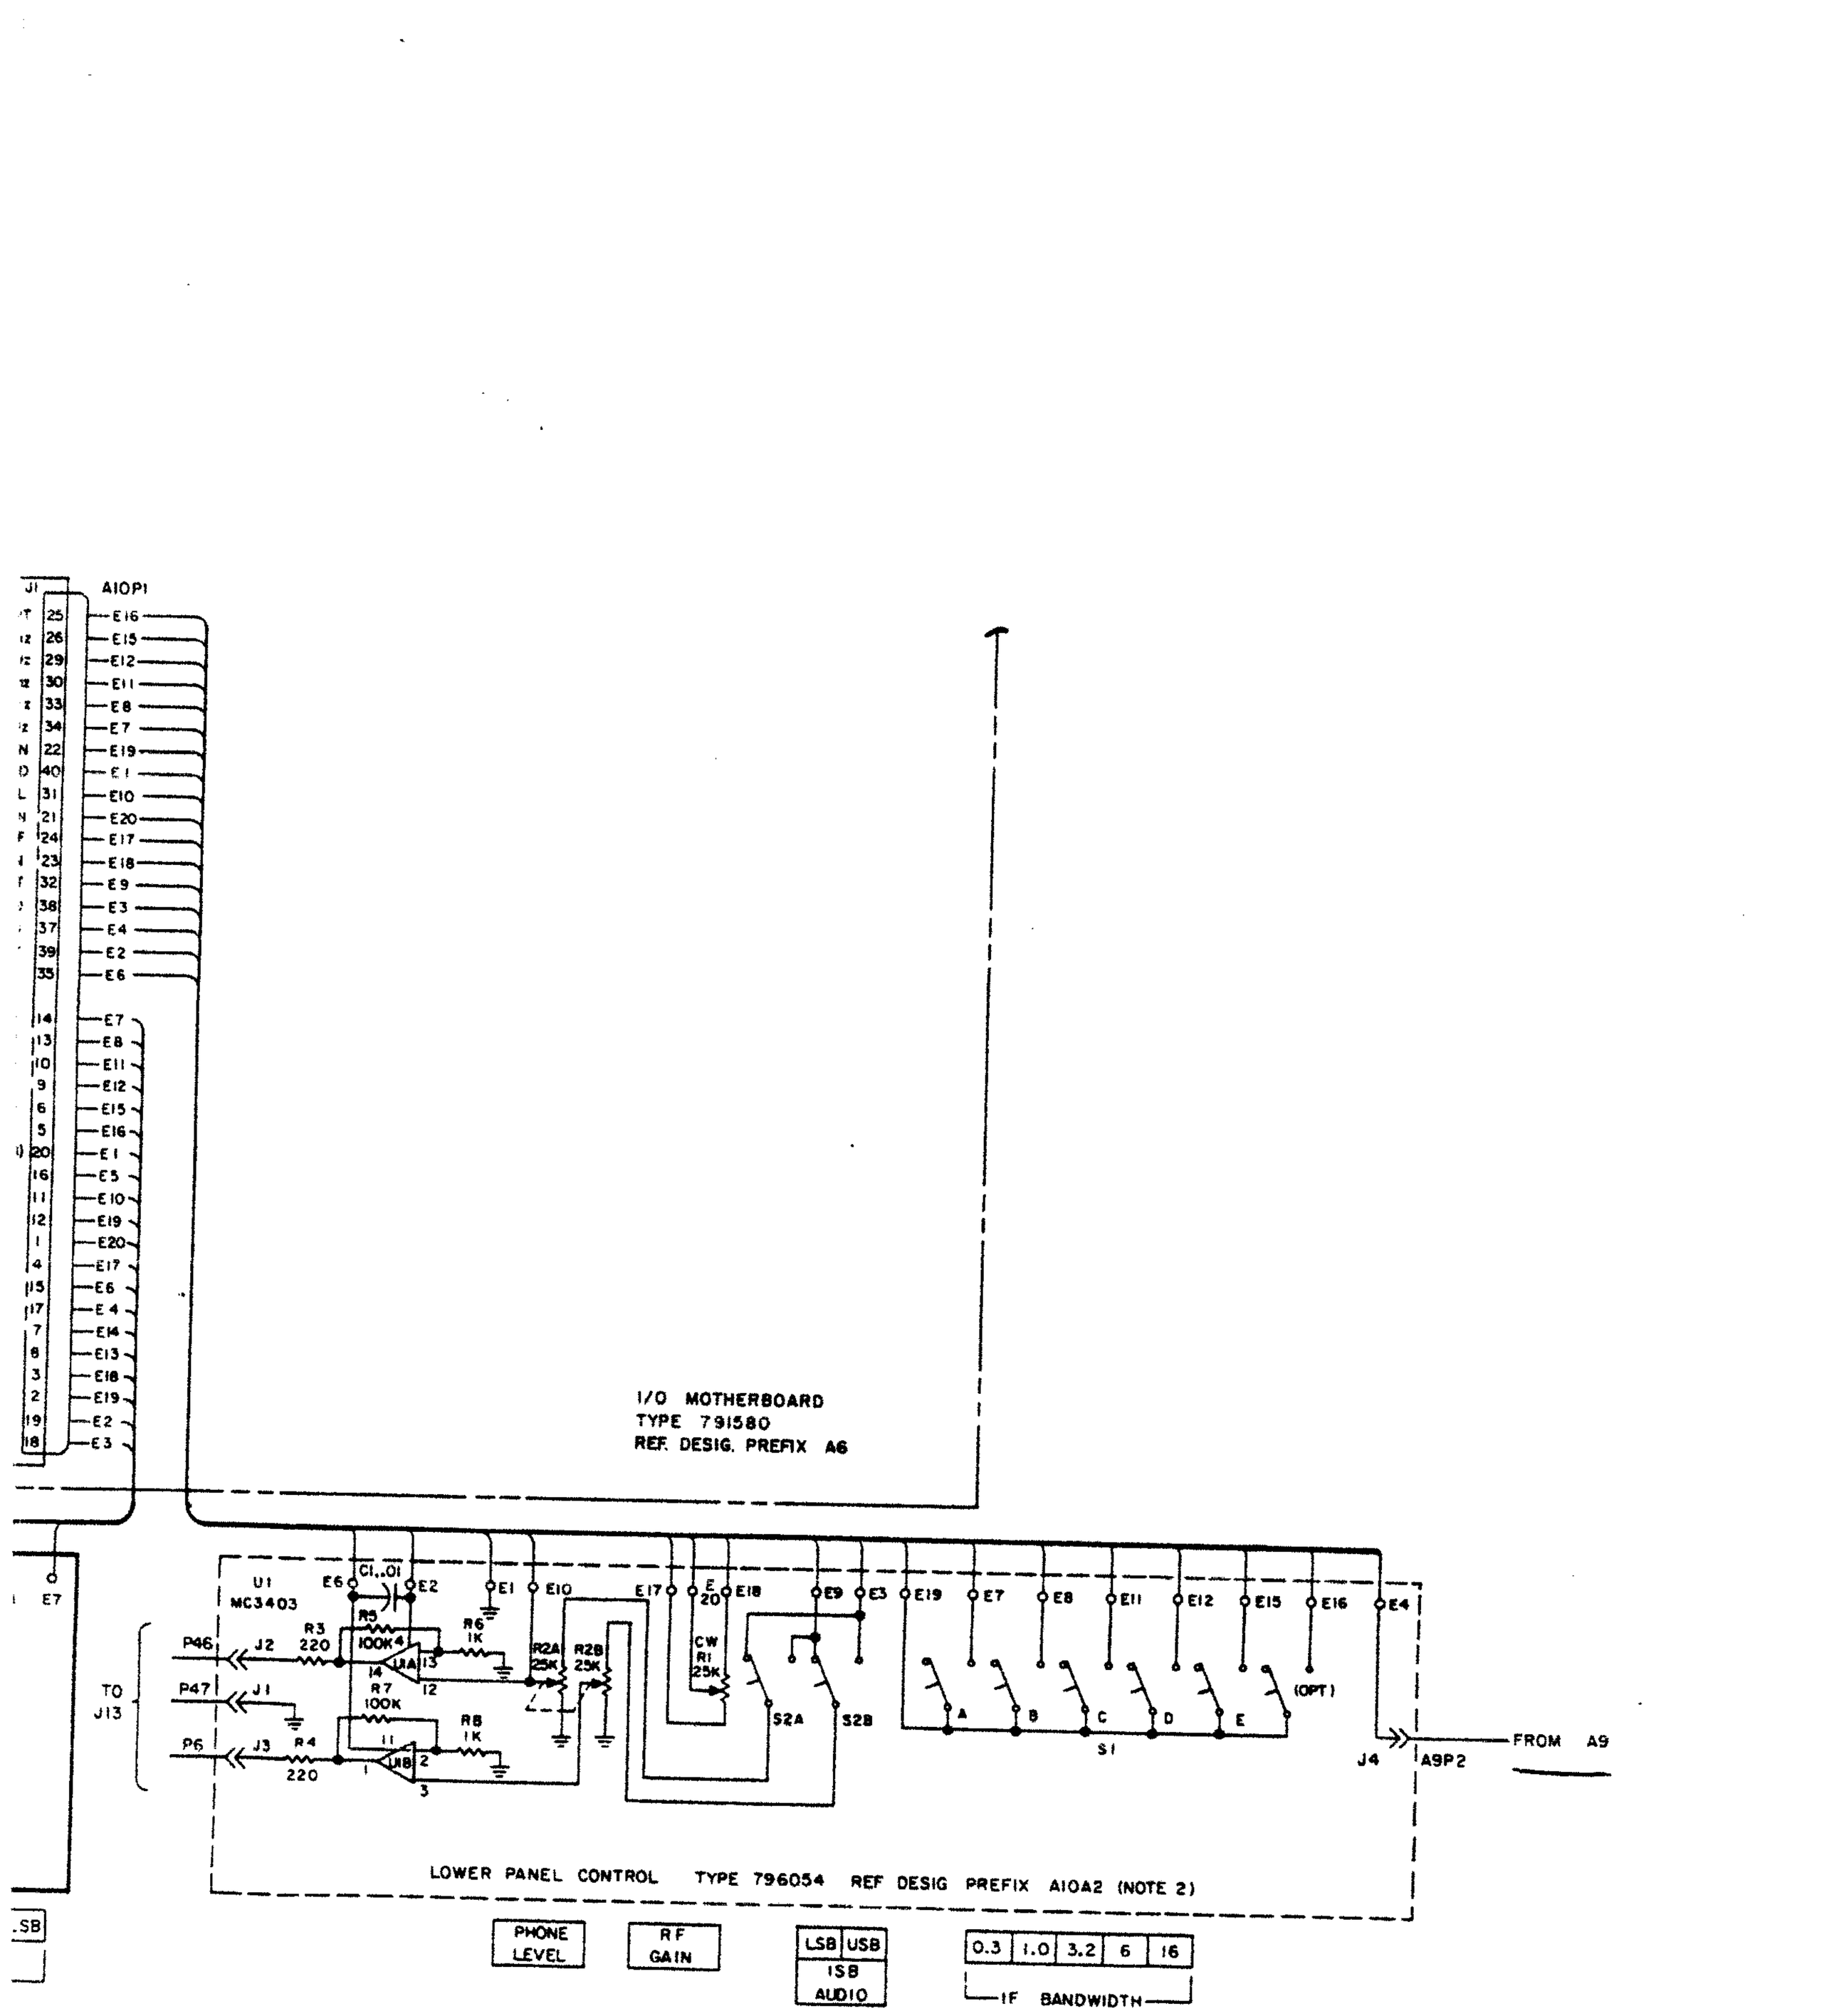



Figure 6-24. Type 796053 Front Panel Control (A10) Schematic Diagram 480074

NOTES:

1. THIS SCHEMATIC IS A SUPPLEMENT TO 61218 (WJ-8718 MAIN FRAME SCHEMATIC) TO DEPICT A WJ-8718-6.
2. PHANTOM LINES INDICATE EXISTING MODULES.
3. A1OA1, A1OA2 ARE PART OF:
   FRONT PANEL CONTROL
   TYPE 796053
   REF. DESIG. PREFIX A1O
4. UNLESS OTHERWISE SPECIFIED:
   a. RESISTANCE IS IN OHMS 5%, 1/4W.

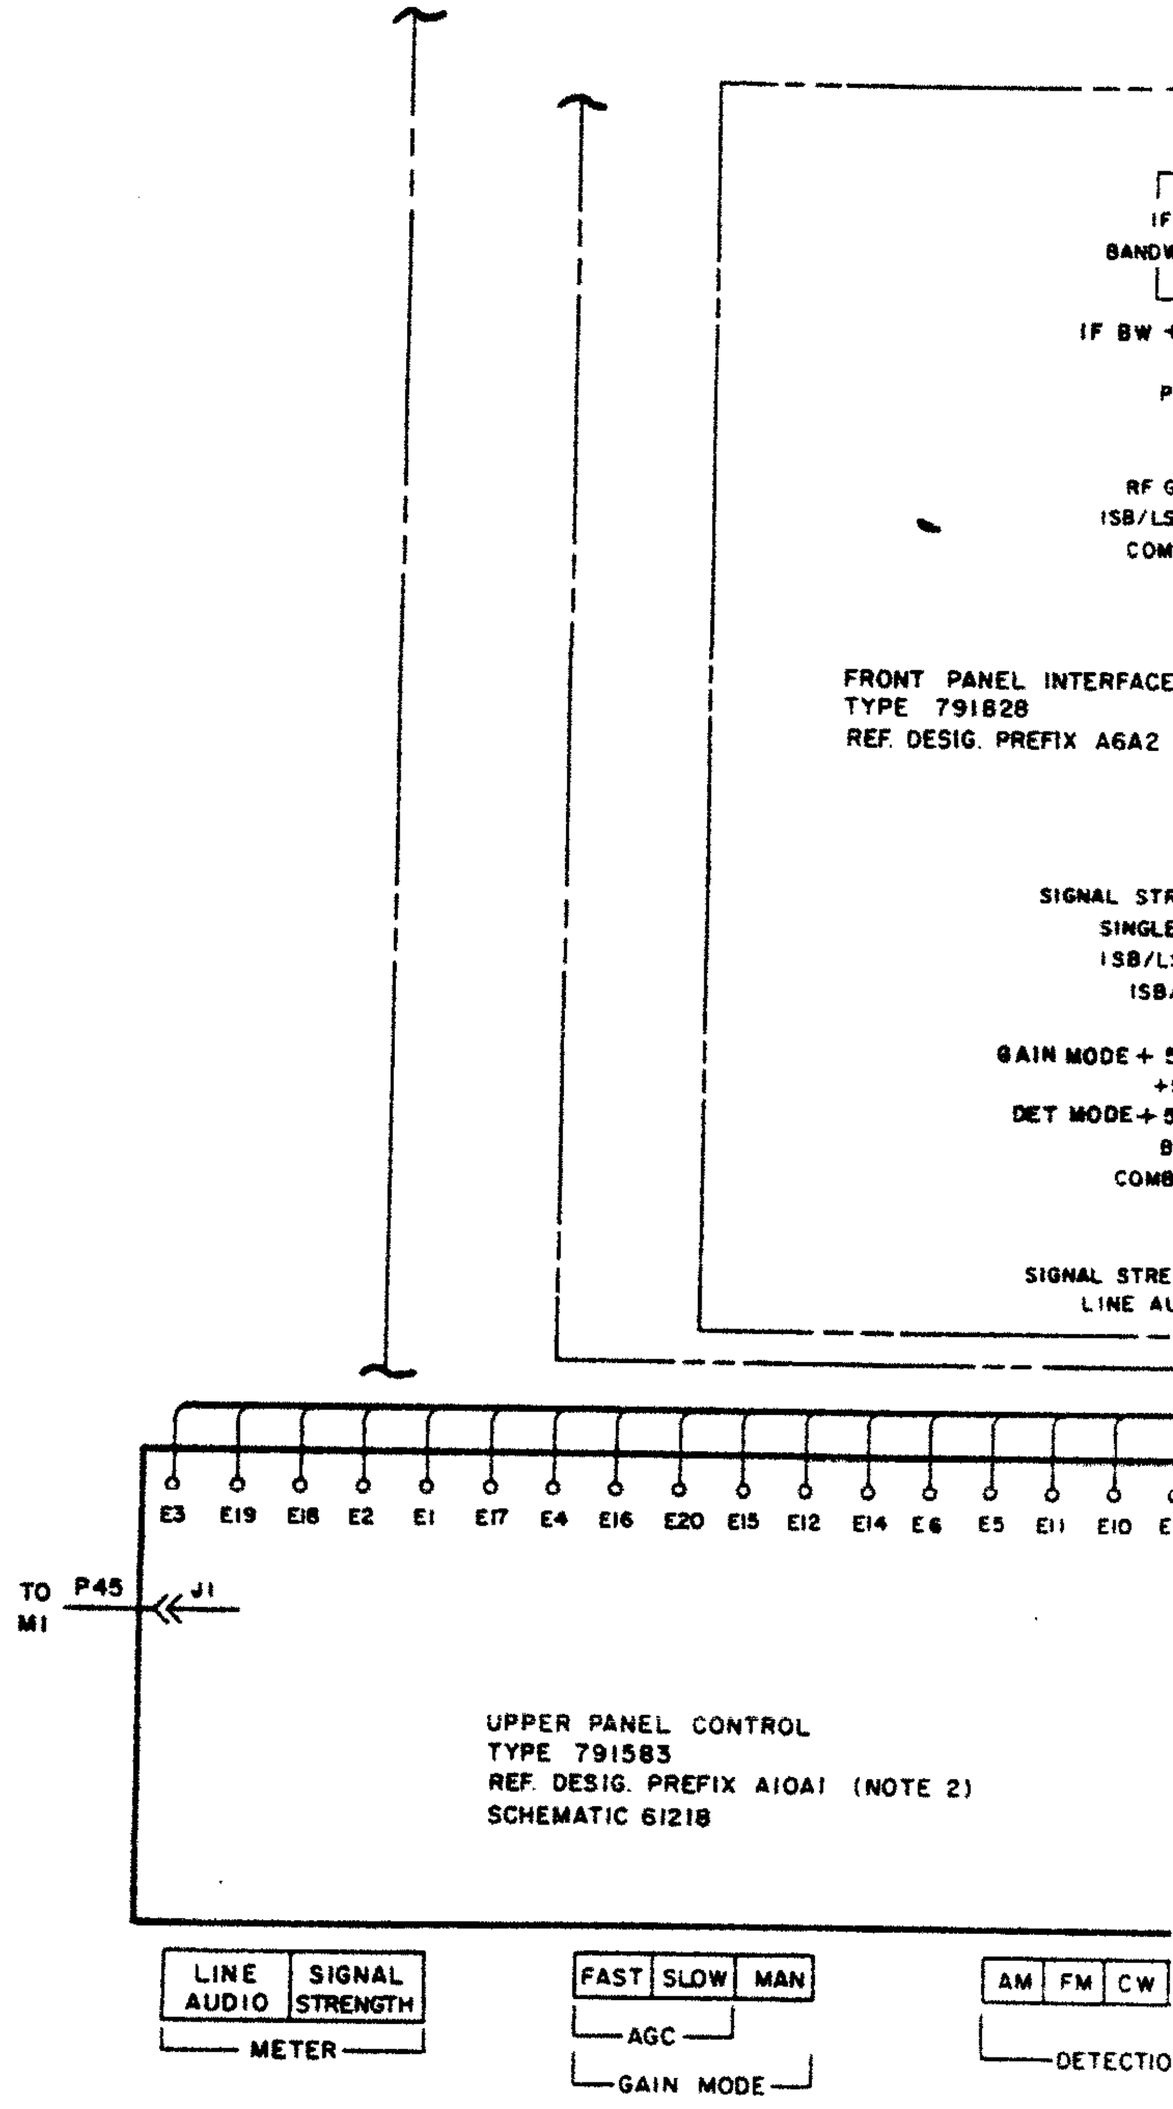


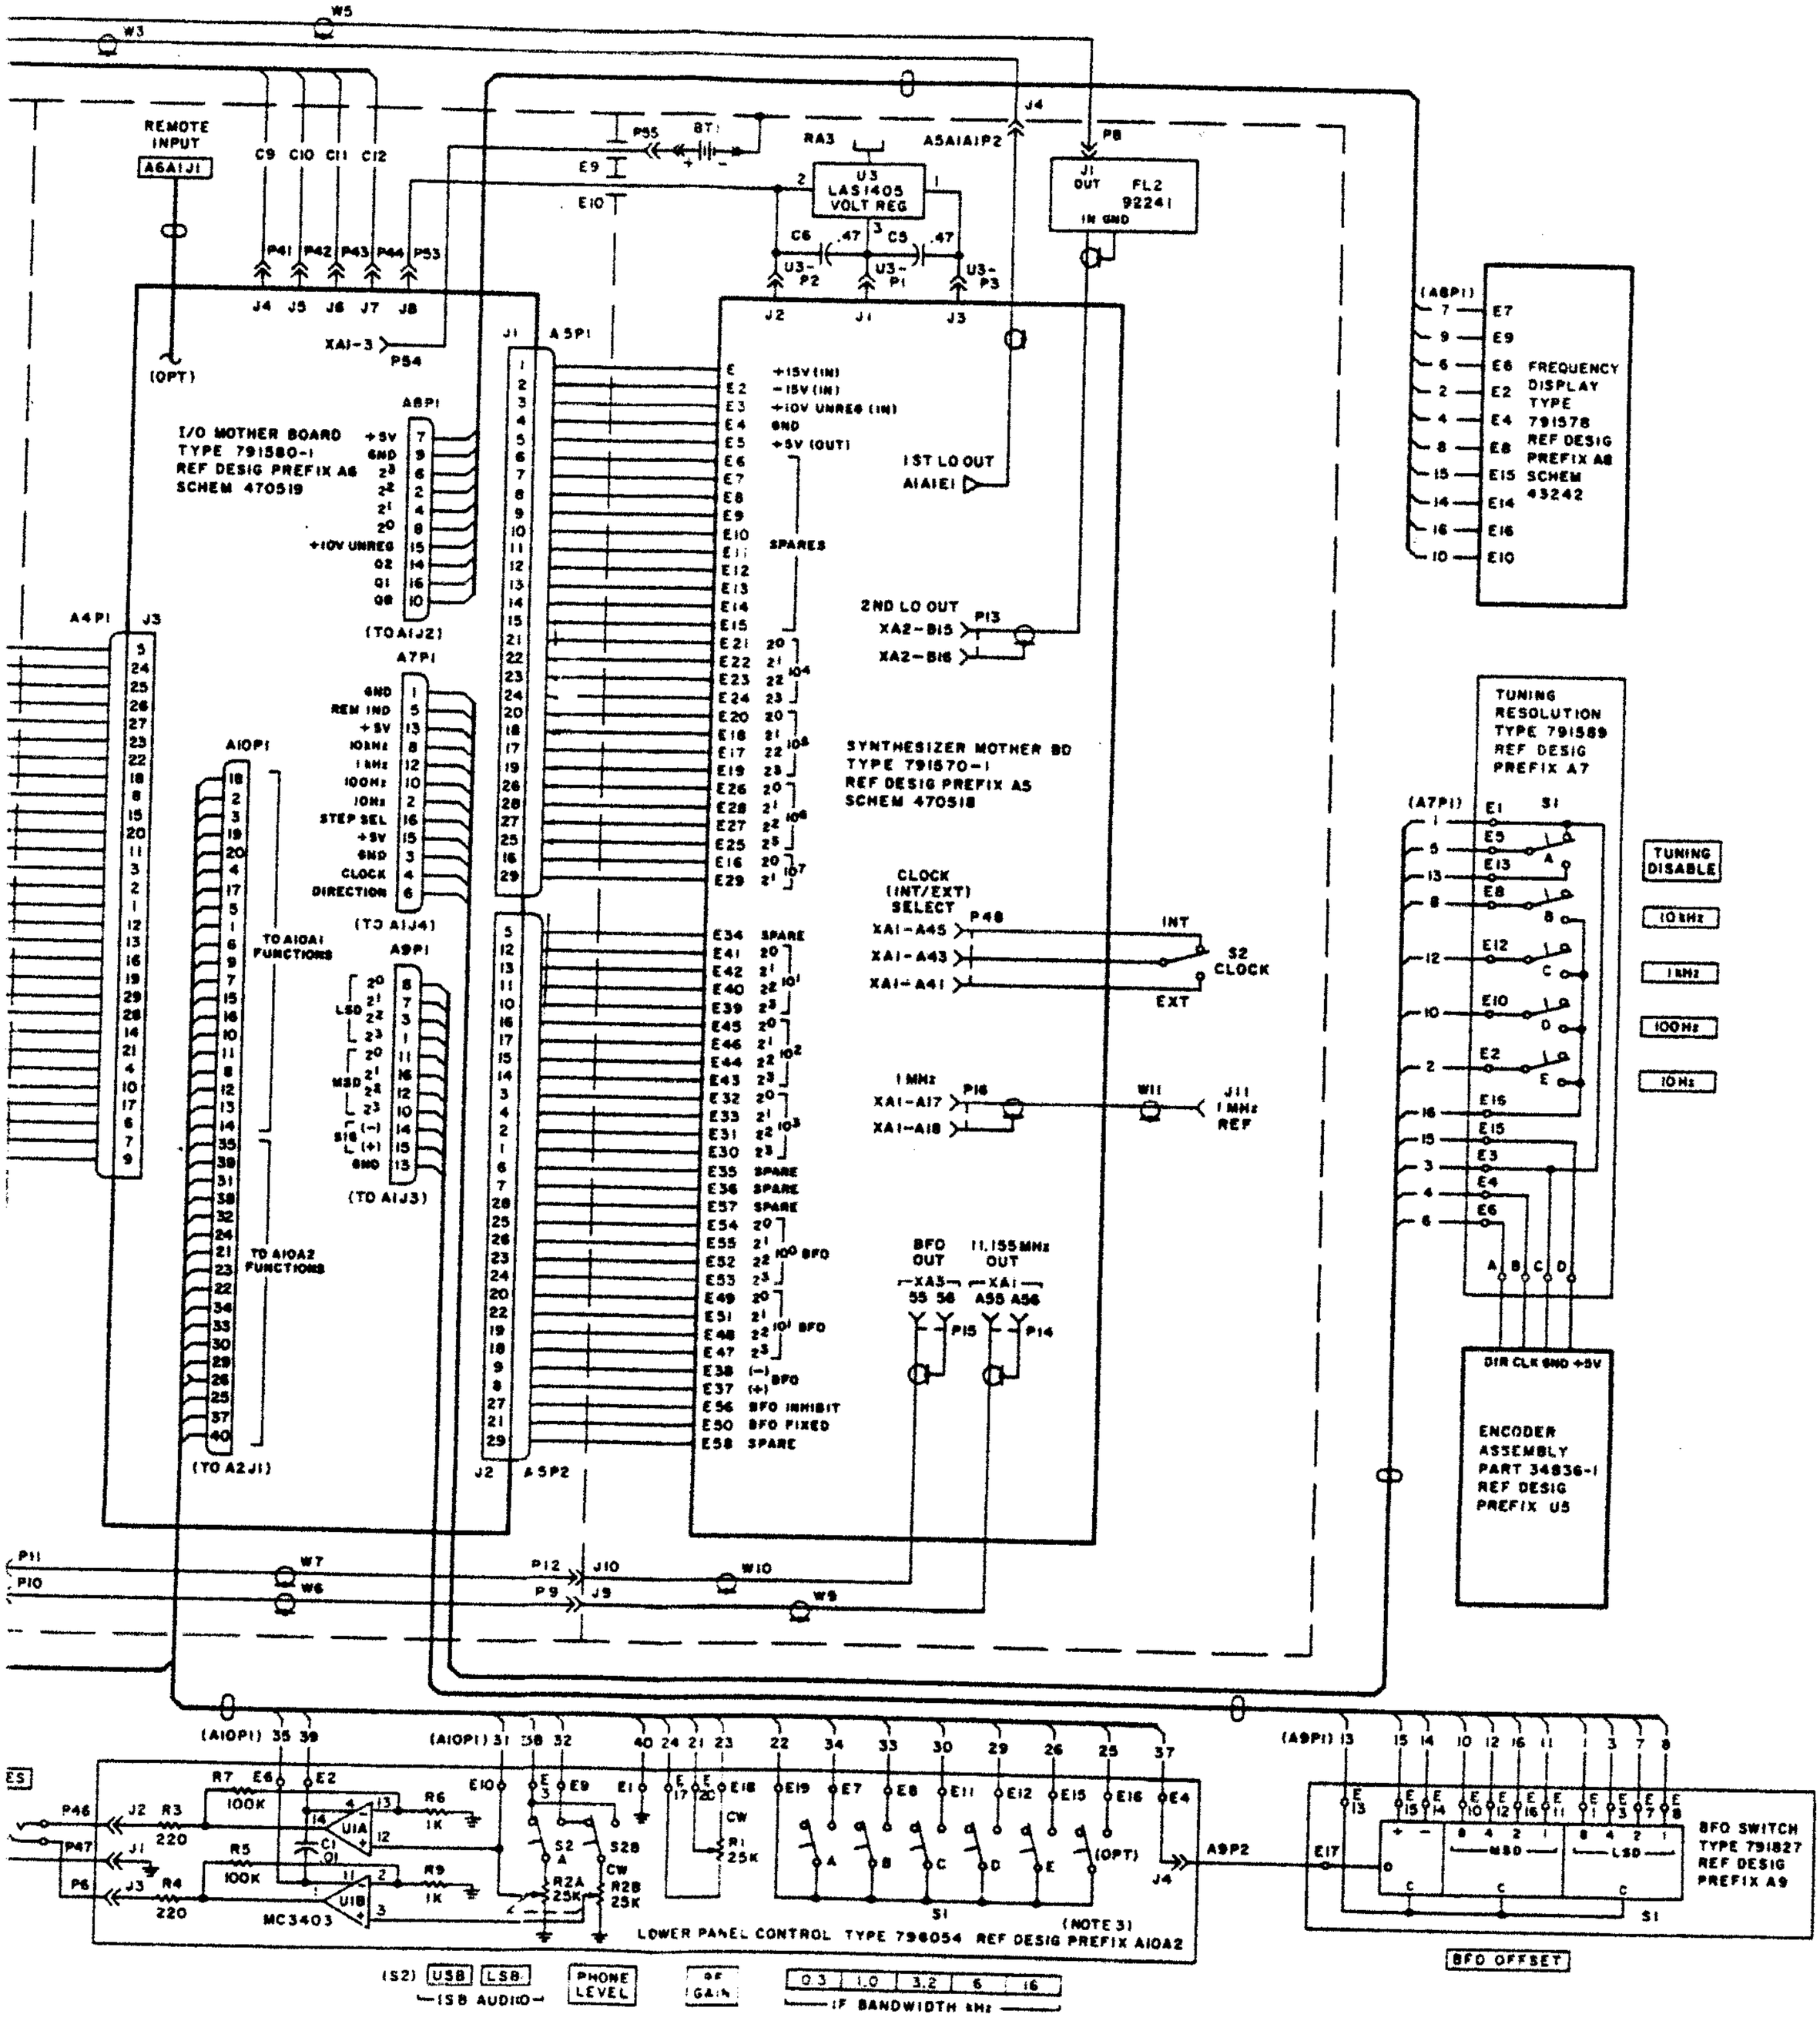
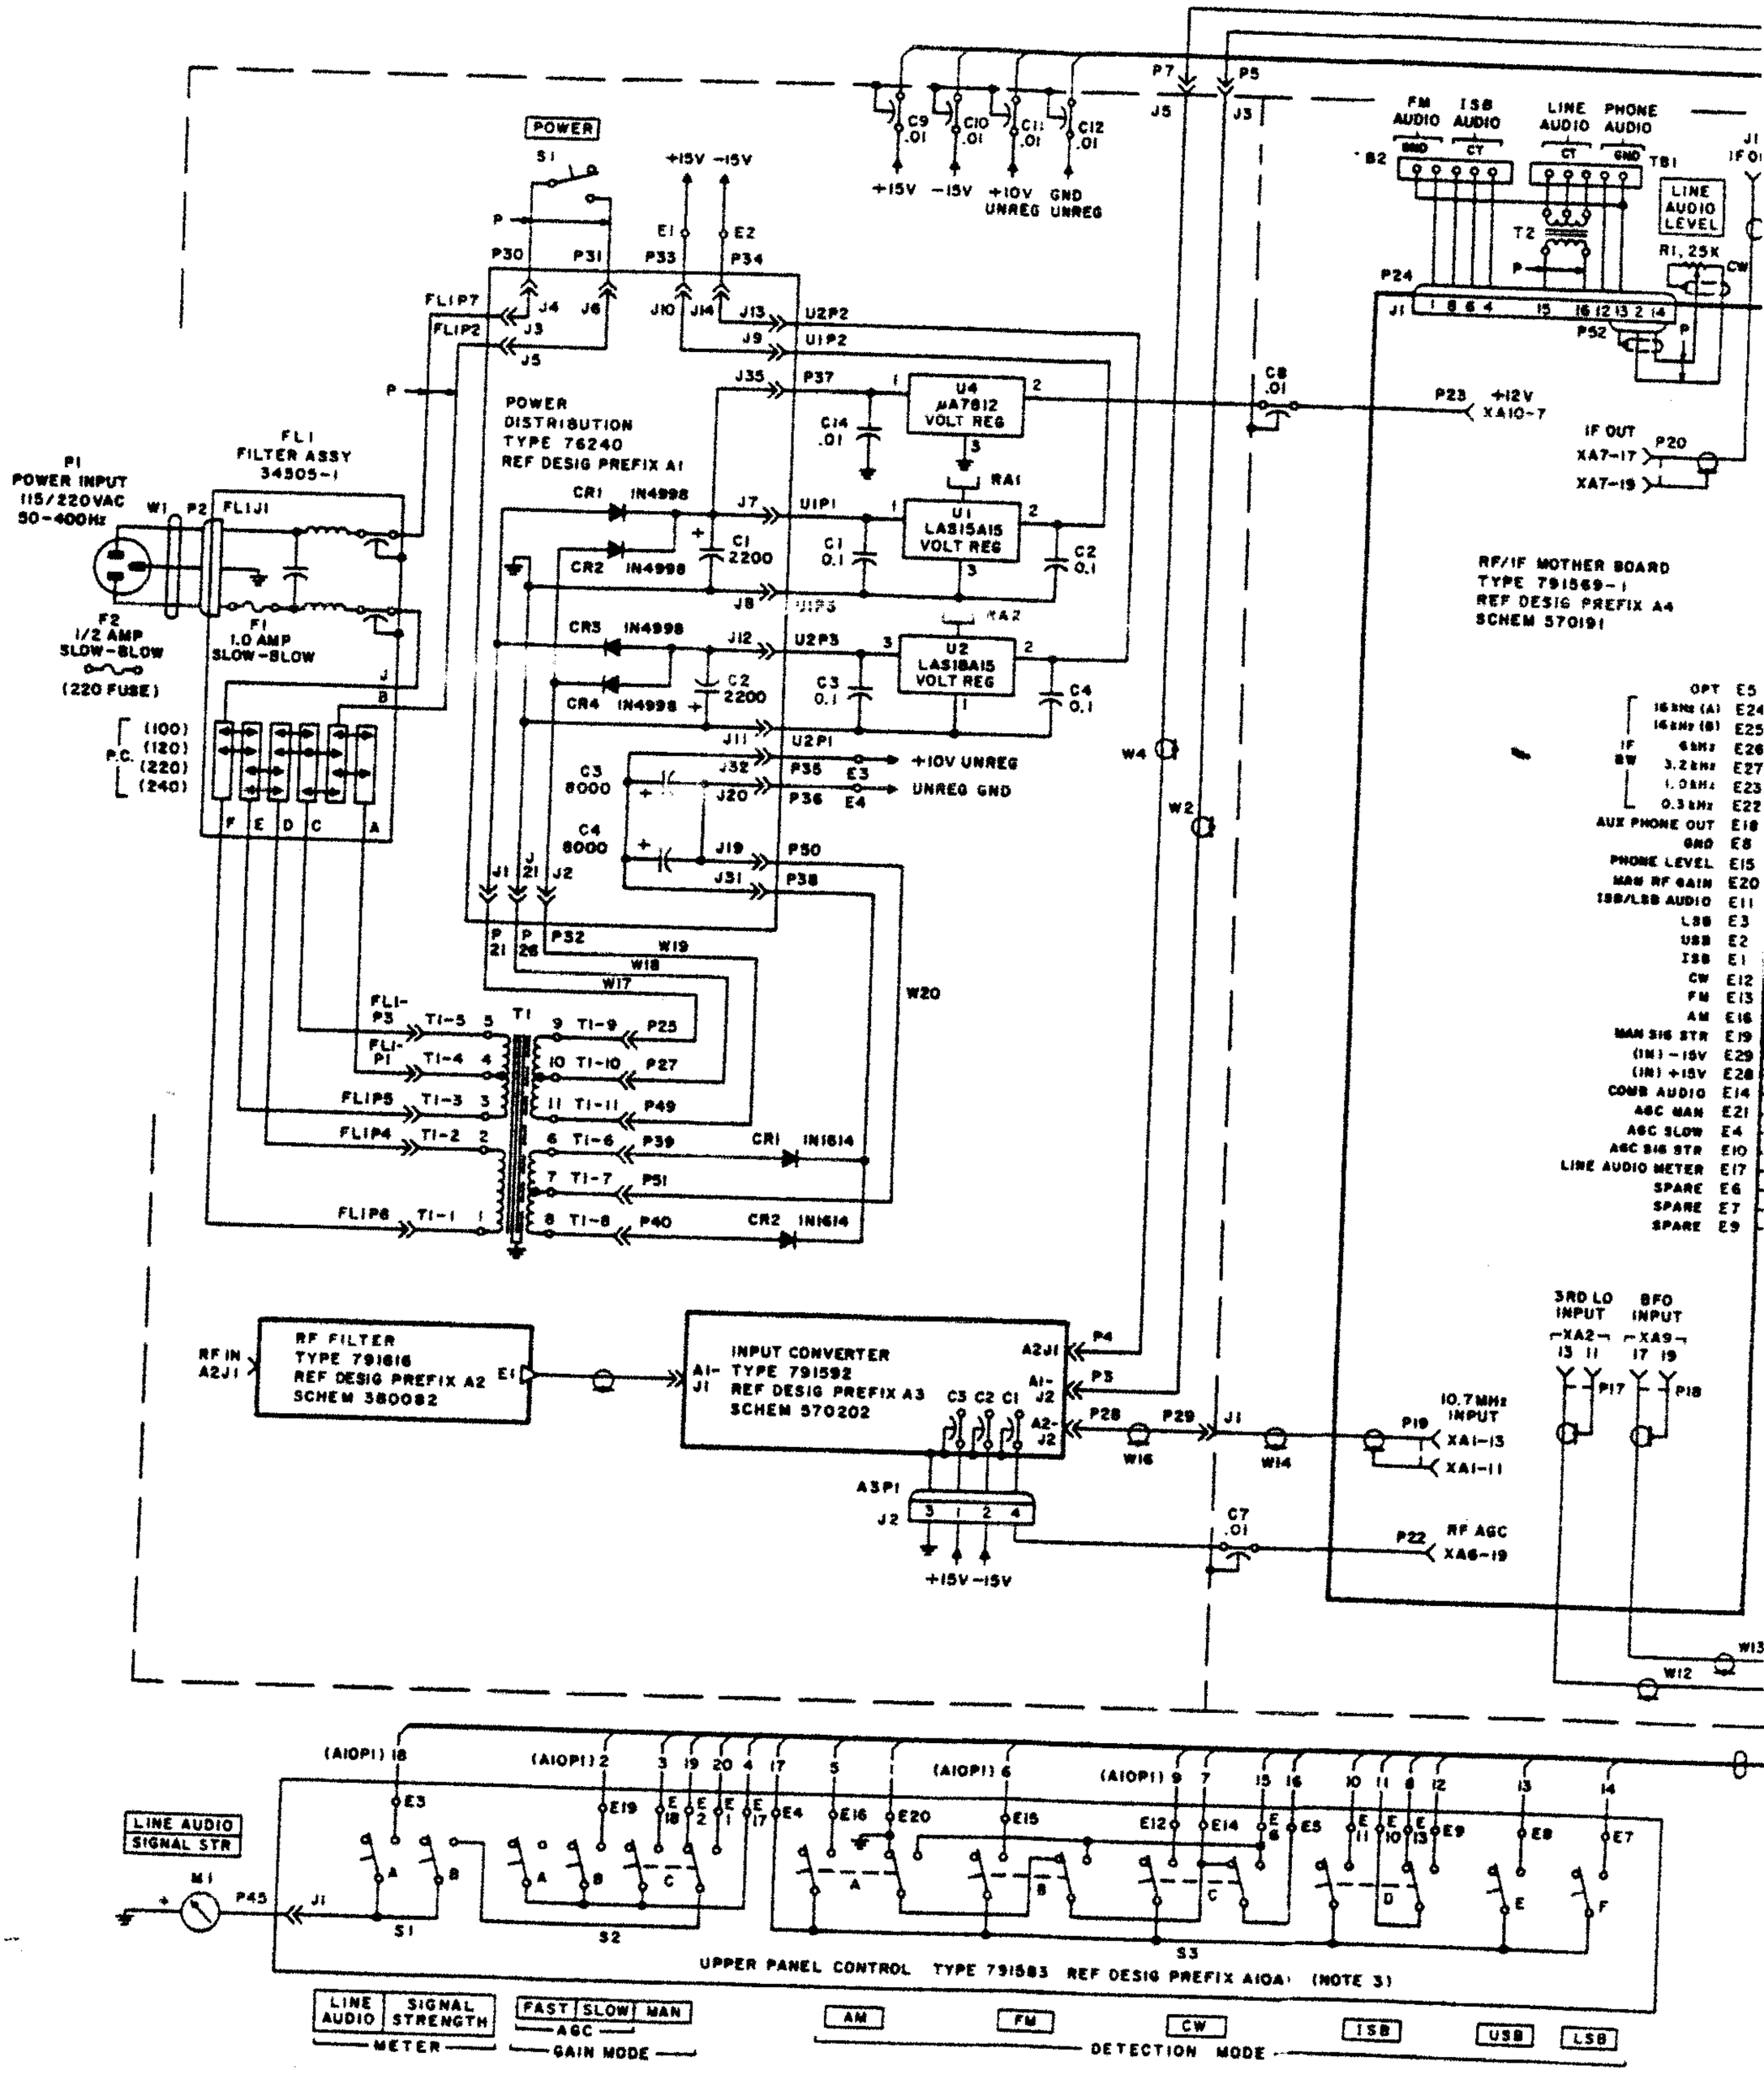



Figure 6-25. Type WJ-8718A HF Receiver, Main Chassis Schematic Diagram 670058


POWER
S1
+15V -15V
E1 E2
P30 P31 P33 P34
FLIP7 J4 J6 J10 J14 J13 U2P2
FLIP2 J3 J9 U1P2
J5
P
POWER
DISTRIBUTION
TYPE 76240
REF DESIG PREFIX A1
J35 P37
U4 µA7812 VOLT REG
C14 .01
RA1
CR1 IN4998
J7 U1P1
U1 LA5I5AI5 VOLT REG
C1 2200
C1 0.1
C2 0.1
CR2 IN4998
J8 U1P3
RA2
CR3 IN4998
J12 U2P3
U2 LA5I8AI5 VOLT REG
C2 2200
C3 0.1
C4 0.1
CR4 IN4998
J11 U2P1
+10V UNREG
UNREG GND
C3 8000
J32 P35 E3
J20 P36 E4
C4 8000
J19 P50
J31 P38
P1
POWER INPUT
115/220VAC
50-400Hz
W1 P2 FL1J1
FL1
FILTER ASSY
34505-1
F2
1/2 AMP
SLOW-BLOW
(220 FUSE)
F1
1.0 AMP
SLOW-BLOW
J
B
P.C. (100) (120) (220) (240)
F E D C A
J1 J J2
P 21 P 26 P32
W19
W18
W17
W20
FLI-P3 TI-5 5
FLI-P1 TI-4 4
FLIP5 TI-3 3
FLIP4 TI-2 2
FLIP6 TI-1 1
TI
9 TI-9 P25
10 TI-10 P27
11 TI-11 P49
6 TI-6 P39
7 TI-7 P51
8 TI-8 P40
CR1 IN1614
CR2 IN1614
P7
P5
J5
J3
C9 .01
C10 .01
C11 .01
C12 .01
+15V -15V +10V UNREG GND UNREG
C8 .01
P23 +12V XA10-7
FM AUDIO
ISB AUDIO
LINE AUDIO
PHONE AUDIO
GND CT CT GND
B2
TB1
T2
LINE AUDIO LEVEL
R1, 25K CW
P24
J1 1 8 6 4 15 16 12 13 2 14
P52
IF OUT P20
XA7-17
XA7-19
RF/IF MOTHER BOARD
TYPE 791569-1
REF DESIG PREFIX A4
SCHEM 570191
W4
W2
OPT E5
IF BW 16 kHz (A) E24
16 kHz (B) E25
6 kHz E26
3.2 kHz E27
1.0 kHz E23
0.3 kHz E22
AUX PHONE OUT E18
GND E8
PHONE LEVEL E15
MAN RF GAIN E20
ISB/LSB AUDIO E11
LSB E3
USB E2
ISB E1
CW E12
FM E13
AM E16
MAN SIG STR E19
(IN) -15V E29
(IN) +15V E28
COMB AUDIO E14
AGC MAN E21
AGC SLOW E4
AGC SIG STR E10
LINE AUDIO METER E17
SPARE E6
SPARE E7
SPARE E9
RF IN A2J1
RF FILTER
TYPE 791616
REF DESIG PREFIX A2
SCHEM 380082
E1
A1-J1
INPUT CONVERTER
TYPE 791592
REF DESIG PREFIX A3
SCHEM 570202
A2J1
P4
P3
A1-J2
A2-J2
P28 P29 J1
W16
W14
P19
10.7MHz INPUT
XA1-13
XA1-11
C5 C2 C1
A3P1
J2
3 1 2 4
+15V -15V
C7 .01
P22 RF AGC
XA6-19
3RD LO INPUT
BFO INPUT
XA2 13 11
XA9 17 19
P17
P18
W13
W12
(A1OP1) 18
(A1OP1) 2
3 19 20 4 17
5
(A1OP1) 6
(A1OP1) 9
7 15 16 10 11 8 12 13 14
E3 E19 E18 E2 E1 E17 E4 E16 E20 E15 E12 E14 E6 E5 E11 E10 E13 E9 E8 E7
LINE AUDIO SIGNAL STR
M1
P45 J1
S1 S2 S3
A B C D E F
UPPER PANEL CONTROL TYPE 791583 REF DESIG PREFIX A10A1 (NOTE 3)
LINE AUDIO
SIGNAL STRENGTH
METER
FAST SLOW MAN
AGC
GAIN MODE
AM FM CW ISB USB LSB
DETECTION MODE

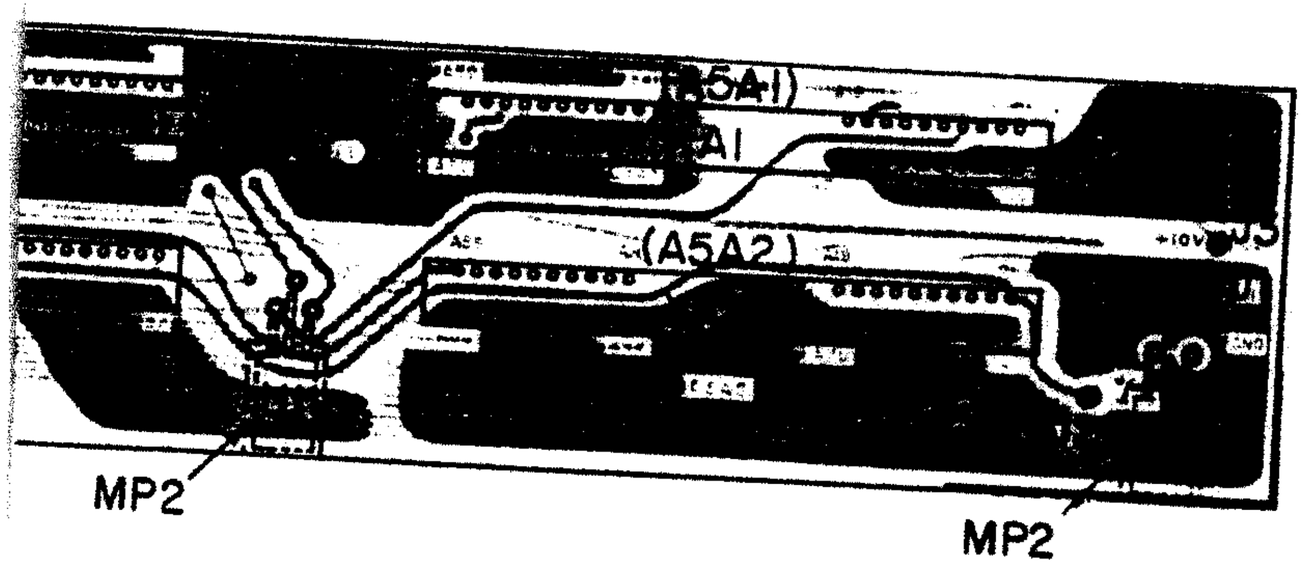
IDE VIEW





NOTES:

1. MOST MODULE PINS
   UNNECESSARY LIN
   PINS ON SOME MOD
   CAUSE OF COMPLEX
   DWG FOR CLARITY)
2. EACH CAPACITOR R
   TO EACH "E" NO.
3. TEST POINT DESCR

| | |
|---|---|
| TP1 | N/U |
| TP2 | 1MHz REF OU |
| TP3 | 3RD LO OUT |
| TP4 | N/U |
| TP5 | IST LO UNL |
| TP6 | IST LO TUN |
| TP7 | 2ND LO MAI |
| TP8 | 2ND LO 32.2 |
| TP9 | 10kHz |
| TP10 | 2ND LO UNL |
| TP11 | N/U |
| TP12 | 2ND LO 32 M |
| TP13 | 2ND LO OUT |
| TP14 | 1kHz |
| TP15 | BFO TUNING |
| TP16 | BFO OUT |
| TP17 | FIXED BFO |
| TP18 | BFO INHIBIT |

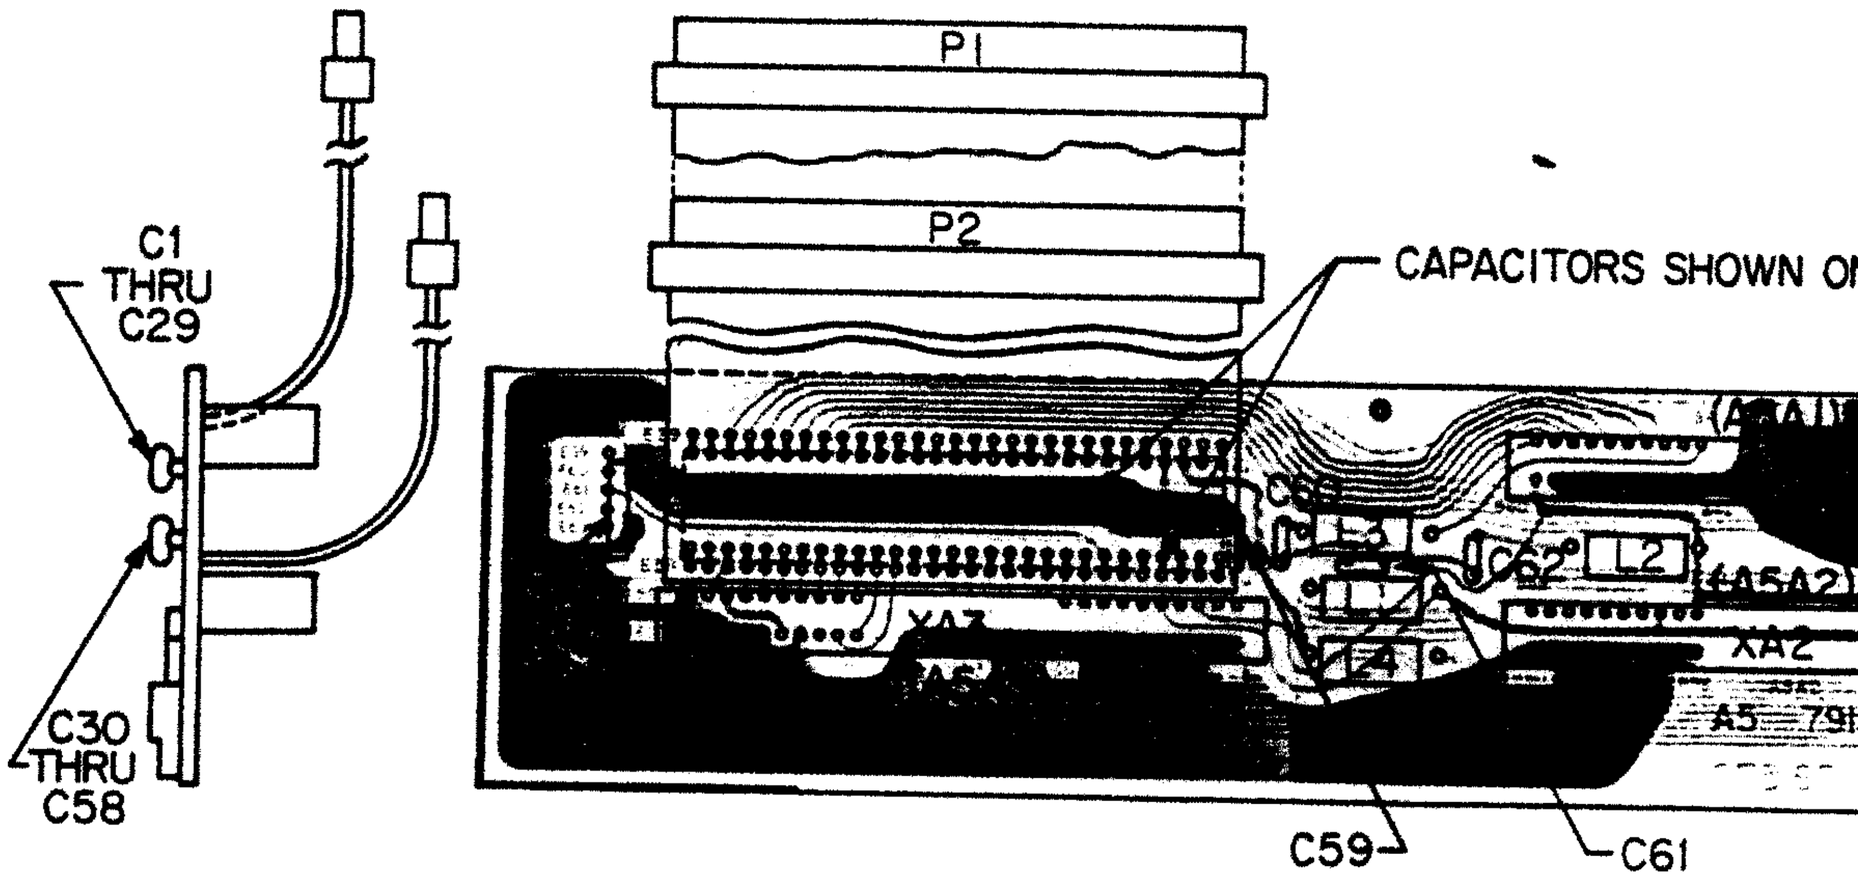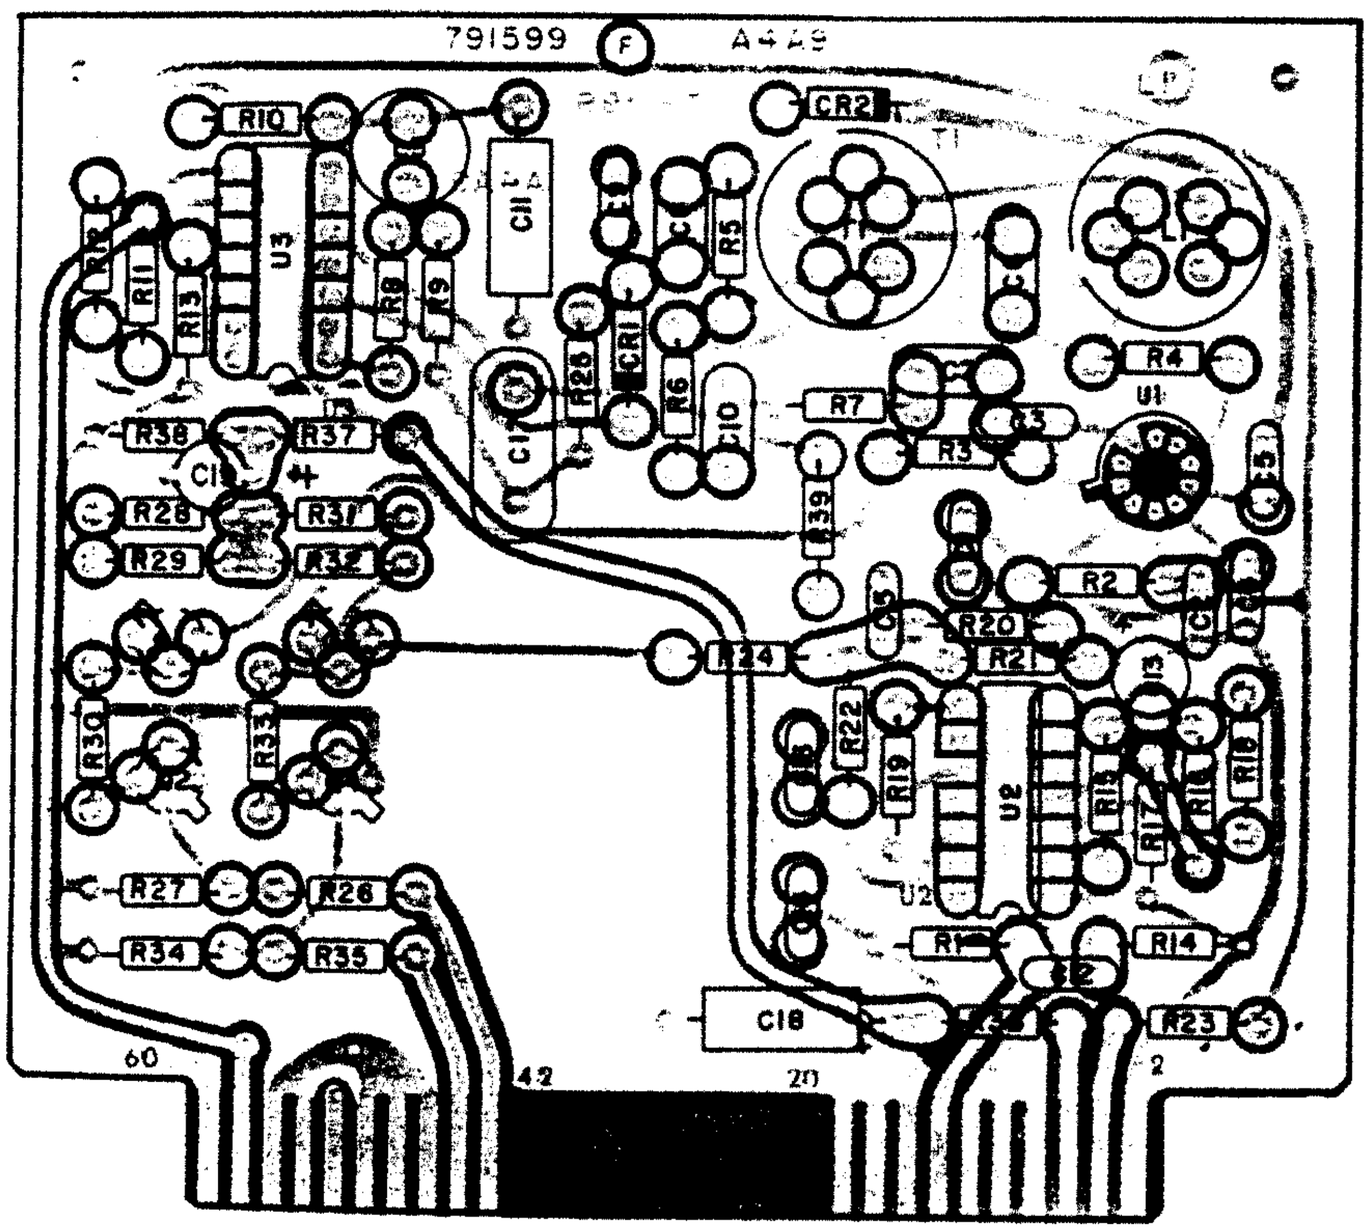
C1
THRU
C29
C30
THRU
C58
P1
P2
CAPACITORS SHOWN ON
C59
C61
XA2
A5




NOTES:

1. UNLESS O
   a) RESIST
   b) CAPACI
2. ENCIRCLE
3. LEAD ARR
* 4. IF DIFFIC
   FOR PART
   BE USED
5. DIFFEREN

DET

BOTTO


| TYP |
|---|
| 7915 |
| 7915 |
| 79159 (MECH |

ERWISE SPECIFIED
E IS IN OHMS, ± 5 %, 1/4W.
CE IS IN µF.
NUMBERS ARE MODULE PINS.
GEMENT OF IC'S - DETAIL A, B
Y OF PROCUREMENT EXISTS
C3403P, PART LM 348N MAY
ALTERNATE IN THIS APPLICATION.
BETWEEN TYPES AS INDICATED IN TABLE A.

A

EW


DETAIL B




U2, U3

BLE A


| NO | C11 | L3 | R11 |
|---|---|---|---|
| -1 | .015 | 47MH | 470K |
| -2 | .0033 | 6.8MH | 390K |
| -3 (Y) | .015 | 47MH | 470K |

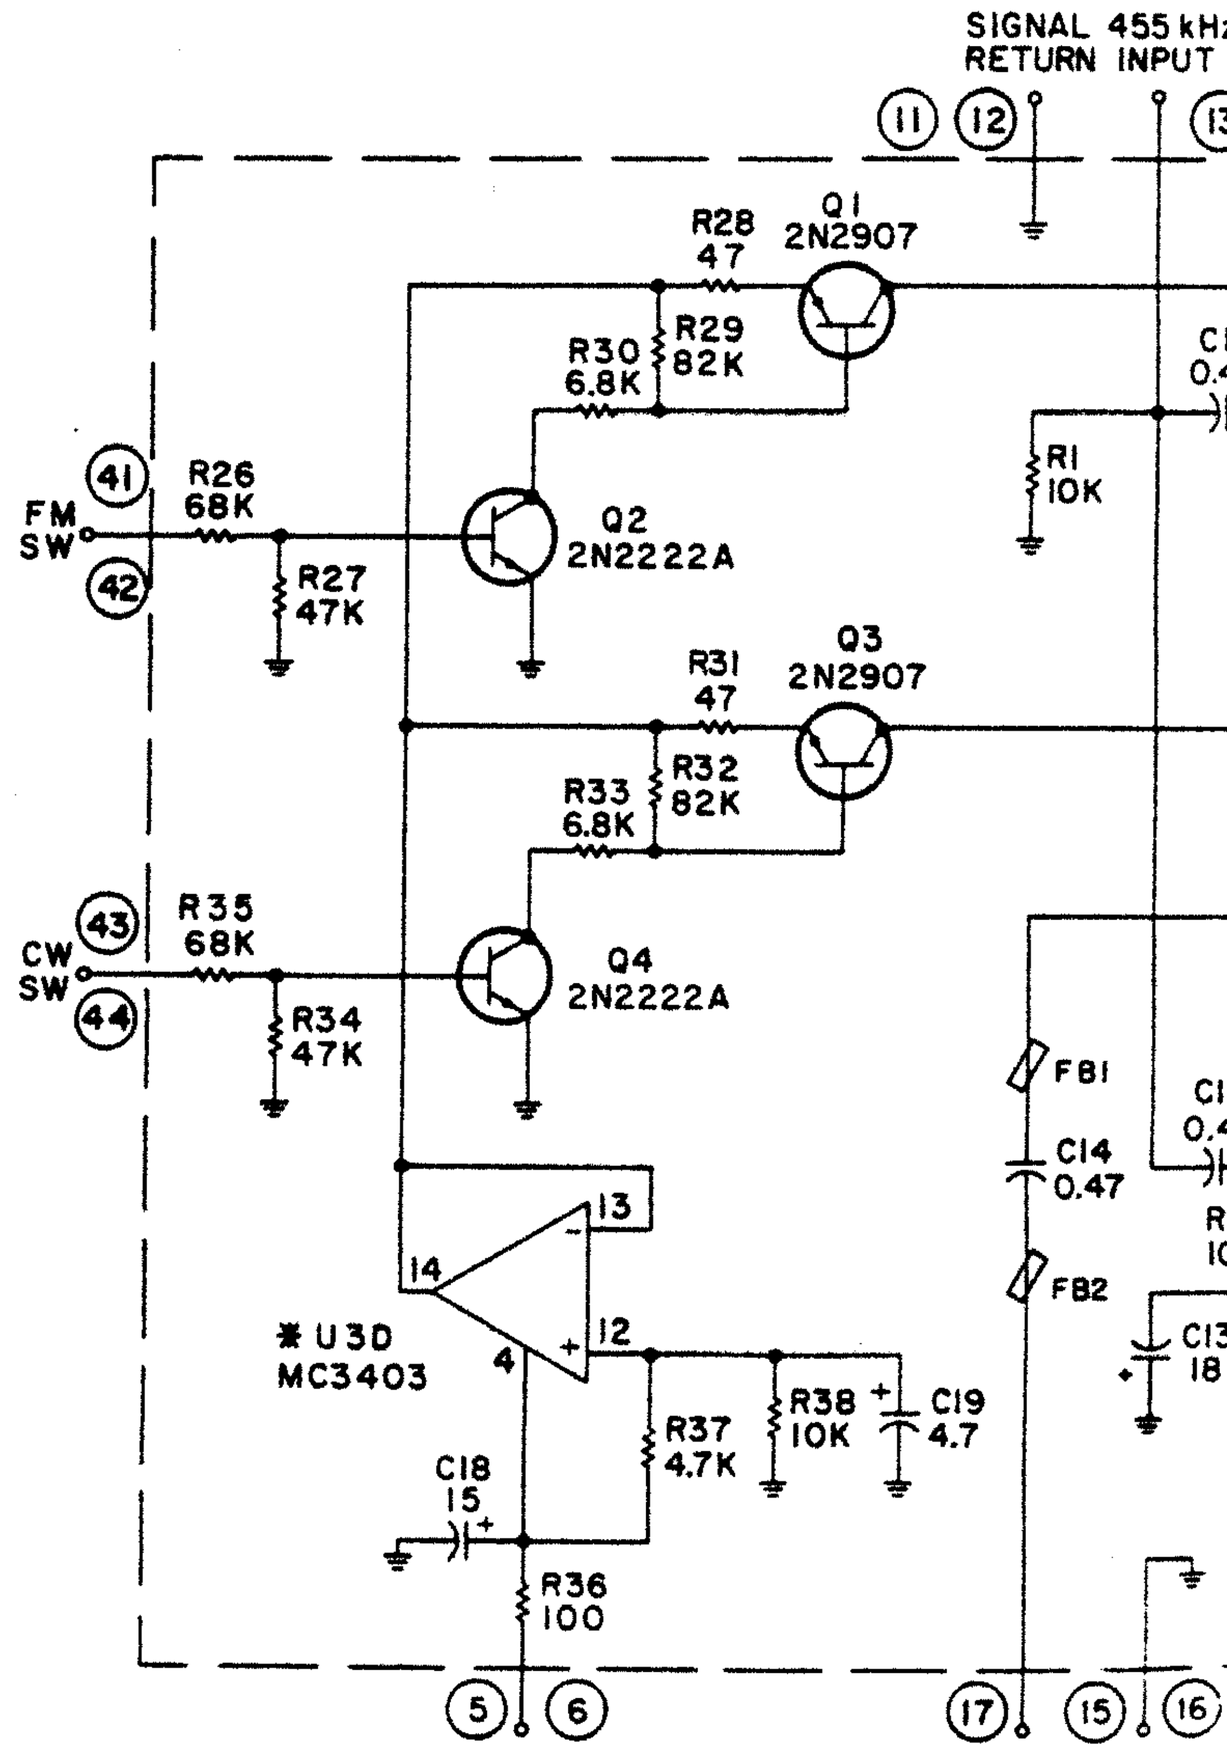

NOTES:


1. UNLESS OTHERWISE SPECIFIED, RESISTANCE IS IN OHMS, ±5%, 1/4W.
2. U10 PIN 18 IS +5V; U10 PIN 9 IS GND.
3. PIN ARRANGEMENT FOR ICs IS SHOWN IN DETAILS A – C.
4. DIFFERENCE BETWEEN TYPES IS MECHANICAL ONLY.

DETAIL A
U1 – U7






TOP VIEW


DETAIL B
U8, U9






DETAIL C
U10




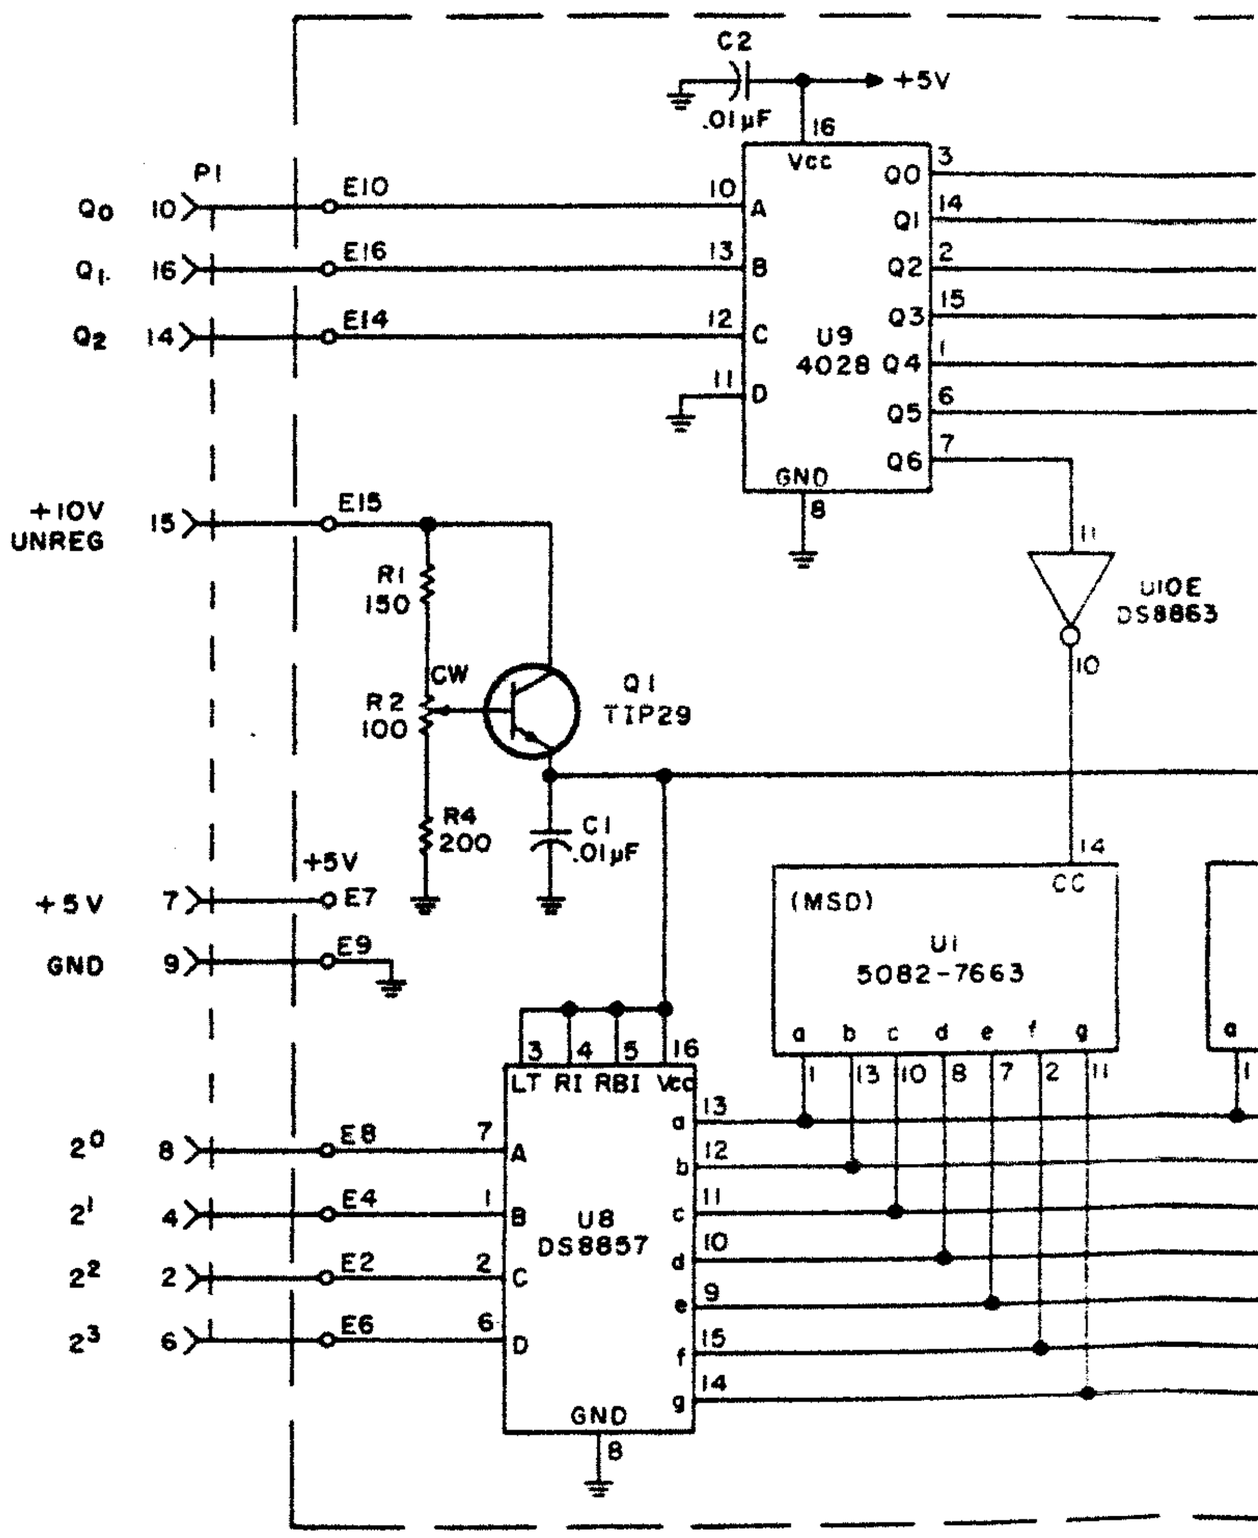
P1
R2
R1
8A

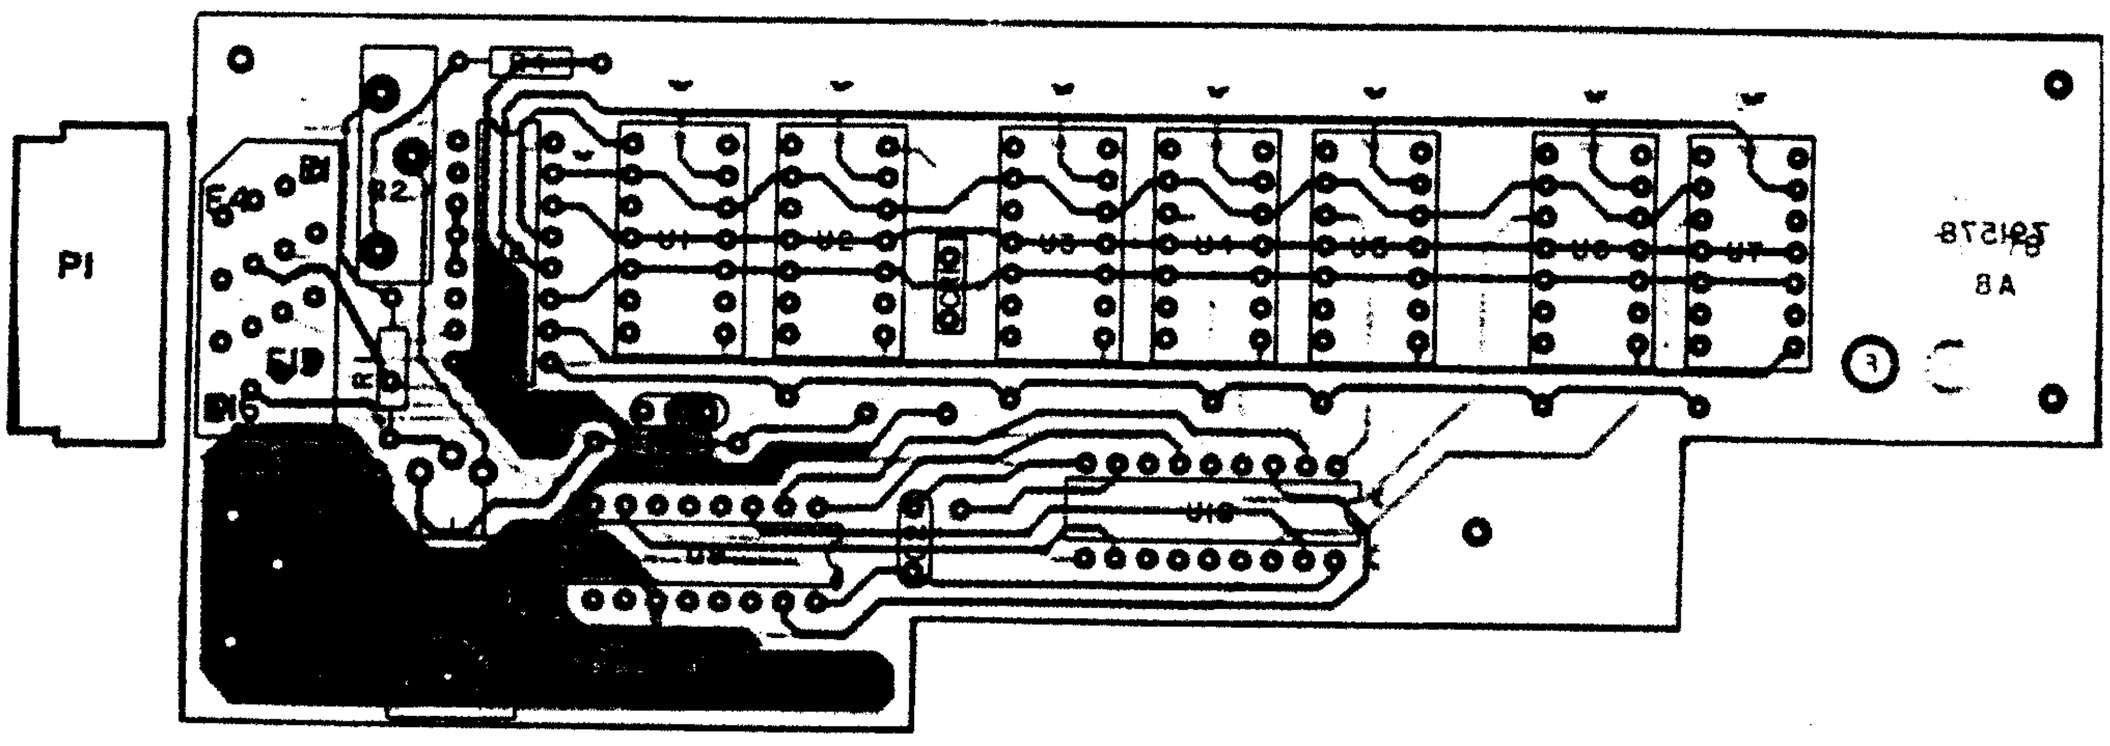
S1
A10A2

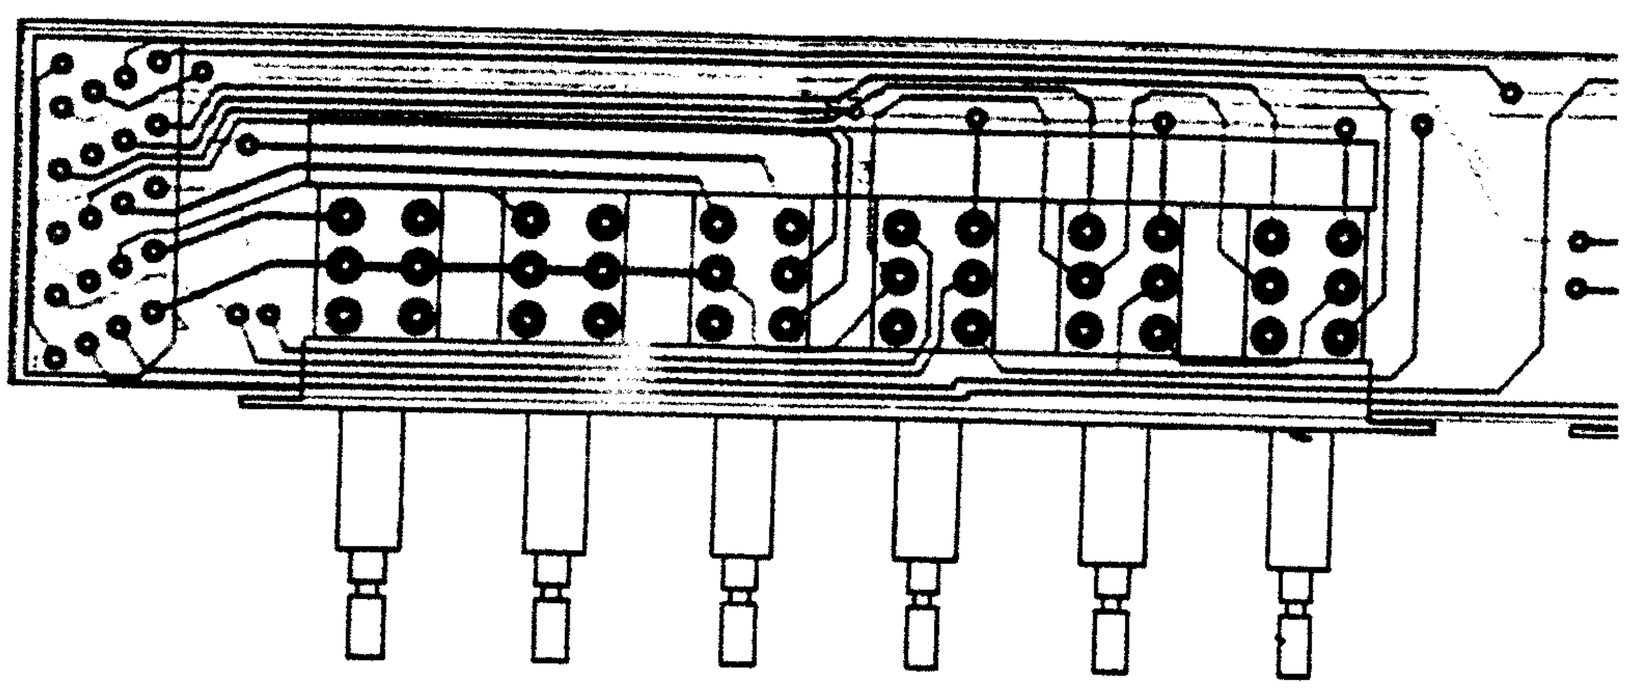

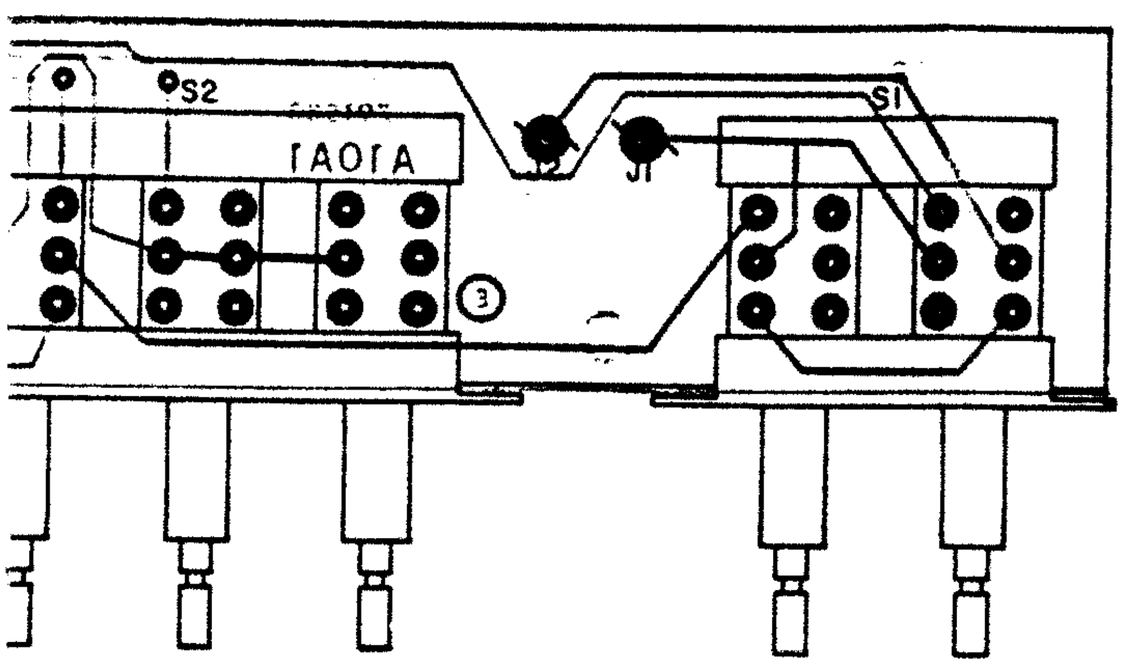
NOTES:

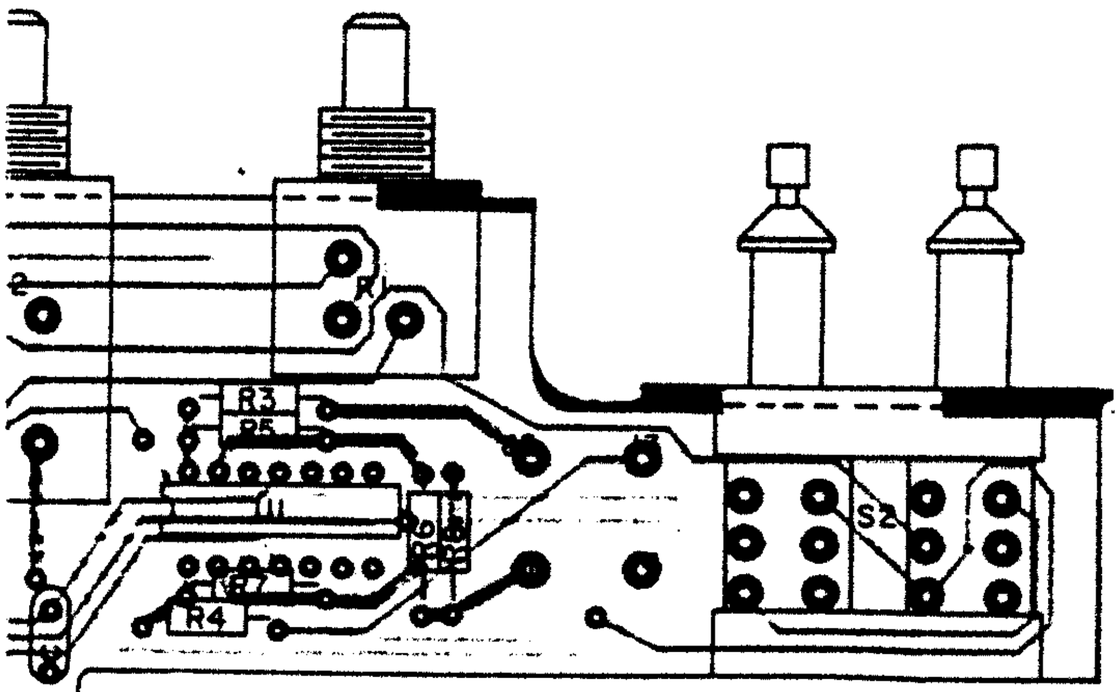
1. THIS SCHEMATIC IS A SUPPLEMENT TO THE
   FRAME SCHEMATIC FOR DETAILS OF THE
2. PHANTOM LINES INDICATE FRONT PANEL
3. A1OA1, A1OA2 ARE PART OF
   FRONT PANEL, CONTROL
   TYPE 7B60P
   REF DESIG PREFIX IS A4
4. UNLESS OTHERWISE SPECIFIED
   a. RESISTANCE IS IN OHMS, 5%, 1/4W

:
,1/4W.


CONNECTIONS
1.
FACTORY SELECTED.
IS MECHANICAL ONLY.


| | Vcc 2 PIN | Vcc 3 PIN | $\nabla_1$ | $\nabla_2$ | $\nabla_3$ |
|---|---|---|---|---|---|
| | | | 7 | | |
| | | | 7 | | |
| | | | 7 | | |
| | | | | | |
| | | | | | |
| 14 | | | | 7 | |
| | 16 | | | | 8 |
| | 16 | | | | 8 |
| | 14 | | | | 7 |
| | 14 | | | | 7 |
| | 16 | | | | 8 |
| | 16 | | | | 8 |
| | 16 | | | | 8 |
| | 14 | | | | 7 |

DETAIL C




BOTTOM VIEW

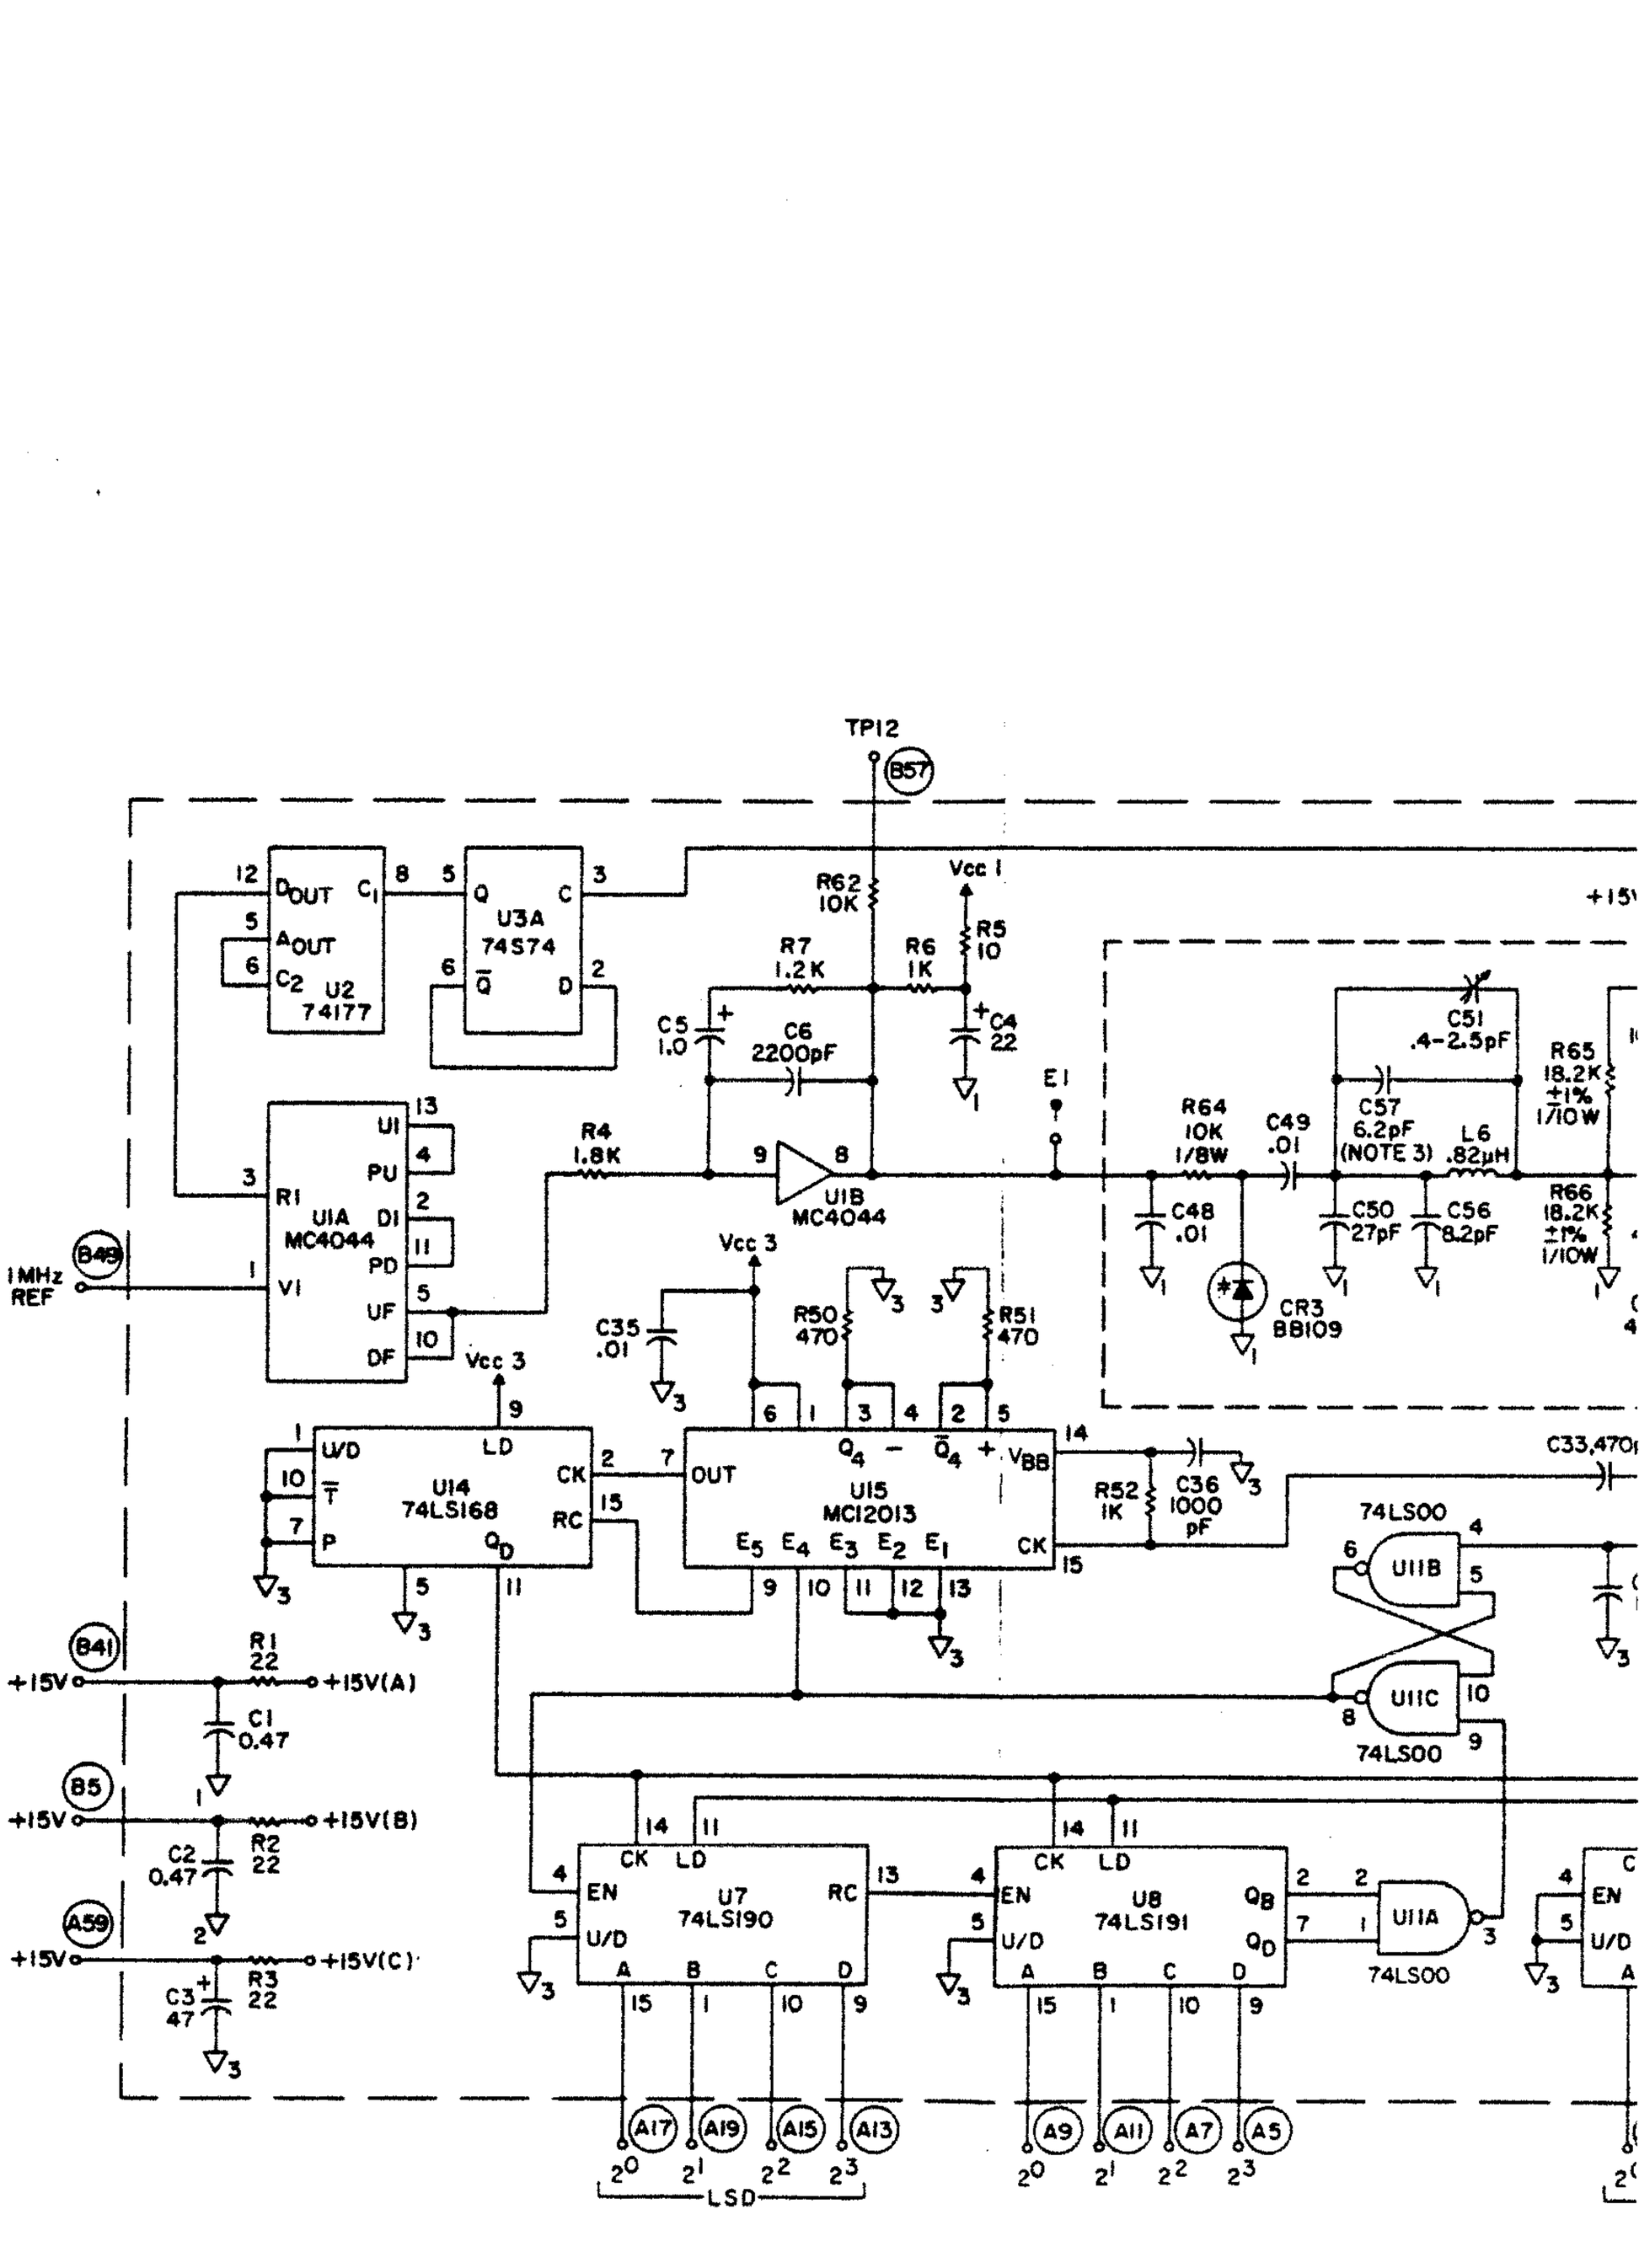

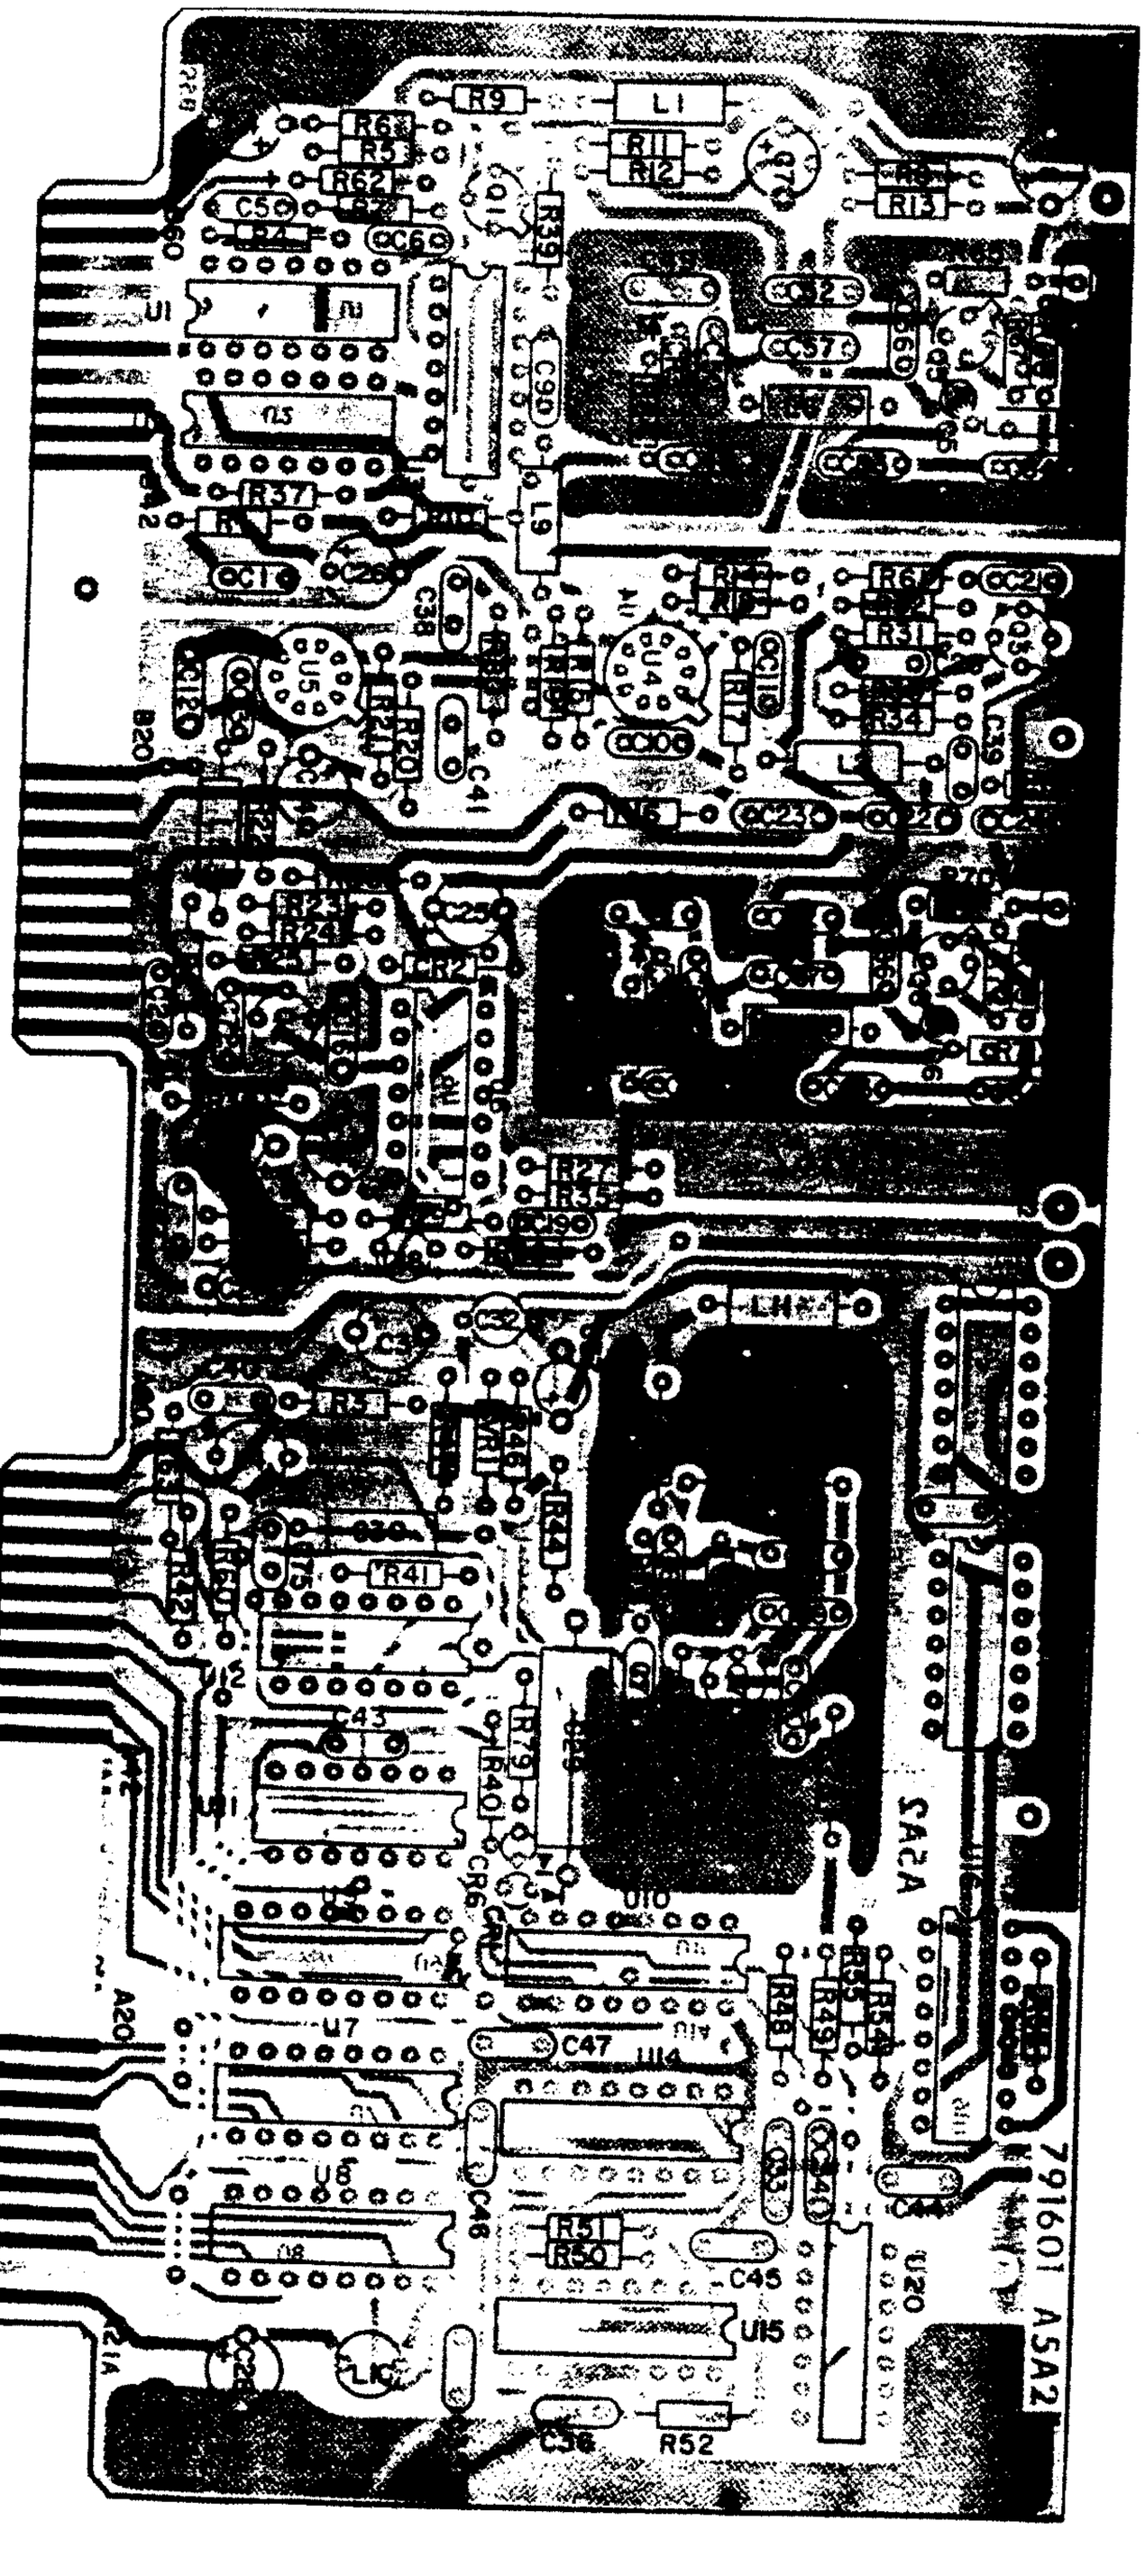


NOTES:


1. UNLESS OTHERWISE SP
   a) RESISTANCE IS IN OH
   b) CAPACITANCE IS IN µ
2. PIN ARRANGEMENTS &
   FOR IC'S ARE GIVEN IN
3. NOMINAL VALUE. FINAL
4. DIFFERENCE BETWEEN


| IC TYPE | REF DESIG | DE |
|---|---|---|
| MC4044 | U1 | |
| 74177 | U2 | |
| 74S74 | U3 | |
| 796 | U4 | |
| 733 | U5 | |
| MC4044 | U6 | |
| 74LSI90 | U7,U8 | |
| 74LSI91 | U9,UI0 | |
| 74LS00 | UII | |
| MC4044 | UI2 | |
| 74LSI68 | UI4 | |
| MCI2013 | UI5 | |
| MCI2013 | UI6 | |
| 74LSI96 | UI7,UI9 | |


DETAIL A



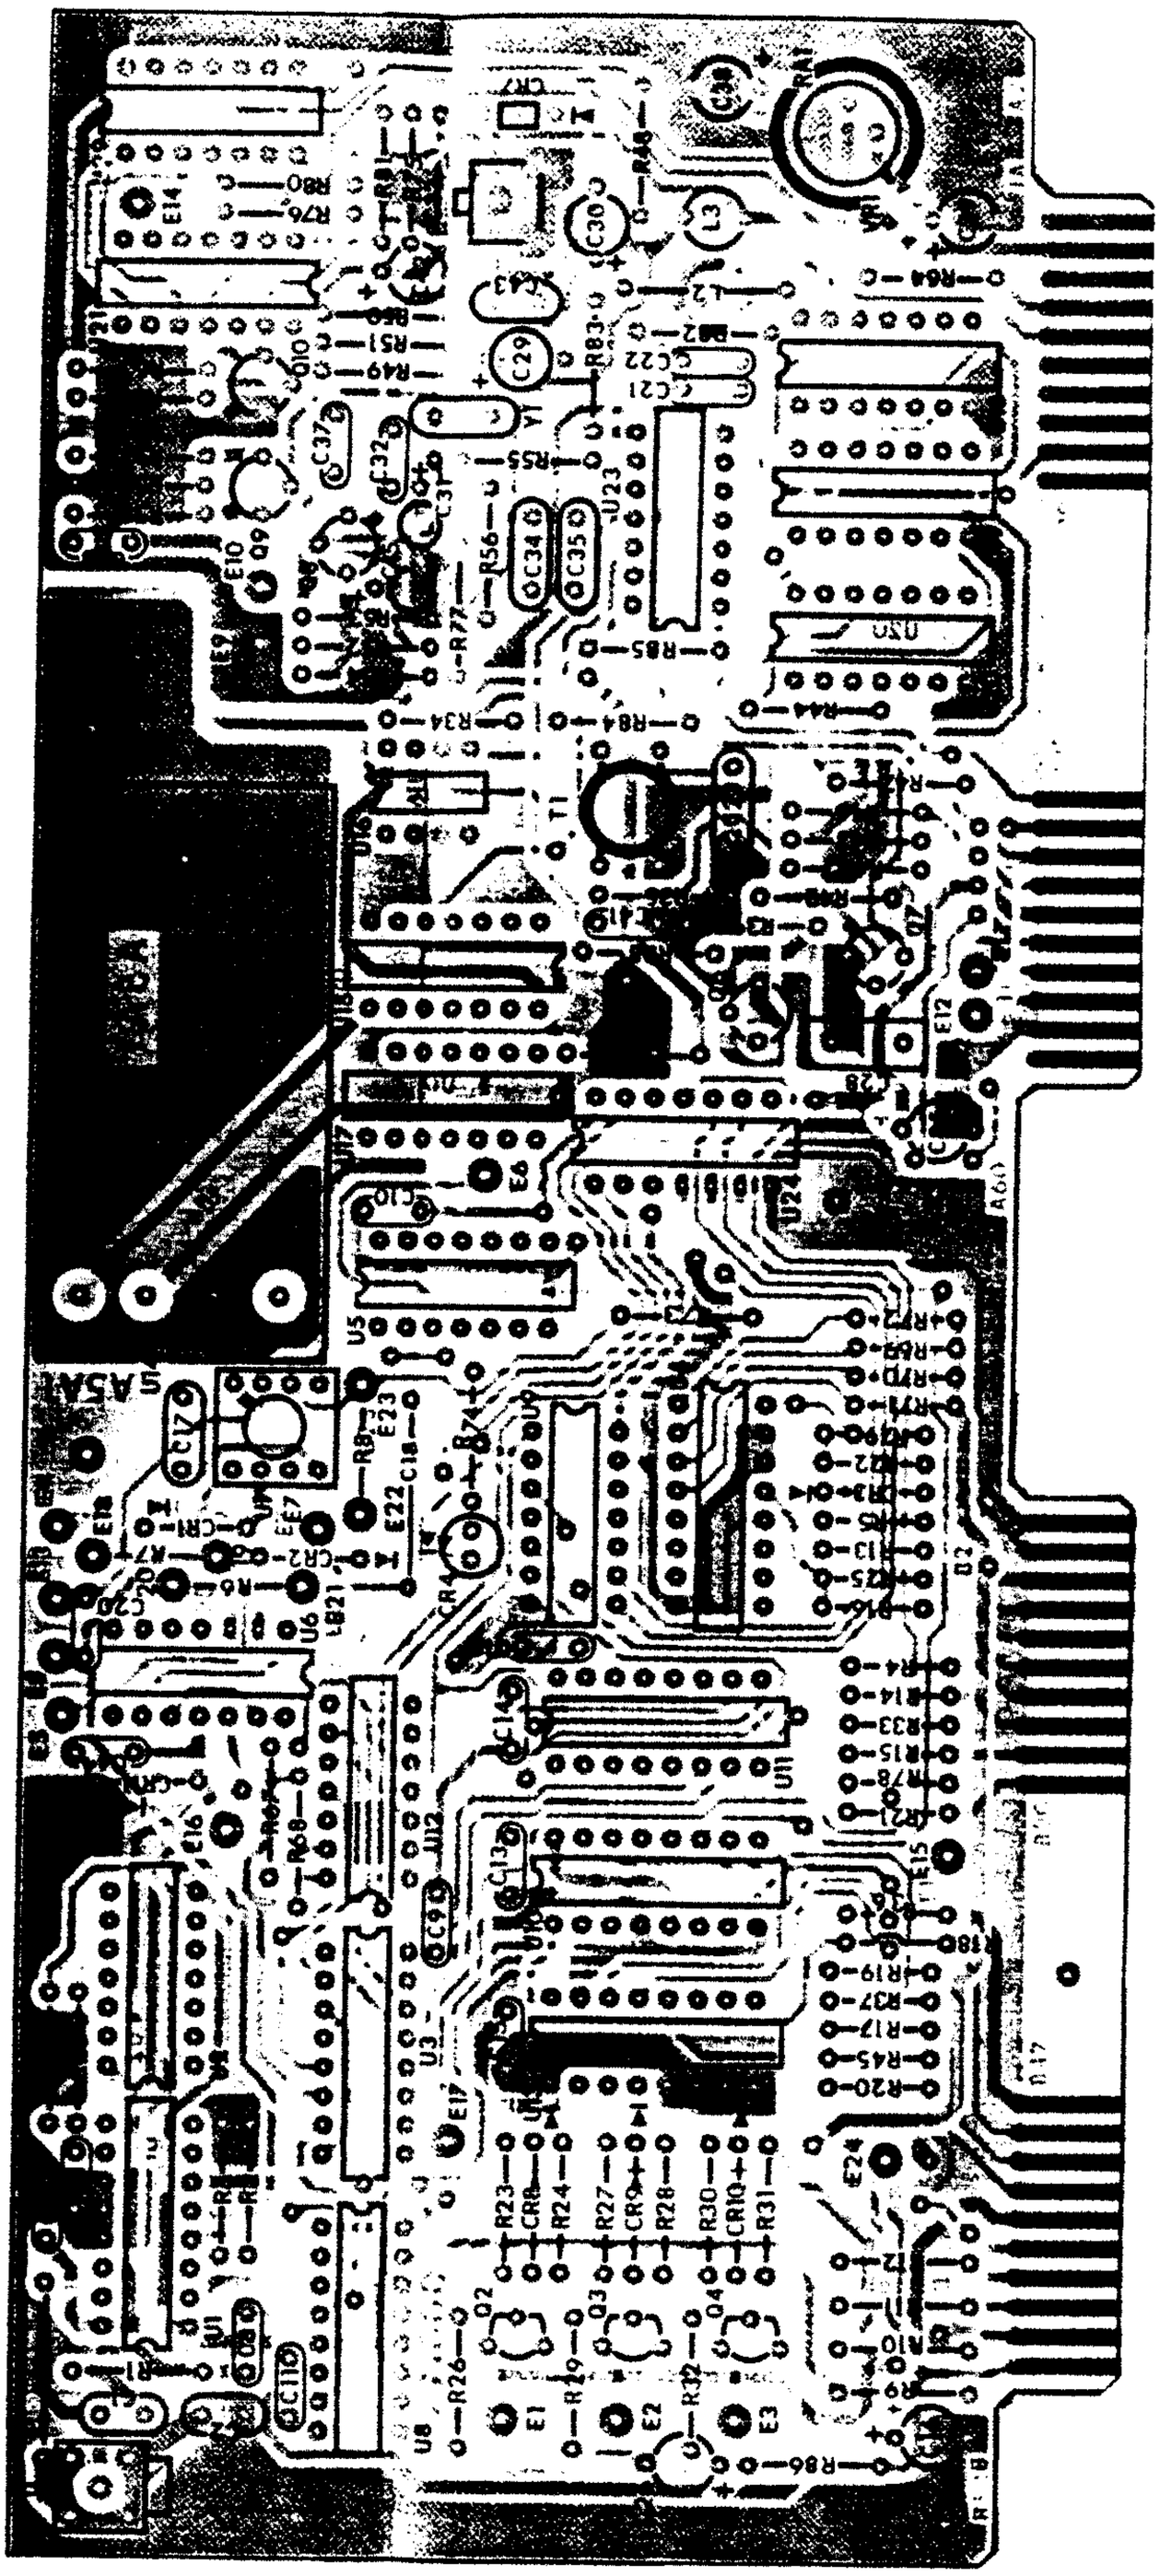
DET


10 MHz
100 kHz
1 MHz
10 MHz

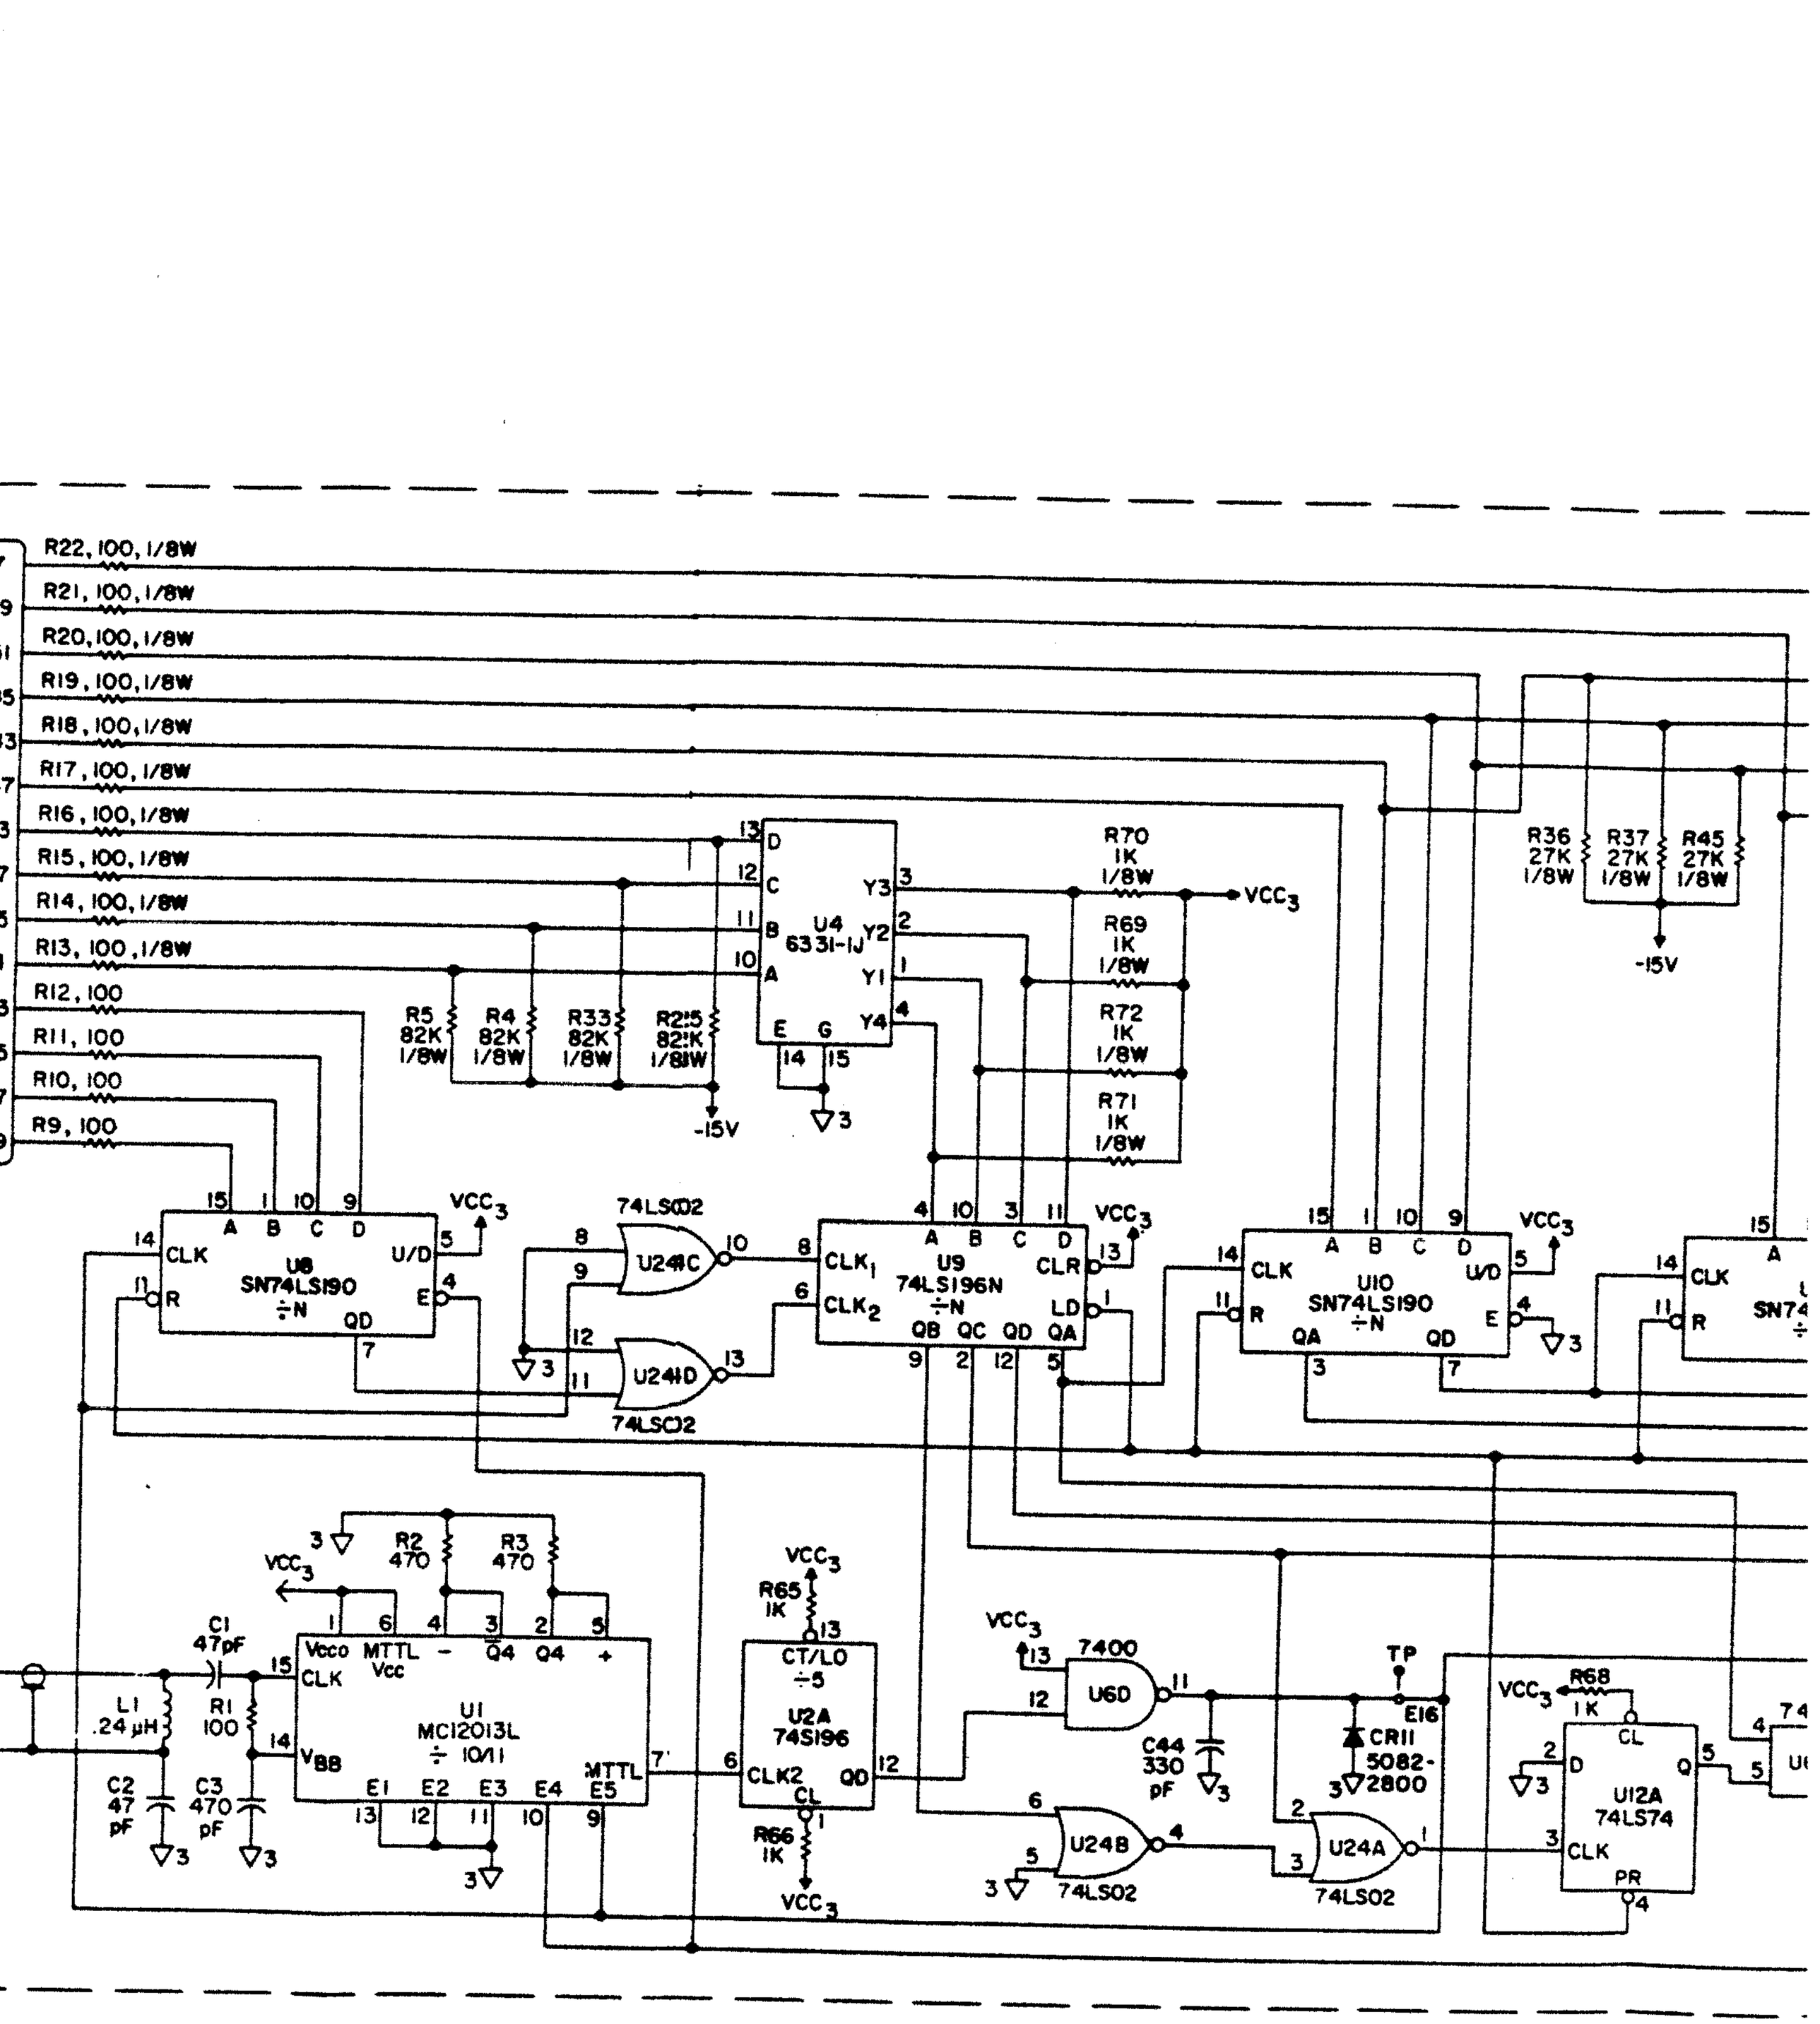
R22, 100, 1/8W
R21, 100, 1/8W
R20, 100, 1/8W
R19, 100, 1/8W
R18, 100, 1/8W
R17, 100, 1/8W
R16, 100, 1/8W
R15, 100, 1/8W
R14, 100, 1/8W
R13, 100, 1/8W
R12, 100
R11, 100
R10, 100
R9, 100
U4 6331-1J
R5 82K 1/8W
R4 82K 1/8W
R33 82K 1/8W
R2:5 82:K 1/8IW
-15V
R70 1K 1/8W
R69 1K 1/8W
R72 1K 1/8W
R71 1K 1/8W
VCC3
R36 27K 1/8W
R37 27K 1/8W
R45 27K 1/8W
-15V
U8 SN74LS190 ÷N
U241C
U241D
74LS02
U9 74LS196N ÷N
U10 SN74LS190 ÷N
R2 470
R3 470
C1 47pF
L1 .24 µH
R1 100
C2 47 pF
C3 470 pF
U1 MC12013L ÷ 10/11
R65 1K
U2A 74S196
R66 1K
U6D 7400
C44 330 pF
U24B
U24A
74LS02
TP
E16
CR11 5082-2800
R68 1K
U12A 74LS74

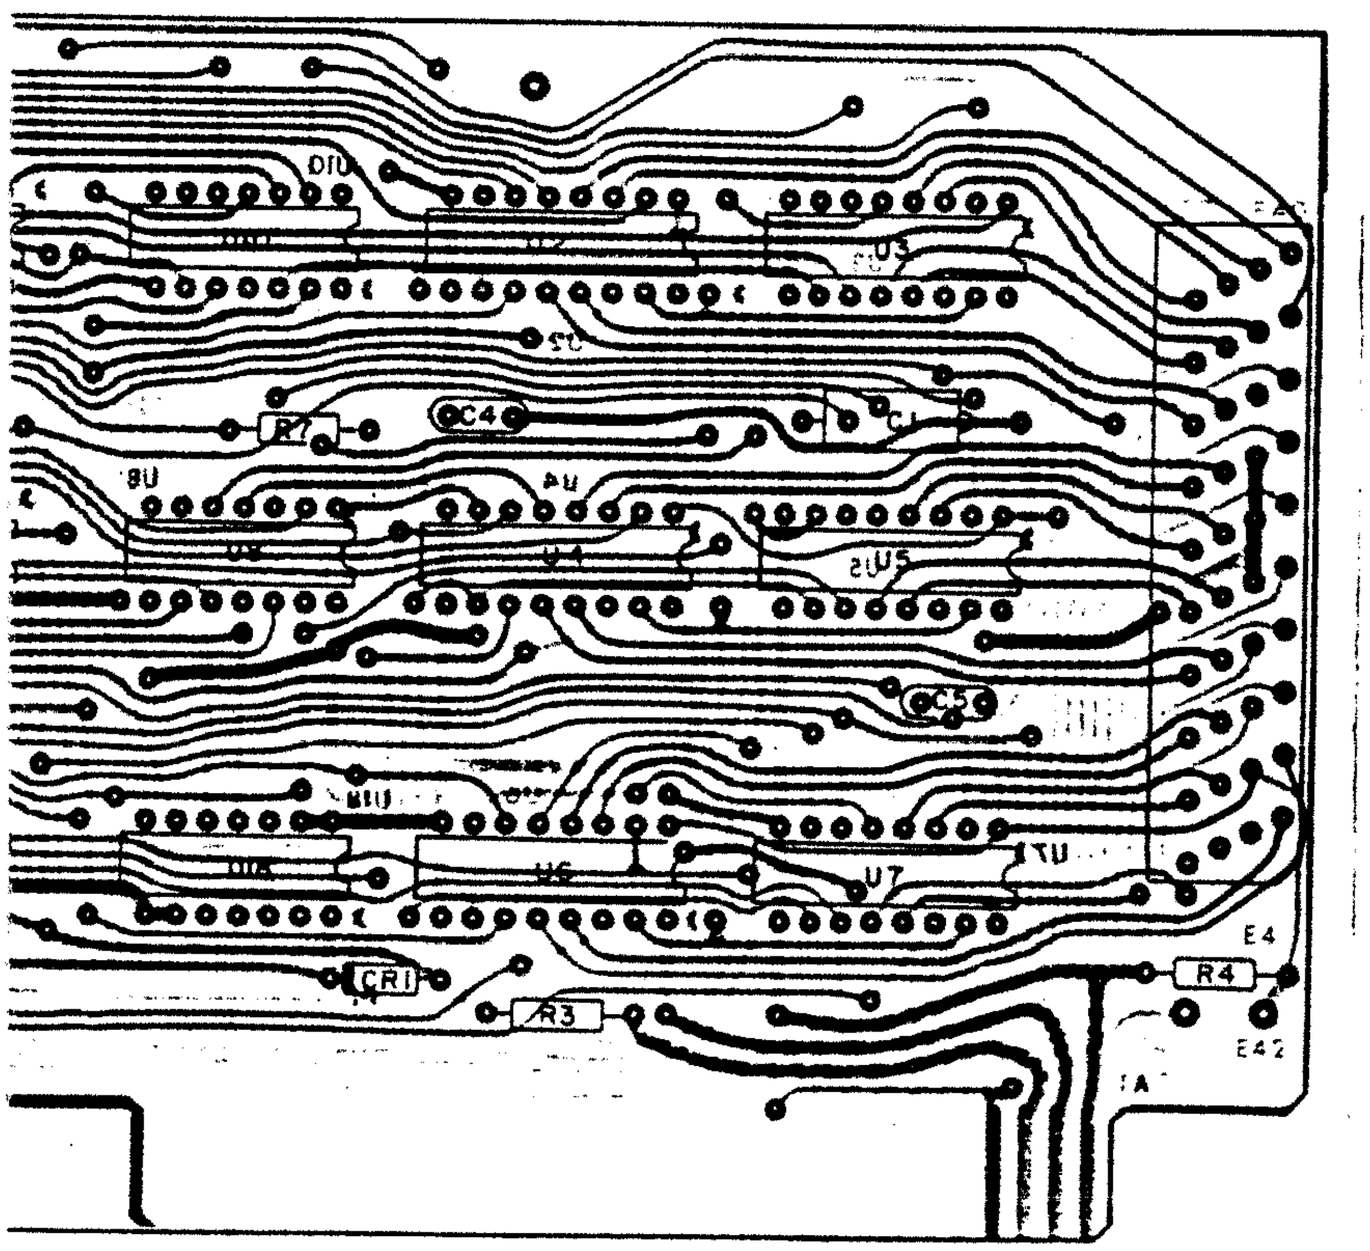


NOTES:

1. UNLESS OTHERWISE SPECIFIED, RESISTANCE IS IN OHMS ± 5%, 1/4 W
2. POWER CONNECTIONS AND PIN ARRANGEMENTS FOR ICs ARE GIVEN IN TABLE 2
3. ENCIRCLED NUMBERS ARE MODULE PIN NUMB
4. REMOVE JUMPER BETWEEN E42 AND E41 FOR E ACTIVATED REMOTE CONTROL. THE PRESENSE PROVIDES FRONT-PANEL ACTIVATED REMOTE C
5. DIFFERENCE BETWEEN TYPES IS SHOWN IN TA


TABLE 2

| IC | $V_{DD}$ PIN | $V_{DD2}$ PIN | GND PIN | DETAIL |
|---|---|---|---|---|
| U1, U8, U18 | | 14 | 7 | B |
| U2-U7, U9, U12-U15 | | 16 | 8 | A |
| U10, U11 | 14 | | 7 | B |
| U16 | 16 | | 8 | A |
| U17 | 1 | | 8 | A |


TABLE 3


| TYPE NO | J1(RMT IN) |
|---|---|
| 791575-1 | OMIT |
| 791575-2 | AS SHOWN |
| 791575-3 | AS SHOWN |
| 791575-4 | AS SHOWN |
| 791575-5 | AS SHOWN |


DETAIL-A





DETAIL-B



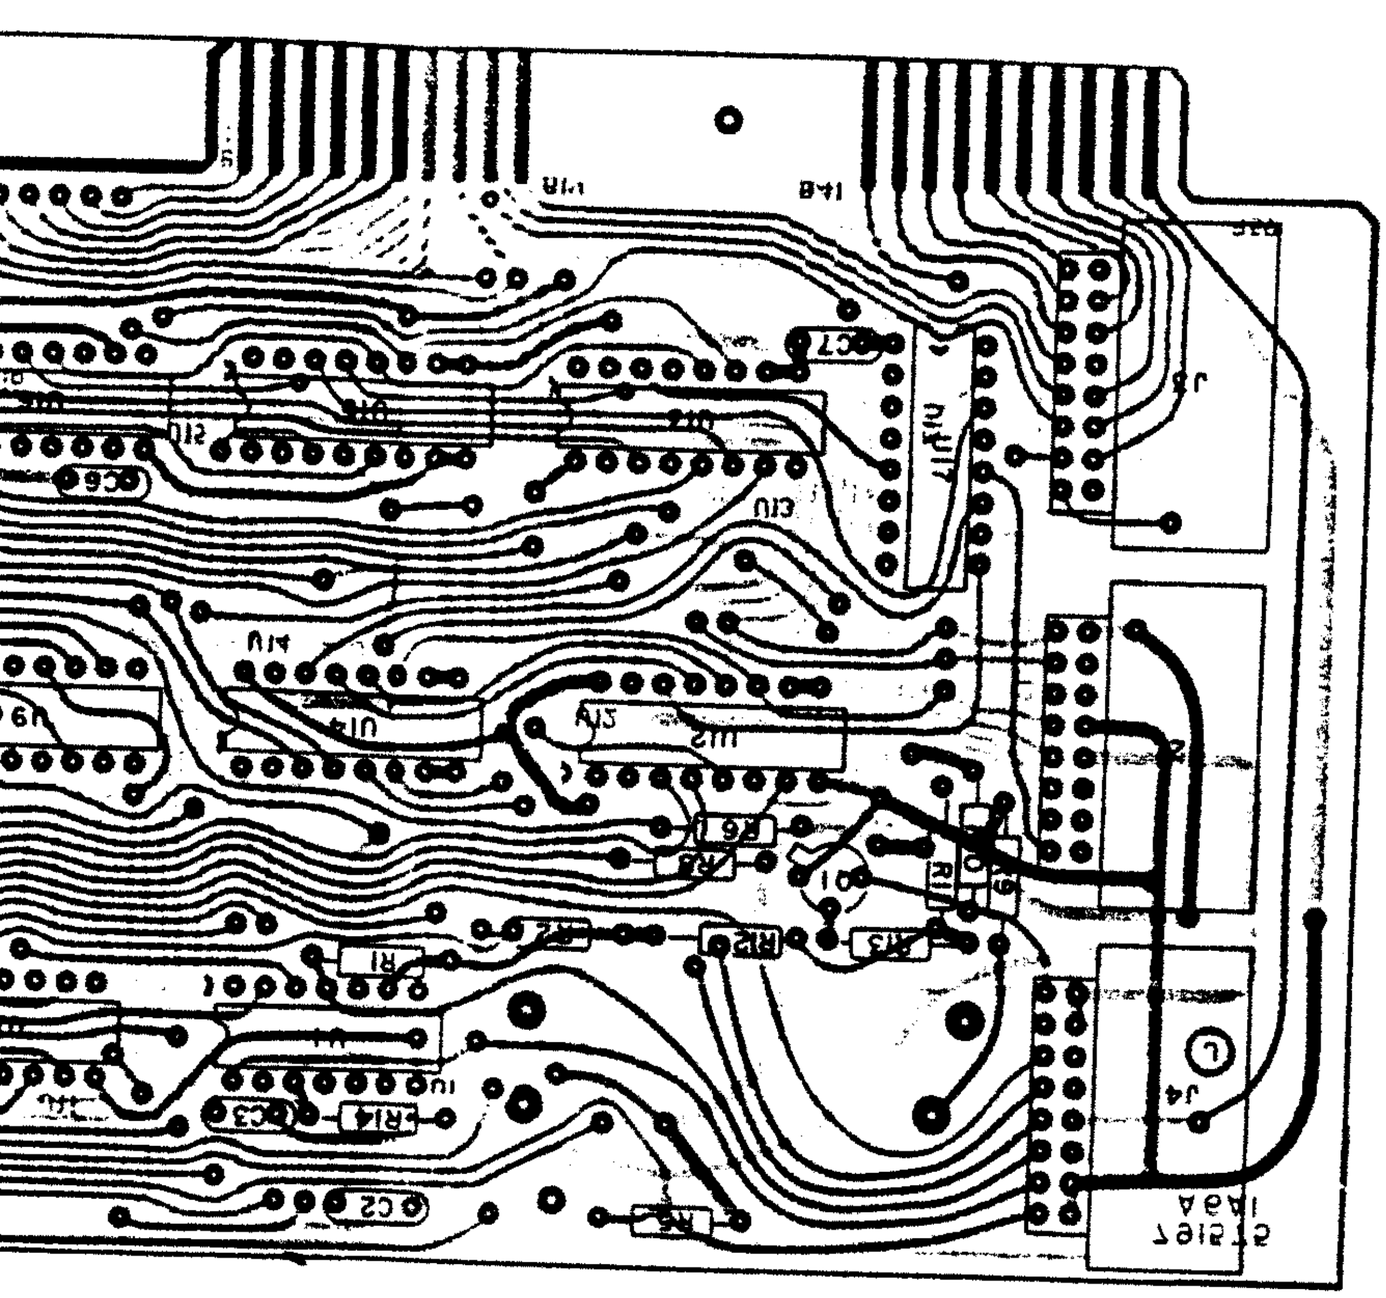

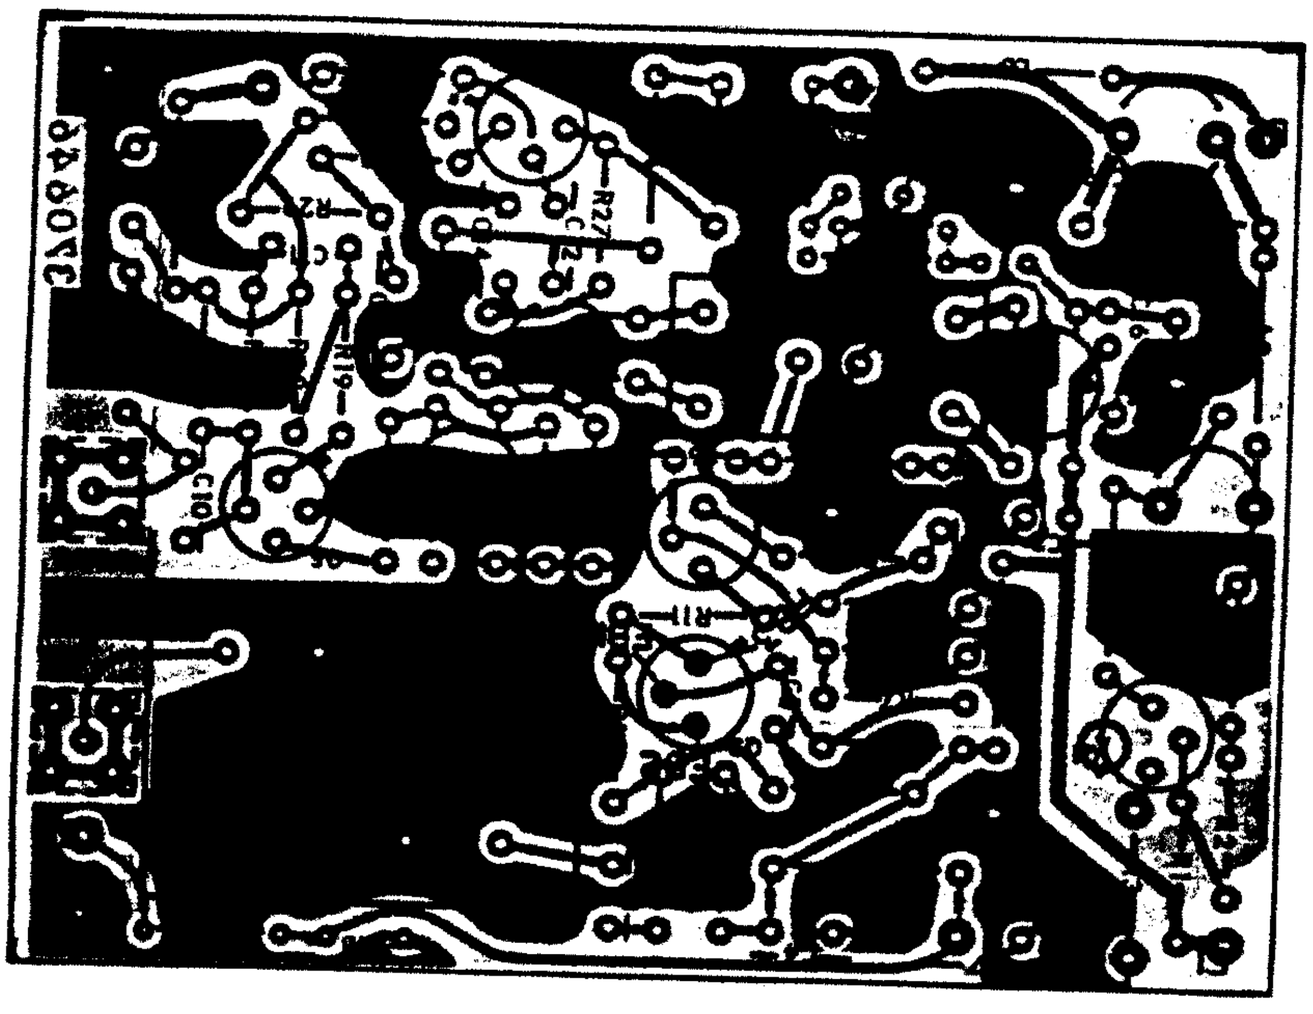
L20L9

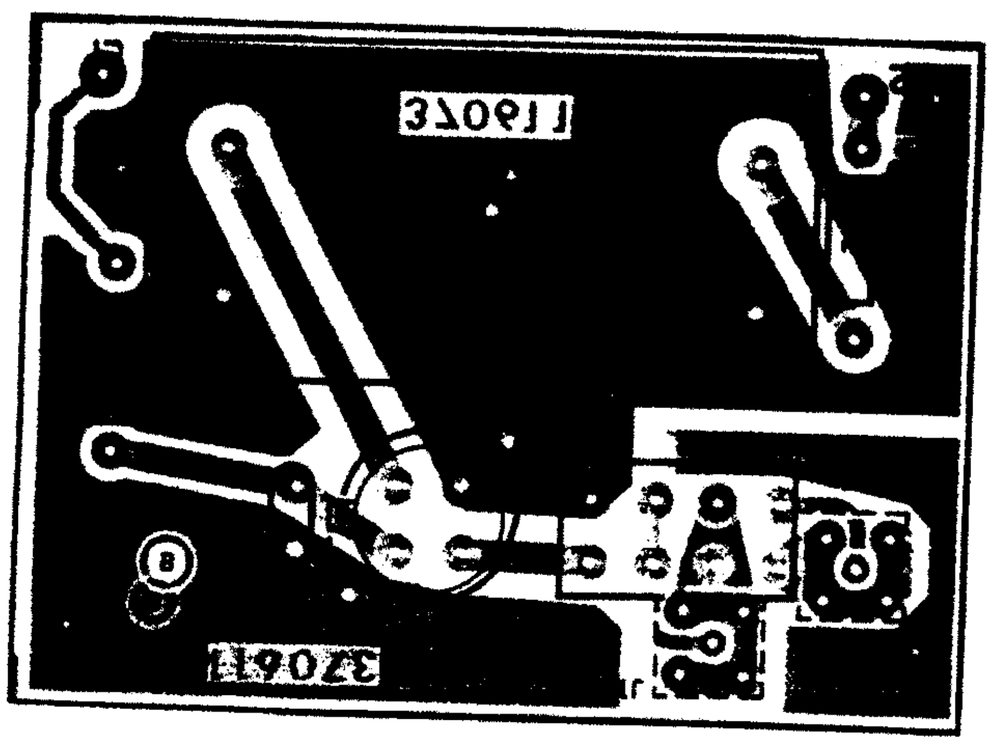
L20L6
3209L